



Docs RF1 (componentes)

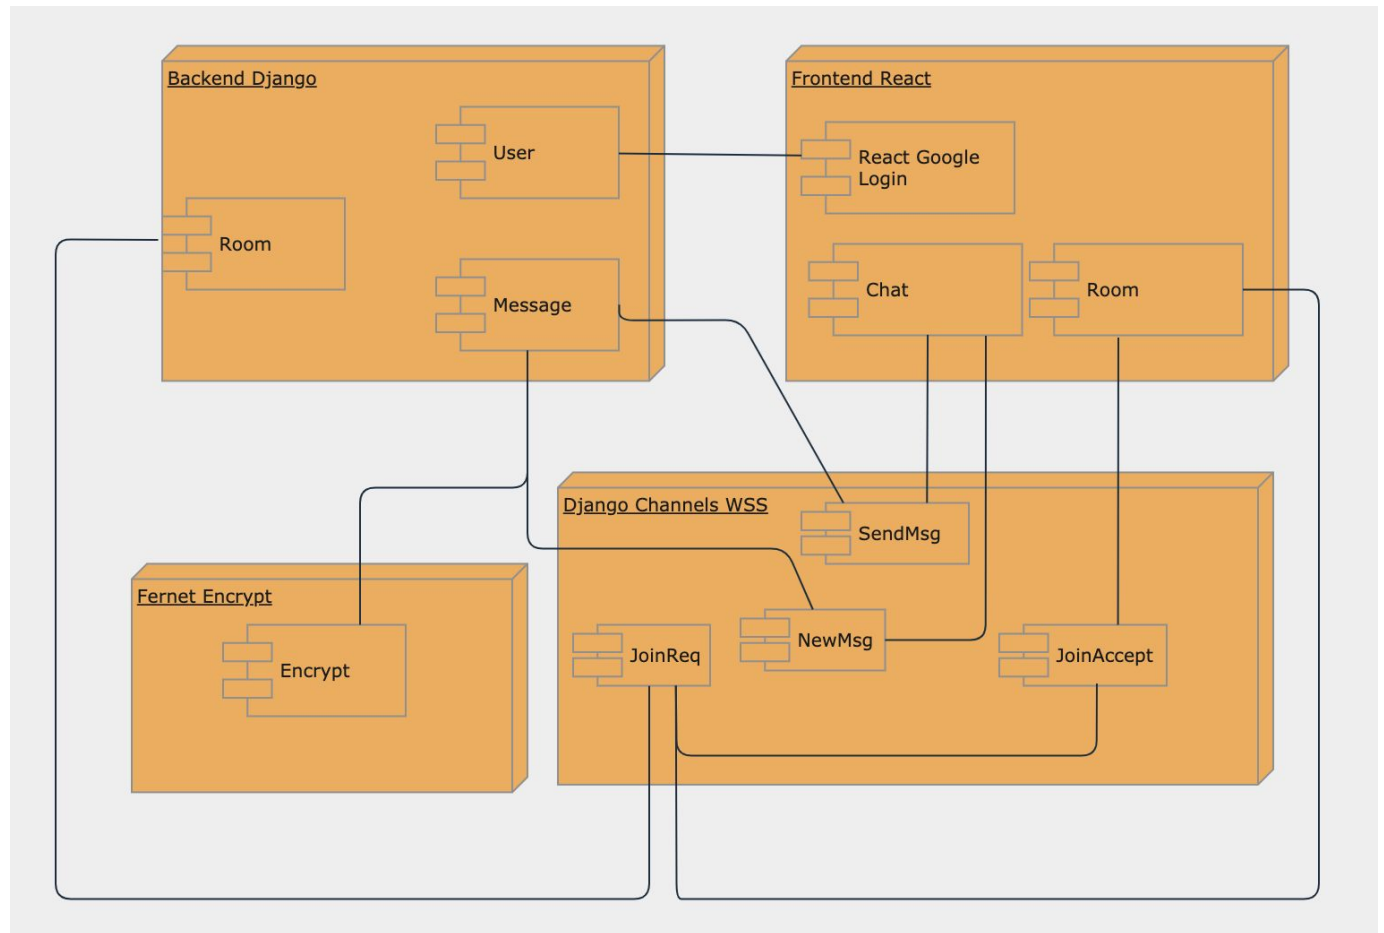


Docs RF2 Diagrama de Flujo

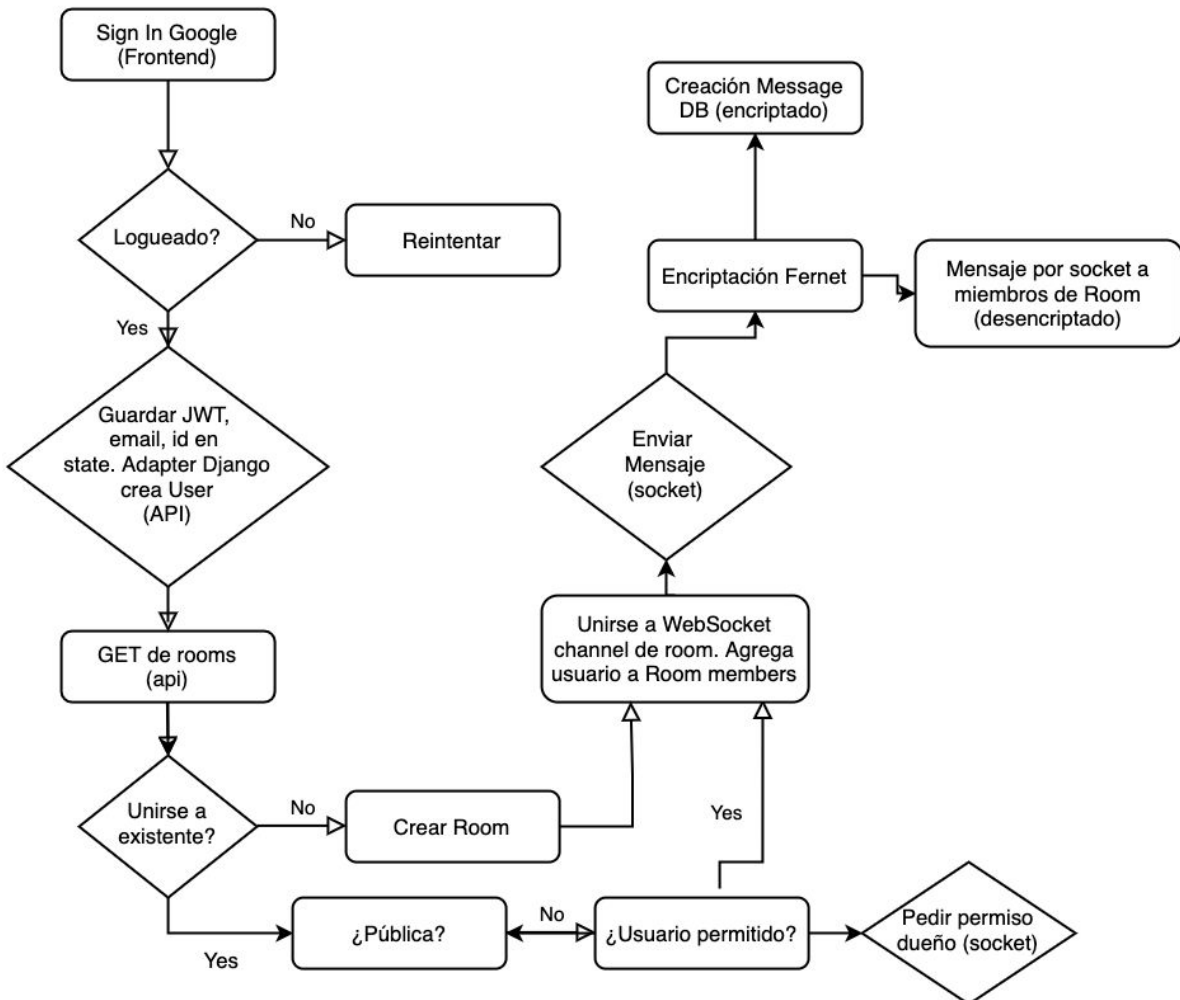


Docs RF3 Deploy

Backend

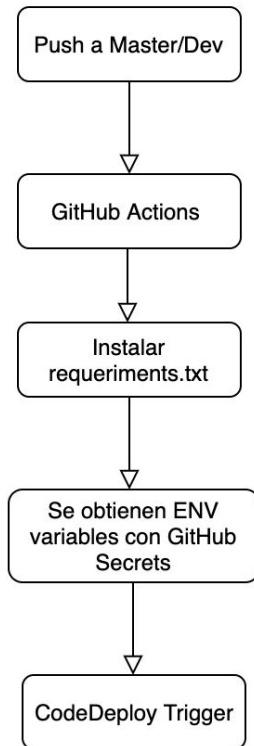

Frontend

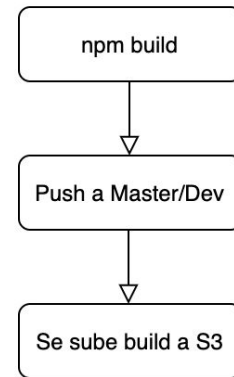

Llamadas API

La documentación de la api se encuentra en

<https://www.iluovobackend.ml/?format=api>

y utiliza el estándar Swagger en las llamadas.

The screenshot shows the Django REST framework API documentation for the 'Message List' endpoint. The interface includes a breadcrumb 'Api Root / Message List', the title 'Message List', and three action buttons: 'DELETE', 'OPTIONS', and 'GET'. The selected 'GET' method is shown with its details: 'GET /messages/?format=api'. The response is an 'HTTP 200 OK' with 'Allow: GET, POST, DELETE, HEAD, OPTIONS', 'Content-Type: application/json', and 'Vary: Accept'. The JSON response is a list of two message objects, each containing an 'id', an 'author' object with 'type' and 'id', a 'content' string, a 'room' string, and a 'timestamp'.

```
HTTP 200 OK
Allow: GET, POST, DELETE, HEAD, OPTIONS
Content-Type: application/json
Vary: Accept

[
  {
    "id": 1,
    "author": {
      "type": "User",
      "id": "1"
    },
    "content": "b'gAAAAABfqjPQnWouegVh6_ukBwDRY8ArEjbbCLrm0fq5syVJH00IXcd0khyNMV96nW7EXCJdc9BvxPAXh5eJP4lcDZ1JLxBQA=='",
    "room": "room",
    "timestamp": "2020-11-10T06:31:44.626583Z"
  },
  {
    "id": 2,
    "author": {
      "type": "User",
      "id": "1"
    },
    "content": "b'gAAAAABfqjQy7x-BVUrIJz-213lMXfw7HkLAQ5EiwI0pg_n_zEboi3EAGDe4qiZQwkfZDYXznVwQI9i00b5iJdWin3VaqqEbMA=='",
    "room": "superRIO01",
    "timestamp": "2020-11-10T06:33:22.158662Z"
  }
]
```