

Tensor Data Interchange: What Existing Solutions Cannot Express

A review of the formats, protocols, and transports that move tensor data in AI/ML inference, the gaps they leave, and a proposal for closing them.

September 2026

Abstract

AI/ML systems move large amounts of tensor data between processes, machines, and storage tiers. This review examines the formats, protocols, and transports used for that purpose, and shows that each one excels in a specific area but lacks support for the others. DLPack shares memory inside one process but describes only strides. Apache Arrow provides a strong buffer and IPC design built on a tabular data model. GGUF stores quantization parameters well, but only for one runtime and only in files. NIXL, NCCL, and UCX move accelerator memory across a network at full hardware speed, but they transfer byte ranges with no description attached. The consequence is visible in disaggregated large-language-model inference, where the key-value cache is transferred for every request: all production systems examined here fix shape, element type, layout, and quantization outside the transfer, send only opaque blocks and identifiers, and require hand-written conversion code whenever the two endpoints differ. From this evidence the review identifies seven gaps and states the capability each one requires: zero-copy sharing with a stated alignment, self-delimiting streaming, self-description, layout negotiation, device and memory-placement description, quantization metadata in the descriptor, and a language-agnostic ABI. The final section introduces **Hurray**, a proposed specification for a tensor interchange format designed to close all seven (github.com/pgillet/hurray, pgillet.github.io/hurray).

1. Introduction

Two kinds of software appear in this review, and the distinction matters only because one depends on the other.

- **Data interchange solutions** move or store tensor data. DLPack, Apache Arrow, Arrow Flight, SafeTensors, GGUF, Zarr, NetCDF, OPeNDAP, NIXL, NCCL, and UCX are in this group.
- **Compute frameworks and libraries** perform computation on tensors. PyTorch, TensorFlow, JAX, NumPy, Eigen, xtensor, PLASMA, SLATE, TVM, MLC-LLM, MLX, vLLM, and NVIDIA Dynamo are in this group. They are the clients of the first group.

When an interchange solution cannot express something the client needs, the client pays for it — with a copy, with private convention, or with adapter code written once per pair of endpoints. Each of those workarounds is evidence of a missing capability, and this review collects them.

Two terms are used throughout. A **tensor** is a multi-dimensional array of numbers of one element type. A **descriptor** is the metadata that says how to interpret a tensor's bytes: its shape, its element type, how it is arranged in memory, how it is quantized, and where it resides. The central finding is that descriptors are rarely transmitted, and that reconstructing them out of band costs time and bandwidth.

2. What a Descriptor Must Carry

Layout. A layout is how a tensor's elements are arranged in memory. The simplest description is *strided*: one step size per dimension, which covers row-major order, column-major order, transposes,

and slices. Fast kernels do not use it. They use *tilled* layouts, which store small rectangular blocks contiguously so that each block fits in cache, and *packed* layouts, which rearrange operands into the exact order a vector or matrix unit reads them. Sparse tensors use index structures such as compressed sparse rows. Attention caches use *paged* layouts, described in § 4. No single layout is best: the right one depends on the operation, the hardware, and which level of the memory hierarchy is saturated. A format therefore cannot mandate a layout. It must describe the one the producer already has.

Quantization. Quantization stores a value as a low-precision integer together with a scale and, optionally, a zero point, so that the value is approximated by $\text{scale} \times (\text{quantized} - \text{zero_point})$. The parameters may apply to a whole tensor, to one channel, or to a block of consecutive elements; the block size is part of the scheme. In inference this is the normal case rather than an exception, so a tensor is not interpretable without its quantization parameters.

Device and memory placement. A buffer may live in host memory, in discrete accelerator memory, in memory addressed by both, or in a region registered with a network interface for remote access. A consumer cannot use a buffer it cannot locate.

Alignment and size. Zero-copy means giving a consumer the producer’s existing memory instead of a duplicate. It requires agreement on alignment, ownership, and lifetime in advance. Size determines how much this matters: a single weight matrix in a 70-billion-parameter model is roughly 448 MB in 16-bit floating point, and a long-context attention cache is several gigabytes per request. A copy imposed by an unstated alignment rule costs bandwidth that the computation needs, and doubles peak memory use at the point where accelerator memory is scarcest.

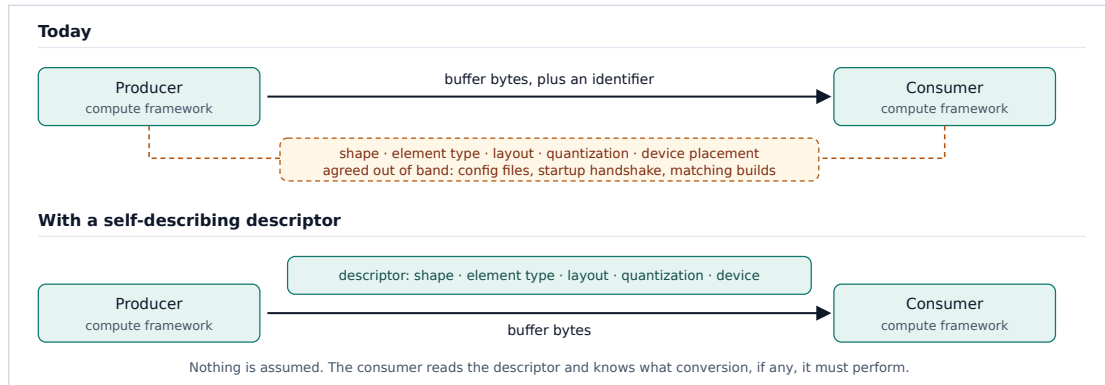


Figure 1. What crosses the boundary today, and what a self-describing descriptor changes.

3. The Landscape

3.1 Interchange solutions

Solution	Kind	Layout model	Quantization	Streaming	Zero-copy	RDMA	Self-describing	Adoption
DLPack [1]	In-process ABI	Strided	✗	✗	✓	✗	Partial	Very high
Apache Arrow [2]	IPC, columnar	Row/column-major	✗	✓	✓	✗	Partial	Very high
Arrow Flight [3]	Streaming RPC	Row/column-major	✗	✓	✗	✗	Partial	Medium

Solution	Kind	Layout model	Quantization	Streaming	Zero-copy	RDMA	Self-describing	Adoption
SafeTensors [4]	File	Row-major	✗	✗	✓ (mmap)	✗	Partial	High
GGUF [5]	File	Row-major + packed blocks	✓ informal	✗	✓ (mmap)	✗	✓	High
Zarr [6]	File, object store	Chunk grid	✗	✗	✗ (compressed)	✗	✓	Medium
NetCDF [7]	File	Row-major	✗	✗	✗	✗	✓	High
OPeNDAP [8]	HTTP request	Row-major	✗	✓	✗	✗	✓	Medium
NIXL [9]	RDMA transport	None	✗	n/a	✓	✓	✗	Emerging
NCCL [10]	RDMA collectives	None	✗	n/a	✓	✓	✗	Very high
UCX [11]	RDMA abstraction	None	✗	n/a	✓	✓	✗	High

Table 1: Data interchange solutions. *Self-describing* means the shape, element type, layout, and quantization travel with the data.

Five facts from this table drive the rest of the review.

1. **No solution describes more than one layout family.** Every entry is limited to strides or to row-major order. None can state that a tensor is tiled, packed, sparse, or paged.
2. **Only GGUF puts quantization parameters in the descriptor**, and its schemes are defined by their reference implementation rather than by a portable specification, so interoperability requires reading that code.
3. **Arrow specifies buffer alignment (64 bytes minimum) and Arrow Flight loses it.** Flight carries data over gRPC, which requires at least one CPU copy per message and does not preserve alignment, so receivers copy again before handing memory to an accelerator or a linear-algebra kernel. Its message structure is nonetheless the right one: the descriptor precedes the data, messages are typed, and exchange is bidirectional.
4. **The RDMA transports describe nothing by design.** RDMA is remote direct memory access: one machine’s network interface reads or writes another machine’s registered memory without involving the remote processor. NIXL, NCCL, and UCX move registered byte ranges and require both endpoints to already agree on the format.
5. **File formats stop at the file.** SafeTensors, GGUF, Zarr, and NetCDF have no in-process ABI and no streaming protocol, so none of them can serve runtime interchange.

3.2 Compute frameworks and libraries

Framework	Interchange it uses	What it cannot express at the boundary
NumPy [12]	DLPack, buffer protocol, .npy	Nothing beyond strides; no path outside Python
PyTorch [13]	DLPack, SafeTensors, NCCL, RDMA libraries via serving stacks	Quantization parameters (kept in separate objects); packed and tiled layouts

Framework	Interchange it uses	What it cannot express at the boundary
TensorFlow [14]	DLPack, saved-model container, NCCL	Compiler-chosen physical layout; quantization is a property of the model artifact
JAX [15]	DLPack, checkpoint libraries, NCCL	Device sharding and compiler-chosen tiling; a handoff degrades to a dense single-device view
Eigen [16], xtensor [17]	None; both map caller-owned memory	Any layout not fixed at compile time; no descriptor of any kind
PLASMA [18], SLATE [19]	None	Tile parameters, which are private to the library although central to its performance
TVM [20], MLC-LLM [21]	DLPack; ad-hoc parameter bundles	The packed and tiled forms the compiler produces; grouped low-bit weight parameters
MLX [22]	DLPack, buffer protocol, existing file formats	Its packed quantized representation; unified memory has no single owning device
vLLM [23]	NIXL, external cache layers, NCCL	Paged cache geometry and quantization; fixed once at startup
NVIDIA Dynamo, TensorRT-LLM [24], [25]	NIXL, UCX, MPI	Cache layout across mismatched parallelism, handled by a hand-written module

Table 2: What the clients use, and what they cannot state at the boundary.

Three observations follow. First, nine of these systems support DLPack, so its descriptor sets the effective limit on what can cross a boundary inside one process. Second, the numerical libraries prove that adopting foreign memory is routine — Eigen and xtensor both map caller-owned buffers — so the obstacle is the missing description, not the sharing mechanism. Third, PLASMA and SLATE show that a serious library maintains several layouts at once, which means a single mandated layout would force a conversion on someone in every exchange.

4. Where the Gap Is Most Expensive

Large-language-model inference has two phases. **Prefill** processes the whole prompt at once, is compute-bound, and fills the **key-value (KV) cache**: the stored attention keys and values that let later steps avoid recomputing attention over the prompt. **Decode** emits one token at a time, is memory-bandwidth-bound, and reads and extends that cache. The two phases have different hardware profiles, so production systems run them on separate accelerators or nodes [26], [27]. The cache, of logical shape [layers, 2, heads, seq_len, head_dim], must then be transferred for every request — several gigabytes at long context lengths. The cache is stored in a **paged** layout [23]: a pool of fixed-size blocks plus a per-sequence block table mapping logical positions to physical blocks, so a transfer moves a list of non-contiguous blocks rather than one contiguous region.

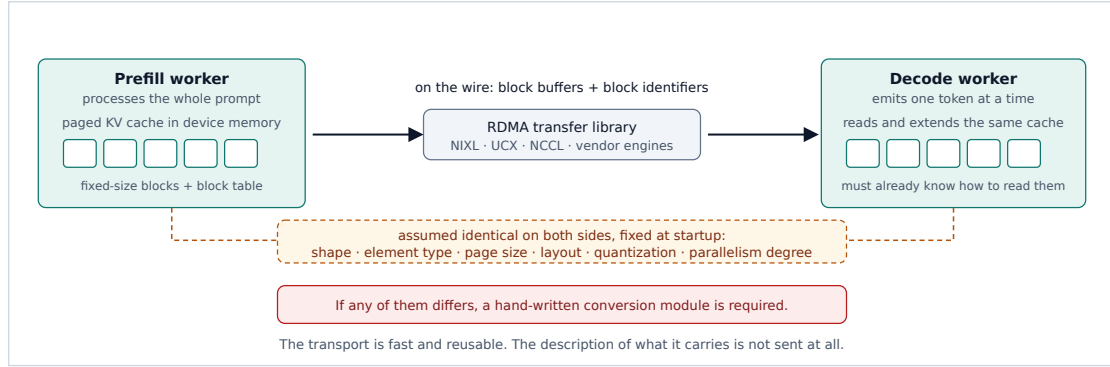


Figure 2. KV cache transfer between a prefill worker and a decode worker.

System	Transport used	Sent with the data	Assumed out of band
DistServe [26]	Intra-node interconnect	Layer and block references	Identical model build and cache layout
Mooncake [27]	Its own multi-NIC RDMA engine	Block keys and offsets	Shape, element type, paged layout
vLLM connectors [23], [28]	NIXL, Mooncake, LMCache	Raw blocks and block identifiers	Everything, fixed at cache-registration time
Dynamo, TensorRT-LLM [24], [25]	NIXL, UCX, MPI	Prompt tokens and connection parameters	Layout; parallelism mismatch resolved by a bespoke module
llm-d [29]	NIXL with a unified collective backend	Blocks and routing hints	Model identity and layout
LMCache [30], [31]	Engine connectors, multi-tier store	Compressed chunks and keys	Cache format and compression codec

Table 3: Six systems that transfer the KV cache.

The pattern is identical in all six. The handshakes negotiate addresses and agent identity; none of them negotiates a descriptor. Three costs follow.

1. **Endpoints are coupled in pairs.** Every connector assumes matching builds on both sides. Transfer between different engines, different versions, or different quantization settings requires a purpose-built adapter, because there is no neutral representation.
2. **Layout conversion is written by hand.** When prefill and decode run at different tensor-parallelism degrees, the block mapping differs; TensorRT-LLM converts the layout during transmission in a dedicated module, and vLLM’s RDMA connector reshuffles the block mapping itself. A description of the source and destination layouts would let one routine handle every such case.
3. **Stored caches are unreadable elsewhere.** A cache written to a pool [27] or compressed to disk [31] carries no standard description, so only the software that wrote it can read it back. This removes most of the benefit of pooling it.

5. A Second Gap: Heterogeneous Composition

Every layout in § 3 describes one element type, one layout, and one quantization scheme across the whole tensor. Several established techniques do not fit that model. Outlier-aware quantization keeps a dense low-precision tensor plus a sparse set of high-precision corrections at shared positions [32], [33]. Residual-precision caches keep recent tokens at full precision and older tokens quantized [34]. Mixture-of-experts models assign different bit widths per expert. Outside machine learning, the same

requirement is long established and production-proven: adaptive-mesh frameworks store a logical array as independently allocated boxes [35], volumetric formats mix constant tiles with dense leaves [36], and HDF5 virtual datasets define one logical dataset as per-region mappings onto separate sources [37].

Two composition rules appear, and they are not interchangeable. A **partition** covers the index space with non-overlapping regions; an **overlay** places corrections on top of a base at shared positions. A format that supports only one of them silently changes the meaning of the other. No mainstream tensor interchange format supports either.

6. The Gaps

#	Gap	What happens today	Required capability
1	Alignment is not stated	Receivers copy defensively before using a buffer; Arrow Flight loses alignment through gRPC	A normative minimum alignment, stricter where accelerator and IPC paths need page alignment, plus explicit lifetime transfer
2	No streaming form	File formats load whole artifacts; readers buffer input they cannot yet use	Descriptor before data, self-delimiting frames, no trailing index or back-reference in the stream
3	Descriptors are not transmitted	Format is fixed at startup and endpoints must match (§ 4)	A descriptor sent with every transfer: shape, element type, layout, quantization, device, and position within a larger tensor
4	Only one layout family per format	Producers repack, or endpoints agree privately; mismatches are resolved by hand-written modules	A layout vocabulary covering strided, tiled, sparse, paged, and composite forms, with an extension path for hardware-specific packings, plus negotiation so conversion happens once on the better-placed side
5	Device placement is not described	Placement lives in engine configuration; unified-memory systems have no single owning device	A placement model covering host, discrete, unified, and registered memory, in which device affinity can belong to an access rather than to the buffer
6	Quantization is not in the descriptor	Parameters travel in config files or framework-private objects; sub-byte packing order differs between implementations	Scheme identifier, scales, zero points and block size in the descriptor, with bit-exact packing order and a normative, versioned scheme set
7	No language-agnostic ABI	Formats stop at a file boundary or at one language’s ecosystem	A stable C ABI carrying the descriptor and buffer handles, with no idioms of the implementation language

Table 4: Seven gaps, what they cost today, and the capability each requires.

No solution in Table 1 addresses more than three of the seven. DLPack addresses 1 and 7 inside one process. Arrow addresses 1, 2, and 7 for a tabular data model. GGUF addresses 3 and 6 for one runtime, in files. The RDMA transports address none of them, which is correct for their role: they are a data plane, and what is missing is a description that travels above them.

7. Hurray: A Proposal

Hurray is a proposed specification for a tensor interchange format and protocol, designed against the seven gaps above. It defines a descriptor, a binary encoding for it, a streaming protocol, a file container, and a C ABI. It defines no kernels, no scheduler, and no cache policy: compute frameworks remain the clients, and existing transports remain the data plane.

The proposed capabilities map directly onto Table 4.

- **Zero-copy with a stated alignment.** A normative minimum buffer alignment, page alignment where accelerator and IPC paths require it, and explicit transfer of buffer ownership and lifetime.
- **Streaming and self-delimiting framing.** Each tensor’s descriptor precedes its data, the stream is self-delimiting, and the streaming form contains no trailing index and no back-references, so a reader can start work before the input ends and a writer can emit tensors one at a time.
- **Self-description.** Shape, element type, layout, quantization, device placement, and position within a larger logical tensor travel with the buffer, on every path: in-process handoff, IPC, file, and RDMA.
- **Layout vocabulary and negotiation.** Named layouts for strided, tiled, sparse, paged, and composite tensors, an extension mechanism for hardware-specific packed forms, and a handshake in which each side declares what it can consume, so that a conversion is performed once by the side better placed to perform it.
- **Device and memory-placement description.** A placement model covering host memory, discrete accelerator memory, unified memory, and registered regions.
- **Quantization metadata.** Scheme identifier, scales, zero points, and block size in the descriptor, with bit-exact sub-byte packing and a normative, versioned scheme set.
- **Language-agnostic C ABI.** A stable boundary that any language can implement against, rather than one library with bindings.

Hurray is a specification effort, and the specification is public. The format is documented at pgillet.github.io/hurray and developed in the open at github.com/pgillet/hurray. Review of the specification, and of the gap analysis in § 6 that motivates it, is welcome.

Several questions remain open and are stated as such. How large should the layout vocabulary be, given that every named layout is a burden on every implementation and every omission forces a copy? What should negotiation exchange beyond a list of supported layouts, given that the better-placed side depends on conversion cost that neither side currently expresses? Should device affinity belong to a buffer or to an access? How should quantization schemes be parameterized so that new ones do not require a new scheme identifier each time?

8. Conclusion

The transports used for tensor data are fast, general, and widely deployed. The descriptions of what they carry are not transmitted at all. Compute frameworks compensate individually: PyTorch keeps quantization parameters outside the tensor, JAX cannot express sharding across a handoff, vLLM fixes its cache format at startup and sends opaque blocks, and TensorRT-LLM contains a hand-written layout converter. These are not defects in those systems; they are what an interchange layer with an insufficient descriptor forces on their authors.

What is missing is a portable description that travels with the bytes, expressive enough to state that a tensor is tiled, paged, sparse, block-quantized, or composed of heterogeneous regions, and carried identically across in-process, IPC, file, and RDMA paths. Table 4 states the seven capabilities such a description requires. Hurray is a proposal to specify them.

References

- [1] DLPack: Open In-Memory Tensor Structure. <https://github.com/dmlc/dlpack>
- [2] Apache Arrow. <https://arrow.apache.org>
- [3] Apache Arrow Flight. <https://arrow.apache.org/docs/format/Flight.html>
- [4] SafeTensors. Hugging Face. <https://github.com/huggingface/safetensors>
- [5] GGUF: GPT-Generated Unified Format. <https://github.com/ggerganov/ggml/blob/master/docs/gguf.md>
- [6] Zarr: chunked, compressed, N-dimensional arrays. <https://zarr.dev>
- [7] NetCDF. Unidata / UCAR. <https://www.unidata.ucar.edu/software/netcdf/>
- [8] OPeNDAP (DAP2 / DAP4). <https://www.opendap.org>
- [9] NIXL: NVIDIA Inference Xfer Library. <https://github.com/ai-dynamo/nixl>
- [10] NCCL: NVIDIA Collective Communications Library. <https://developer.nvidia.com/nccl>
- [11] P. Shamis et al., “UCX: An Open Source Framework for HPC Network APIs and Beyond,” *HOTI*, 2015. <https://openucx.org>
- [12] C. R. Harris et al., “Array programming with NumPy,” *Nature* 585, 357–362, 2020.
- [13] A. Paszke et al., “PyTorch: An Imperative Style, High-Performance Deep Learning Library,” *NeurIPS*, 2019. <https://arxiv.org/abs/1912.01703>
- [14] M. Abadi et al., “TensorFlow: A System for Large-Scale Machine Learning,” *OSDI*, 2016. <https://arxiv.org/abs/1605.08695>
- [15] JAX. <https://docs.jax.dev>
- [16] Eigen. <https://eigen.tuxfamily.org>
- [17] xtensor. <https://xtensor.readthedocs.io>
- [18] PLASMA: Parallel Linear Algebra Software for Multicore Architectures. <https://icl.utk.edu/plasma/>
- [19] M. Gates et al., “SLATE: Software for Linear Algebra Targeting Exascale,” SLATE Working Notes. <https://icl.utk.edu/slate/>
- [20] T. Chen et al., “TVM: An Automated End-to-End Optimizing Compiler for Deep Learning,” *OSDI*, 2018. <https://arxiv.org/abs/1802.04799>
- [21] MLC-LLM. <https://llm.mlc.ai>
- [22] MLX: an array framework for Apple silicon. <https://ml-explore.github.io/mlx/>
- [23] W. Kwon et al., “Efficient Memory Management for Large Language Model Serving with PagedAttention,” *SOSP*, 2023. <https://arxiv.org/abs/2309.06180>
- [24] NVIDIA Dynamo. <https://developer.nvidia.com/blog/introducing-nvidia-dynamo-a-low-latency-distributed-inference-framework-for-scaling-reasoning-ai-models/>

- [25] Disaggregated Serving in TensorRT-LLM. NVIDIA. https://nvidia.github.io/TensorRT-LLM/blogs/tech_blog/blog5_Disaggregated_Serving_in_TensorRT-LLM.html
- [26] Y. Zhong et al., “DistServe: Disaggregating Prefill and Decoding for Goodput-optimized Large Language Model Serving,” *OSDI*, 2024. <https://arxiv.org/abs/2401.09670>
- [27] R. Qin et al., “Mooncake: A KVCache-centric Architecture for Serving LLM Chatbot,” *USENIX FAST*, 2025. <https://arxiv.org/abs/2407.00079>
- [28] vLLM: disaggregated prefilling and KV cache connectors. https://docs.vllm.ai/en/stable/features/disagg_prefill/
- [29] llm-d: Kubernetes-native distributed inference. <https://llm-d.ai/docs/guide/Installation/pd-disaggregation>
- [30] LMCache: a KV cache layer for LLM serving. <https://arxiv.org/html/2510.09665v2>
- [31] Y. Liu et al., “CacheGen: KV Cache Compression and Streaming for Fast Large Language Model Serving,” *ACM SIGCOMM*, 2024. <https://arxiv.org/abs/2310.07240>
- [32] T. Dettmers et al., “SpQR: A Sparse-Quantized Representation for Near-Lossless LLM Weight Compression,” 2023. <https://arxiv.org/abs/2306.03078>
- [33] C. Hooper et al., “KVQuant: Towards 10 Million Context Length LLM Inference with KV Cache Quantization,” 2024. <https://arxiv.org/abs/2401.18079>
- [34] Z. Liu et al., “KIVI: A Tuning-Free Asymmetric 2bit Quantization for KV Cache,” 2024. <https://arxiv.org/abs/2402.02750>
- [35] W. Zhang et al., “AMReX: A Framework for Block-Structured Adaptive Mesh Refinement,” *JOSS*, 2019. <https://amrex-codes.github.io>
- [36] K. Museth, “VDB: High-Resolution Sparse Volumes with Dynamic Topology,” *ACM TOG*, 2013. <https://www.openvdb.org>
- [37] HDF5 Virtual Datasets. The HDF Group. https://docs.hdfgroup.org/hdf5/develop/_v_d_s.html