1. Editor Atom

a. Indica qué nombres de fichero debe ignorar

Ignored Names
List of glob patterns. Files and directories matching these patterns will be ignored by some packages, such as the fuzzy finder and tree view. Individual packages might have additional config settings for ignoring names.


Default: .git, .hg, .svn, .DS_Store, ._*, Thumbs.db, desktop.ini

b. Configura la carpeta de los proyectos


Project Home
The directory where projects are assumed to be located. Packages created using the Package Generator will be stored here by default.

C:\Users\Pedro\Repositorio

c. Instala el paquete color-picker y comprueba que funciona

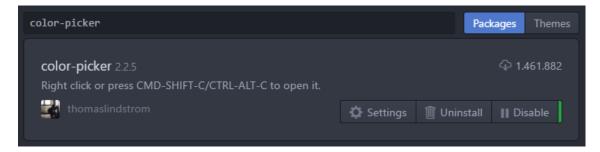

d. Instala otro paquete que consideres interesante del artículo y comprueba que funciona.

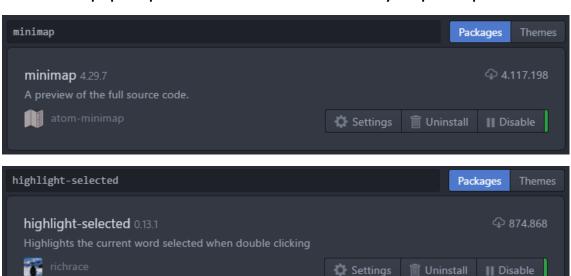


2. Browser-Sync

- ✓ Instalado NodeJS
- ✓ Instalado Browser-Sync
- Creado un ejecutable .bat para lanzar sitios web estáticos
- ✓ Añadido al Path del sistema la ruta donde se sitúa el .bat.


```
C:\Users\Pedro>bs
C:\Users\Pedro>browser-sync start --server --directory --files "**/*"
```

3. Instalar Git

a. Indica que puede emplear Git desde el prompt de Windows

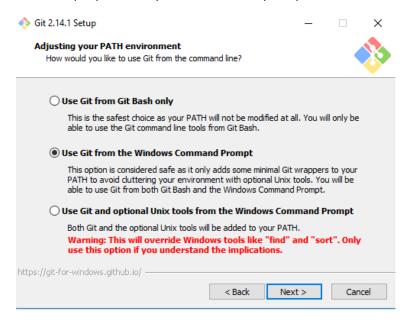

b. Indica que use la consola de Windows por defecto (en configurar el terminal)

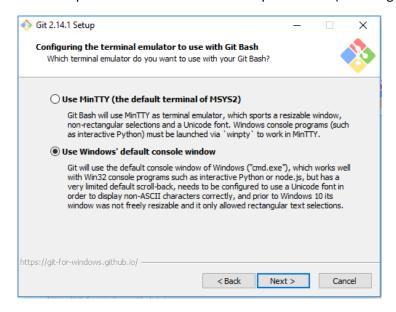


Puedes comprobar con git --versión la versión que has instalado.

```
C:\Users\Pedro>git --version
git version 2.14.1.windows.1
```

remote: Total 23 (delta 5), reused 11 (delta 2), pack-reused 0

4. Crear un repositorio en Github.



C:\Users\Pedro\Repositorios>git init

Unpacking objects: 100% (23/23), done.

```
Initialized empty Git repository in C:/Users/Pedro/Repositorios/.git/
C:\Users\Pedro\Repositorios>git clone https://github.com/pgmonreal/DWEC.git
Cloning into 'DWEC'...
remote: Counting objects: 23, done.
remote: Compressing objects: 100% (16/16), done.
```