

# R na Cozinha

Paulo Guilherme Pinheiro dos Santos

29 de junho de 2021



# Sumário

<b>1</b>	<b>Prerequisites</b>	<b>5</b>
<b>2</b>	<b>Introdução</b>	<b>7</b>
<b>3</b>	<b>Matemática básica no R</b>	<b>9</b>
<b>4</b>	<b>Methods</b>	<b>13</b>
<b>5</b>	<b>A gramática dos gráficos</b>	<b>15</b>
5.1	Example one . . . . .	15
5.2	Example two . . . . .	15
<b>6</b>	<b>Final Words</b>	<b>17</b>
	<b>Referências</b>	<b>17</b>



# Capítulo 1

## Prerequisites

This is a *sample* book written in **Markdown**. You can use anything that Pandoc's Markdown supports, e.g., a math equation  $a^2 + b^2 = c^2$ .

The **bookdown** package can be installed from CRAN or Github:

```
install.packages("bookdown")  
# or the development version  
# devtools::install_github("rstudio/bookdown")
```

Remember each Rmd file contains one and only one chapter, and a chapter is defined by the first-level heading #.

To compile this example to PDF, you need XeLaTeX. You are recommended to install TinyTeX (which includes XeLaTeX): <https://yihui.org/tinytex/>.



## Capítulo 2

# Introdução

You can label chapter and section titles using `{#label}` after them, e.g., we can reference Chapter 2. If you do not manually label them, there will be automatic labels anyway, e.g., Chapter 4.

Figures and tables with captions will be placed in `figure` and `table` environments, respectively.

```
par(mar = c(4, 4, .1, .1))  
plot(pressure, type = 'b', pch = 19)
```

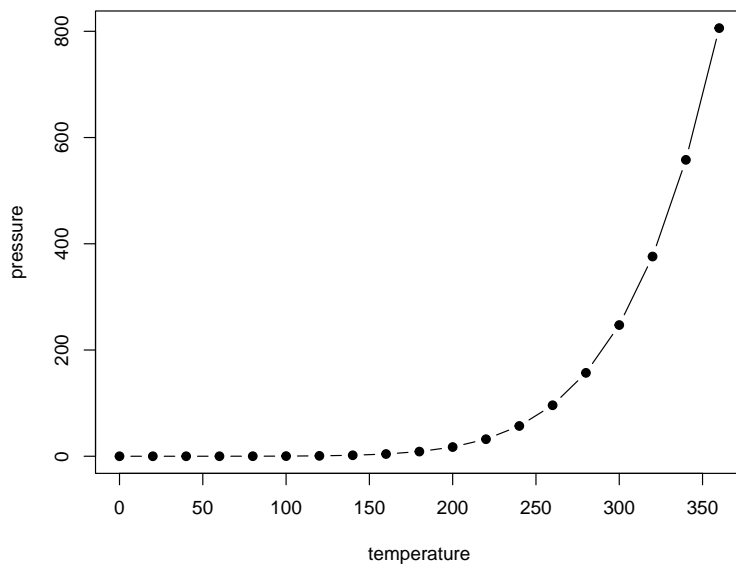


Figura 2.1: Here is a nice figure!

Tabela 2.1: Here is a nice table!

Sepal.Length	Sepal.Width	Petal.Length	Petal.Width	Species
5.1	3.5	1.4	0.2	setosa
4.9	3.0	1.4	0.2	setosa
4.7	3.2	1.3	0.2	setosa
4.6	3.1	1.5	0.2	setosa
5.0	3.6	1.4	0.2	setosa
5.4	3.9	1.7	0.4	setosa
4.6	3.4	1.4	0.3	setosa
5.0	3.4	1.5	0.2	setosa
4.4	2.9	1.4	0.2	setosa
4.9	3.1	1.5	0.1	setosa
5.4	3.7	1.5	0.2	setosa
4.8	3.4	1.6	0.2	setosa
4.8	3.0	1.4	0.1	setosa
4.3	3.0	1.1	0.1	setosa
5.8	4.0	1.2	0.2	setosa
5.7	4.4	1.5	0.4	setosa
5.4	3.9	1.3	0.4	setosa
5.1	3.5	1.4	0.3	setosa
5.7	3.8	1.7	0.3	setosa
5.1	3.8	1.5	0.3	setosa

Reference a figure by its code chunk label with the `fig:` prefix, e.g., see Figure 2.1. Similarly, you can reference tables generated from `knitr::kable()`, e.g., see Table 2.1.

```
knitr::kable(
  head(iris, 20), caption = 'Here is a nice table!',
  booktabs = TRUE
)
```

You can write citations, too. For example, we are using the **bookdown** package (Xie, 2021) in this sample book, which was built on top of R Markdown and **knitr** (Xie, 2015).



## Capítulo 3

# Matemática básica no R

```
# Soma:
```

```
1+3
```

```
## [1] 4
```

```
10+2
```

```
## [1] 12
```

```
# Subtração:
```

```
5-2
```

```
## [1] 3
```

```
10-2
```

```
## [1] 8
```

```
2-10
```

```
## [1] -8
```

```
# Multiplicação;
```

```
2*3
```

```
## [1] 6
```

```
7*4
```

```
## [1] 28
```

```
# Potenciação
```

```
2^3
```

```
## [1] 8
```

```
4^4
```

```
## [1] 256
```

```
2**3
```

```
## [1] 8
```

```
4**4
```

```
## [1] 256
```

```
# Divisão;
```

```
8/2
```

```
## [1] 4
```

```
10/3
```

```
## [1] 3.333333
```

```
# Quociente da divisão; parte inteira: %/%
```

```
10%/%3
```

```
## [1] 3
```

```
# Resto da divisão: %%
```

```
10%%3
```

```
## [1] 1
```

```
# Módulo:
```

```
abs(-3)
```

```
## [1] 3
```

```
abs(8)
```

```
## [1] 8
```

```
abs(-10)
```

```
## [1] 10
```

```
# Logarítmo:
```

```
log(2)
```

```
## [1] 0.6931472
```

```
log(2,10)
```

```
## [1] 0.30103
```

```
log10(2)
```

```
## [1] 0.30103
```

```
?log
help(log)
log(2,exp(1))

## [1] 0.6931472
log

## function (x, base = exp(1)) .Primitive("log")
# Exponencial:
exp(1)

## [1] 2.718282
exp(3)

## [1] 20.08554
exp(0)

## [1] 1
# Pi
pi

## [1] 3.141593
# Funções Trigonômicas:
?sin
sin(pi/2)

## [1] 1
sinpi(1/2)

## [1] 1
cos(pi/2)

## [1] 6.123234e-17
cos(pi)

## [1] -1
cos(0)

## [1] 1
tan(pi/4)

## [1] 1
```

```
sin(pi/4)/cos(pi/4)

## [1] 1
# Fatorial:
factorial(4)

## [1] 24
4*3*2*1

## [1] 24
# Combinações:
choose(10,2)

## [1] 45
10*9/factorial(2)

## [1] 45
factorial(10)/(factorial(10-2)*factorial(2))

## [1] 45
# Somatórios:
x = 3:13
x

## [1] 3 4 5 6 7 8 9 10 11 12 13
sum(x)

## [1] 88
cumsum(x)

## [1] 3 7 12 18 25 33 42 52 63 75 88
max(cumsum(x))

## [1] 88
x |> cumsum() |> max()

## [1] 88
# Produtórios:
x |> prod()

## [1] 3113510400
prod(x)

## [1] 3113510400
```

## Capítulo 4

# Methods

We describe our methods in this chapter.



## Capítulo 5

# A gramática dos gráficos

Some *significant* applications are demonstrated in this chapter.

### 5.1 Example one

### 5.2 Example two





## Capítulo 6

# Final Words

We have finished a nice book.



# Referências

Xie, Y. (2015). *Dynamic Documents with R and knitr*. Chapman and Hall/CRC, Boca Raton, Florida, 2nd edition. ISBN 978-1498716963.

Xie, Y. (2021). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.22.