


Authorization API for ISV Partner

Last update
03 Apr, 2025

Table of Contents

0. Diagram	2
1. Device Authorization API : /oauth2/devicecode	4
Request Specification	4
Request Parameters	4
Request Example	5
Response Specification	5
Success Response	5
Error Response	7
Standard Error Codes	7
Internal Server Error	7
2. Token API : /oauth2/token	7
Request Specification	7
Request Parameters	8
Request Example	9
Response Specification	9
Success Response	9
Error Response	10
Standard Error Codes	11
Internal Server Error	11
3. Calling Foody OpenAPI	11
Request Example (apply Authorization)	11
Request Example (if endpoint required restaurant_id)	12


0. Diagram

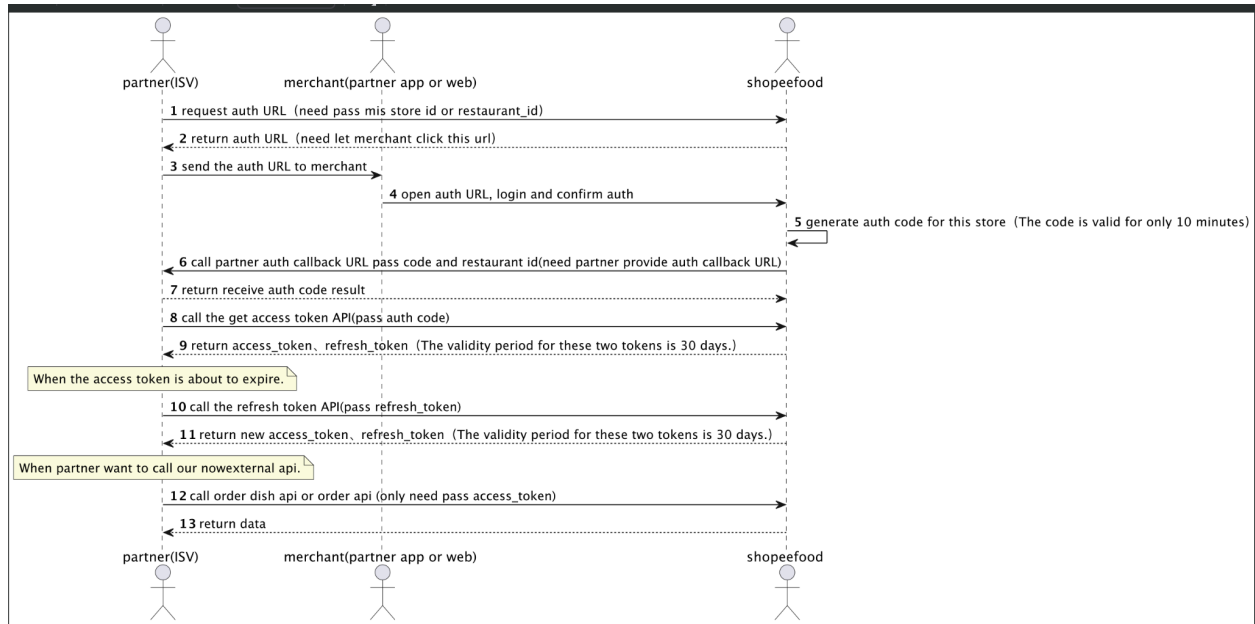

Note:

- ISV Partner need to manage the token of each store separately (with access_token and refresh_token).
- Need refresh token periodically to avoid expired authorization.
- Recommend to create 1 isv_partner_id for 1 chain/brand.
- **If you are using Golang, it is strongly recommended to use the "golang.org/x/oauth2" library to access our OAuth2 API.**

ISV Authen flow

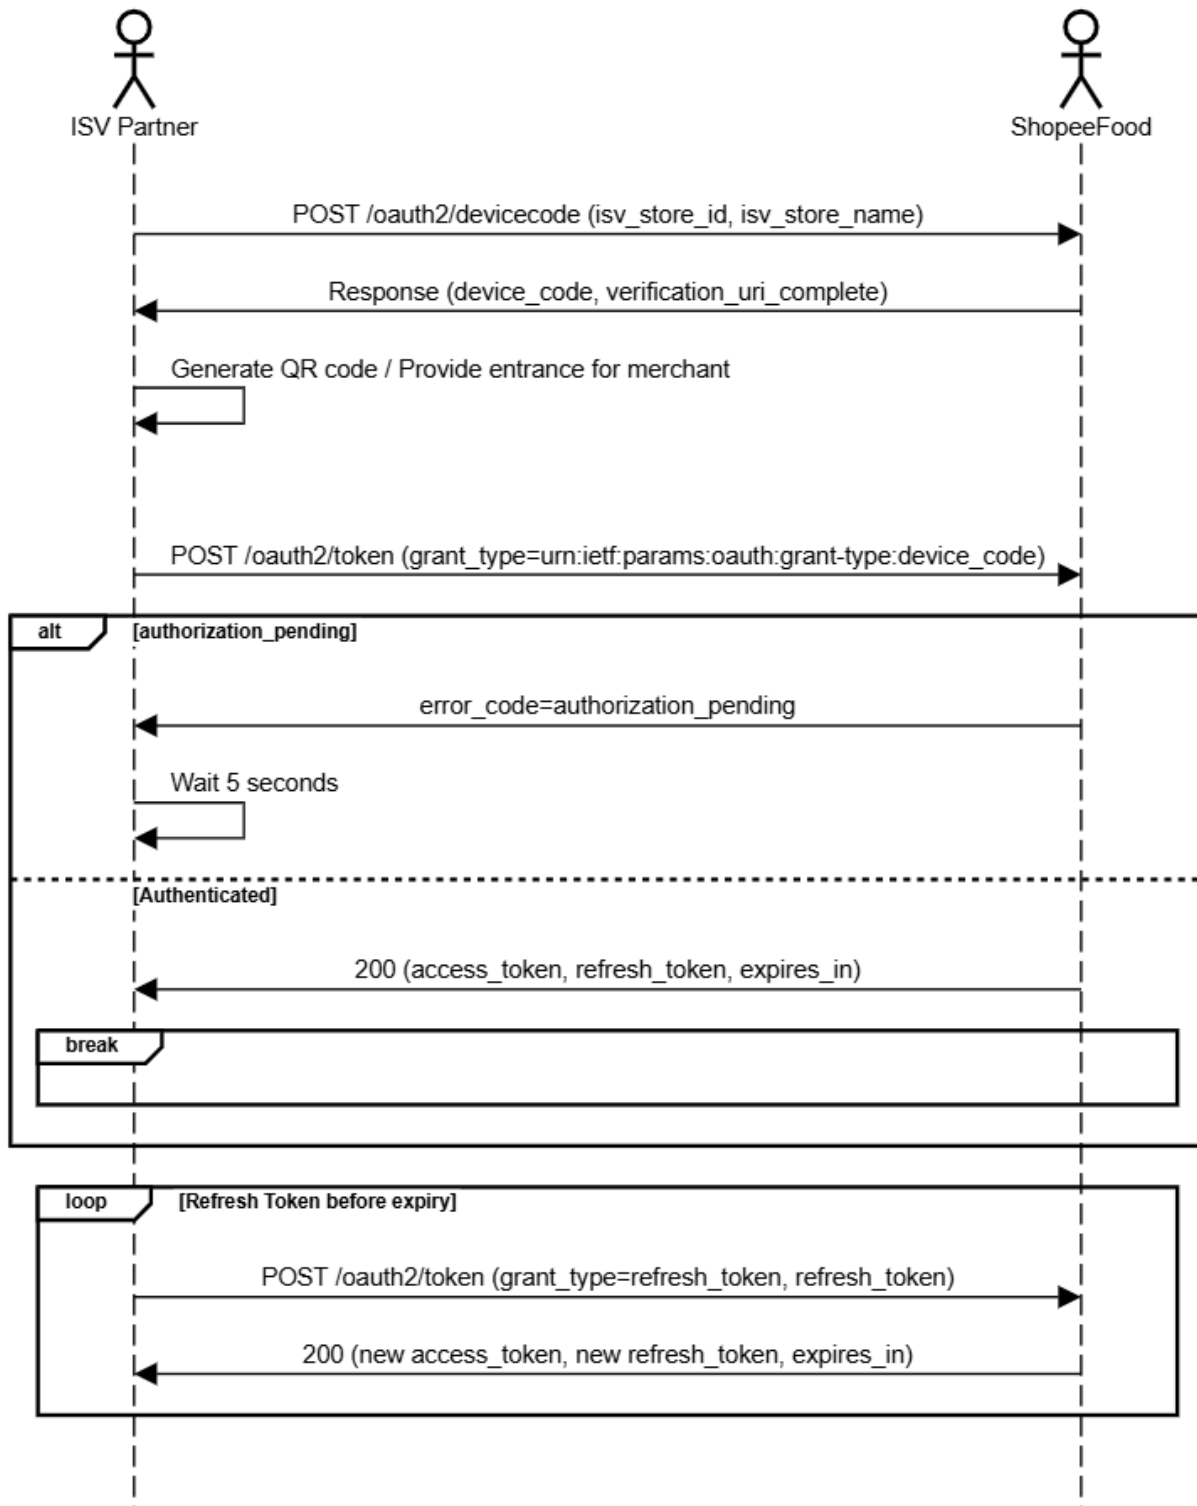

1. Device Authorization API: /oauth2/devicecode

The client must first check with the authentication server for a device and user code used to initiate authentication.

The client collects this request from the `/devicecode` endpoint.

In the request, the client should also include the permissions it needs to acquire from the user.

From the moment the request is sent, the user has 15 minutes to sign in. This is the default value for `expires_in`.

The request should only be made when the user indicates they're ready to sign in.

Request Specification

- **HTTP Method:** POST
- **Content-Type:** Parameters passed in request body as `application/x-www-form-urlencoded` (URL-encoded)
- **Mandatory HTTPS:** Must use https protocol

Request Parameters

Parameter	Required	Description	Example Value
client_id	yes	Client ID assigned during ISV registration	s6BhdRkqt3
scope	no	Requested permissions (space-separated). Must be within ISV-registered scopes. Uses platform default if omitted.	order.read order.write
isv_store_id	no	Store name in ISV platform to display on authorization page	ID12345
isv_store_name	no	Store ID in ISV platform to display on authorization page	Mac Inc.

Request Example

```
POST /oauth2/devicecode HTTP/1.1

Host: openapi.shopeefood.vn

Content-Type: application/x-www-form-urlencoded

client_id=s6BhdRkqt3

&scope=order.read%20order.write

&isv_store_name=Mac%20Inc.

&isv_store_id=ID12345
```

Response Specification

Success Response

- **HTTP Status:** 200 OK
- **Content-Type:** application/json
- **Response Body:**

```
{
  "device_code": "GM...VK",
  "user_code": "WDJB-MJHT",
  "verification_uri": "https://openapi.shopeefood.vn/activate",
  "verification_uri_complete":
"https://openapi.shopeefood.vn/activate?user\_code=WDJB-MJHT",
  "expires_in": 900,
  "interval": 5
}
```

Parameter	Required	Description	Example Value
device_code	yes	32-character random string for client-server session verification	G3Y6JtD4Vp7QwZ2l
user_code	yes	32-character user authorization identifier for device session recognition	B5D2-L9M8
verification_uri	yes	URL for user verification page	https://auth.example.com/activate
verification_uri_complete	yes	Pre-assembled verification URL with user_code parameter	https://auth.example.com/activate?code=B5D2-L9M8
expires_in	yes	Validity period (seconds) for device_code and user_code (typically 900)	900
interval	yes	Polling interval (seconds) for token endpoint	5

Error Response

- **HTTP Status:** 400 Bad Request or 401 Unauthorized

- **Content-Type:** application/json
- **Response Body:**

```
{  
  
  "error": "invalid_request",  
  
  "error_message": "missing required parameter: code"  
  
}
```

Standard Error Codes

Error Code	Description
invalid_client	Invalid or unregistered client_id
invalid_scope	Invalid or unauthorized permission scope
invalid_request	Missing parameters or format error
unauthorized_client	Client unauthorized for this grant type
access_denied	User or server denied authorization

Internal Server Error

- **HTTP Status:** 500 Internal Server Error
- **No redirects.**
- Clients must handle via 500 status code.

2. Token API: /oauth2/token

Allows exchanging authorization codes, refresh tokens, or device codes for access tokens.

Request Specification

- **HTTP Method:** POST
- **Content-Type:** Parameters passed in request body as `application/x-www-form-urlencoded` (URL-encoded)
- **Mandatory HTTPS:** Must use https protocol

Request Parameters

Parameter	Required	Description	Example Value
client_id	yes	Client ID assigned during ISV registration	s6BhdRkqt3
client_secret	yes	Client secret assigned during ISV registration	your_client_secret_here
grant_type	yes	Must be: 1、 authorization_code 2、 refresh_token 3、 urn:ietf:params:oauth:grant-type:device_code	urn:ietf:params:oauth:grant-type:device_code
code	when grant_type= authorization_code required	Authorization code (from /authorize) when grant_type=authorization_code	AUTHORIZATION_CODE
redirect_uri	when grant_type= authorization_code required	Must exactly match redirect_uri from authorization request	https://isv.com/oauth/callback
refresh_token	when grant_type= refresh_token required	refresh token (from token response) when grant_type=refresh_token	REFRESH_TOKEN
device_code	when grant_type= urn:ietf:params:oauth:grant-type:device_code required	device code (from /devicecode) when grant_type=urn:ietf:params:oauth:grant-type:device_code	

Parameter	Required	Description	Example Value
scope	no	Requested permissions (space-separated). Must be within ISV-registered scopes. Uses platform default if omitted.	order.read order.write

Request Example

```
POST /oauth2/token HTTP/1.1

Host: openapi.shopeefood.vn

Content-Type: application/x-www-form-urlencoded

client_id=s6BhdRkqt3

&client_secret=your_client_secret_here

&grant_type=urn:ietf:params:oauth:grant-type:device_code

&code=G3Y6JtD4Vp7QwZ2l
```

Response Specification

Success Response

- **HTTP Status:** 200 OK
- **Content-Type:** application/json
- **Response Body:**

```
{

  "access_token": "ACCESS_TOKEN",

  "token_type": "Bearer",

  "expires_in": 3600,

  "refresh_token": "REFRESH_TOKEN",

  "scope": "all"

}
```

Parameter	Required	Description	Example Value
access_token	yes	Access token for API authentication Attention: The length needs to support being greater than 2048 bytes.	Y2Mq4bam8o8ciyilxogH a4t1G7s32p
token_type	yes	Always Bearer	Bearer
expires_in	yes	Access token and Refresh token validity period (seconds)	3600
refresh_token	yes	Refresh token Attention: The length needs to support being greater than 2048 bytes.	def502abc123.....
scope	no	Granted permissions (space-separated). May differ from requested scope.	order.read order.write

Error Response

- **HTTP Status:** 400 Bad Request or 401 Unauthorized
- **Content-Type:** application/json
- **Response Body:**

```
{  
  
  "error": "invalid_request",  
  
  "error_message": "missing required parameter: code"  
}
```

Standard Error Codes

Error Code	Description
invalid_request	Missing/invalid parameters or format error
invalid_client	Authentication failure (client_id/secret error)
invalid_grant	Invalid/expired code/token or redirect_uri mismatch
unauthorized_client	Client unauthorized for this grant type
invalid_scope	Requested scope invalid or exceeds authorization
authorization_pending	User hasn't completed device authorization
slow_down	Client must reduce polling frequency
expired_token	Device code has expired
	#TODO

Internal Server Error

- **HTTP Status**: 500 Internal Server Error
- **No redirects.**
- Clients must handle via 500 status code.

3. Calling Foody OpenAPI

HTTP Header:

Authorization: token_type access_token

Request Example (apply Authorization)

```
POST /restaurant/get_restaurant_info HTTP/1.1

Host: openapi.shopeefood.vn

Content-Type: application/json

Authorization: Bearer Y2Mq4bam8o8ciyilxogHa4t1G7s32p
```

Note:

ISV can ignore required restaurant_id for all endpoint

Request Example (if endpoint required restaurant_id)

```
POST /s2s/dish/get_detail HTTP/1.1

Host: openapi.shopeefood.vn

Content-Type: application/json

Authorization: Bearer Y2Mq4bam8o8ciyilxogHa4t1G7s32p

{"partner_dish_id": "12345"}
```


3. Mapping new store


Flow to mapping new ISV store with SPF store.

We only allow mapping 1 SPF store with 1 ISV store at the same time.


Notes:

- The old POS is Ocha, we don't support merchant to switch directly
- Merchant need to contact their BI incharge to remove connection with Ocha first, then start these steps again.

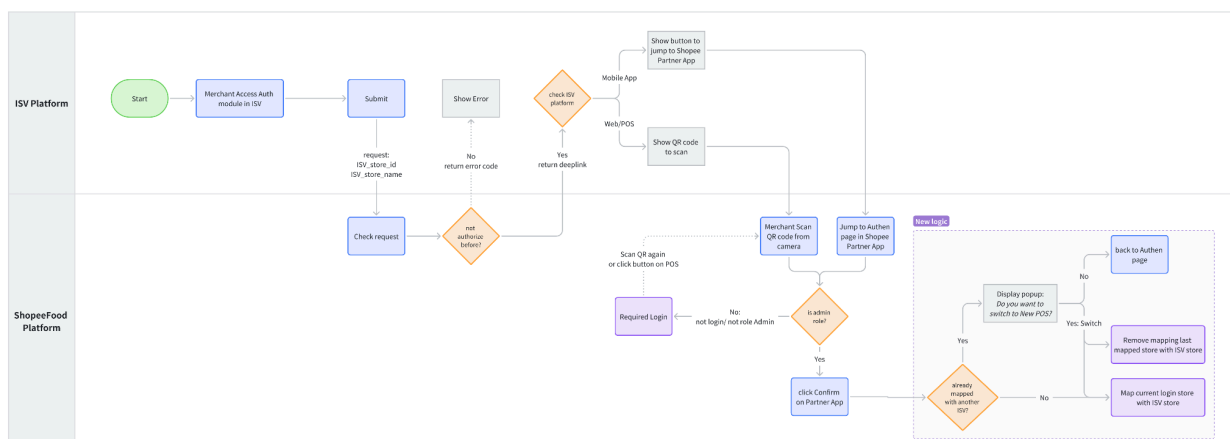

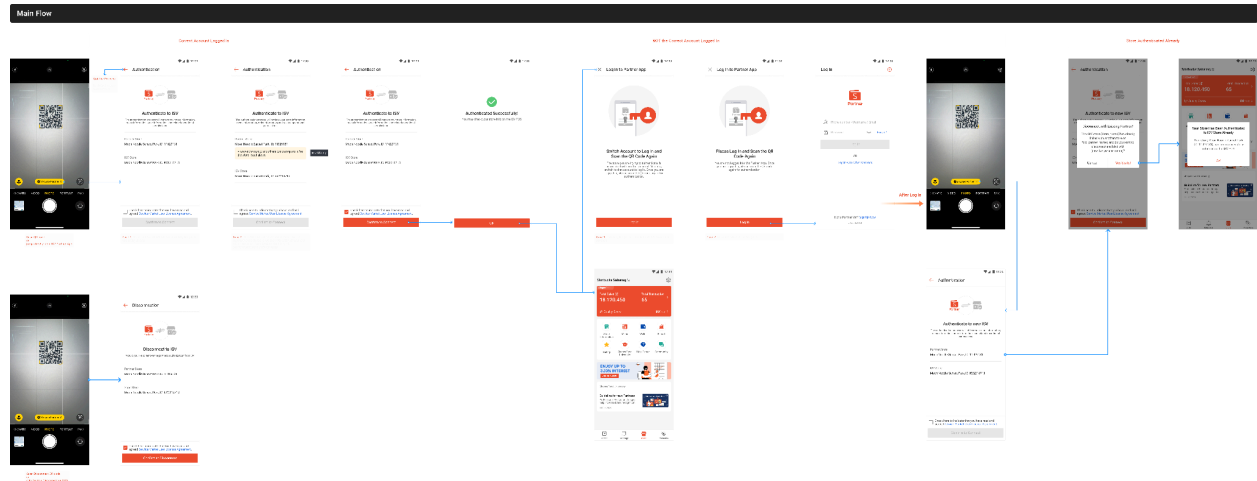

3. Disconnect ISV store with SPF store

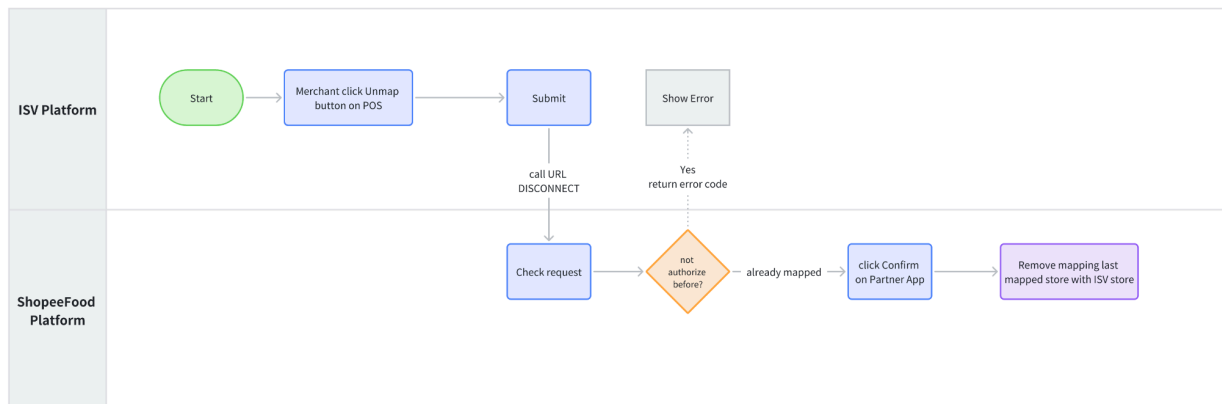

URL to call:

Env	URL
UAT	https://partner.uat.shopee.vn/app-link?enterCondition=tobToken&apprl=rn%2F%40shopee-rn%2Foperations-food%2FISV_AUTHORIZATION_DISCONNECT%3Fclient_id%3D{app_id}%26spf_restaurant_id%3D{Res. ID}
Live	https://partner.shopee.vn/app-link?enterCondition=tobToken&apprl=rn%2F%40shopee-rn%2Foperations-food%2FISV_AUTHORIZATION_DISCONNECT%3Fclient_id%3D{app_id}%26spf_restaurant_id%3D{Res. ID}

Fields:

Field	Description
{app_id}	Partner app_id, provided when start integrate with ShopeeFood
{Res. ID}	ShopeeFood restaurant id

Remarks:

- ISV Partner can use this link to embedded in your UI
- Or use to generate a QR code, allow merchant to scan and open Shopee Partner App
(recommend use this method when display on desktop or POS devices)

To check if merchant has completed Disconnect flow:

Call the endpoint below every 10s, within 5mins:

[/s2s/restaurant/get_restaurant_info](#)

- If return success: Merchant has not complete Disconnect flow yet
- If return error (expire token): Merchant has already complete Disconnect flow