

Foody External API Integration Document

V 0.0.17

Last update

Jan 28, 2026

Change History

No	Version	Content of Change	Who	Date
1	0.0.1	Created	Ho Xuan Hien	26 Feb
2	0.0.2	Add dish API, topping API and restaurant API	Cao Cong Danh	12 March
3	0.0.3	Add Driver callback API	Cao Cong Danh	04 Nov
4	0.0.4	Add api restaurant_api: get_restaurant_info, get_operation_time_ranges, set_operation_time_ranges	Doan Minh Hieu	21 May
5	0.0.5	Allow cascade restaurants in brand, api: dish.create, dish.update, topping.create, topping.update, topping.update_prices	Doan Minh Hieu	9 July
6	0.0.6	Remove unsupported APIs: dish.bulk_create_group, dish.bulk_update_group	Doan Minh Hieu	24 June, 2021
7	0.0.7	Update signature example	Doan Minh Hieu	12 July, 2021
8	0.0.8	Update /s2s/order/update : add reason_id 79 and 81	Nhung Nguyen	18 Sept 2023
9	0.0.9	add promotion api	yuhao.chen	30 May 2024
10	0.0.10	Update /s2s/promotion/get_voucher_infos Add note Add price slash api: price_slash.item_usage.search_usages Add resp slash_discount_info in api: Price_slash.search_ids	jiabin.du	25 Oct 2024

		Add request filed status in Api: Price_slash.search_ids Price_slash.search_usages		
11	0.0.11	Change file format	Phan Anh Tuan	10 Feb 2025
12	0.0.12	Add new merchant statuses: INCHARGED=DRIVER_IN_CHARGED=10 ASSIGNED=ASSIGNING_DRIVER=11 AUTO_ASSIGN=ASSIGNING_DRIVER=11 Notify merchant via API if order is changed to this statuses	Phan Anh Tuan	4 Jun 2025
13	0.0.13	Add object merchant_price (improvement for prepaid SKU): Endpoint: order.get_details	Phan Anh Tuan	9 Jun 2025
14	0.0.14	Add 3 new endpoints: - restaurant.set_restaurant_busy - restaurant.get_restaurant_busy_info - order.ready Add more instructions	Phan Anh Tuan	19 Jun 2025
15	0.0.15	Update merchant_discounts in order.get_details Add dish_id into merchant_discounts object if it's prepaid discount	Phan Anh Tuan	03 Jul 2025
16	0.0.16	Improve performance for menu.sync (within 1 min) Update endpoint menu.sync , return task_id Update instruction of menu.sync Add new endpoints: - menu.sync.get_task → allow partner to query sync task result proactively - Webhook to notify sync task result to partner Add Menu webhook (#3) to section Require partner to provide Update order.update : - Add new reason_id=80 (Shop was busy) and remove "Other" reason - Require at least 1 dish in Out_of_stock array if reason_id=79	Phan Anh Tuan	Sep 30, 2025

Table of Contents

Require partner to provide	7
1. Access and signature	8
• Access	8
• Signature	8
2. Data Definition	10
2.1 Restaurant	10
2.2 Dish	10
2.3 Dish Group	10
2.4 Topping	10
• ExternalAppType	10
• ClientType	10
• OrderListStatus	10
• OrderMerchantStatus	11
• Order Status Machine	11
• OrderUpdateStatus	11
• RejectOrderReason	12
• DishStatus	12
• ToppingStatus	12
• MenuObjectType	12
• MenuObjectUpdateType	12
• ShippingMethod	13
• OrderUpdateType	13
• PartnerErrorType	13
• ToggleType	13
• ConfirmMethod	13
• Weekday	13
• PaymentMethod	13
• MerchantPaidStatus	14
• BuyerPaymentMethod(Not online)	14
• PromotionDiscountType	14
• PromotionDiscountValueType	14
• PromotionPaymentMethod	14
• PriceSlashDiscountApplyFor	15
• PriceSlashDiscountType	15
• CommonStatus	15
• TaskStatus	15
3. Foody API Definition	15

3.1 Order Api	16
• order.get_list	16
• order.get_details	18
• order.update	23
• order.ready	25
3.2 Dish Api	26
• dish.create	26
• dish.bulk_create	26
• dish.update	27
• dish.bulk_update	28
• dish.update_partner_id_mappings	28
• dish.delete	29
• dish.set_statuses	29
• dish.get_out_of_service	30
• dish.create_topping_mapping	30
• dish.delete_topping_mapping	31
• dish.create_group	31
• dish.update_group	32
• dish.delete_group	32
• dish.update_partner_group_id_mappings	33
• dish.get_groups	33
• dish.get_partner_group_id_mappings	34
• dish.get	34
• dish.get_partner_id_mappings	35
• dish.get_topping_mapping	35
• dish.get_group_detail	36
• dish.get_detail	37
• dish.upload_picture	37
• dish.delete_picture	38
• dish.get_approval_status	38
3.3 Topping Api	39
• topping.create_group	39
• topping.bulk_create_group	39
• topping.update_group	40
• topping.bulk_update_group	41
• topping.delete_group	41
• topping.update_partner_group_id_mappings	42
• topping.create	42
• topping.bulk_create	43
• topping.update	43

• topping.bulk_update	44
• topping.delete	44
• topping.update_partner_id_mappings	45
• topping.get_groups	45
• topping.get_partner_group_id_mappings	46
• topping.get	46
• topping.get_partner_id_mappings	47
• topping.get_group_detail	47
• topping.get_detail	48
• topping.set_group_quantity	48
• topping.update_prices	49
• topping.set_statuses	49
• topping.get_out_of_service	50
3.4 Restaurant Api	51
• restaurant.get_restaurant_info	51
• restaurant.get_operation_time_ranges	51
• restaurant.set_operation_time_ranges	52
• restaurant.set_restaurant_busy	53
• restaurant.get_restaurant_busy_infos	53
3.5 Internal Api	54
• driver.update_arriving_times	54
3.5 Menu Api	54
Partner need	55
Structure	55
Diagram	57
• menu.sync	57
Check sync menu result:	59
• menu.sync.get_task	59
3.6 Promotion Api	62
• price_slash.set_discount	62
• price_slash.search_ids	63
• price_slash.usage.search_usage	64
• price_slash.item.item_usage.get_usage	64
4. Webhooks	65
4.1 Order Webhook	65
Partner need	65
• partner_api_url_callback/update_order	65
4.2 Menu Webhook	66
Partner need	66
• partner_api_url_callback	66

[Non-functional information](#)

69

Require partner to provide

No	Documents	Purpose
1	Whitelist IP	ShopeeFood only allow IPs in the list to call our APIs
2	Webhook order	Webhook to get notified of new orders & new status of orders to partner. Follow point 4.1 in this doc
3	Endpoint menu	If partners need to sync the menu from Partner to Shopee Food. Follow point 3.5 in this doc
4	Webhook menu (optional)	Webhook to get notified of new status of menu sync task result

1. Access and signature

● Access

To access Foody External API, you need to

- Apply to whitelist your ip addresses.
- **Get signature key to sign your request data (if you integrate with SPF as a Brand) or using token (if you integrate with SPF as an ISV Parter)**

● Signature

(*) ignore this step if you are an ISV Partner

HTTP requests must be signed by the requester. The key used to sign requests could be app_key or post_key.

For example, if the request is

```
POST /s2s/order/update HTTP/1.1
Content-Type: application/json
Host: testexternalapi.deliverynow.vn
Content-Length: 63
```

```
{
  "now_order_id": 11378,
  "order_id": 119,
  "status": 3,
}
```

Here are the steps to generate the signature.

1. Generate Signature Base String

The Signature Base String is a consistent reproducible concatenation of the request elements into a single string. It includes 3 parts.

a. The HTTP request method used to send the request. Value MUST be uppercase, for example: HEAD, GET , POST, etc.

Here it is **POST**

b. The full request URL includes GET parameters.

Here it is

<http://testexternalapi.deliverynow.vn/s2s/order/update>

c. The HTTP request body

Here it is

```
{"now_order_id":11378,"order_id":119,"status":3}
```

Then join these 3 parts with "|" to get the Signature Base String.

Here it is

POST|http://testexternalapi.deliverynow.vn/s2s/order/update>{"now_order_id":11378,"order_id":119,"status":3}

Example with GET request:

if full request URL is like this:

http://testexternalapi.deliverynow.vn/s2s/order/get_list?from_item_id=0&request_count=30&sort=1&status=1&from_date=2018-08-17&last_request=2017-08-22+11%3A00%3A33 then

Signature Base String will be:

GET|http://testexternalapi.deliverynow.vn/s2s/order/get_list?from_item_id=0&request_count=30&sort=1&status=1&from_date=2018-08-17&last_request=2017-08-22+11%3A00%3A33| Please notice that HTTP request body is empty in this case

2. Calculate the signature

base_string must be encoded with UTF-8 encoding before calculating signature

Signature = HEX(HMAC-SHA256(Key=key.decode('hex'), Data=base_string)) If

the key is 5feceb66ffc86f38d952786c6d696c79

and the base string is:

GET|http://testexternalapi.deliverynow.vn/s2s/order/get_list?from_item_id=0&request_count=30&sort=1&status=1&from_date=2018-08-17&last_request=2017-08-22+11%3A00%3A33| Then the signature is c514bd078e8ff4f1c9e2c0c296f99f98ce20aaa1e1dc37e2f82415758fe0affb (Notice that the key need to be decoded from hexadecimal in advance, otherwise the incorrect signature will be 4e1b0e4fcf9a1d3fee599204595423089d7adc94789faaf2f120e9af5ab49e8a)

3. Add signature in HTTP header

Append "Authorization" Header in HTTP request. The format is as follows.

Authorization: Signature e4874f45173996c8e3e35a6f513c28a8fa022e1e04f4b5d570468fe12eb4386f

So the final HTTP request is as follows.

```
POST /s2s/order/update HTTP/1.1
Content-Type: application/json
Host: testexternalapi.deliverynow.vn
Content-Length: 65
Authorization: Signature
e4874f45173996c8e3e35a6f513c28a8fa022e1e04f4b5d570468fe12eb4386f X-Foody-App-Id:
10001
X-Foody-API-Version: 1
X-Foody-Request-Id: 1
X-Foody-Language: vi

{
  "now_order_id": 11378,
```

```
"order_id": 119,  
"status": 3  
}
```

2. Data Definition

2.1 Restaurant

Restaurants are entities that sell their products to customers. And brand name can be to have restaurants.

2.2 Dish

Dish is items that are sold for customer from Merchant, for dishes example: Chicken Cordon Bleu, Spaghetti with Sausage and Tomato Sauce

2.3 Dish Group

Dishes that are the same functions will be grouped together that is called dish group

2.4 Topping

A layer of food poured or spread over a base of a different type of food to add flavor. For topping examples for Pizza: Black olives, Green peppers,...

- **ExternalAppType**

EXTERNAL_CLIENT_APP = 10004 (request foody to get your app id)

- **ClientType**

CLIENT_WEB = 1

- **OrderListStatus**

PROCESSING = 1

COMPLETED = 2

CANCELLED = 3

CONFIRMED = 4

● OrderMerchantStatus

The status ShopeeFood notify to partner

PICKED = 1 (Driver picks order at the store)

DELIVERED = 2 (Order is delivered)

CONFIRMED = 3 (Order is confirmed)

M_CHANGED = 4 (Not in use)

M_ASSIGNED = 5 (Order is assigned/sent to merchant)

M_RECEIVED = 6 (After merchants responses 200, order is marked as received by merchant)

M_OUT_OF_SERVICE = 7 (Order cannot be fulfilled by merchant and awaiting to be canceled)

CANCELLED = 8 (Order is canceled)

M_TIMEOUT = 9 (Not in use)

VERIFIED = 10 (Not in use)

INCHARGED=DRIVER_IN_CHARGED=10 (notify to partner)

ASSIGNED=ASSIGNING_DRIVER=11 (notify to partner)

AUTO_ASSIGN=ASSIGNING_DRIVER=11 (notify to partner)

● Order Status Machine

Happy flow: M_ASSIGNED >> M_RECEIVED >> CONFIRMED >> PICKED >> DELIVERED

Canceled order: M_ASSIGNED >> M_RECEIVED >> M_OUT_OF_SERVICE >> CANCELED

● OrderUpdateStatus

The enum that partner can use to update order status

CONFIRM = 0 (Merchant can update this status to confirm orders)

RECEIVED = 1 (not in use)

OUT_OF_SERVICE = 2 (Merchant can update this status to send request to cancel orders to SPF)

DONE = 4 (not in use)

CANCEL = 6

- **RejectOrderReason**

WRONG_MENU = 1

RESTAURANT_BUSY = 2

RESTAURANT_CLOSING = 3

WRONG_COMMISSION = 4

CUSTOM = 5

- **DishStatus**

AVAILABLE = 1

OUT_OF_STOCK = 2

INACTIVE = 3

- **ToppingStatus**

AVAILABLE = 1

OUT_OF_STOCK = 2

INACTIVE = 3

- **MenuObjectType**

DISH_TYPE = 1

DISH = 2

DISH_ATTRIBUTE = 3 (Topping Group)

DISH_ATTRIBUTE_VALUE = 4 (Topping)

- **MenuObjectUpdateType**

ADD = 1

CHANGE_STATUS = 2

UPDATE = 3

DELETE = 4

REJECT_REQUEST = 5

- **ShippingMethod**

FOODY_DELIVERY = 1

MERCHANT_DELIVERY = 2

CUSTOMER_PICKUP = 3

- **OrderUpdateType**

UPDATE_ORDER = 1 (*notify to partner if order is changed in any field*)

UPDATE_ORDER_STATUS = 2 (*notify to partner if order updates status only*)

- **PartnerErrorType**

EXPORT_FAIL = 1

PARTNER_ITEM_ID_NONE = 2

- **ToggleType**

OFF = 0

ON = 1

- **ConfirmMethod**

MANUAL = 1

AUTO = 2

- **Weekday**

MONDAY = 1

TUESDAY = 2

WEDNESDAY = 3

THURSDAY = 4

FRIDAY = 5

SATURDAY = 6

SUNDAY = 7

- **PaymentMethod**

COD = 1

MERCHANT_WALLET = 6

- **MerchantPaidStatus**

UN_PAID = 1
PAID = 2
FAIL = 3
REFUNDED = 4

- **BuyerPaymentMethod(Not online)**

COD = 1
CYBER_SOURCE = 4
TOPPAY = 6
VNPAY = 8

- **PromotionDiscountType**

PROMOTION_CODE = 1
FREESHIP = 2
FIRST_ORDER_MERCHANT = 3
FRAME_DISCOUNT = 4
ITEM_DISCOUNT = 5
REFERRAL = 6
AIRPAY_NEW_USER = 7
CASH_BACK = 8
SUBTOTAL_DISCOUNT = 9
GROUP_MEMBERS = 10
COIN_CASHBACK = 11
GIFT_PROMOTION = 12
FLASH_SALE = 13

- **PromotionDiscountValueType**

PERCENT = 1
VALUE = 2
FIXED = 3

- **PromotionPaymentMethod**

COD = 1
PAYNOW_CREDIT = 2
BANK_TRANSFER = 3
CYBER_SOURCE = 4
NAPAS = 5
AIRPAY = 6

MOMO = 7
VNPAY = 8
FDC = 9
PN_CREDIT_CODE = 10
SACOMBANK_ECOM = 11
AIRPAY_CREDIT_CARD = 12
VIETTEL_PAY = 13
SPAY_LATER = 110

- **PriceSlashDiscountApplyFor**

CUSTOM = 1
ALL_MENU = 2

- **PriceSlashDiscountType**

CUSTOM = 1
FIX_PERCENT = 2
FIX_PRICE = 3

- **CommonStatus**

INACTIVE = 0
ACTIVE = 1

- **TaskStatus**

Type: String

Used for [menu.sync.get task](#) and [Menu Webhook](#)

Failed
Success
Retry
Processing
Pending

3. Foody API Definition

General

HTTP Request
Domain:

Live: <https://gexternalapi.deliverynow.vn>

UAT: <https://gqaexternalapi.test.now.vn>

Request:

GET / POST

Content-Type: application/json

Header:

required ExternalAppType X-Foody-App-Id

required uint32 X-Foody-API-Version: current version is 1

required uint32 X-Foody-Request-Id: random integer in range (0, 10¹⁰) required string X-Foody-Country: VN, TH

optional string X-Foody-Language: vi, en, th ...(default: en)

Reply:

Http status = 200 (other error codes need to be retry)

Json data in body

```
{ "result": result_code, "reply": "//json_format_define_in_s2s/" }
```

Common Result Code:

success

error_params

error_header

error_server

error_forbidden

error_access_token

error_version_too_low

3.1 Order Api

List api support management order flow

• order.get_list

Description: Get list order by status and date time

Method: POST

URI: /s2s/order/get_list

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

required OrderListStatus status

required string from_date: in format yyyy-mm-dd

optional string to_date: in format yyyy-mm-dd (default: end of current day)

required uint32 limit (max 100)

required uint32 offset

Reply:

required array orders

required OrderMerchantStatus status
required string code
required object restaurant:
 required uint32 id
 required string name
optional object assignee:
 required uint32 id
 required string name
 required string phone
required string order_time (format like 2017-07-15 14:30:00)
optional string pick_time (format like 2017-07-15 14:30:00)
optional string delivery_time (format like 2017-07-15 14:30:00)
required string distance
required object order_value
 required uint32 value
 required string unit
 required string text
required object total_value
 required uint32 value
 required string unit
 required string text
optional object pay_to_merchant:
 required PaymentMethod type
 optional MerchantPaidStatus status
optional object tax_fee:
 required uint32 value
 required string unit
 required string text

Error:

error_params

Sample:

Request:

POST /s2s/order/get_list
restaurant_id=148
from_date="2018-03-14"
status=1
limit=100
offset=0

Reply:

{"reply":{"orders":[{"status":9,"distance":"2.4
km","code":"14039-421176156","order_value":{"text":"291,000đ","value":291000.0,"unit":"đ"},"order_time": "2019-03-14 11:41:57","restaurant":{"id":148,"name":"Quán
demo"},"total_value":{"text":"145,500đ","value":145500.0,"unit":"đ"},"delivery_time":"2019-03-14
12:55:00","pick_time":"2019-03-14

```
12:40:00","pay_to_merchant":{"status":1,"type":1}}},"result":"success"}
```

● **order.get_details**

Description: Get order details

Method: POST

URI: /s2s/order/get_details

Request:

- required string order_code
- optional ToggleType mark_as_received // default = ToggleType.ON

Reply:

- required string code
- required string serial
- optional object customer_pay:
 - required BuyerPaymentMethod type
- optional object pay_to_merchant:
 - required PaymentMethod type
 - optional MerchantPaidStatus status
- required object restaurant:
 - required uint32 id
 - required string name
 - required string partner_restaurant_id
- required OrderMerchantStatus status
- required string order_time (format like 2017-07-15 14:30:00)
- optional string pick_time (format like 2017-07-15 14:30:00)
- optional string delivery_time (format like 2017-07-15 14:30:00)
- optional object assignee
 - required uint32 id
 - required string name
 - required string phone
- optional object deliver_address
 - required uint32 id
 - required string name
 - required string phone
 - required string address
 - optional DeliveryOption delivery_option
 - optional string gate
- optional object customer
 - required string name
 - required string phone
- required object shipping:
 - required ShippingMethod type

required string name
required object extra_fee
 required uint32 value
 required string unit
 required string text
required object total_merchant_discount
 Required uint32 value
 Required string unit
 Required string text
Required object order_value
 Required uint32 value
 Required string unit
 Required string text
Required object commission_amount
 Required uint32value
 Required string unit
 Required string text
Required object total_value
 Required uint32 value
 Required string unit
 Required string text
Required object customer_bill
 required double total_amount
 Required uint32 value
 Required string unit
 Required string text
 Required double surcharge_fee
 Required uint32 value
 Required string unit
 Required string text
 Required double service_fee
 Required uint32value
 Required stringunit
 Required stringtext
 Required double shipping_fee
 Required uint32value
 Required stringunit
 Required stringtext
 Required double packing_fee
 Required uint32 value
 Required string unit
 Required string text
 Required double hand_deliver_fee
 Required uint32 value

Required string unit
Required string text
Required double vat_deliver_fee
Required uint32 value
Required string unit
required string text
required double confirm_fee
required uint32 value
required string unit
required string text
required double merchant_discount
required uint32 value
required string unit
required string text
required double foody_discount
required uint32 value
required string unit
required string text
required double total_discount
required uint32 value
required string unit
required string text
required array object merchant_discounts
required string name
optional string code
required object merchant_discount
required uint32 value
required string unit
required string text
optional array dish_ids
required uint32 dish_id
optional string note
optional string merchant_note
optional string note_for_shipper
optional string cs_note
optional object vat_info:
required uint32 id
required string tax_number
required string address
required string company_name
required OrderMerchantStatus status
required bool allow_cancel
optional bool allow_confirm // if current status is M_TIMEOUT optional
string confirm_expired_time (format like 2017-07-15 14:30:00) optional

```
int confirm_remaining_time (in seconds)
required array object dish_groups
  required uint32 dish_group_id
  optional string partner_dish_group_id
  required string group_name
  required array object dishes
    required uint32 dish_id
    optional string partner_dish_id
    required string dish_name
    required uint32 quantity
    required bool out_of_stock
    required object price:
      required uint32 value
      required string unit
      required string text
    optional object original_price:
      required uint32 value
      required string unit
      required string text
    optional object merchant_price:
      required uint32 value
      required string unit
      required string text
  required object total:
    required uint32 value
    required string unit
    required string text
  optional string note
  optional string cs_note
  required array object topping_groups:
    required uint32 topping_group_id
    optional string partner_topping_group_id
    required string group_name
    required array object toppings:
      required uint32 topping_id
      optional string partner_topping_id
      required string topping_name
      required uint32 quantity
      required object price
        required uint32 value
        required string unit
        required string text
      required object original_price
        required uint32 value
```

required string unit

required string text

Notes:

Field	Description
price	- if normal dish = discounted price (after PS/ FS) - if prepaid SKU = discounted price (after Prepaid deal, and always = 0đ) - if Cheap Meal dish = Cheap meal price
merchant_price	- for normal dish = original price - merchant funded discount (on PS/ FS/ Prepaid deal) - if prepaid SKU = original price - merchant funded discount (on PS/ FS/ Prepaid deal) - if Cheap Meal dish = Cheap meal price - merchant funded discount (on PS/ FS/ Prepaid deal) Example: <i>original price = 20, FS/PS/Prepaid deal = 10, merchant fund 4, platform fund 6 then normal dish & prepaid dish price = original price 20 - merchant fund 4 = 16</i>

Error:

error_params

Sample:

Request: POST /s2s/order/get_details order_code=14039-421176156

Reply:

```
{
  "reply": {
    "status": 9,
    "delivery_time": "2019-03-14 12:55:00",
    "code": "14039-421176156",
    "order_value": {
      "text": "291,000đ",
      "value": 291000.0,
      "unit": "đ"
    },
    "order_time": "2019-03-14 11:41:57",
    "restaurant": {
      "id": 148,
      "name": "Quán demo"
    },
    "confirm_remaining_time": 0,
    "extra_fee": {
      "text": "0đ",
      "value": 0.0,
      "unit": "đ"
    },
    "total_value": {
      "text": "145,500đ",
      "value": 145500.0,
      "unit": "đ"
    },
    "allow_cancel": false,
    "dish_groups": [
      {
        "dish_group_id": 580,
        "dishes": [
          {
            "dish_id": 142191,
            "quantity": 1,
            "price": {
              "text": "88,000đ",
              "value": 88000.0,
              "unit": "đ"
            },
            "topping_groups": [
              {
                "topping_group_id": 3604,
                "toppings": [
                  {
                    "topping_name": "Thạch Topping",
                    "price": {
                      "text": "3,000đ",
                      "value": 3000.0,
                      "unit": "đ"
                    },
                    "topping_id": 48562,
                    "quantity": 1
                  }
                ],
                "group_name": "Thạch"
              }
            ],
            "order_dish_id": 246799,
            "dish_name": "CHOCOLATE",
            "total": {
              "text": "88,000đ",
              "value": 88000.0,
              "unit": "đ"
            },
            "out_of_stock": 0
          },
          {
            "dish_id": 142190,
            "quantity": 1,
            "price": {
              "text": "113,000đ",
              "value": 113000.0,
              "unit": "đ"
            },
            "topping_groups": [
              {
                "topping_group_id": 3602,
                "toppings": [
                  {
                    "topping_name": "100",
                    "price": {
                      "text": "10,000đ",
                      "value": 10000.0,
                      "unit": "đ"
                    },
                    "topping_id": 48563,
                    "quantity": 1
                  },
                  {
                    "topping_name": "Đá Topping",
                    "price": {
                      "text": "0đ",
                      "value": 0.0,
                      "unit": "đ"
                    },
                    "topping_id": 48560,
                    "quantity": 1
                  }
                ],
                "group_name": "Đá"
              }
            ],
            "order_dish_id": 246800,
            "dish_name": "ICE BLENDED COFFEE",
            "total": {
              "text": "113,000đ",
              "value": 113000.0,
              "unit": "đ"
            },
            "out_of_stock": 0
          }
        ],
        "group_name": "Coffee"
      },
      {
        "dish_group_id": 35863,
        "dishes": [
          {
            "dish_id": 142193,
            "quantity": 1,
            "price": {
              "text": "90,000đ",
              "value": 90000.0,
              "unit": "đ"
            },
            "topping_groups": [],
            "order_dish_id": 246801,
            "dish_name": "SMOOTHIES",
            "total": {
              "text": "90,000đ",
              "value": 90000.0,
              "unit": "đ"
            },
            "out_of_stock": 0
          }
        ],
        "group_name": "Tea"
      }
    ],
    "total_merchant_discount": {
      "text": "0đ",
      "value": 0.0,
      "unit": "đ"
    },
    "allow_confirm": true,
    "pick_time": "2019-03-14 12:40:00",
    "serial": "0x0000000000C9C25F",
    "pay_to_merchant": {
      "status": 1,
      "type": 1
    },
    "customer_pay": {
      "type": 1
    },
    "merchant_discounts": [],
    "result": "success"
  }
}
```

• order.update

Description: update merchant order

Method: POST

URI: /s2s/order/update

Request:

required string order_code

required string serial

required OrderUpdateStatus status

optional ConfirmMethod confirm_method // default = ConfirmMethod.MANUAL

optional string pick_time (format like 2017-07-15 14:30:00)

optional string merchant_note

optional string note_for_shipper

optional object cancel_reasons:

optional array uint32 reason_ids (get from meta)

-reason_id 79 : [VI] Quán hết món [EN] Out of Stock
 -reason_id 80 : [VI] Quán quá tải [EN] Store was busy
 -reason_id 81 : [VI] Quán đóng cửa [EN] Shop was closed

optional uint32 restaurant_id
 optional string partner_restaurant_id (*required this or restaurant_id*)
 optional ConfirmType confirm_type
 optional object reject_reasons
 optional RejectOrderReason type
 optional object price_updates

 optional array dishes
 required uint32 order_dish_id
 required uint32 dish_id
 required double price
 optional array toppings
 required uint32 order_dish_id
 required uint32 dish_id
 required uint32 topping_id
 required double price
 optional object out_of_stock (*required this if reason_id = 79, need to have at least 1 dish_id*)
 optional array dishes
 required uint32 order_dish_id
 required uint32 dish_id
 required string from (format like 2017-07-15 14:30:00)
 required string to (format like 2017-07-15 14:30:00)
 optional array toppings
 required uint32 order_dish_id
 required uint32 topping_id
 required string from (format like 2017-07-15 14:30:00)
 required string to (format like 2017-07-15 14:30:00)
 optional object busy_info
 optional uint32 total_minute
 optional string from (format like 2017-07-15 14:30:00)
 optional string to (format like 2017-07-15 14:30:00)
 optional string custom_note

Reply:

Empty

Error:

error_out_of_update_order
 error_require_assignee_or_res_id
 error_order_total_amount_invalid
 error_restaurant_invalid

error_order_sub_total_value
error_order_pick_time_invalid
error_order_cannot_pay

Sample:

Request:
POST /s2s/order/update
status=1
order_code= "ABDE124"
merchant_note='note...'
Reply:

```
{"reply": {"pay_to_merchant": {"type": 6, "state": 2}}, "result": "success"}
```

Sample(cancel):

Request:
POST /s2s/order/update
{
 "order_code": "05093-476149827",
 "serial": "6f0171ab2c2e9b56ec3dec211a95e926",
 "status": 6,
 "restaurant_id": 774647,
 "cancel_reasons": {
 "reason_ids": [79, 81]
 }
}
Reply:
{ "reply": null, "result": "success" }

● order.ready

Description: mark an order as ready

Method: POST

URI: /s2s/order/ready

Request:

required string order_code
required int restaurant_id

Reply:

Empty

Error code:

success
error_order_not_found
error_forbidden error_invalid_status
"Unable to update picked orders."

"Unable to update delivered orders."
"Unable to update canceled orders."
"Unable to update ready orders."
error_reach_notify_limit error_wait_notify_delay

3.2 Dish Api

• dish.create

Description: create dish

Method: POST

URI: /s2s/dish/create

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required string partner_dish_id
required string name
required string partner_dish_group_id
required double price
optional string name_en
optional int32 display_order
optional string description
optional uint32 picture_id
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

required bool is_pending
optional uint32 dish_id

Sample:

Request:

POST /s2s/dish/create

Reply:

```
{"reply": {"dish_id": 10, "is_pending": False}, "result": "success"}
```

• dish.bulk_create

Description: bulk create dish

Method: POST

URI: /s2s/dish/bulk_create

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)
required array object dishes
 required string partner_dish_id
 required string name
 required string partner_dish_group_id
 required double price
 optional string name_en
 optional int32 display_order
 optional string description
 optional uint32 picture_id

Reply:

Sample:

Request:
POST /s2s/dish/bulk_create

Reply:
{
 "result": "success",
 "reply": []
}

● dish.update

Method: POST

URI: /s2s/dish/update

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required string partner_dish_id
optional string name
optional string name_en
optional string partner_dish_group_id
optional double price
optional uint32 display_order
optional string description
optional uint32 picture_id
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

required bool is_pending

Error:

error_object_invalid_to_update

Sample:

Request:

POST /s2s/dish/update

Reply:

```
{"reply":{"is_pending": False}, "result":"success"}
```

● **dish.bulk_update**

Method: POST

URI: /s2s/dish/bulk_update

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required array object dishes
 - required string partner_dish_id
 - optional string name
 - optional string name_en
 - optional string partner_dish_group_id
 - optional double price
 - optional uint32 display_order
 - optional string description
 - optional uint32 picture_id

Sample:

Request:

POST /s2s/dish/bulk_update

Reply:

```
{  
  "result":"success",  
  "reply": []  
}
```

● **dish.update_partner_id_mappings**

Method: POST

URI: /s2s/dish/update_partner_id_mappings

Request:

- required uint32 restaurant_id
- required array object dishes
 - required uint32 dish_id
 - required string partner_dish_id

Reply:

Error:

Sample:

Request:

POST /s2s/dish/update_partner_id_mappings

Reply:

```
{"reply":null, "result":"success"}
```

● dish.delete

Method: POST

URI: /s2s/dish/delete

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

required string partner_dish_id

Reply:

required bool is_pending

Sample:

Request:

POST /s2s/dish/update

Reply:

```
{"reply":{"is_pending": False}, "result":"success"}
```

● dish.set_statuses

Method: POST

URI: /s2s/dish/set_statuses

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

optional bool is_apply_all

optional array uint32 branch_ids

required array object dishes

required string partner_dish_id

required DishStatus status

optional string from_time // format: YYYY-MM-DD hh:mm:ss, required if

set OUT_OF_STOCK

optional string to_time // required if set OUT_OF_STOCK

Sample:

Request:

```
POST /s2s/dish/set_statuses
```

Reply:

```
{"reply":null,"result":"success"}
```

• dish.get_out_of_service

Method: POST

URI: /s2s/dish/get_out_of_service

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required array string partner_dish_ids

Reply:

- required array object dishes:
 - required uint32 dish_id
 - required string partner_dish_id
 - required string from_time
 - required string to_time

Sample:

Request:

```
POST /s2s/dish/get_out_of_service
```

Reply:

```
{"reply":{"dishes":[]}"result":"success"}
```

• dish.create_topping_mapping

Method: POST

URI: /s2s/dish/create_topping_mapping

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required string partner_dish_id
- optional bool is_apply_all
- optional array uint32 branch_ids
- required array toppings
 - required string partner_topping_id
 - required double price
 - optional boolean is_required

Error:

error_object_invalid_to_update

Sample:

Request:

POST /s2s/dish/create_topping_mapping

Reply:

{"reply": None, "result": "success"}

• dish.delete_topping_mapping

Method: POST

URI: /s2s/dish/delete_topping_mapping

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

required string partner_dish_id

required array string partner_topping_ids

Error:

error_object_invalid_to_update

Sample:

Request:

POST /s2s/dish/delete_topping_mapping

Reply:

{"reply": None, "result": "success"}

• dish.create_group

Description: create dish group

Method: POST

URI: /s2s/dish/create_group

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

required string partner_dish_group_id

required string name

optional string name_en

optional int32 display_order

optional string description

optional bool is_apply_all

optional array uint32 branch_ids

Reply:

required uint32 dish_group_id
Error:
error_object_invalid_to_update

Sample:

Request: POST /s2s/dish/create_group Reply: { "reply": { "dish_group_id": 1 }, "result": "success" }
--

● dish.update_group

Description: update dish group

Method: POST

URI: /s2s/dish/update_group

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required string partner_dish_group_id
optional string name
optional string name_en
optional int32 display_order
optional string description
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

Error:

error_object_invalid_to_update

Sample:

Request: POST /s2s/dish/update_group Reply: { "reply": null, "result": "success" }
--

● dish.delete_group

Method: POST

URI: /s2s/dish/delete_group

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)

required string partner_dish_group_id

Reply:

Sample:

Request:

POST /s2s/dish/delete_group

Reply:

```
{"reply":null, "result":"success"}
```

● dish.update_partner_group_id_mappings

Method: POST

URI: /s2s/dish/update_partner_group_id_mappings

Request:

required uint32 restaurant_id

required array object dish_groups

required uint32 dish_group_id

required string partner_dish_group_id

Reply:

Sample:

Request:

POST /s2s/dish/update_partner_group_id_mappings

Reply:

```
{"reply":null, "result":"success"}
```

● dish.get_groups

Description: get dish groups

Method: GET

URI: /s2s/dish/get_groups

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

Reply:

required array dish_groups:

required uint32 dish_group_id

required string partner_dish_group_id

required string name

required string name_en

optional string description

required uint32 display_order

Sample:

Request:

GET /s2s/dish/get_groups

Reply:

```
{"reply":{"dish_groups":[]},"result":"success"}
```

• dish.get_partner_group_id_mappings

Description: get dish group mapping

Method: GET

URI: /s2s/dish/get_partner_group_id_mappings

Request:

required uint32 restaurant_id

Reply:

required array dish_groups:

required uint32 dish_group_id

required uint32 pos_id

required string partner_dish_group_id

required string name

Sample:

Request:

GET /s2s/dish/get_partner_group_id_mappings

Reply:

```
{"reply":{"dish_groups":[]},"result":"success"}
```

• dish.get

Description: get list of dishes by restaurant

Method: GET

URI: /s2s/dish/get

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

optional string partner_dish_group_id

Reply:

required array dishes:

required uint32 dish_id

required uint32 dish_group_id

required string partner_dish_id

required string name

required string name_en

required uint32 display_order

required double price
required string description
required bool is_active
required string partner_dish_group_id
required string created_time #YYYY-mm-dd HH:MM:SS
required string updated_time #YYYY-mm-dd HH:MM:SS
optional object picture
 required uint32 id
 required string url

Sample:

Request:

GET /s2s/dish/get

Reply:

```
{"reply":{"dishes":[]},"result":"success"}
```

• dish.get_partner_id_mappings

Method: GET

URI: /s2s/dish/get_partner_id_mappings

Request:

 required uint32 restaurant_id

Reply:

 required array dishes:

 required uint32 dish_id

 required uint32 pos_id

 required uint32 restaurant_id

 required string partner_dish_id

 required string name

Sample:

Request:

GET /s2s/dish/get_partner_id_mappings

Reply:

```
{"reply":{"dishes":[]},"result":"success"}
```

• dish.get_topping_mapping

Method: GET

URI: /s2s/dish/get_topping_mapping

Request:

 optional uint32 restaurant_id

 optional string partner_restaurant_id (required this or restaurant_id)

 required string partner_dish_id

Reply:

```
required string partner_dish_id
required array toppings
  required uint32 topping_id
  required uint32 topping_group_id
required string partner_topping_id
required double price // price when mapped with current dish_id
required string partner_topping_group_id
required boolean is_required
required uint32 min_quantity
required uint32 max_quantity
```

Sample:

Request:

GET /s2s/dish/get_topping_mapping

Reply:

```
{"reply":{"dish_id":65918,"toppings":[]}, "result":"success"}
```

● dish.get_group_detail

Description: get dish group detail

Method: GET

URI: /s2s/dish/get_group_detail

Request:

```
optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
optional uint32 dish_group_id
optional string partner_dish_group_id (required this or dish_group_id)
```

Reply:

```
required uint32 dish_group_id
required string partner_dish_group_id
required uint32 restaurant_id
required string name
required string name_en
required int32 display_order
required string description
required bool is_active
```

Sample:

Request:

GET /s2s/dish/get_group_detail

Reply:

```
{"reply":{},"result":"success"}
```

● dish.get_detail

Description: get dish

Method: GET

URI: /s2s/dish/get_detail

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- optional uint32 dish_id
- optional string partner_dish_id (required this or dish_id)

Reply:

- required uint32 dish_id
- required uint32 dish_group_id
- required string partner_dish_id
- required string name
- required string name_en
- required int32 display_order
- required string description
- required uint32 restaurant_id
- required string partner_dish_group_id
- required bool is_active
- required bool is_deleted
- required double price
- required string created_time
- required string updated_time
- optional object picture
 - required uint32 id
 - required string url

Sample:

Request:

GET /s2s/dish/get_detail

Reply:

{"reply": {}, "result": "success"}

● dish.upload_picture

Method: POST

URI: /s2s/dish/upload_picture

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required string image_base_64
- optional bool is_apply_all

optional array uint32 branch_ids

Reply:

required uint32 picture_id

required string url

Sample:

Request:

POST /s2s/dish/upload_picture

Reply:

```
{"reply":null,"result":"success"}
```

● dish.delete_picture

Method: POST

URI: /s2s/dish/delete_picture

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

required string partner_dish_id

required uint32 picture_id

Reply:

required bool is_pending

Sample:

Request:

POST /s2s/dish/delete_picture

Reply:

```
{"reply":{"is_pending": False},"result":"success"}
```

● dish.get_approval_status

Description: get list approval status by restaurant

Method: POST

URI: /s2s/dish/get_approval_status

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

optional uint32 dish_id

optional string partner_dish_id (required this or dish_id)

Reply:

required uint32 status

required uint32 dish_id

Sample:

Request:

POST /s2s/dish/get_approval_status

Reply:

```
{"reply":{"status": 3, "dish_id": 16625}, "result":"success"}
```

3.3 Topping Api

• topping.create_group

Description: create topping group

Method: POST

URI: /s2s/topping/create_group

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required string partner_topping_group_id
required string name
optional string name_en
optional uint32 display_order
optional string description
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

required uint32 topping_group_id

Sample:

Request:

POST /s2s/topping/create_group

Reply:

```
{"reply": {"topping_group_id": 1}, "result":"success"}
```

• topping.bulk_create_group

Description: bulk create topping group

Method: POST

URI: /s2s/topping/bulk_create_group

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required array object topping_groups

required string partner_topping_group_id
required string name
optional string name_en
optional uint32 display_order
optional string description

Reply:

Sample:

```
Request:  
POST /s2s/topping/bulk_create_group  
  
Reply:  
{  
  "result": "success",  
  "reply": []  
}
```

● topping.update_group

Description: update topping group

Method: POST

URI: /s2s/topping/update_group

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required string partner_topping_group_id
optional string name
optional string name_en
optional uint32 display_order
optional string description
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

Sample:

```
Request:  
POST /s2s/topping/update_group  
  
Reply:  
{"reply": null, "result": "success"}
```

• topping.bulk_update_group

Description: bulk update topping group

Method: POST

URI: /s2s/topping/bulk_update_group

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required array object topping_groups
 - required string partner_topping_group_id
 - optional string name
 - optional string name_en
 - optional uint32 display_order
 - optional string description

Reply:

Sample:

```
Request:
POST /s2s/topping/bulk_update_group

Reply:
{
  "result": "success",
  "reply": []
}
```

• topping.delete_group

Description: delete

Method: POST

URI: /s2s/topping/delete_group

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required string partner_topping_group_id

Reply:

Error:

Sample:

Request:

POST /s2s/topping/delete_group

Reply:

```
{"result": "success"}
```

• topping.update_partner_group_id_mappings

Method: POST

URI: /s2s/topping/update_partner_group_id_mappings

Request:

required uint32 restaurant_id

required array object topping_groups

required string partner_topping_group_id

required uint32 topping_group_id

Reply:

Sample:

Request:

POST /s2s/topping/update_partner_group_id_mappings

Reply:

```
{"reply": null, "result": "success"}
```

• topping.create

Method: POST

URI: /s2s/topping/create

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

required string partner_topping_id

required string partner_topping_group_id

required string name

required double price

optional string name_en

optional uint32 display_order

optional bool is_apply_all

optional array uint32 branch_ids

Reply:

optional uint32 topping_id

required bool is_pending

Sample:

Request:

POST /s2s/topping/create

Reply:

```
{"reply": {"topping_id": 1, "is_pending": False}, "result": "success"}
```

• topping.bulk_create

Method: POST

URI: /s2s/topping/bulk_create

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required array object toppings
 - required string partner_topping_id
 - required string partner_topping_group_id
 - required string name
 - required double price
 - optional string name_en
 - optional uint32 display_order

Sample:

Request:

POST /s2s/topping/bulk_create

Reply:

```
{
  "result": "success",
  "reply": [
    {"result": "success", "reply": {"topping_id": 1, "partner_topping_id": "1"}},
    {"result": "pending", "reply": {"partner_topping_id": "2"}}
  ]
}
```

• topping.update

Method: POST

URI: /s2s/topping/update

Request:

- optional uint32 restaurant_id
- optional string partner_restaurant_id (required this or restaurant_id)
- required string partner_topping_id
- optional string partner_topping_group_id
- optional string name

optional string name_en
optional uint32 display_order
optional double price
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

required bool is_pending

Error:

error_object_invalid_to_update

Sample:

Request:

POST /s2s/topping/update

Reply:

```
{"reply": {"is_pending": False}, "result": "success"}
```

● topping.bulk_update

Method: POST

URI: /s2s/topping/bulk_update

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required array object toppings
 required string partner_topping_id
 optional string partner_topping_group_id
 optional string name
 optional string name_en
 optional uint32 display_order
 optional double price

● topping.delete

Description: delete

Method: POST

URI: /s2s/topping/delete

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required string partner_topping_id

Reply:

required bool is_pending

Error:

Sample:

Request:

POST /s2s/topping/delete

Reply:

```
{"reply": {"is_pending": False}, "result": "success"}
```

• topping.update_partner_id_mappings

Method: POST

URI: /s2s/topping/update_partner_id_mappings

Request:

```
required uint32 restaurant_id
required array object toppings
    required uint32 topping_id
    required string partner_topping_id
```

Reply:

Sample:

Request:

POST /s2s/topping/update_partner_id_mappings

Reply:

```
{"reply": null, "result": "success"}
```

• topping.get_groups

Method: GET

URI: /s2s/topping/get_groups

Request:

```
optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
```

Reply:

```
required array topping_groups:
    required uint32 topping_group_id
    required string partner_topping_group_id
    required string name
    required string name_en
    required uint32 display_order
    required bool is_active
    required string description
```

Error:

```
error_object_not_approved
```

Sample:

Request:

GET /s2s/topping/get_groups

Reply:

```
{"reply":{"topping_groups":[]},"result":"success"}
```

● topping.get_partner_group_id_mappings

Description: get topping group mapping ocha

Method: GET

URI: /s2s/topping/get_partner_group_id_mappings

Request:

required uint32 restaurant_id

Reply:

required array topping_groups:

required uint32 topping_group_id

required uint32 pos_id

required string partner_topping_group_id

required string name

Sample:

Request:

GET /s2s/topping/get_partner_group_id_mappings

Reply:

```
{"reply":{"topping_groups":[]},"result":"success"}
```

● topping.get

Method: GET

URI: /s2s/topping/get

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

optional string partner_topping_group_id

Reply:

required array toppings:

required uint32 topping_id

required uint32 topping_group_id

required string partner_topping_id

required string name

required string name_en

required uint32 display_order

required double price

required bool is_active

required string partner_topping_group_id

Sample:

Request:

GET /s2s/topping/get

Reply:

```
{"reply":{"toppings":[]},"result":"success"}
```

• topping.get_partner_id_mappings

Method: GET

URI: /s2s/topping/get_partner_id_mappings

Request:

required uint32 restaurant_id

Reply:

required array toppings:

required uint32 topping_id

required uint32 pos_id

required string partner_topping_id

required string name

Sample:

Request:

GET /s2s/topping/get_partner_id_mappings

Reply:

```
{"reply":{"toppings":[]},"result":"success"}
```

• topping.get_group_detail

Method: GET

URI: /s2s/topping/get_group_detail

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)

optional uint32 topping_group_id

optional string partner_topping_group_id (required this or topping_group_id)

Reply:

required uint32 topping_group_id

required string partner_topping_group_id

required uint32 restaurant_id

required string name

required string name_en

required int32 display_order

required string description

required bool is_active
required bool is_deleted

Sample:

Request:

GET /s2s/topping/get_group_detail

Reply:

```
{"reply": {}, "result": "success"}
```

• topping.get_detail

Method: GET

URI: /s2s/topping/get_detail

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required uint32 topping_id
required string partner_topping_id (required this or topping_id)

Reply:

required uint32 topping_id
required uint32 topping_group_id
required string partner_topping_id
required string partner_topping_group_id
required string name
required string name_en
required double price
required int32 display_order
required bool is_active
required bool is_deleted
optional uint32 max_quantity
required uint32 restaurant_id

Sample:

Request:

GET /s2s/topping/get_detail

Reply:

```
{"reply": {}, "result": "success"}
```

• topping.set_group_quantity

Method: POST

URI: /s2s/topping/set_group_quantity

Request:

optional uint32 restaurant_id

optional string partner_restaurant_id (required this or restaurant_id)
required string partner_topping_group_id
required array object dishes
 required string partner_dish_id
 required uint32 min_quantity
 required uint32 max_quantity
optional bool is_apply_all
options array uint32 branch_ids

Reply:

None

Sample:

Request:

POST /s2s/topping/set_group_quantity

Reply:

{"reply":null,"result":"success"}

● topping.update_prices

Method: POST

URI: /s2s/topping/update_prices

Request:

optional uint32 restaurant_id
optional string partner_restaurant_id (required this or restaurant_id)
required array object toppings
 required string partner_topping_id
 required string partner_dish_id
 required double price
optional bool is_apply_all
optional array uint32 branch_ids

Reply:

Sample:

Request:

POST /s2s/topping/update_prices

Reply:

{"reply":null,"result":"success"}

● topping.set_statuses

Method: POST

URI: /s2s/topping/set_statuses

Request:

optional uint32 restaurant_id
 optional string partner_restaurant_id (required this or restaurant_id)
 required array object toppings
 required string partner_topping_id
 required ToppingStatus status
 optional string from_time // format: YYYY-MM-DD hh:mm:ss, required if
 set OUT_OF_STOCK
 optional string to_time // required if set OUT_OF_STOCK
 optional bool is_apply_all
 optional array uint32 branch_ids

Reply:

Sample:

Request:
 POST /s2s/topping/set_statuses

Reply:
 {"reply":null,"result":"success"}

• topping.get_out_of_service

Method: POST

URI: /s2s/topping/get_out_of_service

Request:

optional uint32 restaurant_id
 optional string partner_restaurant_id (required this or restaurant_id)
 required array string partner_topping_ids

Reply:

required array object toppings:
 required string partner_topping_id
 required string from_time
 required string to_time

Sample:

Request:
 POST /s2s/topping/get_out_of_service

Reply:
 {"reply":{ }, "result":"success"}

3.4 Restaurant Api

• restaurant.get_restaurant_info

Description: get restaurant info by partner id and/or restaurant_id

Method: POST

URI: /s2s/restaurant/get_restaurant_info

Request:

- optional string partner_restaurant_id (required if not restaurant_id)
- optional uint32 restaurant_id (required if not partner_restaurant_id)

Reply:

- required array object restaurants
 - required string partner_restaurant_id
 - required uint32 restaurant_id
 - required string name
 - required string address
 - required string city
 - optional string foody_service

Sample:

Request:

```
POST /restaurant/get_restaurant_info
{"restaurant_id": 29187}
```

Reply:

```
{"result": "success", "reply": {}}
```

• restaurant.get_operation_time_ranges

Description: get restaurant 's opening hours

Method: GET

URI: /s2s/restaurant/get_operation_time_ranges

Request:

- optional uint32 restaurant_id (required if not partner_restaurant_id)
- optional string partner_restaurant_id (required if not restaurant_id)

Reply:

- required array object days
 - optional Weekday day_of_week (required if not custom_date)
 - optional string custom_date (yyyy-mm-dd) (required if not day_of_week)
 - required bool is_closed
 - optional array object time_ranges
 - optional uint32 id
 - required string open_time (format: hh:mm)
 - required string close_time

Error:

success
error_restaurant_invalid

Sample:

Request:

GET /s2s/restaurant/get_operation_time_ranges
{\"restaurant_id\": 29214}

Reply:

{\"result\": \"success\", \"reply\": {}}

● restaurant.set_operation_time_ranges

Description: set restaurant 's opening hours

Method: POST

URI: /s2s/restaurant/set_operation_time_ranges

Request:

optional uint32 restaurant_id (required if not partner_restaurant_id)
optional string partner_restaurant_id (required if not restaurant_id)
required array object days
 optional Weekday day_of_week (required if not custom_date)
 optional string custom_date (yyyy-mm-dd) (required if not day_of_week)
 required bool is_closed
 optional array object time_ranges
 optional uint32 id
 required string open_time (format: hh:mm)
 required string close_time

Reply:

Error:

success
error_params
error_restaurant_invalid
error_invalid_start_time_end_time
error_overlap_time_range
error_invalid_time_range_id
error_duplicate_setting_time_range_day

Sample:

Request:

POST /s2s/restaurant/set_operation_time_ranges

Reply:

```
{ "result": "success", "reply": {} }
```

● restaurant.set_restaurant_busy

Description: set busy status for restaurant

Note: We only allow the busy end_date until 5am tomorrow from **the request time**, no matter you send what start_date (because some merchants open until late night).

Method: POST

URI: s2s/restaurant/set_restaurant_busy

Request:

required number restaurant_id

optional number busy_id (check the busy_id list)

required string start_date

required string end_date

Required number busy_reason_type (1 out of stock; 2 overloaded; 3 blackout)

Reply:

required number busy_id

Sample:

Request:

POST /restaurant/set_restaurant_busy

```
{
  "restaurant_id": 29187,
  "busy_id": 46025,
  "start_date": "2025-05-21 17:58:00",
  "end_date": "2025-05-21 17:59:00",
}
```

Reply:

```
{
  "result": "success",
  "reply": {
    "busy_id": 46025
  }
}
```

● restaurant.get_restaurant_busy_infos

Description: get restaurant info by partner id and/or restaurant_id

Method: POST

URI: s2s/restaurant/get_restaurant_busy_infos

Request:

required number restaurant_id

Reply:

required array object busy_infos
required string busy_id
required string start_date
required string end_date
required int busy_reason_type

Sample:

Request:

POST /restaurant/get_restaurant_info
{\"restaurant_id\": 29187}

Reply:

{\"result\":\"success\",\"reply\":{}}

3.5 Internal Api

• driver.update_arriving_times

Description: request mapping partner restaurant id with Now Restaurant

Method: POST

URI: /s2s-internal/driver/update_arriving_times

Request:

required array object arriving_times
required string order_code
required uint32 restaurant_id
required uint32 driver_uid
required uint32 arriving_time

Reply:

None

Sample:

Request:

POST /s2s/restaurant/request_mapping

Reply:

{\"reply\":null,\"result\":\"success\"}

3.5 Menu Api

Allow partners to sync all dishes/toppings in the menu from merchant to ShopeeFood by store.

We need mapping dishes between 2 systems first to avoid missing the display number of orders of dishes on ShopeeFood.

Partner need

- Provide an endpoint menu allow ShopeeFood can call all menu from partner, follow ShopeeFood's JSON template (<https://dpaste.com/BZT43338J>)
- Allow get menu by store (in the param)

Sample:


[{your_domain}/shopeefoodvn/getMenu?storeCode={partner_store_id}](#)

Structure

No	Part	Description	
	Menu contents > categories		
		Column	Description
		id	partner_dish_group_id
		name	Dish group name
		sequence	Dish group sequence
		Available Status	-AVAILABLE: category should exist in Now menu and is visible to users -UNAVAILABLE: category should not exist in Now menu
		sort_type	1 : Item sales ; 2 -- Item sequence

	Menu contents > items	<table><tr><th>Column</th><th>Description</th></tr><tr><td>id</td><td>partner_dish_id</td></tr><tr><td>name</td><td>Dish name</td></tr><tr><td>Available Status</td><td>-AVAILABLE: item should exist in Now menu, is visible to users and can be ordered by users -UNAVAILABLE: item should exist in Now menu, is visible to users and has ‘out of stock’ status</td></tr><tr><td>description</td><td>description</td></tr><tr><td>sequence</td><td>Dish sorting</td></tr><tr><td>price</td><td>price</td></tr><tr><td>photo</td><td>Image url</td></tr></table>	Column	Description	id	partner_dish_id	name	Dish name	Available Status	-AVAILABLE: item should exist in Now menu, is visible to users and can be ordered by users -UNAVAILABLE: item should exist in Now menu, is visible to users and has ‘out of stock’ status	description	description	sequence	Dish sorting	price	price	photo	Image url
Column	Description																	
id	partner_dish_id																	
name	Dish name																	
Available Status	-AVAILABLE: item should exist in Now menu, is visible to users and can be ordered by users -UNAVAILABLE: item should exist in Now menu, is visible to users and has ‘out of stock’ status																	
description	description																	
sequence	Dish sorting																	
price	price																	
photo	Image url																	
	Menu contents > Topping Group	<table><tr><th>Column</th><th>Description</th></tr><tr><td>id</td><td>partner_topping_group_id</td></tr><tr><td>name</td><td>name</td></tr><tr><td>sequence</td><td>display_order</td></tr><tr><td>Available Status</td><td>AVAILABLE, UNAVAILABLE</td></tr><tr><td>selectionRangeMin</td><td>min_quantity</td></tr><tr><td>selectionRangeMax</td><td>max_quantity</td></tr></table>	Column	Description	id	partner_topping_group_id	name	name	sequence	display_order	Available Status	AVAILABLE, UNAVAILABLE	selectionRangeMin	min_quantity	selectionRangeMax	max_quantity		
Column	Description																	
id	partner_topping_group_id																	
name	name																	
sequence	display_order																	
Available Status	AVAILABLE, UNAVAILABLE																	
selectionRangeMin	min_quantity																	
selectionRangeMax	max_quantity																	
	Menu contents > Topping	<table><tr><th>Column</th><th>Description</th></tr><tr><td>id</td><td>partner_topping_id</td></tr><tr><td>name</td><td>name</td></tr><tr><td>sequence</td><td>display_order</td></tr><tr><td>Available Status</td><td>AVAILABLE, UNAVAILABLE</td></tr><tr><td>price</td><td>Topping price</td></tr></table>	Column	Description	id	partner_topping_id	name	name	sequence	display_order	Available Status	AVAILABLE, UNAVAILABLE	price	Topping price				
Column	Description																	
id	partner_topping_id																	
name	name																	
sequence	display_order																	
Available Status	AVAILABLE, UNAVAILABLE																	
price	Topping price																	

Diagram

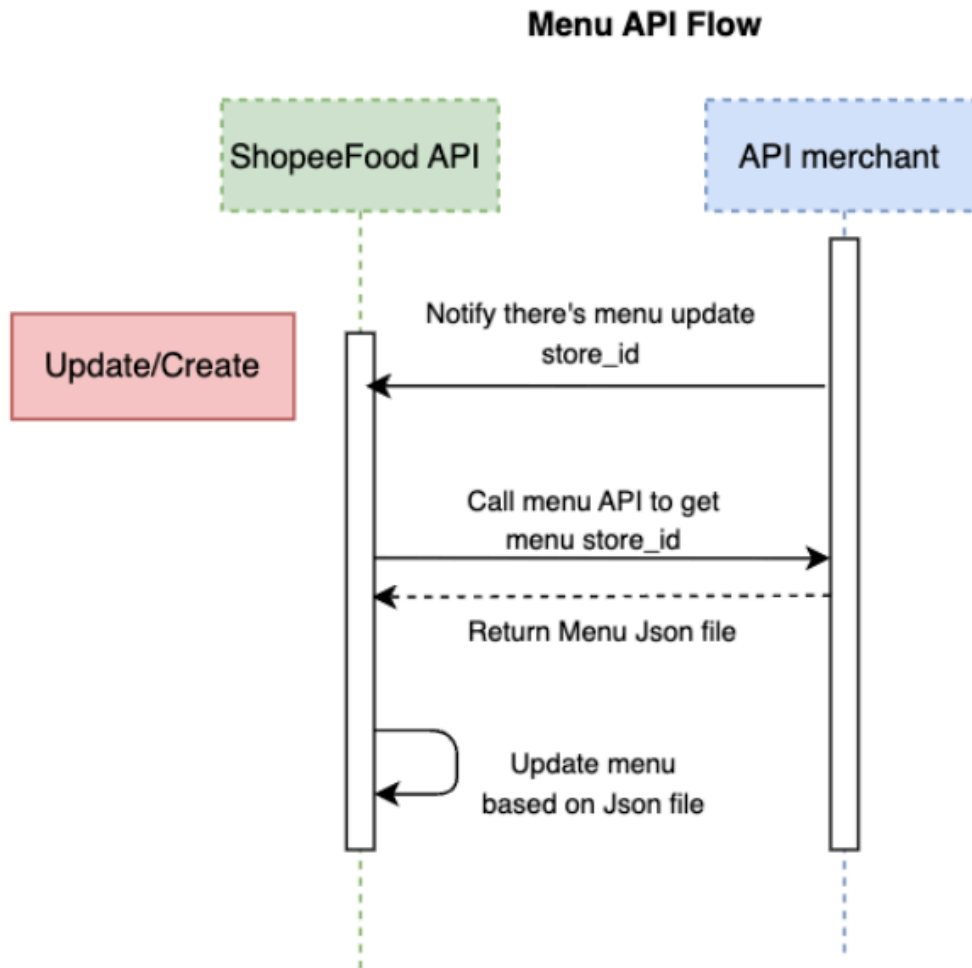

• menu.sync

- URL: /s2s/menu/sync
- Method: POST
- Status: 200
- Introduction: Partner call this API to sync menu from Partner to ShopeeFood
- Logic:
 - If a dish with mapping: will update directly
 - If a dish is in the Partner's menu but does not exist in ShopeeFood: will create new in ShopeeFood menu.

- If a dish is in ShopeeFood but not in Partner's menu: will be deleted in ShopeeFood menu.

Warning!

- Without mapping dish_id → menu might be overwritten with new dish_id → lost dish's sold (displayed in Buyer app when user browse dish)
- Sync task will be failed if:
 - Include updating dish related to Prepaid SKU promotion (Trùm Deal)
 - Delete or not mapping a normal dish related to a CheapMeal dish (Ăn Ngon Rẻ)

Common rules:

- Cannot edit price, information or delete CheapMeal dish (except change status).
- Cannot edit dishes related to Prapaid SKU, need wait after this promotion ends.

• Request:

- Content-Type: String (required)
- X-Foody-App-Id: String (required)
- X-Foody-Request-Id: String (required) (random integer in range (0, 10¹⁰))
- X-Foody-Country: String (required)
- X-Foody-Language: String (required)
- Authorization: String (required)
- ACCESS_TOKEN: String (if partner app_type=isv, the header is required)
- partner_restaurant_id: String

• Response:

- result: String (required) (result code)
- reply: Object
 - task_id: Integer (required) (task id)

Sample:

Request:

POST /s2s/menu/sync

```
{
  "partner_restaurant_id": "test_29214"
}
```

Reply:

```
{
  "result": "success",
  "reply": {
    "task_id": 7340
  }
}
```

Check sync menu result:

When calling menu.sync, ShopeeFood will return a task_id of this sync.

Partner have 2 ways to check result of this sync task:

1. Call endpoint [menu.sync.get_task](#) to get the result
2. Provide a [webhook to receive result](#) from ShopeeFood immediately

• menu.sync.get_task

- URL: /s2s/menu/sync/get_task
- Method: POST
- Status: 200
- Introduction: To get the result of one sync task proactively.
- **[TaskStatus](#): failed,success,retry,processing,pending**
- **Request:**

- └ Content-Type: String (required)
- └ X-Foody-App-Id: String (required)
- └ X-Foody-Request-Id: String (required) (random integer in range (0, 10^10))
- └ X-Foody-Country: String (required)
- └ X-Foody-Language: String (required)
- └ Authorization: String (required)
- └ ACCESS_TOKEN: String (if partner app_type=isv, the header is required)
- └ task_id: Integer (required)
- └ partner_restaurant_id: String (required)

• **Response:**

```

├─ result: String (required) (result code)
└─ reply: Object
    ├─ task_id: Integer (required) (task id)
    ├─ task_status: String (required)
    ├─ partner_restaurant_id: String (required)
    ├─ restaurant_id: Integer (required)
    ├─ summary: String (required)
    ├─ success_sync_dish_num: Integer (required)
    ├─ success_sync_catalog_num: Integer (required)
    ├─ success_sync_option_group_num: Integer (required)
    ├─ success_sync_option_num: Integer (required)
    ├─ success_delete_catalog_num: Integer (required)
    ├─ success_delete_dish_num: Integer (required)
    ├─ success_delete_option_group_num: Integer (required)
    ├─ success_delete_option_num: Integer (required)
    └─ failed_items_detail: Object
        ├─ dish_failed_items: Array
        │   └─ __items__: Object
        │       ├─ action: String (required) (create/update)
        │       ├─ partner_id: String (required)
        │       ├─ error_msg: String (required) (dish description exceeds 500 characters)
        │       └─ data: Object : Object (required)
        ├─ catalog_failed_items: Array
        │   └─ __items__: Object
        │       ├─ action: String (required) (create/update)
        │       ├─ partner_id: String (required)
        │       ├─ error_msg: String (required) (dish description exceeds 500 characters)
        │       └─ data: Object : Object (required)
        ├─ option_group_failed_items: Array
        │   └─ __items__: Object
        │       ├─ action: String (required) (create/update)
        │       ├─ partner_id: String (required)
        │       ├─ error_msg: String (required) (dish description exceeds 500 characters)
        │       └─ data: Object : Object (required)
        └─ option_failed_items: Array
            └─ __items__: Object
                ├─ action: String (required) (create/update)
                ├─ partner_id: String (required)
                ├─ error_msg: String (required) (dish description exceeds 500 characters)
                └─ data: Object : Object (required)
    
```

Sample:

Request:

```
{
  "task_id": 2211,
  "partner_restaurant_id": "test_29214"
}
```

Reply:

```
{
  "reply": {
    "success_sync_catalog_num": 0,
    "success_sync_option_num": 0,
    "success_delete_dish_num": 1,
    "task_id": 1864,
    "success_sync_option_group_num": 0,
    "success_sync_dish_num": 0,
    "restaurant_id": 1000007586,
    "success_delete_option_group_num": 0,
    "summary": "delete_catalog_dish has_cheap_meal_dish failed",
    "update_time": 1759915621,
    "create_time": 1759915617,
    "success_delete_option_num": 0,
    "failed_items_detail": {
      "catalog_failed_items": [
        {
          "action": "delete_catalog_under_dish",
          "data": {
            "dish_ids": [
              160814685
            ]
          },
          "partner_id": "THST",
          "error_msg": "has_cheap_meal_dish",
          "catalog_id": 10043441
        }
      ]
    }
  }
}
```

```

    ],
    "option_failed_items": [],
    "dish_failed_items": [],
    "option_group_failed_items": []
  },
  "success_delete_catalog_num": 1,
  "task_status": "failed",
  "partner_restaurant_id": "568312039806100"
},
"result": "success"
}

```

3.6 Promotion Api

- **price_slash.set_discount**

Description: create or update price slash discount

Method: POST

URI: /api/price_slash/set_discount

Request:

- optional uint32 slash_discount_id
- required string partner_restaurant_id
- required uint32 status (Enum is **CommonStatus**)
- required string start_time(format like "dd/mm/yyyy hh:mm")
- required string end_time (format like "dd/mm/yyyy hh:mm")
- optional uint32 min_merchant_discount_value
- required uint32 apply_for (Enum is **PriceSlashDiscountApplyFor**)
- optional uint32 min_real_order_amount
- required uint32 slash_discount_type (Enum is **PriceSlashDiscountType**,
 - if apply_for is **ALL_MENU**, slash_discount_type must be in[**FIX_PERCENT**, **FIX_PRICE**],
 - else, must be **CUSTOM**)
- optional uint32 discount (required if slash_discount_type is **FIX_PERCENT**)
- optional uint32 discount_after_price (required if slash_discount_type is **FIX_PRICE**)
- optional boolean apply_on_topping (only worked when apply_for is **ALL_MENU**)
- optional array object discount_items (required if slash_discount_type is **CUSTOM**)
 - required string partner_dish_id
 - required uint32 discount_price
 - required uint32 status(Enum is **CommonStatus**)
 - optional string start_time(format like "dd/mm/yyyy hh:mm")

optional string end_time(format like "dd/mm/yyyy hh:mm")
optional uint32 daily_limit_per_item
optional uint32 daily_limit_per_user
required uint32 limit_unique_item_per_order
required uint32 limit_per_order

Reply:

required uint32 slash_discount_id
optional array uint32 fail_partner_dish_ids

Error:

success, error_params

Sample:

Request:
POST /api/price_slash/set_discount
Reply:
{"reply":{"slash_discount_id": 1, "fail_partner_dish_ids": ["abc"]},"result":"success"}

● price_slash.search_ids

Description: search price slash ids by condition

Method: POST

URI: [api/price_slash/search_ids](#)

Request:

optional string from_create_time(format like "dd/mm/yyyy hh:mm")
optional string to_create_time(format like "dd/mm/yyyy hh:mm")
optional string from_start_time(format like "dd/mm/yyyy hh:mm")
optional string to_end_time(format like "dd/mm/yyyy hh:mm")
required string partner_restaurant_id
optional array string partner_dish_ids
optional uint32 last_id
required uint32 page_size
optional uint32 status(Enum is **CommonStatus**)

Reply:

required array uint32 slash_discount_ids
required boolean has_more
required array object slash_discount_infos
 required uint32 slash_discount_id
 required uint32 status

Error:

success, error_params

Sample:

```

Request:
POST /api/price_slash/search_ids

Reply:
{"reply":{"slash_discount_ids": [1,2,3], "has_more": False}, "result": "success"}

```

● price_slash.usage.search_usage

Description: search price slash usage by conditions

Method: POST

URI: /api/price_slash/usage/search_usage

Request:

optional string from_create_time(format like "dd/mm/yyyy hh:mm")
 optional string to_create_time(format like "dd/mm/yyyy hh:mm")
 optional string from_start_time(format like "dd/mm/yyyy hh:mm")
 optional string to_end_time(format like "dd/mm/yyyy hh:mm")
 required string partner_restaurant_id
 optional array string partner_dish_ids
 optional uint32 last_id
 required uint32 page_size
 optional uint32 status(Enum is **CommonStatus**)

Reply:

required array object usages
 required uint32 slash_discount_id
 required uint32 usage
 required boolean has_more

Error:

success, error_params

Sample:

```

Request:
POST /api/price_slash/usage/search_usage

Reply:
{"reply":{"usages": [{"slash_discount_id": 1, "usage": 100}, {"slash_discount_id": 2, "usage": 50}],
"has_more": True}, "result": "success"}

```

● price_slash.item.item_usage.get_usage

Description: search price slash item usage by slash_discount_id

Method: POST

URI: /api/price_slash/item/item_usage/get_usage

Request:

required string partner_restaurant_id
required string slash_discount_id
optional array string partner_dish_ids

Reply:

required array object usages
required uint32 slash_discount_id
required string partner_dish_id
required uint32 usage

Error:

success, error_params

Sample:

Request:

POST /api/price_slash/item/item_usage/get_usage

Reply:

```
{
  "reply": {
    "usages": [
      {
        "slash_discount_id": 1,
        "partner_dish_id": "abc",
        "usage": 100
      },
      {
        "slash_discount_id": 2,
        "partner_dish_id": "bcd",
        "usage": 50
      }
    ],
    "has_more": true,
    "result": "success"
  }
}
```

4. Webhooks

Webhooks allows you to receive real-time HTTP notifications of changes to specific objects in the Foody system. For example, we could send you a notification when a new order or order had changed status. This prevents you from having to query the Foody external api for changes to objects that may or may not have happened, and helps you avoid reaching your rate limit.

You need to give us your url callback link and implement the following api to handle our requests.

4.1 Order Webhook

Partner need

Provide a webhook (*partner_api_url_callback/update_order*) to ShopeeFood to get notified of new orders or new status of orders.

- **partner_api_url_callback/update_order**

Description: Foody will call this API when order is updated

Method: POST

URI: /update_order

Request:

required string order_code
required OrderUpdateType update_type

```

required uint32 restaurant_id
optional string pick_time (format like 2017-07-15 14:30:00)
optional OrderMerchantStatus status
optional string merchant_note
optional string note_for_shipper
optional string partner_restaurant_id
optional string serial (deprecated)

```

Reply:

```
empty
```

4.2 Menu Webhook

Partner need

Provide a webhook (*partner_api_url_callback*) to ShopeeFood to get notified of sync menu task status.

This is related to [menu.sync](#) endpoint


• partner_api_url_callback

- URL: /s2s/menu/sync/task/callback
- Method: POST
- Status: 200
- Introduction: ShopeeFood will notify partner's webhook when the task_id has been updated to another status.
- Request:

```

├─ task_id: Number
├─ task_status: String → data model: TaskStatus
├─ partner_restaurant_id: String
├─ restaurant_id: Number
├─ summary: String
├─ success_sync_dish_num: Number
├─ success_sync_catalog_num: Number
├─ success_sync_option_group_num: Number
├─ success_sync_option_num: Number
├─ success_delete_catalog_num: Number
├─ success_delete_dish_num: Number
├─ success_delete_option_group_num: Number
├─ success_delete_option_num: Number
├─ failed_items_detail: Object
│   └─ dish_failed_items: Array
│       └─ __items__: Object

```

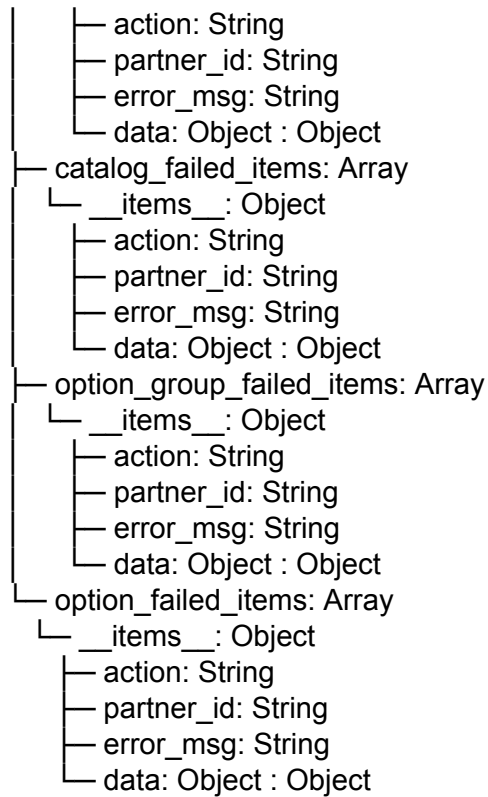

Sample:

```

{
  "task_id": 15,
  "task_status": "string",
  "partner_restaurant_id": "02",
  "restaurant_id": 68,
  "summary": "string",
  "success_sync_dish_num": 36,
  "success_sync_catalog_num": 43,
  "success_sync_option_group_num": 8,
  "success_sync_option_num": 29,
  "success_delete_catalog_num": 27,
  "success_delete_dish_num": 40,
  "success_delete_option_group_num": 74,
  "success_delete_option_num": 48,
  "failed_items_detail": {
    "dish_failed_items": [
      {
        "action": "string",
        "partner_id": "250",

```

```
        "error_msg": "string",
        "data": {}
    },
    {
        "action": "string",
        "partner_id": "250",
        "error_msg": "string",
        "data": {}
    }
],
"catalog_failed_items": [
    {
        "action": "string",
        "partner_id": "3",
        "error_msg": "string",
        "data": {}
    },
    {
        "action": "string",
        "partner_id": "3",
        "error_msg": "string",
        "data": {}
    }
],
"option_group_failed_items": [
    {
        "action": "string",
        "partner_id": "383",
        "error_msg": "string",
        "data": {}
    },
    {
        "action": "string",
        "partner_id": "383",
        "error_msg": "string",
        "data": {}
    }
]
```

```
    ],  
    "option_failed_items": [  
      {  
        "action": "string",  
        "partner_id": "9",  
        "error_msg": "string",  
        "data": {}  
      },  
      {  
        "action": "string",  
        "partner_id": "9",  
        "error_msg": "string",  
        "data": {}  
      }  
    ]  
  }  
}
```

Non-functional information

API rate limit: Each IP is limited to 25 QPS