

Design Patterns Tutorial		
Design Patterns - Home		
Design Patterns - Overview		
Design Patterns - Factory Pattern		
Abstract Factory Pattern		
Design Patterns - Singleton Pattern		
Design Patterns - Builder Pattern		
Design Patterns - Prototype Pattern		
Design Patterns - Adapter Pattern		
Design Patterns - Bridge Pattern		
🛚 Design Patterns - Filter Pattern		
Design Patterns - Composite Pattern		
Design Patterns - Decorator Pattern		
Design Patterns - Facade Pattern		
Design Patterns - Flyweight Pattern		
Design Patterns - Proxy Pattern		
Chain of Responsibility Pattern		
Design Patterns - Command Pattern		
Design Patterns - Interpreter Pattern		
Design Patterns - Iterator Pattern		

1 of 7



- Design Patterns Observer Pattern
- Design Patterns State Pattern
- Design Patterns Null Object Pattern
- Design Patterns Strategy Pattern
- Design Patterns Template Pattern
- Design Patterns Visitor Pattern
- Design Patterns MVC Pattern
- Business Delegate Pattern
- Composite Entity Pattern
- Data Access Object Pattern
- Front Controller Pattern
- Intercepting Filter Pattern
- Service Locator Pattern
- Transfer Object Pattern

Design Patterns Resources

- Design Patterns Questions/Answers
- Design Patterns Quick Guide
- Design Patterns Useful Resources
- Design Patterns Discussion

Design Patterns - Template Pattern




Next Page **⊙**

In Template pattern, an abstract class exposes defined way(s)/template(s) to execute its methods. Its subclasses can override the method implementation as per need but the invocation is to be in the same way as defined by an abstract class. This pattern comes under behavior pattern category.

Implementation

We are going to create a *Game* abstract class defining operations with a template method set to be final so that it cannot be overridden. *Cricket* and *Football* are concrete classes that extend *Game* and override its methods.

TemplatePatternDemo, our demo class, will use *Game* to demonstrate use of template pattern.

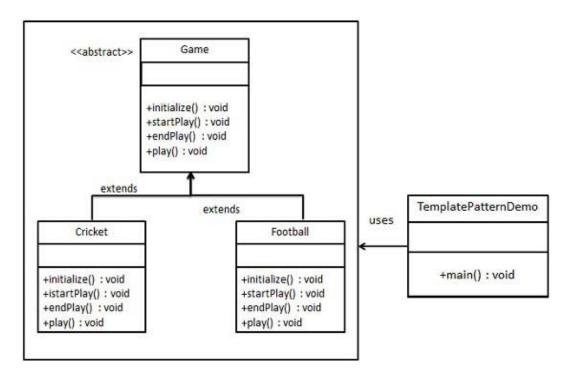

Step 1

Create an abstract class with a template method being final.

Game.java

```
public abstract class Game {
```



```
//initialize the game
initialize();

//start game
startPlay();

//end game
endPlay();
}
```

Step 2

Create concrete classes extending the above class.

Cricket.java

```
public class Cricket extends Game {
    @Override
    void endPlay() {
        System.out.println("Cricket Game Finished!");
    }
    @Override
    void initialize() {
        System.out.println("Cricket Game Initialized! Start playing.");
    }
    @Override
    void startPlay() {
        System.out.println("Cricket Game Started. Enjoy the game!");
    }
}
```

Football.java

```
public class Football extends Game {
    @Override
    void endPlay() {
        System.out.println("Football Game Finished!");
    }
    @Override
    void initialize() {
        System.out.println("Football Game Initialized! Start playing.");
    }
    @Override
    void startPlay() {
        System.out.println("Football Game Started. Enjoy the game!");
    }
}
```



Use the Game's template method play() to demonstrate a defined way of playing game.

TemplatePatternDemo.java

```
public class TemplatePatternDemo {
   public static void main(String[] args) {

        Game game = new Cricket();
        game.play();
        System.out.println();
        game = new Football();
        game.play();
   }
}
```

Step 4

Verify the output.

```
Cricket Game Initialized! Start playing.
Cricket Game Started. Enjoy the game!
Cricket Game Finished!

Football Game Initialized! Start playing.
Football Game Started. Enjoy the game!
Football Game Finished!
```

⊙ Previous Page


Next Page 🕣

Advertisements



marketplace.openshift.com

Add Databases, Monitoring, Search, Messaging, Scheduling, and More.

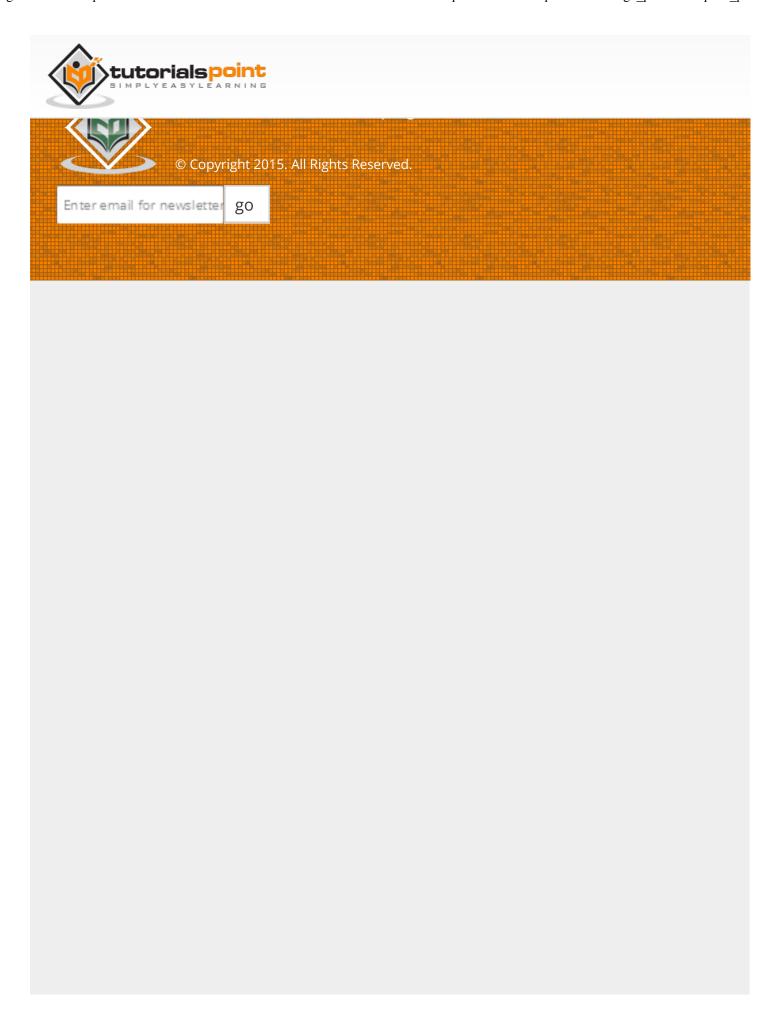

7 of 7