



# Build A Real-Time Chat App With VueJS, Vuex & Cloud Firestore

BY LACHLAN MILLER ON OCTOBER 16, 2017 13 COMMENTS

33 67 0

Last week Google's Firebase platform released a new product, *Cloud Firestore*. Much like the Firebase real-time database, it is a NoSQL-based cloud database that can be used to build real-time applications. It addresses some of the problems Firebase has, like writing complex queries. You can read more about its features [here](#).

In this post, I'll be building a simple real-time chat application called *Firechat* which uses Vue and Vuex,

SEARCH THIS SITE

e.g. Vue:



The Ultimate Vue.js Developers Course

**90% Off Sale!**

13-hours of video lessons from the basics to advanced!



Adobe Creative Cloud for Teams starting at \$29.99 per month.

ADS VIA CARBON

FOLLOW US



and the new Cloud Firestore. I'll look at how to integrate Firestore into a Vue.js application and some best practices with Vuex. You can get the final source code [here on Github](#).

## Installation

Let's start by scaffolding a new Vue application using the vue-cli. I'll use the *webpack-simple* template.

```
$ vue init webpack-simple firechat
```

Before going any further, I want to use the spread operator ... and async/await. We will also be using Vuex for state management, and uuid for generating random ids, so let's install those. We will also need the Firebase module.

```
$ npm install babel-plugin-transform-async-to-g
```

Next, in the project root directory, edit `.babelrc` like so:

```
{
  "presets": [
    ["env", { "modules": false }]
  ],
  "plugins": ["transform-async-to-generator", "
```

### LATEST POSTS

Using React-Style  
Callback Props With  
Vue: Pros and Cons  
JULY 30, 2018

7 Tips For Building A  
Large Nuxt App  
JULY 16, 2018

Make HTTP  
Requests to Remote  
Web Services in a  
NativeScript-Vue  
App  
JULY 2, 2018

How To Build Vue  
Components That  
Play Nice  
JUNE 18, 2018

Speed Up  
Development With  
Prototyping and Vue  
JUNE 4, 2018

### TOPICS

AJAX    BLADE

BOILERPLATE

BRUNCH    CHROME

CLI    CLOUD

COMPONENTS


COMPUTED    CSS

DESIGN PATTERNS




Now we can use the spread operator ... and `await/async`.

Before going any further, go to Firebase and sign up if you haven't got an account. Once you do, click "Add Project" and enter a name.

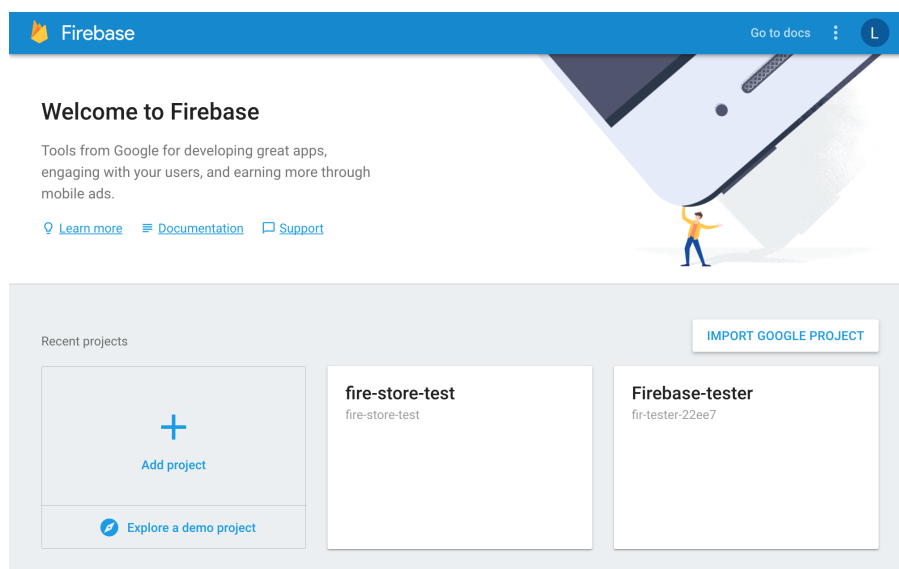


Then click "Add Firebase to your web app".

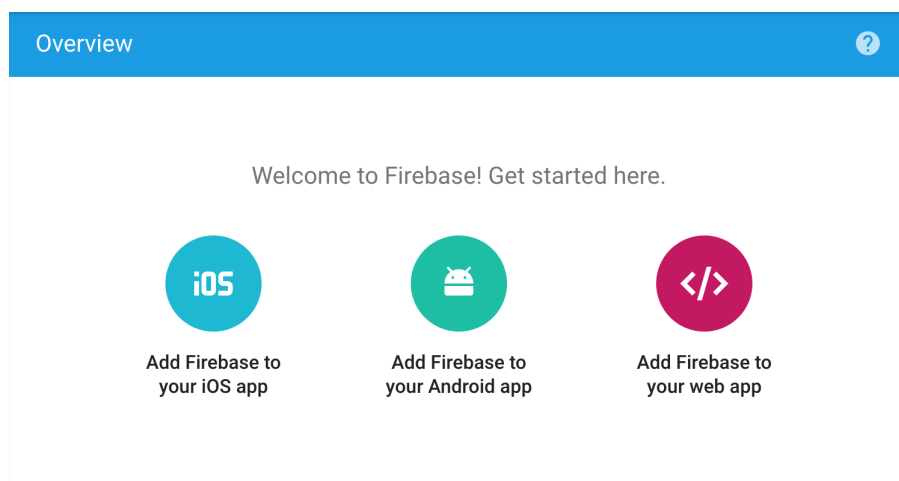

Grab the `config` object and create a file called `config.js` under `src` like below. Select "test mode" -

DJANGO  
EXTENSIONS  
FILTERS    FIREBASE  
INTERNATIONALIZATION  
JAVASCRIPT  
JQUERY    JSX  
LARAVEL  
LIBRARIES  
LIFECYCLE HOOKS  
METHODS    MOBILE  
NATIVESCRIPT  
NODE    NODE.JS  
NPM    NUXT    PDF  
PLUGINS  
PRE-RENDERING  
PRERENDERING  
PROPS    PUG  
PWA    RAILS  
REACT    REACTIVITY  
RENDER    ROUTER  
SEO  
SERVER-SIDE  
RENDERING  
SERVERLESS  
SINGLE FILE  
COMPONENTS  
SLOTS    TDD

that'll be fine for learning Firestore. It means your database will be public, so don't share the link on the internet anywhere.

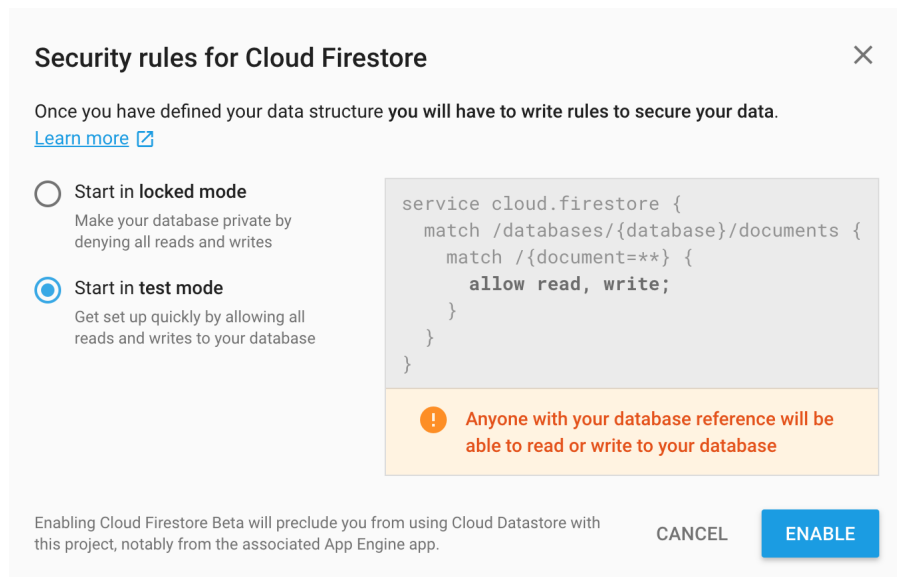

&lt;/&gt;

```
const config = {
  apiKey: "...",
  authDomain: "...",
  databaseURL: "...",
  projectId: "...",
  storageBucket: "",
  messagingSenderId: "..."
};
```

```
export default config
```

Head back to Firebase, and under the database tab, click "Try Firestore Beta" and "Start in Test Mode", which will take you to a UI where you view the database as it changes in real time.

TEMPLATES

TESTING

TRANSITIONS

UX

VIDEO

VIRTUAL DOM

VUE ROUTER

VUE.JS

VUECONF

VUEX


WATCHERS

WEB COMPONENTS

WEB PERFORMANCE

WEBPACK

WORDPRESS

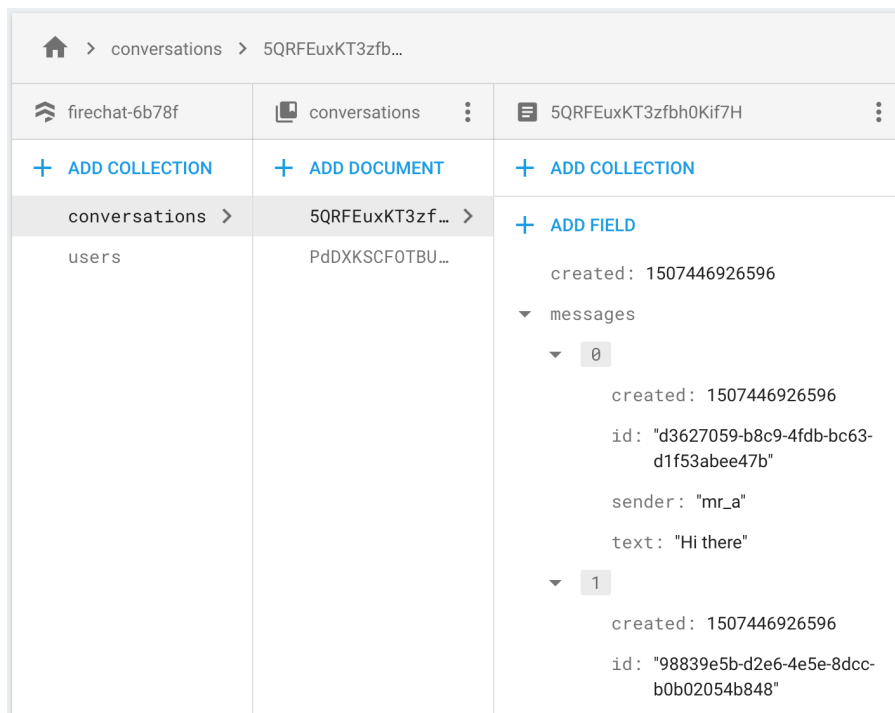

## Setup Firestore with Vuex

Next, let's set up Vuex and Firestore. Create a folder under src called store, and inside index.js. Enter the following:

```
import Vue from 'vue'
import Vuex from 'vuex'

import 'babel-polyfill'

import Firebase from 'Firebase'
import 'Firebase/firestore'
import config from '../config'

Firebase.initializeApp(config)

Vue.use(Vuex)
const state = {
  db: Firebase.firestore()
}
```

</>

```
export default new Vuex.Store({
  state,
  modules: {}
})
```

Next, head over to `main.js` and import the store, and inject it into the app.

---

```
import Vue from 'vue'
import App from './App.vue'
import store from './store'

new Vue({
  el: '#app',
  store,
  render: h => h(App)
})
```

</>

Lastly, visit `App.vue`, delete all the default content, add `console.log` on the database to make sure everything is working.

---

```
<template>
  <div></div>
</template>

<script>
export default {
  name: 'app',
  created () {
    console.log(this.$store.state.db)
  }
}
```

</>

```
}  
</script>  
  
<style>  
</style>
```

Finally, run the server using `npm run dev`. If you didn't make any mistakes, you should see Firestore `{__ob__: Observer}` in the console! That means Firestore is configured and working.

## Writing Seed Data To Firestore

Let's create some initial data to work with. We can write using the Firestore API method, `add`. Start by creating a component called `Initialize.vue` in `src`. This component will give us an interface to seed the data. The actual creation of data will happen in the Vuex store.

---

```
</>  
  
<template>  
  <div>  
    <button @click="init">Initialize app base s  
    <button @click="get">Get</button>  
  </div>  
</template>  
  
<script>  
  export default {  
    name: 'InitializeData',  
  
    methods: {
```

```
init () {  
  this.$store.dispatch('users/seed')  
  this.$store.dispatch('conversations/seed')  
},  
  
get () {  
  // todo  
}  
}  
}  
</script>  
  
<style>  
</style>
```



We also stubbed a `get()` method which will get the data later on.

The application will have two Vuex modules: `conversations.js` and `users.js`. Messages will be saved in an array in `conversations.js`. If the application was to get bigger and more complex, I'd make a module for `messages.js` as well, but it will not be necessary at this stage.

Go ahead and create `conversations.js` and `users.js` inside of `store`.

## Users Seed Data

Inside of `users.js`, add the following:





```
const state = {
  all: {},
  currentUser: 'mr_a'
}

const mutations = {

}

const actions = {
  seed ({ rootState }) {
    let userRef = rootState.db.collection('user

    userRef.doc('mr_a').set({
      firstName: 'Andy',
      lastName: 'Andyson'
    })

    userRef.doc('mr_b').set({
      firstName: 'Ben',
      lastName: 'Benson'
    })

    userRef.doc('mr_c').set({
      firstName: 'Cee',
      lastName: 'Ceeson'
    })
  }
}

export default {
  namespaced: true, state, mutations, actions
}
```

state simply declares the state, so Vue can add reactivity for us. currentUser will simulate having

someone logged in, and used to set the sender property on messages.

`db.collection('users')` is part of the Firestore API. It returns a reference to the collection in the Firestore database. If it does not exist, it is created (or will be when you insert a document into it). Read more here: <https://firebase.google.com/docs/firestore/data-model>.

Firestore provides a `set()` method to add new data. You must provide a unique identifier. In this case, I'm using what would usually be known as a username - `mr_a`, `mr_b` and so on. Even if a user was to change their `firstName` or `lastName`, the unique identifier would remain the same. In the above snippet, I also set `currentUser` in the state. This will be used later to set a sender field when sending messages. Easy.

## Conversations Seed Data

Let's see a bit more of the Firestore API by creating some seed data in `conversations.js`.

---

```
import Vue from 'vue'
import uuidv4 from 'uuid/v4'

const state = {
  all: {},
  allIds: [],
  allMsgIds: []
}

const mutations = {
```

&lt;/&gt;

```

    }

    const actions = {
      seed ({ rootState }) {
        let convoRef = rootState.db.collection('conversations')

        convoRef.add({
          created: Date.now(),
          users: ['mr_a', 'mr_b'],
          messages: [
            { id: uuidv4(), text: 'Hi there', sender: 'mr_a' },
            { id: uuidv4(), text: 'Hi to you too!', sender: 'mr_b' },
          ]
        })

        convoRef.add({
          created: Date.now(),
          users: ['mr_a', 'mr_c'],
          messages: []
        })
      }
    }

    export default { namespaces: true, state, mutations, actions }

```



A bit more going on here than the users store. `all` will hold all the conversations in the application. `allIds` will be an array of `conversation.id`. Lastly, `allMsgIds` will be an array containing all the `conversation.message` ids. We will use `allMsgIds` to decide if a message is new or not later on when adding new messages.

There are actually two ways to add data to a collection in Firestore, `set()` and `add()`. When using `set()` you must specify an id for the document. You could make one using something like `uuid` (which we import at the top of the store). In `users`, we manually specified one.

Alternatively, we can have Firestore generate a random id for us using `add()`, which is what is happening above. The messages are nested in the conversation document, however, as Firestore cannot generate an id for us, so we created one using the `uuid` module. That's it for setting the seed data up.

## Inject the modules to the Vuex store

Now we have some seed data ready to go, head back to `index.js` and import the `conversations` and `users` modules, and add them to the `Vuex.Store` constructor. Previous code has been omitted for brevity.

---

```
import Vue from 'vue'
import Vuex from 'vuex'
...
import users from './users'
import conversations from './conversations'
...

export default new Vuex.Store({
  state,
  modules: {
    users,
```

&lt;/&gt;

```
      conversations
    }
  })
```

Modify App.vue to import and use the Initialize.vue component:

---

```
</>

<template>
  <div>
    <Initialize />
  </div>
</template>

<script>
import Initialize from './Initialize.vue'

export default {
  name: 'app',

  created () {
    console.log(this.$store.state.db)
  },

  components: {
    Initialize
  }
}
</script>

<style>
</style>
```

Now try clicking *Initialize app base state*. The data should be written to Firestore (you may need to refresh

the Firestore page to see the new collections).

## Fetching Data From Firestore

The next thing to do is display the Firestore data in the Vue app. Head to `conversations.js` and add a `get()` method. We will use the ES7 `async/await` syntax.

---

```
actions: {  
  // seed () ...  
  async get ({ commit, rootState }) {  
    let convoRef = rootState.db.collection('conversations')  
    let convos = await convoRef.get()  
  
    convos.forEach(conversation => commit('SET_CONVERSATION', conversation))  
  }  
}
```



Again, we get a reference to the collection using `db.collection`. Calling `get()` on the collection returns a promise. I don't check for failure here, but you can do so with a `try/catch` loop in a real application.

For each conversation, we then `commit` a mutation which we will make next, with `conversation` as the payload.

Let's create the mutation now:

---

```
const mutations = {  
  SET_CONVERSATION (state, { conversation }) {  
    const data = conversation.data()  
  }  
}
```

```
state.all = {  
  ...state.all,  
  [conversation.id]: { users: data.users, c  
}  
state.allIds.push(conversation.id)  
}  
}
```

Some interesting stuff here. Firstly, to access the data in a Firestore document, you need to call `data()` on the object. If you simply do `console.log(conversation)`, you won't see the data. `conversation.id` contains the unique id Firestore made for us.

Note that doing `state.app[conversation.id] = conversation` does not work! It will add the properties to the store, but they will NOT have Vue reactivity, which would prevent us from adding new message down the line. See <https://vuejs.org/v2/guide/reactivity.html> for more details.

Note that we also do not add the messages (although when we call `data()` we do have access to them). We'll see why later on. We also save the `conversation.id` in the `allIds` array.

Let's do the same for `users.js`. We will also set `mr_b` as the `currentUser`.

---

```
const state = {  
  all: {},
```

&lt;/&gt;

```
    currentUser: 'mr_b'
  }

  const mutations = {
    SET_USER (state, { user }) {
      state.all = {...state.all, [user.id]: user.
    }
  }

  const actions = {
    seed ({ rootState }) {
      let userRef = rootState.db.collection('user

      userRef.doc('mr_a').set({
        firstName: 'Andy',
        lastName: 'Andyson'
      })

      userRef.doc('mr_b').set({
        firstName: 'Ben',
        lastName: 'Benson'
      })

      userRef.doc('mr_c').set({
        firstName: 'Cee',
        lastName: 'Ceeson'
      })
    },

    async get ({ commit, rootState }) {
      let userRef = rootState.db.collection('user
      let users = await userRef.get()

      users.forEach(user => commit('SET_USER', {
    }
  }

  export default {
```



```
    namespace: true, state, mutations, actions
  }
```

That's it for access the data. Time to create some components to display it.

## Creating Components to Display Firestore Data

Now create ConversationContainer.vue and Message.vue inside src, and enter the following. We will start with Message.vue.

```
<template>
  <div class="message-container">
    <div :class="getPosition">
      {{ message.text }}
    </div>
  </div>
</template>
```

```
<script>
  export default {
    name: 'Message',

    props: {
      message: {
        type: Object,
        required: true
      }
    },

    computed: {
```

```

    getPosition () {
      if (this.message.sender === this.$store
        return 'my message'
      } else {
        return 'message'
      }
    }
  }
}
}
</script>

<style scoped>
.my.message {
  text-align: right;
}

.message-container {
  border: 1px solid silver;
}
</style>

```



Nothing exciting here. A simple check to decide if the message was sent by the current user and to position it accordingly. Let's move on to ConversationContainer.vue.

&lt;/&gt;

```

<template>
  <div>
    Conversation ID: {{ id }}
    <hr>
    <Message
      v-for="message in conversation.messages"
      :message="message"
      :key="message.created"
    />
  </div>

```

```
</div>
</template>

<script>
import Message from './Message.vue'
import { mapState } from 'vuex'

export default {
  name: 'ConversationContainer',

  props: {
    conversation: {
      type: Object,
      required: true
    },
    id: {
      type: String,
      required: true
    }
  },

  created () {
    // todo: LOAD MESSAGES
  },

  components: {
    Message
  }
}
</script>

<style scoped>
</style>
```

Again, nothing special. Later on in `created()` we will load all the messages, and listen for new ones. This

component will receive a conversations as a prop,  
which comes from `$store.state.conversations`.

Now import `ConversationContainer.vue` in `App.vue`.  
Note this is the final implementation for `App.vue`.

---

```
</>

<template>
  <div>
    <Initialize />
    <ConversationContainer
      v-for="id in convoIds"
      :conversation="conversations[id]"
      :id="id"
      :key="id"
    />
  </div>
</template>

<script>
import Initialize from './Initialize.vue'
import ConversationContainer from './Conversati

import { mapState } from 'vuex'

export default {
  name: 'app',
  components: {
    Initialize,
    ConversationContainer
  },

  computed: {
    ...mapState({
      conversations: state => state.conversatic
      convoIds: state => state.conversations.al
    })
  },
}
```

```
}  
</script>  
  
<style>  
</style>
```

Pretty straightforward - we loop `allIds`, and pass each conversation as a prop to the `ConversationContainer.vue`. We can use the `id` from Firestore as a `:key` for the `v-for` loop as a bonus. The Vuex `mapState` helper function makes it easy to access the state.

Lastly, update `Initialize.vue` to actually fetch the data (we stubbed `get()` out earlier, remember?)

```
methods: {  
  // init () ...  
  get () {  
    this.$store.dispatch('users/get')  
    this.$store.dispatch('conversations/get')  
  }  
}
```

If everything went well, you should be able to click the "GET" button and see the following:

## Fetching Messages in Real Time

Finally, the bit we've all been waiting for - real-time messaging. In `ConversationContainer.vue`, update `create()` to look like the following:

```
</>

created () {
  this.$store.state.db.collection('conversations')
    .where('source', '==', convo.metadata.hasPendingWrite)
    .onSnapshot((snapshot) => {
      console.log(`Source: ${snapshot.source}`)

      // TODO: add messages to store
    })
}
```

In Firestore, you can listen to a document using the `onSnapshot()` method. More here: <https://firebase.google.com/docs/firestore/query-data/listen>.

Firstly, refresh the Vue application and hit `get` to query Firestore for the conversations. Check the console. You should see `Source: Server` printed twice.

`onSnapshot()` triggers immediately, returning the current state of the document. It also will trigger every time the document changes.

This is why we didn't populate the messages in the `conversations.js` - module - we want to fetch the conversation once initially, to get the ID and members, but constantly be watching for new messages. We will take advantage of the initial `onSnapshot()` to get the current state of the conversation, specifically the

messages, and then update anytime a new message is created.

Notice the line `let source = convo.metadata.hasPendingWrites ? 'Local' : 'Server'`. This is due to a feature called latency compensation. Basically, when you write data, all clients listening to the document will receive a notification, before the data is even sent to Firestore. You could use perhaps use this to show a "member is typing..." notification. If `hasPendingWrites` is true, the data has not been written yet, and if it's false, it has.

Now, we need to add the messages to the store.

Update `created()` like so:

---

```
created () {  
  this.$store.state.db.collection('conversations')  
    .doc(this.id).set({  
      let source = convo.metadata.hasPendingWrites ? 'Local' : 'Server'  
    })  
  
    console.log(`Source: ${source}`)  
  
    if (convo && convo.data()) {  
      convo.data().messages.forEach(message => {  
        conversationId: this.id, message })  
      })  
    }  
  })  
}
```

You access the data in the document returned from `onSnapshot()` using the `data()` method. Let's now

write the mutation to add the messages in `conversations.js`.

```
const mutations = {  
  // SET_CONVERSATION ...  
  
  ADD_MESSAGE (state, { conversationId, message }) {  
    if (!state.allMsgIds.includes(message.id))  
      state.all[conversationId].messages.push(message)  
      state.allMsgIds.push(message.id)  
  }  
}
```

`onSnapshot()` returns the *entire* conversation, including the existing messages. By checking if `allMsgIds` includes the `message.id`, and pushing it as such, we can ensure only new message are added to the conversation. Vue's reactivity will automatically update the UI for us.

That should be enough to display the messages! Try refreshing, grabbing the data and you should see something like this.

## Sending A Message In Real Time

Lastly, let's send a message in real-time. Update `ConversationContainer.vue`:



&lt;/&gt;

```
<template>
<div>
  Conversation ID: {{ id }}
  <hr>
  <Message
    v-for="message in conversation.messages"
    :message="message"
    :key="message.created"
  />
  <br />
  <input v-model="newMessageText" @keyup.enter=
</div>
</template>
```

```
<script>
import Message from './Message.vue'
import { mapState } from 'vuex'

export default {
  name: 'ConversationContainer',

  data () {
    return {
      newMessageText: ''
    }
  },

  props: {
    // ...
  },

  created () {
    // ...
  },

  methods: {
    send () {
```

```

      this.$store.dispatch('conversations/sendM
        text: this.newMessageText,
        created: Date.now(),
        conversationId: this.id,
        sender: this.$store.state.users.current
      })
    }
  },

  components: {
    Message
  }
}
</script>

```

Fairly straightforward. Using `v-model`, we bind to an `<input>`, and on `keyup.enter` send the message, passing the `conversationId` to the `commit`.

Header over to `conversations.js` and add the following action:

---

```

actions: {
  // get ()
  // seed ()
  sendMessage ({ commit, rootState }, { text, c
    const convoRef = rootState.db.collection('c

    convoRef.update({
      messages: [...state.all[conversationId].m
    })
    .then(res => console.log('Message sent.'))
    .catch(err => console.log('Error', err))
  }
}

```



Firestore documents are updated using `update()`, which allows you to update certain fields, without touching the others. Read more here:

<https://firebase.google.com/docs/firestore/manage-data/update-data>.

We simply update the `messages` property, with all the existing ones, plus the newly sent message. When the Firestore document is updated, `onSnapshot()` triggers again and adds the message to the conversation.

This should be enough to get the application working real-time! Try opening another browser and send some messages - they should be received real-time in any other clients.

## Conclusion and Improvements

Firestore is very easy to get started with, and extremely powerful. Some improvements to this application include:

- *Only sending and fetching new messages.* At this point, the entire conversation is sent and received. I'm not sure how to do this yet using Firestore. Likely some kind of `Array.push` method exists - let me know if you have a good technique for this!

- *Deleting or editing messages.* This would not work in the current application since when adding messages, we check by id - to allow for editing, you would need to check for the id in `allMsgIds`, and if the text was different.
- *Creating new conversations.* At the moment only two conversations exist, the ones created by `seed()`. It would be a good exercise to extend the application to allow for this.
- *Auth.* Firebase also provides authentication, that you could use with an application like this.

🐦 33    f 67    G+ 0

---

Enjoy this article? Get the latest Vue.js articles in your inbox by joining the [Vue.js Developers Newsletter](#).

---

TOPICS:    VUE.JS    FIREBASE    VUEX    CLOUD

### — ABOUT LACHLAN MILLER

Lachlan is a full stack developer with a strong interest in the modern Javascript stack. He currently resides in Tokyo, Japan.

@LACHLAN06036367

## Related posts

### 7 Vue.js Backends...

MAY 7, 2018

### Using React-Style ...

JULY 30, 2018

### 7 Tips For Building...

JULY 16, 2018

[See more...](#)

## — COMMENTS

---





[Comments](#)[Community](#)[1 Login](#)[Recommend 3](#)[Share](#)[Sort by Best](#)

LOG IN WITH

OR SIGN UP WITH DISQUS [?](#)**whatever** • 10 months ago

Should I be installing "Firebase" or "firebase"?

On windows

```
$ npm install Firebase resulted in
```

```
$ npm ERR! 404 Not Found: Firebase@latest
```

but

```
$ npm install firebase (seemed to have) worked.
```

3 ^ | v • Reply • Share ›

**Lachlan Miller** ➔ whatever • 10 months ago

I didn't realised casing made a difference - I guess it does on windows under powershell. Stick to lowercase always with npm modules :)

^ | v • Reply • Share ›

**whatever** ➔ Lachlan Miller • 10 months ago

That's a real oddity then as traditionally Windows has problems because it would ignore casing that Linux systems would treat as different.

"Stick to lowercase always with npm modules"

Thanks I will do that from now on (still learning)

2 ^ | v • Reply • Share ›

**Podster** • 7 months ago

From what I can see we do not add Real Time Data code in the Vuex but it's placed instead in the component. Is this because placing that kind of code in the Vuex is bad or... trying to understand the benefits of using Vuex with



Firestore.

```
this.$store.state.db.collection('conversations').doc(this.id).o
```

Thank you.

1 ^ | v • Reply • Share ›

**natzi** • 2 months ago

Hi, I'm a newbie and I just want to ask if this can be converted to an android/ios app using Nativescript and with the same Vuejs code? Thanks.

^ | v • Reply • Share ›

**Justin Chan** • 10 months ago

Thank you so much for this. Can you also make a tutorial on how to make a chat app like the one in zopim chat by using this method? I will really appreciate it. Thanks! :)

^ | v • Reply • Share ›

**Lachlan Miller** ➔ Justin Chan • 10 months ago

Thanks for reading. I'm not sure what zopim is, if you need some guidance I can help out though. If you make a start maybe I can contribute :) shoot me a repo link when you start work on it!

^ | v • Reply • Share ›

**Electron Priest** • 10 months ago

great tutorial, all done in about 15 min :)

^ | v • Reply • Share ›

**Lachlan Miller** ➔ Electron Priest • 10 months ago

Thanks! I'm glad you found it useful!

^ | v • Reply • Share ›

**DRP** • 10 months ago

do you have github link for the project? Thanks. Nice structure...

^ | v • Reply • Share ›

**Travis Reynolds** ➔ DRP • 10 months ago

second that - useful tut, but good to compare to the authors finished project.

^ | v • Reply • Share ›

**Lachlan** ➔ Travis Reynolds • 10 months ago

Thanks @DRP and @Travis Reynolds !

Thanks @DPA and @David Reynolds :

Glad you liked it

There is a link the in second paragraph! But  
here it is again just in case:

#### Sponsored Links

##### Set 5 khăn mặt cao cấp BW sợi tre Nhật Bản

130.000₫ - shopee.vn

##### This invention taking the internet by storm

ECOCUT pro

##### If you like the summer, this game is a must have

Throne Free online games

##### Choose a star ship and play this Game for 3 Minutes


Astro Conquest

##### Top 10 Best Countries To Travel To Alone In 2018

Bored Articles

##### 10 Easiest Countries for Immigration from Vietnam

DestinationON



© VUE.JS DEVELOPERS ALL RIGHTS RESERVED. VIEW OUR PRIVACY POLICY.