

Microsoft Azure Administrator v1.0 (AZ-104) - Full Access

Question 1 (Question Set 1)



Your company has several departments. Each department has a number of virtual machines (VMs).
The company has an Azure subscription that contains a resource group named RG1.
All VMs are located in RG1.
You want to associate each VM with its respective department.
What should you do?

- A. Create Azure Management Groups for each department.
- B. Create a resource group for each department.
- C. Assign tags to the virtual machines.
- D. Modify the settings of the virtual machines.

Answer : C

Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags>

Question 2 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the multi-factor authentication page to alter the user settings.
Does the solution meet the goal?

- A. Yes
- B. No

Answer : B

Question 3 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the Azure portal to alter the session control of the Azure AD conditional access policy.
Does the solution meet the goal?

- A. Yes
- B. No

Answer : B

Question 4 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) subscription.
You want to implement an Azure AD conditional access policy.
The policy must be configured to require members of the Global Administrators group to use Multi-Factor Authentication and an Azure AD-joined device when they connect to Azure AD from untrusted locations.
Solution: You access the Azure portal to alter the grant control of the Azure AD conditional access policy.
Does the solution meet the goal?

- A. Yes
- B. No

Answer : A

Question 5 (Question Set 1)



You are planning to deploy an Ubuntu Server virtual machine to your company's Azure subscription.
You are required to implement a custom deployment that includes adding a particular trusted root certification authority (CA).
Which of the following should you use to create the virtual machine?

- A. The New-AzureRmVm cmdlet.
- B. The New-AzVM cmdlet.
- C. The Create-AzVM cmdlet.

D. The az vm create command.

Answer : C

Explanation:

Once Cloud-init.txt has been created, you can deploy the VM with az vm create cmdlet, using the --custom-data parameter to provide the full path to the cloud-init.txt file.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/linux/tutorial-automate-vm-deployment>

Question 6 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.

After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.

To achieve this, the Per Enabled User setting must be set for the usage model.

Solution: You reconfigure the existing usage model via the Azure portal.

Does the solution meet the goal?

A. Yes

B. No

Answer : B

Explanation:

Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.

Reference:

<https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/>

Question 7 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company's Azure solution makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.

After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.

To achieve this, the Per Enabled User setting must be set for the usage model.

Solution: You reconfigure the existing usage model via the Azure CLI.

Does the solution meet the goal?

A. Yes

B. No

Answer : B

Explanation:

Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.

Reference:

<https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/>

Question 8 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company's Azure solution makes use of Multi-Factor Authentication for when users are not in the office. The Per Authentication option has been configured as the usage model.

After the acquisition of a smaller business and the addition of the new staff to Azure Active Directory (Azure AD) obtains a different company and adding the new employees to Azure Active Directory (Azure AD), you are informed that these employees should also make use of Multi-Factor Authentication.

To achieve this, the Per Enabled User setting must be set for the usage model.

Solution: You create a new Multi-Factor Authentication provider with a backup from the existing Multi-Factor Authentication provider data.

Does the solution meet the goal?

A. Yes

B. No

Answer : A

Explanation:

Since it is not possible to change the usage model of an existing provider as it is right now, you have to create a new one and reactivate your existing server with activation credentials from the new provider.

Reference:

<https://365lab.net/2015/04/11/switch-usage-model-in-azure-multi-factor-authentication-server/>

Question 9 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active Directory domain.

You have a server named DirSync1 that is configured as a DirSync server.

You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.

Solution: You run the Start-ADSyncSyncCycle -PolicyType Initial PowerShell cmdlet.

Does the solution meet the goal?

- A. Yes
B. No

Answer : A

Reference:
<https://blog.kloud.com.au/2016/03/08/azure-ad-connect-manual-sync-cycle-with-powershell-start-adsyncsyncycle/>

Question 10 (Question Set 1)

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active Directory domain.

You have a server named DirSync1 that is configured as a DirSync server.

You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.

Solution: You use Active Directory Sites and Services to force replication of the Global Catalog on a domain controller.

Does the solution meet the goal?

- A. Yes
B. No

Answer : B

Question 11 (Question Set 1)

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an Azure Active Directory (Azure AD) tenant named weyland.com that is configured for hybrid coexistence with the on-premises Active Directory domain.

You have a server named DirSync1 that is configured as a DirSync server.

You create a new user account in the on-premise Active Directory. You now need to replicate the user information to Azure AD immediately.

Solution: You restart the NetLogon service on a domain controller.

Does the solution meet the goal?

- A. Yes
B. No

Answer : B

Question 12 (Question Set 1)

Your company has a Microsoft Azure subscription.
The company has datacenters in Los Angeles and New York.
You are configuring the two datacenters as geo-clustered sites for site resiliency.
You need to recommend an Azure storage redundancy option.
You have the following data storage requirements:
⇒ Data must be stored on multiple nodes.
⇒ Data must be stored on nodes in separate geographic locations.
⇒ Data can be read from the secondary location as well as from the primary location.
Which of the following Azure stored redundancy options should you recommend?

- A. Geo-redundant storage
B. Read-only geo-redundant storage
C. Zone-redundant storage
D. Locally redundant storage

Answer : B

Explanation:
RA-GRS allows you to have higher read availability for your storage account by providing `:read only:` access to the data replicated to the secondary location. Once you enable this feature, the secondary location may be used to achieve higher availability in the event the data is not available in the primary region. This is an `:opt-in:` feature which requires the storage account be geo-replicated.
Reference:
<https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy>

Question 13 (Question Set 1)

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Virtual Machine blade.

Does the solution meet the goal?

- A. Yes
B. No

Answer : B

Explanation:

You should use the Resource Group blade

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template>

Question 14 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.

Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.

A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.

You want to review the ARM template that was used by Jon Ross.

Solution: You access the Resource Group blade.

Does the solution meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

To view a template from deployment history:

1. Go to the resource group for your new resource group. Notice that the portal shows the result of the last deployment. Select this link.

2. You see a history of deployments for the group. In your case, the portal probably lists only one deployment. Select this deployment.

3. The portal displays a summary of the deployment. The summary includes the status of the deployment and its operations and the values that you provided for parameters. To see the template that you used for the deployment, select View template.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template>Question 15 (Question Set 1) 

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has an azure subscription that includes a storage account, a resource group, a blob container and a file share.
A colleague named Jon Ross makes use of a solitary Azure Resource Manager (ARM) template to deploy a virtual machine and an additional Azure Storage account.
You want to review the ARM template that was used by Jon Ross.
Solution: You access the Container blade.
Does the solution meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:
You should use the Resource Group blade
Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-export-template>

Question 16 (Question Set 1) 

Your company has three virtual machines (VMs) that are included in an availability set.
You try to resize one of the VMs, which returns an allocation failure message.
It is imperative that the VM is resized.
Which of the following actions should you take?

- A. You should only stop one of the VMs.
- B. You should stop two of the VMs.
- C. You should stop all three VMs.
- D. You should remove the necessary VM from the availability set.

Answer : C

Explanation:
If the VM you wish to resize is part of an availability set, then you must stop all VMs in the availability set before changing the size of any VM in the availability set.
The reason all VMs in the availability set must be stopped before performing the resize operation to a size that requires different hardware is that all running VMs in the availability set must be using the same physical hardware cluster. Therefore, if a change of physical hardware cluster is required to change the VM size then all VMs must be first stopped and then restarted one-by-one to a different physical hardware clusters.
Reference:
<https://azure.microsoft.com/es-es/blog/resize-virtual-machines/>

Question 17 (Question Set 1) 

You have an Azure virtual machine (VM) that has a single data disk. You have been tasked with attaching this data disk to another Azure VM.
You need to make sure that your strategy allows for the virtual machines to be offline for the least amount of time possible.
Which of the following is the action you should take FIRST?

- A. Stop the VM that includes the data disk.
- B. Stop the VM that the data disk must be attached to.
- C. Detach the data disk.
- D. Delete the VM that includes the data disk.

Answer : A

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/detach-disk> <https://docs.microsoft.com/en-us/azure/lab-services/devtest-lab-attach-detach-data-disk>

Question 18 (Question Set 1) 

Your company has an Azure subscription.
You need to deploy a number of Azure virtual machines (VMs) using Azure Resource Manager (ARM) templates. You have been informed that the VMs will be included in a single availability set.
You are required to make sure that the ARM template you configure allows for as many VMs as possible to remain accessible in the event of fabric failure or maintenance.
Which of the following is the value that you should configure for the platformFaultDomainCount property?

- A. 10
- B. 30
- C. Min Value
- D. Max Value

Answer : D

Explanation:
The number of fault domains for managed availability sets varies by region - either two or three per region.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability>

Question 19 (Question Set 1)

Your company has an Azure subscription.

You need to deploy a number of Azure virtual machines (VMs) using Azure Resource Manager (ARM) templates. You have been informed that the VMs will be included in a single availability set. You are required to make sure that the ARM template you configure allows for as many VMs as possible to remain accessible in the event of fabric failure or maintenance.

Which of the following is the value that you should configure for the platformUpdateDomainCount property?

- A. 10
- B. 20
- C. 30
- D. 40

Answer : B

Explanation:

Each virtual machine in your availability set is assigned an update domain and a fault domain by the underlying Azure platform. For a given availability set, five non-user-configurable update domains are assigned by default (Resource Manager deployments can then be increased to provide up to 20 update domains) to indicate groups of virtual machines and underlying physical hardware that can be rebooted at the same time.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/availability-set-overview>

Question 20 (Question Set 1)

DRAG DROP -

You have downloaded an Azure Resource Manager (ARM) template to deploy numerous virtual machines (VMs). The ARM template is based on a current VM, but must be adapted to reference an administrative password.

You need to make sure that the password cannot be stored in plain text.

You are preparing to create the necessary components to achieve your goal.

Which of the following should you create to achieve your goal? Answer by dragging the correct option from the list to the answer area.

Select and Place:

Options

Answer

An Azure Key Vault

An Azure Storage account

Azure Active Directory (AD)
Identity Protection

An access policy

An Azure policy

A backup policy

Answer :

Options

Answer

An Azure Key Vault

An Azure Storage account

Azure Active Directory (AD)
Identity Protection

An access policy

An Azure policy

A backup policy

An Azure Key Vault

An access policy

Question 21 (Question Set 1)



Your company has an Azure Active Directory (Azure AD) tenant that is configured for hybrid coexistence with the on-premises Active Directory domain. The on-premise virtual environment consists of virtual machines (VMs) running on Windows Server 2012 R2 Hyper-V host servers. You have created some PowerShell scripts to automate the configuration of newly created VMs. You plan to create several new VMs. You need a solution that ensures the scripts are run on the new VMs.

Which of the following is the best solution?

- A. Configure a SetupComplete.cmd batch file in the %windir%\setup\scripts directory.
- B. Configure a Group Policy Object (GPO) to run the scripts as logon scripts.
- C. Configure a Group Policy Object (GPO) to run the scripts as startup scripts.
- D. Place the scripts in a new virtual hard disk (VHD).

Answer : A

Explanation:

After you deploy a Virtual Machine you typically need to make some changes before it's ready to use. This is something you can do manually or you could use Remote PowerShell to automate the configuration of your VM after deployment for example.

But now there's a third alternative available allowing you customize your VM: the CustomScriptextension.

This CustomScript extension is executed by the VM Agent and it's very straightforward: you specify which files it needs to download from your storage account and which file it needs to execute. You can even specify arguments that need to be passed to the script. The only requirement is that you execute a .ps1 file.

Reference:

<https://docs.microsoft.com/en-us/windows-hardware/manufacture/desktop/add-a-custom-script-to-windows-setup> <https://azure.microsoft.com/en-us/blog/automating-vm-customization-tasks-using-custom-script-extension/>

Question 22 (Question Set 1)



Your company has an Azure Active Directory (Azure AD) tenant that is configured for hybrid coexistence with the on-premises Active Directory domain. You plan to deploy several new virtual machines (VMs) in Azure. The VMs will have the same operating system and custom software requirements. You configure a reference VM in the on-premise virtual environment. You then generalize the VM to create an image. You need to upload the image to Azure to ensure that it is available for selection when you create the new Azure VMs. Which PowerShell cmdlets should you use?

- A. Add-AzVm
- B. Add-AzVhd
- C. Add-AzImage
- D. Add-AzImageDataDisk

Answer : B

Explanation:

The Add-AzVhd cmdlet uploads on-premises virtual hard disks, in .vhd file format, to a blob storage account as fixed virtual hard disks.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/upload-generalized-managed>

Question 23 (Question Set 1)



DRAG DROP -

Your company has an Azure subscription that includes a number of Azure virtual machines (VMs), which are all part of the same virtual network. Your company also has an on-premises Hyper-V server that hosts a VM, named VM1, which must be replicated to Azure. Which of the following objects that must be created to achieve this goal? Answer by dragging the correct option from the list to the answer area. Select and Place:

Options Answer

Hyper-V site

Storage account

Azure Recovery Services Vault

Azure Traffic Manager instance

Replication policy

Endpoint

Answer :

Options Answer

Hyper-V site

Hyper-V site

Storage account

Azure Recovery Services Vault

Azure Recovery Services Vault

Replication policy

Azure Traffic Manager instance

Replication policy

Endpoint

Question 24 (Question Set 1)

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements. Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB. VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA. You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation. You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.

Solution: You choose the Allow gateway transit setting on VirtualNetworkA.
Does the solution meet the goal?

- A. Yes
B. No

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing>

Question 25 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.
VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.
You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.

You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.

Solution: You choose the Allow gateway transit setting on VirtualNetworkB.

Does the solution meet the goal?

- A. Yes
B. No

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing>

Question 26 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company's Azure subscription includes two Azure networks named VirtualNetworkA and VirtualNetworkB.
VirtualNetworkA includes a VPN gateway that is configured to make use of static routing. Also, a site-to-site VPN connection exists between your company's on-premises network and VirtualNetworkA.
You have configured a point-to-site VPN connection to VirtualNetworkA from a workstation running Windows 10. After configuring virtual network peering between VirtualNetworkA and VirtualNetworkB, you confirm that you are able to access VirtualNetworkB from the company's on-premises network. However, you find that you cannot establish a connection to VirtualNetworkB from the Windows 10 workstation.

You have to make sure that a connection to VirtualNetworkB can be established from the Windows 10 workstation.

Solution: You download and re-install the VPN client configuration package on the Windows 10 workstation.

Does the solution meet the goal?

- A. Yes
B. No

Answer : A

Reference:
<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing>

Question 27 (Question Set 1)



Your company has virtual machines (VMs) hosted in Microsoft Azure. The VMs are located in a single Azure virtual network named VNet1.
The company has users that work remotely. The remote workers require access to the VMs on VNet1.
You need to provide access for the remote workers.
What should you do?

- A. Configure a Site-to-Site (S2S) VPN.
B. Configure a VNet-toVNet VPN.
C. Configure a Point-to-Site (P2S) VPN.
D. Configure DirectAccess on a Windows Server 2012 server VM.
E. Configure a Multi-Site VPN

Answer : C

Explanation:
A Point-to-Site (P2S) VPN gateway connection lets you create a secure connection to your virtual network from an individual client computer.
Reference:
<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpngateways>

Question 28 (Question Set 1)



Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).
You need to configure an Azure internal load balancer as a listener for the availability group.
Solution: You create an HTTP health probe on port 1433.

Does the solution meet the goal?

- A. Yes
- B. No

Answer : B

Question 29 (Question Set 1)

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).

You need to configure an Azure internal load balancer as a listener for the availability group.

Solution: You set Session persistence to Client IP.

Does the solution meet the goal?

- A. Yes
- B. No

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/sql/virtual-machines-windows-portal-sql-alwayson-int-listener>

Question 30 (Question Set 1)

Note: The question is included in a number of questions that depicts the identical set-up. However, every question has a distinctive result. Establish if the solution satisfies the requirements.
Your company has a Microsoft SQL Server Always On availability group configured on their Azure virtual machines (VMs).

You need to configure an Azure internal load balancer as a listener for the availability group.

Solution: You enable Floating IP.

Does the solution meet the goal?

- A. Yes
- B. No

Answer : A

Question 31 (Question Set 1)

Your company has two on-premises servers named SRV01 and SRV02. Developers have created an application that runs on SRV01. The application calls a service on SRV02 by IP address.
You plan to migrate the application on Azure virtual machines (VMs). You have configured two VMs on a single subnet in an Azure virtual network.

You need to configure the two VMs with static internal IP addresses.

What should you do?

- A. Run the New-AzureRMVMConfig PowerShell cmdlet.
- B. Run the Set-AzureSubnet PowerShell cmdlet.
- C. Modify the VM properties in the Azure Management Portal.
- D. Modify the IP properties in Windows Network and Sharing Center.
- E. Run the Set-AzureStaticVNetIP PowerShell cmdlet.

Answer : E

Explanation:

Specify a static internal IP for a previously created VM

If you want to set a static IP address for a VM that you previously created, you can do so by using the following cmdlets. If you already set an IP address for the

VM and you want to change it to a different IP address, you'll need to remove the existing static IP address before running these cmdlets. See the instructions below to remove a static IP.

For this procedure, you'll use the Update-AzureVM cmdlet. The Update-AzureVM cmdlet restarts the VM as part of the update process. The DIP that you specify will be assigned after the VM restarts. In this example, we set the IP address for VM2, which is located in cloud service StaticDemo.

```
Get-AzureVM -ServiceName StaticDemo -Name VM2 | Set-AzureStaticVNetIP -IPAddress 192.168.4.7 | Update-AzureVM
```

Question 32 (Question Set 1)

Your company has an Azure Active Directory (Azure AD) subscription.

You need to deploy five virtual machines (VMs) to your company's virtual network subnet.

The VMs will each have both a public and private IP address. Inbound and outbound security rules for all of these virtual machines must be identical.

Which of the following is the least amount of network interfaces needed for this configuration?

- A. 5
- B. 10
- C. 20
- D. 40

Answer : A

Question 33 (Question Set 1)

Your company has an Azure Active Directory (Azure AD) subscription.
You need to deploy five virtual machines (VMs) to your company's virtual network subnet.
The VMs will each have both a public and private IP address. Inbound and outbound security rules for all of these virtual machines must be identical.
Which of the following is the least amount of security groups needed for this configuration?

- A. 4
- B. 3
- C. 2
- D. 1

Answer : D

Question 34 (Question Set 1)

Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016.
One of the VMs is backed up every day using Azure Backup Instant Restore.
When the VM becomes infected with data encrypting ransomware, you decide to recover the VM's files.
Which of the following is TRUE in this scenario?

- A. You can only recover the files to the infected VM.
- B. You can recover the files to any VM within the company's subscription.
- C. You can only recover the files to a new VM.
- D. You will not be able to recover the files.

Answer : A

Question 35 (Question Set 1)

Your company's Azure subscription includes Azure virtual machines (VMs) that run Windows Server 2016.
One of the VMs is backed up every day using Azure Backup Instant Restore.
When the VM becomes infected with data encrypting ransomware, you are required to restore the VM.
Which of the following actions should you take?

- A. You should restore the VM after deleting the infected VM.
- B. You should restore the VM to any VM within the company's subscription.
- C. You should restore the VM to a new Azure VM.
- D. You should restore the VM to an on-premise Windows device.

Answer : B

Question 36 (Question Set 1)

You administer a solution in Azure that is currently having performance issues.
You need to find the cause of the performance issues pertaining to metrics on the Azure infrastructure.
Which of the following is the tool you should use?

- A. Azure Traffic Analytics
- B. Azure Monitor
- C. Azure Activity Log
- D. Azure Advisor

Answer : B

Explanation:

Metrics in Azure Monitor are stored in a time-series database which is optimized for analyzing time-stamped data. This makes metrics particularly suited for alerting and fast detection of issues.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/data-platform>

Question 37 (Question Set 1)

Your company has an Azure subscription that includes a Recovery Services vault. You want to use Azure Backup to schedule a backup of your company's virtual machines (VMs) to the Recovery Services vault. Which of the following VMs can you back up? Choose all that apply.

- A. VMs that run Windows 10.
- B. VMs that run Windows Server 2012 or higher.
- C. VMs that have NOT been shut down.
- D. VMs that run Debian 8.2+.
- E. VMs that have been shut down.

Answer : ABCDE

Explanation:

Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008.

Azure Backup supports backup of 64-bit Windows 10 operating system.

Azure Backup supports backup of 64-bit Debian operating system from Debian 7.9+.

Azure Backup supports backup of VM that are shutdown or offline.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-support-matrix-iaas> <https://docs.microsoft.com/en-us/azure/virtual-machines/linux/endorsed-distros>

Question 38 (Question Set 1)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a PowerShell script that runs the New-AzureADUser cmdlet for each user.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

The New-AzureADUser cmdlet creates a user in Azure Active Directory (Azure AD).

Instead use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.

Reference:

<https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation>

Question 39 (Question Set 1)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users.

You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: From Azure AD in the Azure portal, you use the Bulk create user operation.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

The New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.

Reference:

<https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation>

Question 40 (Question Set 1)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users.
You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: You create a PowerShell script that runs the New-AzureADMSInvitation cmdlet for each external user.
Does this meet the goal?

- A. Yes
B. No

Answer : A

Explanation:
Use the New-AzureADMSInvitation cmdlet which is used to invite a new external user to your directory.
Reference:
<https://docs.microsoft.com/en-us/powershell/module/azuread/new-azureadmsinvitation>

Question 41 (Question Set 2)

HOTSPOT -
You have an Azure subscription named Subscription1 that contains a resource group named RG1.
In RG1, you create an internal load balancer named LB1 and a public load balancer named LB2.
You need to ensure that an administrator named Admin1 can manage LB1 and LB2. The solution must follow the principle of least privilege.
Which role should you assign to Admin1 for each task? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

To add a backend pool to LB1:

Contributor on LB1
Network Contributor on LB1
Network Contributor on RG1
Owner on LB1

To add a health probe to LB2:

Contributor on LB2
Network Contributor on LB2
Network Contributor on RG1
Owner on LB2

Answer :

Answer Area

To add a backend pool to LB1:

Contributor on LB1
Network Contributor on LB1
Network Contributor on RG1
Owner on LB1

To add a health probe to LB2:

Contributor on LB2
Network Contributor on LB2
Network Contributor on RG1
Owner on LB2

Explanation:

The Network Contributor role lets you manage networks, but not access them.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles>

Question 42 (Question Set 2)

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com and an Azure Kubernetes Service (AKS) cluster named AKS1. An administrator reports that she is unable to grant access to AKS1 to the users in contoso.com. You need to ensure that access to AKS1 can be granted to the contoso.com users. What should you do first?

- A. From contoso.com, modify the Organization relationships settings.
- B. From contoso.com, create an OAuth 2.0 authorization endpoint.
- C. Recreate AKS1.
- D. From AKS1, create a namespace.

Answer : B

Reference:
<https://kubernetes.io/docs/reference/access-authn-authz/authentication/>

Question 43 (Question Set 2)

You have a Microsoft 365 tenant and an Azure Active Directory (Azure AD) tenant named contoso.com. You plan to grant three users named User1, User2, and User3 access to a temporary Microsoft SharePoint document library named Library1. You need to create groups for the users. The solution must ensure that the groups are deleted automatically after 180 days. Which two groups should you create? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. a Microsoft 365 group that uses the Assigned membership type
- B. a Security group that uses the Assigned membership type
- C. a Microsoft 365 group that uses the Dynamic User membership type
- D. a Security group that uses the Dynamic User membership type
- E. a Security group that uses the Dynamic Device membership type

Answer : AC

Explanation:

You can set expiration policy only for Office 365 groups in Azure Active Directory (Azure AD). Note: With the increase in usage of Office 365 Groups, administrators and users need a way to clean up unused groups. Expiration policies can help remove inactive groups from the system and make things cleaner.

When a group expires, all of its associated services (the mailbox, Planner, SharePoint site, etc.) are also deleted.

You can set up a rule for dynamic membership on security groups or Office 365 groups.

Incorrect Answers:

B, D, E: You can set expiration policy only for Office 365 groups in Azure Active Directory (Azure AD).

Reference:

<https://docs.microsoft.com/en-us/office365/admin/create-groups/office-365-groups-expiration-policy?view=o365-worldwide>

Question 44 (Question Set 2)

HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains the users shown in the following table:

Name	Type	Member of
User1	Member	Group1
User2	Guest	Group1
User3	Member	None
UserA	Member	Group2
UserB	Guest	Group2

User3 is the owner of Group1.

Group2 is a member of Group1.

You configure an access review named Review1 as shown in the following exhibit:

Create an access review

Access reviews enable reviewers to attest user's membership in a group or access to an application.

* Review name: Review1

Description:

* Start date: 2018-11-22

Frequency: One time

Duration (in days): 1

End: Never / End by Occurrence

* Number of times: 0

* End date: 2018-12-22

Users

Users to review: Members of a group

Scope: Guest users only (selected)

Everyone

* Group: Group1

Reviewers

Reviewers: Group owners

Programs

Link to program: Default program

Upon completion settings

Advanced settings

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Answer :

Statements	Yes	No
------------	-----	----

Answer Area

Statements	Yes	No
------------	-----	----

User3 can perform an access review of User1

User3 can perform an access review of UserA

User3 can perform an access review of UserB

Reference:
https://docs.microsoft.com/en-us/azure/active-directory/governance/create-access-review

Question 45 (Question Set 2)

HOTSPOT -
You have the Azure management groups shown in the following table:



Name	In management group
Tenant Root Group	Not applicable
ManagementGroup11	Tenant Root Group
ManagementGroup12	Tenant Root Group
ManagementGroup21	ManagementGroup11

You add Azure subscriptions to the management groups as shown in the following table:

Name	Management group
Subscription1	ManagementGroup21
Subscription2	ManagementGroup12

You create the Azure policies shown in the following table:

Name	Parameter	Scope
Not allowed resource types	virtualNetworks	Tenant Root Group
Allowed resource types	virtualNetworks	ManagementGroup12

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can create a virtual network in Subscription1.	<input type="radio"/>	<input type="radio"/>
You can create a virtual machine in Subscription2.	<input type="radio"/>	<input type="radio"/>
You can add Subscription1 to ManagementGroup11.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
You can create a virtual network in Subscription1.	<input checked="" type="radio"/>	<input type="radio"/>
You can create a virtual machine in Subscription2.	<input checked="" type="radio"/>	<input type="radio"/>
You can add Subscription1 to ManagementGroup11.	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: No - Virtual networks are not allowed at the root and is inherited. Deny overrides allowed.

Box 2: Yes - Virtual Machines can be created on a Management Group provided the user has the required RBAC permissions.

Box 3: Yes - Subscriptions can be moved between Management Groups provided the user has the required RBAC permissions.

Reference:
<https://docs.microsoft.com/en-us/azure/governance/management-groups/overview> <https://docs.microsoft.com/en-us/azure/governance/management-groups/manage#moving-management-groups-and-subscriptions>

Question 46 (Question Set 2)

You have an Azure policy as shown in the following exhibit:



SCOPE

- * Scope ([Learn more about setting the scope](#))

Subscription 1

Exclusions

Subscription 1/ContosoRG1

BASICS

- * Policy definition

Not allowed resource types

- * Assignment name ⓘ

Not allowed resource types

Assignment ID

/subscriptions/5eb8d0b6-ce3b-4ce0-a631-9f5321bedabb/providers/Microsoft.Authorization/policyAssignments/0e6fb866bf854f54accce2a9

Description

Assigned by

admin1@contoso.com

PARAMETERS

- * Not allowed resource types ⓘ

Microsoft.Sql/servers

What is the effect of the policy?

- You are prevented from creating Azure SQL servers anywhere in Subscription 1.
- You can create Azure SQL servers in ContosoRG1 only.
- You are prevented from creating Azure SQL Servers in ContosoRG1 only.
- You can create Azure SQL servers in any resource group within Subscription 1.

Answer : B

Explanation:

You are prevented from creating Azure SQL servers anywhere in Subscription 1 with the exception of ContosoRG1

Question 47 (Question Set 2)



HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table:

Name	Type	Resource group	Tag
RG6	Resource group	Not applicable	None
VNET1	Virtual network	RG6	Department: D1

You assign a policy to RG6 as shown in the following table:

Section	Setting	Value
Scope	Scope	Subscription1/RG6
	Exclusions	None
Basics	Policy definition	Apply tag and its default value
	Assignment name	Apply tag and its default value
Parameters	Tag name	Label
	Tag value	Value1

To RG6, you apply the tag: RGroup: RG6.

You deploy a virtual network named VNET2 to RG6.

Which tags apply to VNET1 and VNET2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

VNET1:

None
Department: D1 only
Department: D1, and RGroup: RG6 only
Department: D1, and Label: Value1 only
Department: D1, RGroup: RG6, and Label: Value1

VNET2:

None
RGroup: RG6 only
Label: Value1 only
RGroup: RG6, and Label: Value1

Answer :

Answer Area

VNET1:

None
Department: D1 only
Department: D1, and RGroup: RG6 only
Department: D1, and Label: Value1 only
Department: D1, RGroup: RG6, and Label: Value1

VNET2:

None
RGroup: RG6 only
Label: Value1 only
RGroup: RG6, and Label: Value1

Explanation:

VNET1: Department: D1, and Label: Value1 only.

Tags applied to the resource group or subscription are not inherited by the resources.

Note: Azure Policy allows you to use either built-in or custom-defined policy definitions and assign them to either a specific resource group or across a whole Azure subscription.

VNET2: Label: Value1 only.

Incorrect Answers:

RGROUP: RG6 -

Tags applied to the resource group or subscription are not inherited by the resources.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-policies>

Question 48 (Question Set 2)



You have an Azure subscription named AZPT1 that contains the resources shown in the following table:

Name	Type
storage1	Azure Storage account
VNET1	Virtual network
VM1	Azure virtual machine
VM1Managed	Managed disk for VM1
RVAULT1	Recovery Services vault for the site recovery of VM1

You create a new Azure subscription named AZPT2.

You need to identify which resources can be moved to AZPT2.

Which resources should you identify?

- A. VM1, storage1, VNET1, and VM1Managed only
- B. VM1 and VM1Managed only
- C. VM1, storage1, VNET1, VM1Managed, and RVault1
- D. RVault1 only

Answer : C

Explanation:

You can move a VM and its associated resources to a different subscription by using the Azure portal.

You can now move an Azure Recovery Service (ASR) Vault to either a new resource group within the current subscription or to a new subscription.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-resource-group-and-subscription>

Question 49 (Question Set 2)



You recently created a new Azure subscription that contains a user named Admin1.

Admin1 attempts to deploy an Azure Marketplace resource by using an Azure Resource Manager template. Admin1 deploys the template by using Azure PowerShell and receives the following error message: `:CUser failed validation to purchase resources. Error message: :CLegal terms have not been accepted for this item on this subscription. To accept legal terms, please go to the Azure portal (http://go.microsoft.com/fwlink/?LinkId=534873) and configure programmatic deployment for the Marketplace item or create it there for the first time.:C`

You need to ensure that Admin1 can deploy the Marketplace resource successfully.

What should you do?

- A. From Azure PowerShell, run the `Set-AzApiManagementSubscription` cmdlet
- B. From the Azure portal, register the Microsoft.Marketplace resource provider
- C. From Azure PowerShell, run the `Set-AzMarketplaceTerms` cmdlet
- D. From the Azure portal, assign the Billing administrator role to Admin1

Answer : C

Reference:

<https://docs.microsoft.com/en-us/powershell/module/az.marketplaceordering/set-azmarketplaceterms?view=azps-4.1.0>

Question 50 (Question Set 2)



You have an Azure Active Directory (Azure AD) tenant that contains 5,000 user accounts.

You create a new user account named AdminUser1.

You need to assign the User administrator administrative role to AdminUser1.

What should you do from the user account properties?

- A. From the Licenses blade, assign a new license
- B. From the Directory role blade, modify the directory role
- C. From the Groups blade, invite the user account to a new group

Answer : B

Explanation:

Assign a role to a user -

1. Sign in to the Azure portal with an account that's a global admin or privileged role admin for the directory.
2. Select Azure Active Directory, select Users, and then select a specific user from the list.
3. For the selected user, select Directory role, select Add role, and then pick the appropriate admin roles from the Directory roles list, such as Conditional access administrator.
4. Press Select to save.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-assign-role-azure-portal>

Question 51 (Question Set 2)



You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com that contains 100 user accounts.

You purchase 10 Azure AD Premium P2 licenses for the tenant.

You need to ensure that 10 users can use all the Azure AD Premium features.

What should you do?

- A. From the Licenses blade of Azure AD, assign a license
- B. From the Groups blade of each user, invite the users to a group
- C. From the Azure AD domain, add an enterprise application
- D. From the Directory role blade of each user, modify the directory role

Answer : A

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/license-users-groups>

Question 52 (Question Set 2)



You have an Azure subscription named Subscription1 and an on-premises deployment of Microsoft System Center Service Manager.

Subscription1 contains a virtual machine named VM1.

You need to ensure that an alert is set in Service Manager when the amount of available memory on VM1 is below 10 percent.

What should you do first?

- A. Create an automation runbook
- B. Deploy a function app
- C. Deploy the IT Service Management Connector (ITSM)
- D. Create a notification

Answer : C

Explanation:

The IT Service Management Connector (ITSMC) allows you to connect Azure and a supported IT Service Management (ITSM) product/service, such as the Microsoft System Center Service Manager.

With ITSMC, you can create work items in ITSM tool, based on your Azure alerts (metric alerts, Activity Log alerts and Log Analytics alerts).

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/itsmc-overview>

Question 53 (Question Set 2)



You sign up for Azure Active Directory (Azure AD) Premium P2.

You need to add a user named admin1@contoso.com as an administrator on all the computers that will be joined to the Azure AD domain.

What should you configure in Azure AD?

- A. Device settings from the Devices blade
- B. Providers from the MFA Server blade
- C. User settings from the Users blade
- D. General settings from the Groups blade

Answer : A

Explanation:

When you connect a Windows device with Azure AD using an Azure AD join, Azure AD adds the following security principles to the local administrators group on the device:

- ⇒ The Azure AD global administrator role
- ⇒ The Azure AD device administrator role
- ⇒ The user performing the Azure AD join

In the Azure portal, you can manage the device administrator role on the Devices page. To open the Devices page:

1. Sign in to your Azure portal as a global administrator or device administrator.
2. On the left navbar, click Azure Active Directory.
3. In the Manage section, click Devices.
4. On the Devices page, click Device settings.
5. To modify the device administrator role, configure Additional local administrators on Azure AD joined devices.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/devices/assign-local-admin>

Question 54 (Question Set 2)



HOTSPOT -

You have Azure Active Directory tenant named Contoso.com that includes following users:

Name	Role
User1	Cloud device administrator
User2	User administrator

Contoso.com includes following Windows 10 devices:

Name	Join type
Device1	Azure AD registered
Device2	Azure AD joined

You create following security groups in Contoso.com:

Name	Membership Type	Owner
Group1	Assigned	User2
Group2	Dynamic Device	User2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can add Device2 to Group1	<input type="radio"/>	<input type="radio"/>
User2 can add Device1 to Group1	<input type="radio"/>	<input type="radio"/>
User2 can add Device2 to Group2	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
User1 can add Device2 to Group1	<input checked="" type="radio"/>	<input type="radio"/>
User2 can add Device1 to Group1	<input type="radio"/>	<input checked="" type="radio"/>
User2 can add Device2 to Group2	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: Yes -

User1 is a Cloud Device Administrator.

Device2 is Azure AD joined.

Group1 has the assigned join type. User1 is the owner of Group1.

Note: Assigned groups - Manually add users or devices into a static group.

Azure AD joined or hybrid Azure AD joined devices utilize an organizational account in Azure AD

Box 2: No -

User2 is a User Administrator.

Device1 is Azure AD registered.

Group1 has the assigned join type, and the owner is User1.

Note: Azure AD registered devices utilize an account managed by the end user, this account is either a Microsoft account or another locally managed credential.

Box 3: Yes -

User2 is a User Administrator.

Device2 is Azure AD joined.

Group2 has the Dynamic Device join type, and the owner is User2.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/devices/overview>

Question 55 (Question Set 2)



You have an Azure subscription that contains a resource group named RG26.

RG26 is set to the West Europe location and is used to create temporary resources for a project. RG26 contains the resources shown in the following table.

Name	Type	Location
VM1	Virtual machine	North Europe
RGV1	Recovery Services vault	North Europe
SQLDB01	SQL server in Azure VM	North Europe
sa001	Storage account	West Europe

SQLDB01 is backed up to RGV1.

When the project is complete, you attempt to delete RG26 from the Azure portal. The deletion fails.

You need to delete RG26.

What should you do first?

- A. Delete VM1
- B. Stop VM1
- C. Stop the backup of SQLDB01
- D. Delete sa001

Answer : C

Question 56 (Question Set 2)



You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

- A. Remove User1 from the Security Reader and Reader roles for Subscription1.
- B. Assign User1 the User Access Administrator role for VNet1.
- C. Assign User1 the Network Contributor role for VNet1.
- D. Assign User1 the Network Contributor role for RG1.

Answer : B

Explanation:

Has full access to all resources including the right to delegate access to others.

Note:

There are several versions of this question in the exam. The question has two possible correct answers:

- Assign User1 the User Access Administrator role for VNet1.
- Assign User1 the Owner role for VNet1.

Other incorrect answer options you may see on the exam include the following:

- Assign User1 the Contributor role for VNet1.

c. Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.

c. Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/overview>

Question 57 (Question Set 2)



You have an Azure Active Directory (Azure AD) tenant named contosocloud.onmicrosoft.com.

Your company has a public DNS zone for contoso.com.

You add contoso.com as a custom domain name to Azure AD.

You need to ensure that Azure can verify the domain name.

Which type of DNS record should you create?

- A. MX
- B. NSEC
- C. PTR
- D. RRSIG

Answer : A

Explanation:

To verify your custom domain name (example)

1. Sign in to the Azure portal using a Global administrator account for the directory.
2. Select Azure Active Directory, and then select Custom domain names.
3. On the Fabrikam - Custom domain names page, select the custom domain name, Contoso.
4. On the Contoso page, select Verify to make sure your custom domain is properly registered and is valid for Azure AD. Use either the TXT or the MX record type.

Note:

There are several versions of this question in the exam. The question can have two correct answers:

- 1. MX
- 2. TXT

The question can also have other incorrect answer options, including the following:

- 1. SRV
- 2. NSEC3

Reference:

<https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain>

Question 58 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers.

Subscription1 contains a resource group named Dev.

You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.

Solution: On Subscription1, you assign the DevTest Labs User role to the Developers group.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

DevTest Labs User role only lets you connect, start, restart, and shutdown virtual machines in your Azure DevTest Labs.

The Logic App Contributor role lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles> <https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app>

Question 59 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Subscription1, you assign the Logic App Operator role to the Developers group.
Does this meet the goal?

- A. Yes
B. No

Answer : B

Explanation:
You would need the Logic App Contributor role.
Reference:
<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles> <https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app>

Question 60 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Dev, you assign the Contributor role to the Developers group.
Does this meet the goal?

- A. Yes
B. No

Answer : A

Explanation:
The Contributor role can manage all resources (and add resources) in a Resource Group.

Question 61 (Question Set 2)



DRAG DROP -
You have an Azure subscription that is used by four departments in your company. The subscription contains 10 resource groups. Each department uses resources in several resource groups. You need to send a report to the finance department. The report must detail the costs for each department.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions

Answer Area

Assign a tag to each resource group.

Assign a tag to each resource.

Download the usage report.

From the Cost analysis blade, filter the view by tag.

Open the **Resource costs** blade of each resource group.



Answer :

Actions	Answer Area
Assign a tag to each resource group.	Assign a tag to each resource.
Assign a tag to each resource.	From the Cost analysis blade, filter the view by tag.
Download the usage report.	Download the usage report.
From the Cost analysis blade, filter the view by tag.	
Open the Resource costs blade of each resource group.	

Question 62 (Question Set 2)



You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1. You need to view the error events from a table named Event. Which query should you run in Workspace1?

- A. Get-Event Event | where \${__EventType == "error"}
- B. search in (Event) "error"
- C. select * from Event where EventType == "error"
- D. search in (Event) * | where EventType -eq "error"

Answer : B

Explanation:

To search a term in a specific table, add the table-name just after the search operator

Note:

There are several versions of this question in the exam. The question has two possible correct answers:

- 1. Event | search "error"
 - 2. Event | where EventType == "error"
 - 3. search in (Event) "error"
- Other incorrect answer options you may see on the exam include the following:
- 1. Get-Event Event | where \${__EventType :C"eq "error"}
 - 2. Event | where EventType is "error"
 - 3. search in (Event) * | where EventType :C"eq "error"
 - 4. select * from Event where EventType is "error"

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/search-queries> <https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/get-started-portal> <https://docs.microsoft.com/en-us/azure/data-explorer/kusto/query/searchoperator?pivot=azuredatatable>

Question 63 (Question Set 2)



HOTSPOT -

You have an Azure subscription that contains a virtual network named VNET1 in the East US 2 region. A network interface named VM1-NI is connected to VNET1.

You successfully deploy the following Azure Resource Manager template.

```
{
  "apiVersion": "2017-03-30",
  "type": "Microsoft.Compute/virtualMachines",
  "name": "VM1",
  "zones": "1",
  "location": "EastUS2",
  "dependsOn": [
    "[resourceId('Microsoft.Network/networkInterfaces', 'VM1-NI')]"
  ],
  "properties": {
    "hardwareProfile": {
      "vmSize": "Standard_A2_v2"
    },
    "osProfile": {
      "computerName": "VM1",
      "adminUsername": "AzureAdmin",
      "adminPassword": "[parameters('adminPassword')]"
    },
    "storageProfile": {
      "imageReference": "[variables('image')]",
      "osDisk": {
        "createOption": "FromImage"
      }
    },
    "networkProfile": {
      "networkInterfaces": [
        {
          "id": "[resourceId('Microsoft.Network/networkInterfaces', 'VM1-NI')]"
        }
      ]
    }
  }
},
{
  "apiVersion": "2017-03-30",
  "type": "Microsoft.Compute/virtualMachines",
  "name": "VM2",
  "zones": "2",
  "location": "EastUS2",
  "dependsOn": [
    "[resourceId('Microsoft.Network/networkInterfaces', 'VM2-NI')]"
  ],
  "properties": {
    "hardwareProfile": {
      "vmSize": "Standard_A2_v2"
    },
    "osProfile": {
      "computerName": "VM2",
      "adminUsername": "AzureAdmin",
      "adminPassword": "[parameters('adminPassword')]"
    },
    "storageProfile": {
      "imageReference": "[variables('image')]",
      "osDisk": {
        "createOption": "FromImage"
      }
    },
    "networkProfile": {
      "networkInterfaces": [
        {
          "id": "[resourceId('Microsoft.Network/networkInterfaces', 'VM2-NI')]"
        }
      ]
    }
  }
}
Answer: }
```

Answer Area

Statements	Yes	No
VM1 and VM2 can connect to VNET1	<input checked="" type="radio"/>	<input type="radio"/>
If an Azure datacenter becomes unavailable, VM1 or VM2 will be available.	<input checked="" type="radio"/>	<input type="radio"/>
If the East US 2 region becomes unavailable, VM1 or VM2 will be available.	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

Box 1: Yes -

Answer Area

Box 2: Yes -

VM1 is in Zone1, while VM2 is in Zone2.

Box 3: No -

Reference:

<https://docs.microsoft.com/en-us/azure/architecture/resiliency/recovery-loss-azure-region>**Statements****Yes****No****VM1 and VM2 can connect to VNET1**

Question 64 (Question Set 2)

You have an Azure subscription named Subscription1. Subscription1 contains the resource groups in the following table.

Name	Azure region	Policy
RG1	West Europe	Policy1
RG2	North Europe	Policy2
RG3	France Central	Policy3

RG1 has a web app named WebApp1. WebApp1 is located in West Europe.

You move WebApp1 to RG2.

What is the effect of the move?

- A. The App Service plan for WebApp1 remains in West Europe. Policy2 applies to WebApp1.
- B. The App Service plan for WebApp1 moves to North Europe. Policy2 applies to WebApp1.
- C. The App Service plan for WebApp1 remains in West Europe. Policy1 applies to WebApp1.
- D. The App Service plan for WebApp1 moves to North Europe. Policy1 applies to WebApp1.

Answer : A

Explanation:

You can move an app to another App Service plan, as long as the source plan and the target plan are in the same resource group and geographical region.

The region in which your app runs is the region of the App Service plan it's in. However, you cannot change an App Service plan's region.

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage>

Question 65 (Question Set 2)



HOTSPOT -

You have an Azure subscription named Subscription1 that has a subscription ID of c276fc76-9cd4-44c9-99a7-4fd71546436e.

You need to create a custom RBAC role named CR1 that meets the following requirements:

- ⇒ Can be assigned only to the resource groups in Subscription1
 - ⇒ Prevents the management of the access permissions for the resource groups
 - ⇒ Allows the viewing, creating, modifying, and deleting of resources within the resource groups
- What should you specify in the assignable scopes and the permission elements of the definition of CR1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

"assignableScopes": [

Answer :

"/"

Answer Area

"assignableScopes": [

"/"
"/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546436e"
"/subscriptions/c276fc76-9cd4-44c9-99a7-4fd71546436e/resourceGroups"

],

"permissions": [

{

 "actions": [

 "**"

],

 "additionalProperties": {},

 "dataActions": [],

 "notActions": [

"Microsoft.Authorization/**"
"Microsoft.Resources/**"
"Microsoft.Security/**"

],

 "notDataActions": []

}

],

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles> <https://docs.microsoft.com/en-us/azure/role-based-access-control/resource-provider-operations#microsoftresources>

Question 66 (Question Set 2)



You have an Azure subscription.

Users access the resources in the subscription from either home or from customer sites. From home, users must establish a point-to-site VPN to access the Azure resources. The users on the customer sites access the Azure resources by using site-to-site VPNs.

You have a line-of-business-app named App1 that runs on several Azure virtual machine. The virtual machines run Windows Server 2016.

You need to ensure that the connections to App1 are spread across all the virtual machines.

What are two possible Azure services that you can use? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. an internal load balancer
- B. a public load balancer
- C. an Azure Content Delivery Network (CDN)
- D. Traffic Manager
- E. an Azure Application Gateway

Answer : AE

Explanation:

Network traffic from the VPN gateway is routed to the cloud application through an internal load balancer. The load balancer is located in the front-end subnet of the application.

Reference:

<https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/hybrid-networking/vpn> <https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview>

<https://docs.microsoft.com/en-us/azure/application-gateway/overview>

Question 67 (Question Set 2)



You have an Azure subscription.

You have 100 Azure virtual machines.

You need to quickly identify underutilized virtual machines that can have their service tier changed to a less expensive offering.

Which blade should you use?

- A. Monitor
- B. Advisor
- C. Metrics
- D. Customer insights

Answer : B

Explanation:

Advisor helps you optimize and reduce your overall Azure spend by identifying idle and underutilized resources. You can get cost recommendations from the Cost tab on the Advisor dashboard.

Reference:

<https://docs.microsoft.com/en-us/azure/advisor/advisor-cost-recommendations>

Question 68 (Question Set 2)



HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant.

You need to create a conditional access policy that requires all users to use multi-factor authentication when they access the Azure portal.

Which three settings should you configure? To answer, select the appropriate settings in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

* Name

Policy1



Assignments

Users and groups



0 users and groups selected

Cloud apps



0 cloud apps selected

Conditions



0 conditions selected

Access controls

Grant



0 controls selected

Session



Answer :

Answer Area

* Name

Policy1



Assignments

Users and groups



0 users and groups selected

Cloud apps



0 cloud apps selected

Conditions



0 conditions selected

Question 69 (Question Set 2)



You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com.

The User administrator role is assigned to a user named Admin1.

An external partner has a Microsoft account that uses the user1@outlook.com sign in.

Admin1 attempts to invite the external partner to sign in to the Azure AD tenant and receives the following error message: "Unable to invite user user1@outlook.com" Generic authorization exception.

You need to ensure that Admin1 can invite the external partner to sign in to the Azure AD tenant.

What should you do?

- A. From the Users settings blade, modify the External collaboration settings.
- B. From the Custom domain names blade, add a custom domain.
- C. From the Organizational relationships blade, add an identity provider.
- D. From the Roles and administrators blade, assign the Security administrator role to Admin1.

Answer : A

Reference:

<https://techcommunity.microsoft.com/t5/Azure-Active-Directory/Generic-authorization-exception-inviting-Azure-AD-gests/td-p/274742>

Question 70 (Question Set 2)



You have an Azure subscription linked to an Azure Active Directory tenant. The tenant includes a user account named User1.

You need to ensure that User1 can assign a policy to the tenant root management group.

What should you do?

- A. Assign the Owner role for the Azure Subscription to User1, and then modify the default conditional access policies.
- B. Assign the Owner role for the Azure subscription to User1, and then instruct User1 to configure access management for Azure resources.
- C. Assign the Global administrator role to User1, and then instruct User1 to configure access management for Azure resources.
- D. Create a new management group and delegate User1 as the owner of the new management group.

Answer : B

Explanation:

The following chart shows the list of roles and the supported actions on management groups.

Azure Role Name	Create	Rename	Move**	Delete	Assign Access	Assign Policy	Read
Owner	X	X	X	X	X	X	X
Contributor	X	X	X	X			X
MG Contributor*	X	X	X	X			X
Reader							X
MG Reader*							X
Resource Policy Contributor							X

Question 71 (Question Set 2)



HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant named adatum.com. Adatum.com contains the groups in the following table.

Name	Group type	Membership type	Membership rule
Group1	Security	Dynamic user	(user.city -startsWith "m")
Group2	Microsoft 365	Dynamic user	(user.department -notIn ["human resources"])
Group3	Microsoft 365	Assigned	Not applicable

You create two user accounts that are configured as shown in the following table.

Name	City	Department	Office 365 license assigned
User1	Montreal	Human resources	Yes
User2	Melbourne	Marketing	No

Of which groups are User1 and User2 members? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1: ▼

- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

User2: ▼

- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

Answer :

Answer Area

User1:

- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

User2:

- Group1 only
- Group2 only
- Group3 only
- Group1 and Group2 only
- Group1 and Group3 only
- Group2 and Group3 only
- Group1, Group2, and Group3

Question 72 (Question Set 2)



HOTSPOT -
You have a hybrid deployment of Azure Active Directory (Azure AD) that contains the users shown in the following table.

Name	Type	Source
User1	Member	Azure AD
User2	Member	Windows Server Active Directory
User3	Guest	Microsoft account

You need to modify the JobTitle and UsageLocation attributes for the users.

For which users can you modify the attributes from Azure AD? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

JobTitle:

- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

UsageLocation:

- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

Answer :

Answer Area

JobTitle:

- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

UsageLocation:

- User1 only
- User1 and User2 only
- User1 and User3 only
- User1, User2, and User3

Explanation:

Box 1: User1 and User3 only -

You must use Windows Server Active Directory to update the identity, contact info, or job info for users whose source of authority is Windows Server Active Directory.

Box 2: User1, User2, and User3 -

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-users-profile-azure-portal>

Question 73 (Question Set 2)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.

Solution: You assign the Network Contributor role at the subscription level to Admin1.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Your account must meet one of the following to enable traffic analytics:

Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq>

Question 74 (Question Set 2)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.

Solution: You assign the Owner role at the subscription level to Admin1.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Your account must meet one of the following to enable traffic analytics:

Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq>

Question 75 (Question Set 2)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.

Solution: You assign the Reader role at the subscription level to Admin1.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Your account must meet one of the following to enable traffic analytics:

Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq>

Question 76 (Question Set 2)



You have an Azure subscription that contains a user named User1.
You need to ensure that User1 can deploy virtual machines and manage virtual networks. The solution must use the principle of least privilege.
Which role-based access control (RBAC) role should you assign to User1?

- A. Owner
- B. Virtual Machine Contributor
- C. Contributor
- D. Virtual Machine Administrator Login

Answer : C

Explanation:

Contributor: Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC

Incorrect Answers:

- A: Owner: Grants full access to manage all resources, including the ability to assign roles in Azure RBAC.
- B: Virtual Machine Contributor: Lets you manage virtual machines, but not access to them, and not the virtual network or storage account they're connected to.
- D: Virtual Machine Administrator Login: View Virtual Machines in the portal and login as administrator.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles>

Question 77 (Question Set 2)



HOTSPOT -

You have an Azure Active Directory (Azure AD) tenant that contains three global administrators named Admin1, Admin2, and Admin3.
The tenant is associated to an Azure subscription. Access control for the subscription is configured as shown in the Access control exhibit. (Click the Access Control tab.)

[+ Add](#) [Edit columns](#) [Refresh](#) | [Remove](#) | [Got feedback?](#)

[Check access](#) [Role assignments](#) [Deny assignments](#) [Classic administrators](#) [Roles](#)

Manage access to Azure resources for users, groups, service principals and managed identities at this scope by creating role assignments. [Learn more](#)

Name	Type	Role
<input type="text"/> Search by name or email	<input type="text"/> All	<input type="text"/> Owner
Scope	Group by	Search for a role
<input type="text"/> All scopes	<input type="text"/> Role	<input checked="" type="checkbox"/> Select all <input checked="" type="checkbox"/> Owner

1 items (1 Users)

<input type="checkbox"/>	NAME	TYPE	ROLE	SCOPE
--------------------------	------	------	------	-------

OWNER

Admin3 Admin3@Cont...	User	Owner	This resource
--------------------------	------	-------	---------------

You sign in to the Azure portal as Admin1 and configure the tenant as shown in the Tenant exhibit. (Click the Tenant tab.)

Save Discard

Directory properties

* Name

Cont190525outlook

Country or region

Slovenia

Location

EU Model Clause compliant datacenters

Notification language

English

Directory ID

a93d91a6-faca-4fa6-a749-f6c25469152e

Technical contact

Global privacy contact

Privacy statement URL

Access management for Azure resources

Admin1@Cont190525outlook.onmicrosoft.com (Admin1@Cont190525outlook.onmicrosoft.com) can manage access to all Azure subscriptions and management groups in this directory. [Learn more](#)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area
Answer Area

Statements	Yes	No
Admin1 can add Admin 2 as an owner of the subscription.	<input type="radio"/>	<input checked="" type="radio"/>
Admin3 can add Admin 2 as an owner of the subscription.	<input checked="" type="radio"/>	<input type="radio"/>
Admin2 can create a resource group in the subscription.	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

Box 1: No -
Only Admin3, the owner, can assign ownership.

Box 2: Yes -

Box 3: No -
Reference:
<https://docs.microsoft.com/en-us/azure/cost-management-billing/manage/add-change-subscription-administrator>

Question 78 (Question Set 2)

You have an Azure subscription named Subscription1 that contains an Azure virtual machine named VM1. VM1 is in a resource group named RG1. VM1 runs services that will be used to deploy resources to RG1.

You need to ensure that a service running on VM1 can manage the resources in RG1 by using the identity of VM1.

What should you do first?

- A. From the Azure portal, modify the Managed Identity settings of VM1
- B. From the Azure portal, modify the Access control (IAM) settings of RG1
- C. From the Azure portal, modify the Access control (IAM) settings of VM1

D. From the Azure portal, modify the Policies settings of RG1

Answer : A

Explanation:

Managed identities for Azure resources provides Azure services with an automatically managed identity in Azure Active Directory. You can use this identity to authenticate to any service that supports Azure AD authentication, without having credentials in your code.

You can enable and disable the system-assigned managed identity for VM using the Azure portal.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/qn-configure-portal-windows-vm>

Question 79 (Question Set 2)



You have an Azure subscription that contains a resource group named TestRG.

You use TestRG to validate an Azure deployment.

TestRG contains the following resources:

Name	Type	Description
VM1	Virtual Machine	VM1 is running and configured to back up to Vault1 daily
Vault1	Recovery Services Vault	Vault1 includes all backups of VM1
VNET1	Virtual Network	VNET1 has a resource lock of type Delete

You need to delete TestRG.

What should you do first?

- A. Modify the backup configurations of VM1 and modify the resource lock type of VNET1
- B. Remove the resource lock from VNET1 and delete all data in Vault1
- C. Turn off VM1 and remove the resource lock from VNET1
- D. Turn off VM1 and delete all data in Vault1

Answer : C

Explanation:

When you delete a resource group, all of its resources are also deleted. Deleting a resource group deletes all of its template deployments and currently stored operations.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/delete-resource-group?tabs=azure-powershell>

Question 80 (Question Set 2)



You have an Azure DNS zone named adatum.com.

You need to delegate a subdomain named research.adatum.com to a different DNS server in Azure.

What should you do?

- A. Create an NS record named research in the adatum.com zone.
- B. Create a PTR record named research in the adatum.com zone.
- C. Modify the SOA record of adatum.com.
- D. Create an A record named *.research in the adatum.com zone.

Answer : A

Explanation:

You need to create a name server (NS) record for the zone.

Reference:

<https://docs.microsoft.com/en-us/azure/dns/delegate-subdomain>

Question 81 (Question Set 2)



DRAG DROP -

You have an Azure Active Directory (Azure AD) tenant that has the contoso.onmicrosoft.com domain name.

You have a domain name of contoso.com registered at a third-party registrar.

You need to ensure that you can create Azure AD users that have names containing a suffix of @contoso.com.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Add a record to the public contoso.com DNS zone	
Add an Azure AD tenant	
Configure company branding	>
Create an Azure DNS zone	<
Answer : Add a custom name	
Actions	Answer Area
	Add a custom name
Add an Azure AD tenant	Add a record to the public contoso.com DNS zone
Configure company branding	>
Create an Azure DNS zone	<
	Verify the domain

Explanation:

1. Add the custom domain name to your directory
2. Add a DNS entry for the domain name at the domain name registrar
3. Verify the custom domain name in Azure AD

Reference:

<https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain>

Question 82 (Question Set 2)



You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1. You need to view the error events from a table named Event. Which query should you run in Workspace1?

- A. Get-Event Event | where \${__EventType == "error"}
- B. Event | search "error"
- C. select * from Event where EventType == "error"
- D. search in (Event) * | where EventType :eq :error:

Answer : B

Explanation:

The search operator provides a multi-table/multi-column search experience.

The syntax is:

Table_name | search "search term"

Note:

There are several versions of this question in the exam. The question has three possible correct answers:

1. search in (Event) "error"
2. Event | search "error"
3. Event | where EventType == "error"

Other incorrect answer options you may see on the exam include the following:

1. Get-Event Event | where \${__EventType :eq : "error"}
2. Event | where EventType is "error"
3. select * from Event where EventType is "error"
4. search in (Event) * | where EventType :eq : "error"

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/search-queries> [https://docs.microsoft.com/en-us/azure/data-explorer/kusto/query/searchoperator?pivots=azuredatadexplorer](https://docs.microsoft.com/en-us/azure/azure-monitor/get-started-portal)

Question 83 (Question Set 2)



You have a registered DNS domain named contoso.com. You create a public Azure DNS zone named contoso.com. You need to ensure that records created in the contoso.com zone are resolvable from the internet. What should you do?

- A. Create NS records in contoso.com.
- B. Modify the SOA record in the DNS domain registrar.

- C. Create the SOA record in contoso.com.
 D. Modify the NS records in the DNS domain registrar.

Answer : D

Reference:
<https://docs.microsoft.com/en-us/azure/dns/dns-delegate-domain-azure-dns>

Question 84 (Question Set 2)



HOTSPOT -

You have an Azure subscription that contains a storage account named storage1. The subscription is linked to an Azure Active Directory (Azure AD) tenant named contoso.com that syncs to an on-premises Active Directory domain.
 The domain contains the security principals shown in the following table.

Name	Type
User1	User
Computer1	Computer

In Azure AD, you create a user named User2.

The storage1 account contains a file share named share1 and has the following configurations.

```
"kind": "StorageV2",
"properties": {
    "azureFilesIdentityBasedAuthentication": {
        "directoryServiceOptions": "AD",
        "activeDirectoryProperties": {
            "domainName": "Contoso.com",
            "netBiosDomainName": "Contoso.com",
            "forestName": "Contoso.com",
        }
    }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements

Yes No

You can assign the Storage File Data SMB Share Contributor role to User1 for share1.

You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.

You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.

Answer :

Answer Area

Statements

Yes No

You can assign the Storage File Data SMB Share Contributor role to User1 for share1.

You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.

You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-ad-ds-assign-permissions?tabs=azure-portal>

Question 85 (Question Set 2)



HOTSPOT -

You have an Azure subscription named Subscription1 that contains a virtual network VNet1.
 You add the users in the following table.

User	Role
User1	Owner
User2	Security Admin
User3	Network Contributor

Which user can perform each configuration? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Add a subnet to VNet1:

- User1 only
- User3 only
- User1 and User3 only
- User2 and User3 only
- User1, User2, and User3

Assign a user the Reader role to VNet1:

- User1 only
- User2 only
- User3 only
- User1 and User2 only
- User2 and User3 only
- User1, User2, and User3

Answer :

Answer Area

Add a subnet to VNet1:

- User1 only
- User3 only
- User1 and User3 only
- User2 and User3 only
- User1, User2, and User3

Assign a user the Reader role to VNet1:

- User1 only
- User2 only
- User3 only
- User1 and User2 only
- User2 and User3 only
- User1, User2, and User3

Explanation:

Box 1: User1 and User3 only.

User1: The Owner Role lets you manage everything, including access to resources.

User3: The Network Contributor role lets you manage networks, including creating subnets.

Box 2: User1 only.

The Security Admin role: In Security Center only: Can view security policies, view security states, edit security policies, view alerts and recommendations, dismiss alerts and recommendations.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles> <https://docs.microsoft.com/en-us/azure/role-based-access-control/resource-provider-operations#microsoftnetwork>

Question 86 (Question Set 2)



HOTSPOT -

You have the Azure resources shown on the following exhibit.



Tenant Root Group



MG1



Sub1



RG1



VM1

You plan to track resource usage and prevent the deletion of resources.

To which resources can you apply locks and tags? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Locks:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Tags:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only

Answer :

Answer Area

Locks:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Tags:

RG1 and VM1 only
Sub1 and RG1 only
Sub1, RG1, and VM1 only
MG1, Sub1, RG1, and VM1 only
Tenant Root Group, MG1, Sub1, RG1, and VM1

Explanation:

Box 1: Sub1, RG1, and VM1 only -

You can lock a subscription, resource group, or resource to prevent other users in your organization from accidentally deleting or modifying critical resources.

Box 2: Sub1, RG1, and VM1 only -

You apply tags to your Azure resources, resource groups, and subscriptions.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources?tabs=json> <https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json>

Question 87 (Question Set 2)



You have an Azure Active Directory (Azure AD) tenant.
 You plan to delete multiple users by using Bulk delete in the Azure Active Directory admin center.
 You need to create and upload a file for the bulk delete.
 Which user attributes should you include in the file?

- A. The user principal name and usage location of each user only
- B. The user principal name of each user only
- C. The display name of each user only
- D. The display name and usage location of each user only
- E. The display name and user principal name of each user only

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/users-bulk-delete>

Question 88 (Question Set 2)



HOTSPOT -
 You have an Azure subscription named Sub1 that contains the Azure resources shown in the following table.

Name	Type
RG1	Resource group
storage1	Storage account
VNET1	Virtual network

You assign an Azure policy that has the following settings:

- ⇒ Scope: Sub1
- ⇒ Exclusions: Sub1/RG1/VNET1
- ⇒ Policy definition: Append a tag and its value to resources
- ⇒ Policy enforcement: Enabled
- ⇒ Tag name: Tag4
- ⇒ Tag value: value4

You assign tags to the resources as shown in the following table.

Resource	Tag
Sub1	Tag1:subscription
RG1	Tag2:IT
storage1	Tag3:value1
VNET1	Tag3:value2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements

Yes

No

RG1 has the Tag2:IT tag assigned only

Storage1 has the Tag1:subscription, Tag2:IT, Tag3:value1, and Tag4:value4 tags assigned.

VNET1 has the Tag2:IT and Tag3:value2 tags assigned only

Answer :

Answer Area

Statements	Yes	No
RG1 has the Tag2:IT tag assigned only	<input type="radio"/>	<input checked="" type="radio"/>
Storage1 has the Tag1:subscription, Tag2:IT, Tag3:value1, and Tag4:value4 tags assigned.	<input type="radio"/>	<input checked="" type="radio"/>
VNET1 has the Tag2:IT and Tag3:value2 tags assigned only	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

Box 1: No -
The Azure Policy will add Tag4 to RG1.

Box 2: No -
Tags applied to the resource group or subscription aren't inherited by the resources although you can enable inheritance with Azure Policy. Storage1 has Tag3: Value1 and the Azure Policy will add Tag4.

Box 3: No -
Tags applied to the resource group or subscription aren't inherited by the resources so VNET1 does not have Tag2.
VNET1 has Tag3:value2. VNET1 is excluded from the Azure Policy so Tag4 will not be added to VNET1.

Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/tag-resources?tabs=json>

Question 89 (Question Set 2)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.

Solution: You assign the Traffic Manager Contributor role at the subscription level to Admin1.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq>

Question 90 (Question Set 2)

You have three offices and an Azure subscription that contains an Azure Active Directory (Azure AD) tenant.
You need to grant user management permissions to a local administrator in each office.
What should you use?

- A. Azure AD roles
- B. administrative units
- C. access packages in Azure AD entitlement management
- D. Azure roles

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/active-directory/roles/administrative-units>

Question 91 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.
You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.
Solution: On Dev, you assign the Logic App Contributor role to the Developers group.
Does this meet the goal?

- A. Yes
B. No

Answer : A

Reference:
<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles>

Question 92 (Question Set 2)



HOTSPOT -
You have an Azure Load Balancer named LB1.
You assign a user named User1 the roles shown in the following exhibit.

User1 assignments – LB1

Assignments for the selected user, group, service principal, or managed identity at this scope or inherited to this scope.

Search by assignment name or description

Role assignments (2) ①

Role	D..	Scope	Group assignment
User Access Administrator	L...	This resource	--
Virtual Machine Contributor	L...	Resource group (inherited)	--

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1 can [answer choice] LB1.

delete

create a NAT rule for

assign access to other users for

User1 can [answer choice] the resource group.

delete a virtual machine from


modify the load balancing rules in

deploy an Azure Kubernetes Service (AKS) cluster to


Answer :

Answer Area

User1 can [answer choice] LB1.



User1 can [answer choice] the resource group.



Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor> <https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles>

Question 93 (Question Set 2)



You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1. Subscription1 has a user named User1. User1 has the following roles:

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users.

What should you do?

- A. Remove User1 from the Security Reader role for Subscription1. Assign User1 the Contributor role for RG1.
- B. Assign User1 the Owner role for VNet1.
- C. Assign User1 the Contributor role for VNet1.
- D. Assign User1 the Network Contributor role for VNet1.

Answer : B

Explanation:

Has full access to all resources including the right to delegate access to others.

Note:

There are several versions of this question in the exam. The question has two possible correct answers:

- Assign User1 the User Access Administrator role for VNet1.
- Assign User1 the Owner role for VNet1.

Other incorrect answer options you may see on the exam include the following:

- Remove User1 from the Security Reader and Reader roles for Subscription1. Assign User1 the Contributor role for Subscription1.
- Remove User1 from the Security Reader and Reader roles for Subscription1.
- Assign User1 the Network Contributor role for RG1.

References:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles> <https://docs.microsoft.com/en-us/azure/role-based-access-control/overview>

Question 94 (Question Set 2)



HOTSPOT -

You configure the custom role shown in the following exhibit.

```
{  
    "properties": {  
        "roleName": "role1",  
        "description": "",  
        "roletype": "true",  
        "assignableScopes": [  
            "/subscriptions/3d6209d5-c714-4440-9556e-d6342086c2d7/"  
        ],  
        "permissions": [  
            {  
                "actions": [  
                    "Microsoft.Authorization/*/read",  
                    "Microsoft.Compute/availabilitySets/*",  
                    "Microsoft.Compute/locations/*",  
                    "Microsoft.Compute/virtualMachines/*",  
                    "Microsoft.Compute/virtualMachineScaleSets/*",  
                    "Microsoft.Compute/disks/write",  
                    "Microsoft.Compute/disks/read",  
                    "Microsoft.Compute/disks/delete",  
                    "Microsoft.Network/locations/*",  
                    "Microsoft.Network/networkInterfaces/*",  
                    "Microsoft.Network/networkSecurityGroups/join/action",  
                    "Microsoft.Network/networkSecurityGroups/read",  
                    "Microsoft.Network/publicIPAddresses/join/action",  
                    "Microsoft.Network/publicIPAddresses/read",  
                    "Microsoft.Network/virtualNetworks/read",  
                    "Microsoft.Network/virtualNetworks/subnets/join/action",  
                    "Microsoft.Resources/deployments/*",  
                    "Microsoft.Resources/subscriptions/resourceGroups/read",  
                    "Microsoft.Support/*"  
                ],  
                "notActions": [],  
                "dataActions": [],  
                "notDataActions": []  
            }  
        ]  
    }  
}
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

To ensure that users can sign in to virtual machines that are assigned role1, modify the [answer choice] section

Answer :

▼
actions
roletype
notActions
dataActions
notDataActions
assignableScopes

To ensure that role1 can be assigned only to a resource group named RG1, modify the [answer choice] section

▼
actions
roletype
notActions
dataActions
notDataActions
assignableScopes

Answer Area

To ensure that users can sign in to virtual machines that are assigned role1, modify the [answer choice] section

actions
roletype
notActions
dataActions
notDataActions
assignableScopes

To ensure that role1 can be assigned only to a resource group named RG1, modify the [answer choice] section

actions
roletype
notActions
dataActions
notDataActions
assignableScopes

Question 95 (Question Set 2)



You have an Azure subscription that contains a storage account named storage1. The storage1 account contains a file share named share1. The subscription is linked to a hybrid Azure Active Directory (Azure AD) tenant that contains a security group named Group1. You need to grant Group1 the Storage File Data SMB Share Elevated Contributor role for share1. What should you do first?

- A. Enable Active Directory Domain Service (AD DS) authentication for storage1.
- B. Grant share-level permissions by using File Explorer.
- C. Mount share1 by using File Explorer.
- D. Create a private endpoint.

Answer : A

Explanation:

Before you enable Azure AD over SMB for Azure file shares, make sure you have completed the following prerequisites:

1. Select or create an Azure AD tenant.
2. To support authentication with Azure AD credentials, you must enable Azure AD Domain Services for your Azure AD tenant.

Etc.

Note: The Storage File Data SMB Share Elevated Contributor allows read, write, delete and modify NTFS permissions in Azure Storage file shares over SMB.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-files-identity-auth-active-directory-domain-service-enable>

Question 96 (Question Set 2)



You have 15 Azure subscriptions.

You have an Azure Active Directory (Azure AD) tenant that contains a security group named Group1.

You plan to purchase additional Azure subscription.

You need to ensure that Group1 can manage role assignments for the existing subscriptions and the planned subscriptions. The solution must meet the following requirements:

- ⇒ Use the principle of least privilege.
- ⇒ Minimize administrative effort.

What should you do?

- A. Assign Group1 the Owner role for the root management group.
- B. Assign Group1 the User Access Administrator role for the root management group.
- C. Create a new management group and assign Group1 the User Access Administrator role for the group.
- D. Create a new management group and assign Group1 the Owner role for the group.

Answer : B

Explanation:

The User Access Administrator role enables the user to grant other users access to Azure resources. This switch can be helpful to regain access to a subscription.

Management groups give you enterprise-grade management at scale no matter what type of subscriptions you might have.

Each directory is given a single top-level management group called the "Root" management group. This root management group is built into the hierarchy to have all management groups and subscriptions fold up to it. This root management group allows for global policies and Azure role assignments to be applied at the directory level.

Incorrect:

Not C: A few directories that started using management groups early in the preview before June 25 2018 could see an issue where not all the subscriptions were within the hierarchy. The process to have all subscriptions in the hierarchy was put in place after a role or policy assignment was done on the root management group in the directory.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles> <https://docs.microsoft.com/en-us/azure/governance/management-groups/overview>

Question 97 (Question Set 2)



HOTSPOT -

You have an Azure subscription that contains the hierarchy shown in the following exhibit.



You create an Azure Policy definition named Policy1.

To which Azure resources can you assign Policy1 and which Azure resources can you specify as exclusions from Policy1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can assign Policy1 to:

Subscription1 and RG1 only
ManagementGroup1 and Subscription1 only
Tenant Root Group, ManagementGroup1, and Subscription1 only
Tenant Root Group, ManagementGroup1, Subscription1, and RG1 only
Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

You can exclude Policy1 from:

VM1 only
RG1 and VM1 only
Subscription1, RG1, and VM1 only
ManagementGroup1, Subscription1, RG1, and VM1 only
Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Answer :

Answer Area

You can assign Policy1 to:

- Subscription1 and RG1 only
- ManagementGroup1 and Subscription1 only
- Tenant Root Group, ManagementGroup1, and Subscription1 only
- Tenant Root Group, ManagementGroup1, Subscription1, and RG1 only
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1**

You can exclude Policy1 from:


- VM1 only
- RG1 and VM1 only
- Subscription1, RG1, and VM1 only
- ManagementGroup1, Subscription1, RG1, and VM1 only**
- Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Explanation:

Box 1: Tenant Root Group, ManagementGroup1, Subscription1, RG1, and VM1

Once your business rules have been formed, the policy definition or initiative is assigned to any scope of resources that Azure supports, such as management groups, subscriptions, resource groups, or individual resources.

Note: Azure provides four levels of scope: management groups, subscriptions, resource groups, and resources. The following image shows an example of these layers.

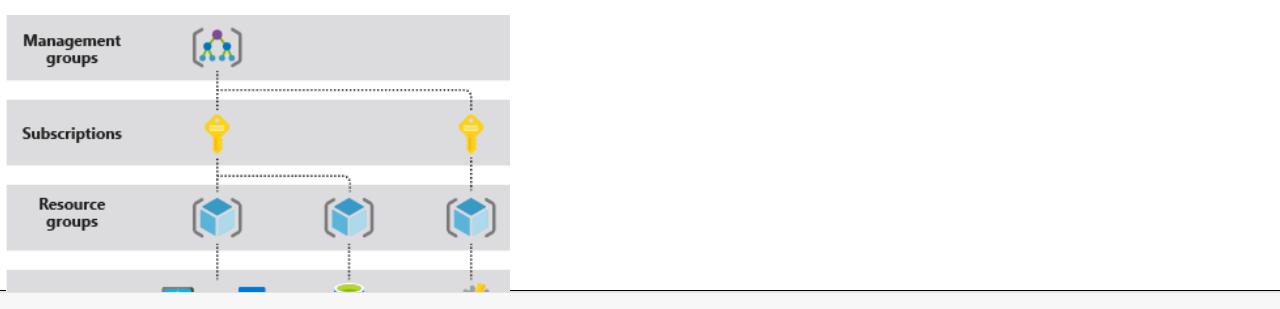

Question 98 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.

You need to create new user accounts in external.contoso.onmicrosoft.com.

Solution: You instruct User2 to create the user accounts.

Does that meet the goal?

- A. Yes
B. No

Answer : A

Explanation:

Only a global administrator can add users to this tenant.

Reference:

<https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad>

Question 99 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.

You need to create new user accounts in external.contoso.onmicrosoft.com.

Solution: You instruct User4 to create the user accounts.

Does that meet the goal?

A. Yes

B. No

Answer : B

Explanation:

Only a global administrator can add users to this tenant.

Reference:

<https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad>

Question 100 (Question Set 2)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.

You need to create new user accounts in external.contoso.onmicrosoft.com.

Solution: You instruct User3 to create the user accounts.

Does that meet the goal?

A. Yes

B. No

Answer : B

Explanation:

Only a global administrator can add users to this tenant.

Reference:

<https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad>

Microsoft Azure Administrator v1.0 (AZ-104) - Full Access

Question 101 (Question Set 2)



You have two Azure subscriptions named Sub1 and Sub2.
 An administrator creates a custom role that has an assignable scope to a resource group named RG1 in Sub1.
 You need to ensure that you can apply the custom role to any resource group in Sub1 and Sub2. The solution must minimize administrative effort.
 What should you do?

- A. Select the custom role and add Sub1 and Sub2 to the assignable scopes. Remove RG1 from the assignable scopes.
- B. Create a new custom role for Sub1. Create a new custom role for Sub2. Remove the role from RG1.
- C. Create a new custom role for Sub1 and add Sub2 to the assignable scopes. Remove the role from RG1.
- D. Select the custom role and add Sub1 to the assignable scopes. Remove RG1 from the assignable scopes. Create a new custom role for Sub2.

Answer : A

Explanation:

Can be used as:

```
"AssignableScopes": [
  "/subscriptions/{Sub1}",
  "/subscriptions/{Sub2}"]
```

Note: Custom role example:

The following shows what a custom role looks like as displayed using Azure PowerShell in JSON format. This custom role can be used for monitoring and restarting virtual machines.

```
{
  "Name": "Virtual Machine Operator",
  "Id": "88888888-8888-8888-888888888888",
  "IsCustom": true,
  "Description": "Can monitor and restart virtual machines.",
  "Actions": [
    "Microsoft.Storage/*/read",
    "Microsoft.Network/*/read",
    "Microsoft.Compute/*/read",
    "Microsoft.Compute/virtualMachines/start/action",
    "Microsoft.Compute/virtualMachines/restart/action",
    "Microsoft.Authorization/*/read",
    "Microsoft.ResourceHealth/availabilityStatuses/read",
    "Microsoft.Resources/subscriptions/resourceGroups/read",
    "Microsoft.Insights/alertRules/*",
    "Microsoft.Insights/diagnosticSettings/*",
    "Microsoft.Support/*"
  ],
  "NotActions": [],
  "DataActions": [],
  "NotDataActions": [],
  "AssignableScopes": [
    "/subscriptions/{subscriptionId1}",
    "/subscriptions/{subscriptionId2}",
    "/providers/Microsoft.Management/managementGroups/{groupId1}"
  ]
}
```

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/custom-roles>

Question 102 (Question Set 2)



You have an Azure Subscription that contains a storage account named storageacct1234 and two users named User1 and User2.
 You assign User1 the roles shown in the following exhibit.

User1 assignments – storageacct1234

Assignments for the selected user, group, service principal, or managed identity at this scope or inherited to this scope.

Role assignments (2) i

Role	Scope	Group assignment	Condition
Reader	Resource group (inherited)	--	None
Storage Blob Data Contributor	This resource	--	Add

Deny assignments (0) i

Classic administrators (0) i

Which two actions can User1 perform? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. Assign roles to User2 for storageacct1234.
- B. Upload blob data to storageacct1234.

- C. Modify the firewall of storageacct1234.
- D. View blob data in storageacct1234.
- E. View file shares in storageacct1234.

Answer : AE

Question 103 (Testlet 1)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market. Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.

Use unmanaged standard storage for the hard disks of the virtual machines.

Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.

Designate a new user named Admin1 as the service admin for the Azure subscription.

Admin1 must receive email alerts regarding service outages.

Ensure that a new user named User3 can create network objects for the Azure subscription.

HOTSPOT -

You need to configure the Device settings to meet the technical requirements and the user requirements.

Which two settings should you modify? To answer, select the appropriate settings in the answer area.

Hot Area:

Answer Area

Save  Got feedback?

Users may join devices to Azure AD ⓘ

All Selected None

Selected
No member selected

Additional local administrators on Azure AD joined devices ⓘ

Selected None

Selected
No member selected

Users may register their devices with Azure AD ⓘ

All None

Require Multi-Factor Auth to join devices ⓘ

Yes No

Maximum number of devices per user ⓘ

50

Answer :

Answer Area

Save Discard | Got feedback?

Users may join devices to Azure AD ⓘ

All Selected None

Selected
No member selected

Additional local administrators on Azure AD joined devices ⓘ

Selected None

Question 104 (Testlet 1)

Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam.

You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more

information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.

Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.

Use unmanaged standard storage for the hard disks of the virtual machines.

Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.

Designate a new user named Admin1 as the service admin for the Azure subscription.

Admin1 must receive email alerts regarding service outages.

Ensure that a new user named User3 can create network objects for the Azure subscription.

You need to meet the user requirement for Admin1.

What should you do?

- A. From the Azure Active Directory blade, modify the Groups
- B. From the Azure Active Directory blade, modify the Properties
- C. From the Subscriptions blade, select the subscription, and then modify the Access control (IAM) settings
- D. From the Subscriptions blade, select the subscription, and then modify the Properties

Answer : D

Explanation:

Scenario:

⇒ Designate a new user named Admin1 as the service admin for the Azure subscription.

⇒ Admin1 must receive email alerts regarding service outages.

Follow these steps to change the Service Administrator in the Azure portal.

1. Make sure your scenario is supported by checking the limitations for changing the Service Administrator.
2. Sign in to the Azure portal as the Account Administrator.
3. Open Cost Management + Billing and select a subscription.
4. In the left navigation, click Properties.
5. Click Service Admin.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/classic-administrators>

Question 105 (Testlet 2)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

HOTSPOT -

You need to ensure that User1 can create initiative definitions, and User4 can assign initiatives to RG2. The solution must meet the technical requirements.

Which role should you assign to each user? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1:	<input type="text"/>	
	Contributor for RG1	
	Contributor for Sub1	
	Security Admin for RG1	
	Resource Policy Contributor for Sub1	

Answer :

Answer Area

User1:	<input type="text"/>	
	Contributor for RG1	
	Contributor for Sub1	
	Security Admin for RG1	
	Resource Policy Contributor for Sub1	

User4:	<input type="text"/>	
	Contributor for RG2	
	Contributor for Sub1	
	Security Admin for Sub1	
	Resource Policy Contributor for RG2	

Reference:

<https://docs.microsoft.com/en-us/azure/governance/policy/overview>

Question 106 (Testlet 2)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam.

You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

You need to ensure that you can grant Group4 Azure RBAC read only permissions to all the Azure file shares.

What should you do?

- A. On storage2, enable identity-based access for the file shares.
- B. Recreate storage2 and set Hierarchical namespace to Enabled.
- C. On storage1 and storage4, change the Account kind type to StorageV2 (general purpose v2).
- D. Create a shared access signature (SAS) for storage1, storage2, and storage4.

Answer : A

Explanation:

Azure Files supports identity-based authentication over Server Message Block (SMB) through on-premises Active Directory Domain Services (AD DS) and Azure Active Directory Domain Services (Azure AD DS).

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-files-active-directory-overview>

Question 107 (Question Set 3)



You have an Azure subscription named Subscription1 that contains the storage accounts shown in the following table:

Name	Account kind	Azure service that contains data
storage1	Storage	File
storage2	StorageV2 (general purpose v2)	File, Table
storage3	StorageV2 (general purpose v2)	Queue
storage4	BlobStorage	Blob

You plan to use the Azure Import/Export service to export data from Subscription1.

You need to identify which storage account can be used to export the data.

What should you identify?

- A. storage1
- B. storage2
- C. storage3
- D. storage4

Answer : D

Explanation:

Azure Import/Export service supports the following of storage accounts:

⇒ Standard General Purpose v2 storage accounts (recommended for most scenarios)

⇒ Blob Storage accounts

⇒ General Purpose v1 storage accounts (both Classic or Azure Resource Manager deployments),

Azure Import/Export service supports the following storage types:

⇒ Import supports Azure Blob storage and Azure File storage

⇒ Export supports Azure Blob storage

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-requirements>

Question 108 (Question Set 3)



HOTSPOT -

You have Azure Storage accounts as shown in the following exhibit.

Home > Storage accounts

Storage accounts

+ Add Edit columns Refresh Assign Tags Delete

Subscription: All 2 selected - Don't see a subscription? Switch directories

Filter by home... All subscriptions All resource groups All types All locations No grouping

3 items

NAME	TYPE	KIND	RESOURCE...	LOCATION	SUBSCRIPTION	ACCESS T...	REPLICAT...
storageaccount1	Storage account	Storage	ContosoRG1	East US	Subscription 1	-	Read-access ge...
storageaccount2	Storage account	StorageV2	ContosoRG1	Central US	Subscription 1	Hot	Geo-redundant...
storageaccount3	Storage account	BlobStorage	ContosoRG1	East US	Subscription 1	Hot	Locally-redundant...

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can use [answer choice] for Azure Table Storage.

Answer:

storageaccount1 only
storageaccount2 only
storageaccount3 only
storageaccount1 and storageaccount2 only
storageaccount2 and storageaccount3 only

You can use [answer choice] for Azure Blob storage.

Answer:

storageaccount1 only
storageaccount2 only
storageaccount3 only
storageaccount1 and storageaccount2 only
storageaccount2 and storageaccount3 only

Answer Area

You can use [answer choice] for Azure Table Storage.

Answer:

storageaccount1 only
storageaccount2 only
storageaccount3 only
storageaccount1 and storageaccount2 only
storageaccount2 and storageaccount3 only

You can use [answer choice] for Azure Blob storage.

Answer:

storageaccount3 only
storageaccount2 and storageaccount3 only
storageaccount1 and storageaccount3 only
all the storage accounts

Explanation:

Box 1: storageaccount1 and storageaccount2 only

Box 2: All the storage accounts -

Note: The three different storage account options are: General-purpose v2 (GPv2) accounts, General-purpose v1 (GPv1) accounts, and Blob storage accounts.

⇒ General-purpose v2 (GPv2) accounts are storage accounts that support all of the latest features for blobs, files, queues, and tables.

⇒ Blob storage accounts support all the same block blob features as GPv2, but are limited to supporting only block blobs.

⇒ General-purpose v1 (GPv1) accounts provide access to all Azure Storage services, but may not have the latest features or the lowest per gigabyte pricing.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-account-options>

Question 109 (Question Set 3)



You have Azure subscription that includes data in following locations:

Name	Type
container1	Blob container
share1	Azure files share
DB1	SQL database
Table1	Azure Table

You plan to export data by using Azure import/export job named Export1.

You need to identify the data that can be exported by using Export1.

Which data should you identify?

- A. DB1
- B. container1
- C. share1
- D. Table1

Answer : B

Question 110 (Question Set 3)



HOTSPOT -

You have an Azure Storage account named storage1.

You have an Azure App Service app named App1 and an app named App2 that runs in an Azure container instance. Each app uses a managed identity.

You need to ensure that App1 and App2 can read blobs from storage1. The solution must meet the following requirements:

⇒ Minimize the number of secrets used.

⇒ Ensure that App2 can only read from storage1 for the next 30 days.

What should you configure in storage1 for each app? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

App1:

Access keys
Advanced security
Access control (IAM)
Shared access signatures (SAS)

App2:

Access keys
Advanced security
Access control (IAM)
Shared access signatures (SAS)

Answer :

Answer Area

App1:

Access keys
Advanced security
Access control (IAM)
Shared access signatures (SAS)

App2:

Access keys
Advanced security
Access control (IAM)
Shared access signatures (SAS)

Explanation:

App1: Access keys -

App2: Shared access signature (SAS)

A shared access signature (SAS) provides secure delegated access to resources in your storage account without compromising the security of your data. With a SAS, you have granular control over how a client can access your data. You can control what resources the client may access, what permissions they have on those resources, and how long the SAS is valid, among other parameters.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-sas-overview>

Question 111 (Question Set 3)



HOTSPOT -

You need to create an Azure Storage account that meets the following requirements:

- Minimizes costs
- Supports hot, cool, and archive blob tiers
- Provides fault tolerance if a disaster affects the Azure region where the account resides

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
az storage account create -g RG1 -n storageaccount1
```

Answer :

--kind		--sku
FileStorage		Standard_GRS

Answer Area

```
az storage account create -g RG1 -n storageaccount1
```

--kind	--sku
FileStorage	Standard_GRS
Storage	Standard_LRS
StorageV2	Standard_RAGRS
	Premium_LRS

Explanation:

Box 1: StorageV2 -

You may only tier your object storage data to hot, cool, or archive in Blob storage and General Purpose v2 (GPv2) accounts. General Purpose v1 (GPv1) accounts do not support tiering. General-purpose v2 accounts deliver the lowest per-gigabyte capacity prices for Azure Storage, as well as industry-competitive transaction prices.

Box 2: Standard_GRS -

Geo-redundant storage (GRS): Cross-regional replication to protect against region-wide unavailability.

Incorrect Answers:

Locally-redundant storage (LRS): A simple, low-cost replication strategy. Data is replicated within a single storage scale unit.

Read-access geo-redundant storage (RA-GRS): Cross-regional replication with read access to the replica. RA-GRS provides read-only access to the data in the secondary location, in addition to geo-replication across two regions, but is more expensive compared to GRS.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-grs> <https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers>

Question 112 (Question Set 3)



You have an Azure subscription that contains the resources in the following table.

Name	Type
RG1	Resource group
store1	Azure Storage account
Sync1	Azure File Sync

Store1 contains a file share named data. Data contains 5,000 files.

You need to synchronize the files in the file share named data to an on-premises server named Server1.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Create a container instance
- B. Register Server1
- C. Install the Azure File Sync agent on Server1
- D. Download an automation script
- E. Create a sync group

Answer : BCE

Explanation:

Step 1 (C): Install the Azure File Sync agent on Server1

The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share

Step 2 (B): Register Server1.

Register Windows Server with Storage Sync Service

Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.

Step 3 (E): Create a sync group and a cloud endpoint.

A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide>

Question 113 (Question Set 3)



HOTSPOT -
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VNET2	Virtual network	RG2
VM1	Virtual machine	RG2

The status of VM1 is Running.

You assign an Azure policy as shown in the exhibit. (Click the Exhibit tab.)

Home > Policy - Assignments > Assign Policy

Assign Policy

SCOPE

* Scope ([Learn more about setting the scope](#))

Azure Pass/RG2 ...

Exclusions

Optionally select resources to exempt from the policy assignment ...

BASICS

* Policy definition

Not allowed resource types ✓ ...

* Assignment name i

Not allowed resource types ✓

Description

Assigned by

First User

PARAMETERS

* Not allowed resource types i

3 selected ✓

Assign Cancel

You assign the policy by using the following parameters:

Microsoft.ClassicNetwork/virtualNetworks

Microsoft.Network/virtualNetworks

Microsoft.Compute/virtualMachines

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
------------	-----	----

An administrator can move VNET1 to RG2

Answer :

Answer Area

Statements	Yes	No
------------	-----	----

An administrator can move VNET1 to RG2

The state of VM1 changed to deallocated

An administrator can modify the address space of VNET2

Question 114 (Question Set 3)



DRAG DROP -

You have an Azure subscription that contains a storage account.

You have an on-premises server named Server1 that runs Windows Server 2016. Server1 has 2 TB of data.

You need to transfer the data to the storage account by using the Azure Import/Export service.

In which order should you perform the actions? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

Actions **Answer Area**

From the Azure portal, update the import job



From the Azure portal, create an import job



Attach an external disk to Server1 and then run wainportexport.exe



Detach the external disks from Server1 and ship the disks to an Azure data center

Answer :

Actions **Answer Area**

From the Azure portal, update the import job

Attach an external disk to Server1 and then run wainportexport.exe

From the Azure portal, create an import job

From the Azure portal, create an import job

Attach an external disk to Server1 and then run wainportexport.exe



Detach the external disks from Server1 and ship the disks to an Azure data center



Detach the external disks from Server1 and ship the disks to an Azure data center



From the Azure portal, update the import job

**Explanation:**

At a high level, an import job involves the following steps:

Step 1: Attach an external disk to Server1 and then run wainportexport.exe

Determine data to be imported, number of drives you need, destination blob location for your data in Azure storage.

Use the WAIImportExport tool to copy data to disk drives. Encrypt the disk drives with BitLocker.

Step 2: From the Azure portal, create an import job.

Create an import job in your target storage account in Azure portal. Upload the drive journal files.

Step 3: Detach the external disks from Server1 and ship the disks to an Azure data center.

Provide the return address and carrier account number for shipping the drives back to you.

Ship the disk drives to the shipping address provided during job creation.

Step 4: From the Azure portal, update the import job

Update the delivery tracking number in the import job details and submit the import job.

The drives are received and processed at the Azure data center.
 The drives are shipped using your carrier account to the return address provided in the import job.
 Reference:
<https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service>

Question 115 (Question Set 3)



HOTSPOT -
 You have Azure subscription that includes following Azure file shares:

Name	In storage account	Location
share1	storage1	West US
share2	storage1	West US

You have the following on-premises servers:

Name	Folders
Server1	D:\Folder1, E:\Folder2
Server2	D:\Data

You create a Storage Sync Service named Sync1 and an Azure File Sync group named Group1. Group1 uses share1 as a cloud endpoint.

You register Server1 and Server2 in Sync1. You add D:\Folder1 on Server1 as a server endpoint of Group1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
share2 can be added as a cloud endpoint for Group1	<input type="radio"/>	<input type="radio"/>
E:\Folder2 on Server1 can be added as a server endpoint for Group1	<input type="radio"/>	<input type="radio"/>
D:\Data on Server2 can be added as a server endpoint for Group1	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
share2 can be added as a cloud endpoint for Group1	<input type="radio"/>	<input checked="" type="radio"/>
E:\Folder2 on Server1 can be added as a server endpoint for Group1	<input checked="" type="radio"/>	<input type="radio"/>
D:\Data on Server2 can be added as a server endpoint for Group1	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: No -
 Group1 already has a cloud endpoint named Share1.
 A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints.

Box 2: Yes -
 Yes, one or more server endpoints can be added to the sync group.

Box 3: Yes -
 Yes, one or more server endpoints can be added to the sync group.
 Reference:
<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide>

Question 116 (Question Set 3) 

DRAG DROP -
 You have an Azure subscription named Subscription1.
 You create an Azure Storage account named contosostorage, and then you create a file share named data.
 Which UNC path should you include in a script that references files from the data file share? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once or not at all. You may need to drag the split bar between panes or scroll to view content.
 NOTE: Each correct selection is worth one point.
 Select and Place:

Values	Answer Area
blob	\\ <input type="text"/> . <input type="text"/> \ <input type="text"/>
contosostorage	<input type="text"/>
file	<input type="text"/>
portal.azure.com	<input type="text"/>
subscription1	<input type="text"/>

Answer :

Values	Answer Area
blob	\\ <input type="text"/> . <input type="text"/> \ <input type="text"/>
contosostorage	<input type="text"/> contosostorage
file	<input type="text"/> file.core.windows.net
portal.azure.com	<input type="text"/> data
subscription1	<input type="text"/>

Explanation:

Box 1: contosostorage -


The name of account -

Box 2: file.core.windows.net -

Box 3: data -

The name of the file share is data.

Example:

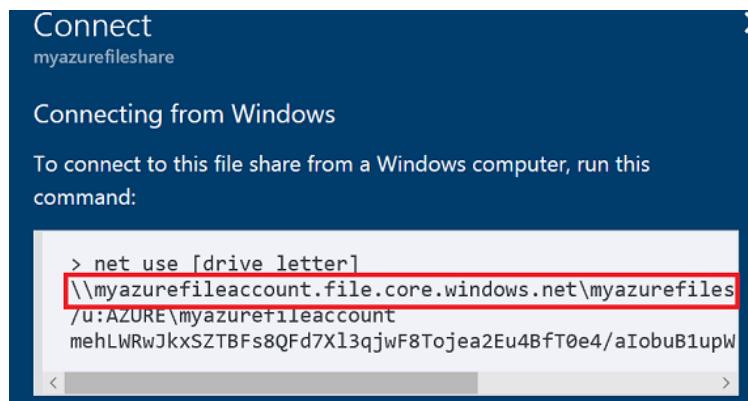

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows>

Question 117 (Question Set 3) 

HOTSPOT -
 You have an Azure subscription that contains an Azure Storage account.
 You plan to copy an on-premises virtual machine image to a container named vmiimages.
 You need to create the container for the planned image.

Which command should you run? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

azcopy	▼
make	
sync	
copy	

'https://mystorageaccount.	▼	.core.windows.net/vmimages'
blob		
dfs		
queue		
table		
images		
file		

Answer :

Answer Area

azcopy	▼
make	
sync	
copy	

'https://mystorageaccount.	▼	.core.windows.net/vmimages'
blob		
dfs		
queue		
table		
images		
file		

Question 118 (Question Set 3)



HOTSPOT -

You have an Azure File sync group that has the endpoints shown in the following table.

Name	Type
Endpoint1	Cloud endpoint
Endpoint2	Server endpoint
Endpoint3	Server endpoint

Cloud tiering is enabled for Endpoint3.

You add a file named File1 to Endpoint1 and a file named File2 to Endpoint2.

On which endpoints will File1 and File2 be available within 24 hours of adding the files? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

File1:

- Endpoint1 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

File2:

- Endpoint2 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only

Answer :

Answer Area

File1:

- Endpoint1 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

File2:

- Endpoint2 only
- Endpoint3 only
- Endpoint2 and Endpoint3 only
- Endpoint1, Endpoint2, and Endpoint3

Explanation:

File1: Endpoint3 only -

Cloud Tiering: A switch to enable or disable cloud tiering. When enabled, cloud tiering will tier files to your Azure file shares. This converts on-premises file shares into a cache, rather than a complete copy of the dataset, to help you manage space efficiency on your server. With cloud tiering, infrequently used or accessed files can be tiered to Azure Files.

File2: Endpoint1, Endpoint2, and Endpoint3

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-cloud-tiering>

Question 119 (Question Set 3)



HOTSPOT -

You have several Azure virtual machines on a virtual network named VNet1.
You configure an Azure Storage account as shown in the following exhibit.

The screenshot shows the Azure Storage Account settings for the 'contoso' account. The left sidebar lists various options like Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Events, Storage Explorer (preview), SETTINGS, Access keys, Configuration, Encryption, Shared access signature, Firewalls and virtual networks (which is selected and highlighted in blue), Properties, Locks, and Automation script.

Firewall and Virtual Networks

Allow access from All networks Selected networks

Virtual networks

Secure your storage account with virtual networks. + Add existing virtual network + Add new virtual network

VIRTUAL NET...	SUBNET	ADDRESS RA...	ENDPOINT ST...	RESOURCE G...	SUBSCRIPTION
VNet1	1	10.2.0.0/16	DemoRG	Production subscrip ...	
	Prod	10.2.0.0/24	✓ Enabled	DemoRG	Production subscrip ...

Firewall

Add IP ranges to allow access from the Internet or your on-premises networks. [Learn more](#).

ADDRESS RANGE

IP address or CIDR

Exceptions

Allow trusted Microsoft services to access this storage account [Learn more](#)

Allow read access to storage logging from any network

Allow read access to storage metrics from any network

Answer :

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account [answer choice].

always
during a backup
never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account [answer choice].

always
during a backup
never

Explanation:

Box 1: never -
The 10.2.9.0/24 subnet is not whitelisted.

Box 2: never -
After you configure firewall and virtual network settings for your storage account, select Allow trusted Microsoft services to access this storage account as an exception to enable Azure Backup service to access the network restricted storage account.

Question 120 (Question Set 3)

HOTSPOT -

You have a sync group named Sync1 that has a cloud endpoint. The cloud endpoint includes a file named File1.txt. Your on-premises network contains servers that run Windows Server 2016. The servers are configured as shown in the following table.

Name	Share	Share contents
Server1	Share1	File1.txt, File2.txt
Server2	Share2	File2.txt, File3.txt

You add Share1 as an endpoint for Sync1. One hour later, you add Share2 as an endpoint for Sync1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On the cloud endpoint, File1.txt is overwritten by File1.txt from Share1.	<input type="radio"/>	<input type="radio"/>
On Server1, File1.txt is overwritten by File1.txt from the cloud endpoint.	<input type="radio"/>	<input type="radio"/>
File1.txt from Share1 replicates to Share2.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
On the cloud endpoint, File1.txt is overwritten by File1.txt from Share1.	<input checked="" type="radio"/>	<input type="radio"/>
On Server1, File1.txt is overwritten by File1.txt from the cloud endpoint.	<input type="radio"/>	<input checked="" type="radio"/>
File1.txt from Share1 replicates to Share2.	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: Yes -

If you add an Azure file share that has an existing set of files as a cloud endpoint to a sync group, the existing files are merged with any other files that are already on other endpoints in the sync group.

Box 2: No -

Box 3: Yes -

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-planning>

Question 121 (Question Set 3)

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Kind	Performance	Replication	Access tier
storage1	Storage (general purpose v1)	Premium	Geo-redundant storage (GRS)	None
storage2	StorageV2 (general purpose v2)	Standard	Locally-redundant storage (LRS)	Cool
storage3	StorageV2 (general purpose v2)	Premium	Read-access geo-redundant storage (RA-GRS)	Hot
storage4	BlobStorage	Standard	Locally-redundant storage (LRS)	Hot

You need to identify which storage account can be converted to zone-redundant storage (ZRS) replication by requesting a live migration from Azure support.

What should you identify?

- A. storage1
- B. storage2
- C. storage3
- D. storage4

Answer : B

Explanation:

ZRS currently supports standard general-purpose v2, FileStorage and BlockBlobStorage storage account types.

Incorrect Answers:

A. not C: Live migration is supported only for storage accounts that use LRS replication. If your account uses GRS or RA-GRS, then you need to first change your account's replication type to LRS before proceeding. This intermediary step removes the secondary endpoint provided by GRS/RA-GRS.

Also, only standard storage account types support live migration. Premium storage accounts must be migrated manually.

D: ZRS currently supports standard general-purpose v2, FileStorage and BlockBlobStorage storage account types.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs>

Question 122 (Question Set 3)

You have an Azure subscription that contains a storage account named account1.

You plan to upload the disk files of a virtual machine to account1 from your on-premises network. The on-premises network uses a public IP address space of 131.107.1.0/24.

You plan to use the disk files to provision an Azure virtual machine named VM1. VM1 will be attached to a virtual network named VNet1. VNet1 uses an IP address space of 192.168.0.0/24.

You need to configure account1 to meet the following requirements:

- ☞ Ensure that you can upload the disk files to account1.
- ☞ Ensure that you can attach the disks to VM1.
- ☞ Prevent all other access to account1.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. From the Networking blade of account1, select Selected networks.
- B. From the Networking blade of account1, select Allow trusted Microsoft services to access this storage account.
- C. From the Networking blade of account1, add the 131.107.1.0/24 IP address range.
- D. From the Networking blade of account1, add VNet1.
- E. From the Service endpoints blade of VNet1, add a service endpoint.

Answer : AE

Explanation:

A: By default, storage accounts accept connections from clients on any network. To limit access to selected networks, you must first change the default action.

Azure portal -

1. Navigate to the storage account you want to secure.
2. Click on the settings menu called Firewalls and virtual networks.
3. To deny access by default, choose to allow access from 'Selected networks'. To allow traffic from all networks, choose to allow access from 'All networks'.
4. Click Save to apply your changes.

E: Grant access from a Virtual Network

Storage accounts can be configured to allow access only from specific Azure Virtual Networks. By enabling a Service Endpoint for Azure Storage within the Virtual Network, traffic is ensured an optimal route to the Azure Storage service. The identities of the virtual network and the subnet are also transmitted with each request.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-network-security>

Question 123 (Question Set 3)

DRAG DROP -

You have an on-premises file server named Server1 that runs Windows Server 2016.

You have an Azure subscription that contains an Azure file share.

You deploy an Azure File Sync Storage Sync Service, and you create a sync group.

You need to synchronize files from Server1 to Azure.
 Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
 Select and Place:

Actions	Answer Area
Install the Azure File Sync agent on Server1	
Create an Azure on-premises data gateway	
Create a Recovery Services vault	>
Register Server1	<
Add a server endpoint	
Install the DFS Replication server role on Server1	

Answer :

Actions	Answer Area
Install the Azure File Sync agent on Server1	Install the Azure File Sync agent on Server1
Create an Azure on-premises data gateway	Register Server1
Create a Recovery Services vault	>
Register Server1	<
Add a server endpoint	Add a server endpoint
Install the DFS Replication server role on Server1	^

Explanation:

Step 1: Install the Azure File Sync agent on Server1

The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share

Step 2: Register Server1.

Register Windows Server with Storage Sync Service

Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.

Step 3: Add a server endpoint -

Create a sync group and a cloud endpoint.

A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide>

Question 124 (Question Set 3)



HOTSPOT -

You plan to create an Azure Storage account in the Azure region of East US 2.

You need to create a storage account that meets the following requirements:

Replicates synchronously.

Remains available if a single data center in the region fails.

How should you configure the storage account? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Replication:

Geo-redundant storage (GRS)
Locally-redundant storage (LRS)
Read-access geo-redundant storage (RA GRS)
Zone-redundant storage (ZRS)

Account type:

Blob storage
Storage (general purpose v1)
StorageV2 (general purpose v2)

Answer :

Answer Area

Replication:

Geo-redundant storage (GRS)
Locally-redundant storage (LRS)
Read-access geo-redundant storage (RA GRS)
Zone-redundant storage (ZRS)

Account type:

Blob storage
Storage (general purpose v1)
StorageV2 (general purpose v2)

Explanation:

Box 1: Zone-redundant storage (ZRS)

Zone-redundant storage (ZRS) replicates your data synchronously across three storage clusters in a single region.

LRS would not remain available if a data center in the region fails

GRS and RA GRS use asynchronous replication.

Box 2: StorageV2 (general purpose V2)

ZRS only support GPv2.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy> <https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy-zrs>

Question 125 (Question Set 3)



You plan to use the Azure Import/Export service to copy files to a storage account.

Which two files should you create before you prepare the drives for the import job? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. an XML manifest file
- B. a dataset CSV file
- C. a JSON configuration file
- D. a PowerShell PS1 file
- E. a driveset CSV file

Answer : BE

Explanation:

B: Modify the dataset.csv file in the root folder where the tool resides. Depending on whether you want to import a file or folder or both, add entries in the dataset.csv file

E: Modify the driveset.csv file in the root folder where the tool resides.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-data-to-files>

Question 126 (Question Set 3)



You have a Recovery Service vault that you use to test backups. The test backups contain two protected virtual machines.

You need to delete the Recovery Services vault.

What should you do first?

- A. From the Recovery Service vault, delete the backup data.
- B. Modify the disaster recovery properties of each virtual machine.
- C. Modify the locks of each virtual machine.
- D. From the Recovery Service vault, stop the backup of each backup item.

Answer : D

Explanation:

You can't delete a Recovery Services vault if it is registered to a server and holds backup data. If you try to delete a vault, but can't, the vault is still configured to receive backup data.

Remove vault dependencies and delete vault

In the vault dashboard menu, scroll down to the Protected Items section, and click Backup Items. In this menu, you can stop and delete Azure File Servers, SQL

Servers in Azure VM, and Azure virtual machines.

The screenshot shows the 'Recovery Services vault' dashboard. On the left, under 'PROTECTED ITEMS', 'Backup items' is selected and highlighted with a red box. Under 'MANAGE', 'Site Recovery Infrastructure' is also highlighted with a red box. The main area displays a table of 'BACKUP MANAGEMENT TYPE' and 'BACKUP ITEM COUNT'. The rows are: 'Azure Storage (Azure Files)' (4), 'Azure Backup Server' (3), 'SQL in Azure VM' (1), 'Azure Backup Agent' (1), and 'Azure Virtual Machine' (1). The 'DPM' row has a count of 0. A 'Refresh' button is at the top of the table.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-delete-vault>

Question 127 (Question Set 3)



HOTSPOT -

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	West US	Not applicable
RG2	Resource group	West US	Not applicable
Vault1	Recovery Services vault	Central US	RG1
Vault2	Recovery Services vault	West US	RG2
VM1	Virtual machine	Central US	RG2
storage1	Storage account	West US	RG1
SQL1	Azure SQL database	East US	RG2

In storage1, you create a blob container named blob1 and a file share named share1.

Which resources can be backed up to Vault1 and Vault2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Can use Vault1 for backups:

VM1 only
VM1 and share1 only
VM1 and SQL1 only
VM1, storage1, and SQL1 only
VM1, blob1, share1, and SQL1

Can use Vault2 for backups:

storage1 only
share1 only
VM1 and share1 only
blob1 and share1 only
storage1 and SQL1 only

Answer :

Answer Area

Can use Vault1 for backups:

VM1 only
VM1 and share1 only
VM1 and SQL1 only
VM1, storage1, and SQL1 only
VM1, blob1, share1, and SQL1

Can use Vault2 for backups:

storage1 only
share1 only
VM1 and share1 only
blob1 and share1 only
storage1 and SQL1 only

Explanation:

Box 1: VM1 only -

VM1 is in the same region as Vault1.

File1 is not in the same region as Vault1.

SQL1 is not in the same region as Vault1.

Blobs cannot be backup up to service vaults.

Note: To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines.

Box 2: Share1 only.

Storage1 is in the same region (West USA) as Vault2. Share1 is in Storage1.

Note: After you select Backup, the Backup pane opens and prompts you to select a storage account from a list of discovered supported storage accounts. They're either associated with this vault or present in the same region as the vault, but not yet associated to any Recovery Services vault.

Question 128 (Question Set 3)



You have an Azure subscription named Subscription1.

You have 5 TB of data that you need to transfer to Subscription1.

You plan to use an Azure Import/Export job.

What can you use as the destination of the imported data?

- A. a virtual machine
- B. an Azure Cosmos DB database
- C. Azure File Storage
- D. the Azure File Sync Storage Sync Service

Answer : C

Explanation:

Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter.

The maximum size of an Azure Files Resource of a file share is 5 TB.

Note:

There are several versions of this question in the exam. The question has two correct answers:

1. Azure File Storage

2. Azure Blob Storage

The question can have other incorrect answer options, including the following:

cso Azure Data Lake Store

cso Azure SQL Database

cso Azure Data Factory

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service>

Question 129 (Question Set 3)



HOTSPOT -

You have an Azure subscription.

You create the Azure Storage account shown in the following exhibit.

Create storage account

Validation passed

Basics Networking Advanced Tags Review + create

Basics

Subscription	Subscription1
Resource group	RG1

Location {Europe} North Europe

Storage account name	storage16852
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Locally-redundant storage (LRS)
Performance	Standard
Access tier (default)	Hot

Networking

Connectivity method	Private endpoint
Private Endpoint	{New} StorageEndpoint1 (blob) (privatelink.blob.core.windows.net)

Advanced

Secure transfer required	Enabled
Large file shares	Disabled
Blob soft delete	Disabled
Blob change feed	Disabled
Hierarchical namespace	Disabled
NFS v3	Disabled

Create < Previous Next >

Download a template for automation

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The minimum number of copies of the storage account will be
[answer choice]

Answer :

1
2
3

Answer Area

The minimum number of copies of the storage account will be
[answer choice]

1
2
3
4

To reduce the cost of infrequently accessed data in the storage account, you must modify the [answer choice] setting

Access tier (default)
Performance
Account kind
Replication

Explanation:

Box 1: 3 - Locally Redundant Storage (LRS) provides highly durable and available storage within a single location (sub region). We maintain an equivalent of 3 copies

(replicas) of your data within the primary location as described in our SOSP paper; this ensures that we can recover from common failures (disk, node, rack) without impacting your storage account's availability and durability.

Box 2: Access tier -

Change the access tier from Hot to Cool.

Note: Azure storage offers different access tiers, which allow you to store blob object data in the most cost-effective manner. The available access tiers include:

Hot - Optimized for storing data that is accessed frequently.

Cool - Optimized for storing data that is infrequently accessed and stored for at least 30 days.

Archive - Optimized for storing data that is rarely accessed and stored for at least 180 days with flexible latency requirements (on the order of hours).

Reference:

<https://azure.microsoft.com/en-us/blog/data-series-introducing-locally-redundant-storage-for-windows-azure-storage/> <https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers>

Question 130 (Question Set 3)

You have an Azure Storage account named storage1.

You plan to use AzCopy to copy data to storage1.

You need to identify the storage services in storage1 to which you can copy the data.

Which storage services should you identify?

- A. blob, file, table, and queue
- B. blob and file only
- C. file and table only
- D. file only
- E. blob, table, and queue only

Answer : B

Explanation:

AzCopy is a command-line utility that you can use to copy blobs or files to or from a storage account.

Incorrect Answers:

A, C, E: AzCopy does not support table and queue storage services.

D: AzCopy supports file storage services, as well as blob storage services.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10>

Question 131 (Question Set 3)**HOTSPOT -**

You have an Azure Storage account named storage1 that uses Azure Blob storage and Azure File storage.

You need to use AzCopy to copy data to the blob storage and file storage in storage1.

Which authentication method should you use for each type of storage? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area**Blob storage:**

Azure Active Directory (Azure AD) only
Shared access signatures (SAS) only
Access keys and shared access signatures (SAS) only
Azure Active Directory (Azure AD) and shared access signatures (SAS) only
Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

File storage:

Azure Active Directory (Azure AD) only
Shared access signatures (SAS) only
Access keys and shared access signatures (SAS) only
Azure Active Directory (Azure AD) and shared access signatures (SAS) only
Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

Answer :

Answer Area

Blob storage:

Azure Active Directory (Azure AD) only
Shared access signatures (SAS) only
Access keys and shared access signatures (SAS) only
Azure Active Directory (Azure AD) and shared access signatures (SAS) only
Azure Active Directory (Azure AD), access keys, and shared access signatures (SAS)

File storage:

Azure Active Directory (Azure AD) only

Question 132 (Question Set 3)



You have an Azure subscription that contains an Azure Storage account. You plan to create an Azure container instance named container1 that will use a Docker image named Image1. Image1 contains a Microsoft SQL Server instance that requires persistent storage. You need to configure a storage service for Container1. What should you use?

- A. Azure Files
- B. Azure Blob storage
- C. Azure Queue storage
- D. Azure Table storage

Answer : A

Reference:

<https://azure.microsoft.com/en-us/blog/persistent-docker-volumes-with-azure-file-storage/> <https://docs.microsoft.com/en-us/azure/aks/concepts-storage>

Question 133 (Question Set 3)



You have an app named App1 that runs on two Azure virtual machines named VM1 and VM2. You plan to implement an Azure Availability Set for App1. The solution must ensure that App1 is available during planned maintenance of the hardware hosting VM1 and VM2. What should you include in the Availability Set?

- A. one update domain
- B. two fault domains
- C. one fault domain
- D. two update domains

Answer : D

Explanation:

Microsoft updates, which Microsoft refers to as planned maintenance events, sometimes require that VMs be rebooted to complete the update. To reduce the impact on VMs, the Azure fabric is divided into update domains to ensure that not all VMs are rebooted at the same time.

Incorrect Answers:

A: An update domain is a group of VMs and underlying physical hardware that can be rebooted at the same time.

B, C: A fault domain shares common storage as well as a common power source and network switch. It is used to protect against unplanned system failure.

References:

<https://petri.com/understanding-azure-availability-sets>

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/tutorial-availability-sets>

Question 134 (Question Set 3)



You have an Azure subscription named Subscription1. You have 5 TB of data that you need to transfer to Subscription1. You plan to use an Azure Import/Export job. What can you use as the destination of the imported data?

- A. an Azure Cosmos DB database
- B. Azure Blob storage
- C. Azure Data Lake Store
- D. the Azure File Sync Storage Sync Service

Answer : B

Explanation:

Azure Import/Export service is used to securely import large amounts of data to Azure Blob storage and Azure Files by shipping disk drives to an Azure datacenter.

Note:

There are several versions of this question in the exam. The question has two correct answers:

1. Azure File Storage

2. Azure Blob Storage

The question can have other incorrect answer options, including the following:

- a virtual machine
- Azure SQL Database
- Azure Data Factory

Reference:
<https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-service>

Question 135 (Question Set 3)



DRAG DROP -

You have an Azure subscription that contains an Azure file share.
You have an on-premises server named Server1 that runs Windows Server 2016.
You plan to set up Azure File Sync between Server1 and the Azure file share.
You need to prepare the subscription for the planned Azure File Sync.
Which two actions should you perform in the Azure subscription? To answer, drag the appropriate actions to the correct targets. Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Actions

- Create a Storage Sync Service
- Install the Azure File Sync agent
- Create a sync group
- Run Server Registration

Answer Area

First action:

Action

Second action:

Action

Answer :

Actions

-
-
- Create a sync group
- Run Server Registration

Answer Area

First action:

Create a Storage Sync Service

Second action:

Install the Azure File Sync agent

Explanation:

First action: Create a Storage Sync Service
The deployment of Azure File Sync starts with placing a Storage Sync Service resource into a resource group of your selected subscription.
Second action: Install the Azure File Sync agent
The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share.
Reference:
<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide>

Question 136 (Question Set 3)



HOTSPOT -
You have an Azure subscription that contains the file shares shown in the following table.

Name	Location
share1	West US
share2	West US
share3	East US

You have the on-premises file shares shown in the following table.

Name	Server	Path
data1	Server1	D:\Folder1
data2	Server2	E:\Folder2
data3	Server3	E:\Folder2

You create an Azure file sync group named Sync1 and perform the following actions:

- ⇒ Add share1 as the cloud endpoint for Sync1.
- ⇒ Add data1 as a server endpoint for Sync1.
- ⇒ Register Server1 and Server2 to Sync1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can add share3 as an additional cloud endpoint for Sync1.	<input type="radio"/>	<input type="radio"/>
You can add data2 as an additional server endpoint for Sync1.	<input type="radio"/>	<input type="radio"/>
You can add data3 as an additional server endpoint for Sync1.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
You can add share3 as an additional cloud endpoint for Sync1.	<input type="radio"/>	<input checked="" type="radio"/>
You can add data2 as an additional server endpoint for Sync1.	<input checked="" type="radio"/>	<input type="radio"/>
You can add data3 as an additional server endpoint for Sync1.	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

Box 1: No -
A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints.

Box 2: Yes -
Data2 is located on Server2 which is registered to Sync1.

Box 3: No -
Data3 is located on Server3 which is not registered to Sync1.

Reference:
<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide?tabs=azure-portal%2Cproactive-portal#create-a-sync-group-and-a-cloud-endpoint>

Question 137 (Question Set 3)



HOTSPOT -
You have an Azure subscription named Subscription1 that contains the resources shown in the following table:

Name	Type	Location	Resource group
RG1	Resource group	East US	Not applicable
RG2	Resource group	West US	Not applicable
Vault1	Recovery Services vault	West Europe	RG1
storage1	Storage account	East US	RG2
storage2	Storage account	West US	RG1
storage3	Storage account	West Europe	RG2
Analytics1	Log Analytics workspace	East US	RG1
Analytics2	Log Analytics workspace	West US	RG2
Analytics3	Log Analytics workspace	West Europe	RG1

You plan to configure Azure Backup reports for Vault1.

You are configuring the Diagnostics settings for the AzureBackupReports log.

Which storage accounts and which Log Analytics workspaces can you use for the Azure Backup reports of Vault1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Storage accounts:

storage1 only
storage2 only
storage3 only
storage1, storage2, and storage3

Log Analytics workspaces:

Analytics1 only
Analytics2 only
Analytics3 only
Analytics1, Analytics2, and Analytics3

Answer :

Answer Area

Storage accounts:

storage1 only
storage2 only
storage3 only
storage1, storage2, and storage3

Log Analytics workspaces:

Analytics1 only
Analytics2 only
Analytics3 only
Analytics1, Analytics2, and Analytics3

Explanation:

Box 1: storage1, storage2, and storage3

The location and subscription where this Log Analytics workspace can be created is independent of the location and subscription where your vaults exist.

Box 2: Analytics3 -

Vault1 and Analytics3 are both in West Europe.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-configure-reports>

Question 138 (Question Set 3)



HOTSPOT -

You have an Azure subscription that contains the storage accounts shown in the following exhibit.

Storage accounts

Default Directory

[+ Add](#) [Manage view](#) [Refresh](#) [Export to CSV](#) [Assign tags](#) [Delete](#) [Feedback](#) Filter by name...

Subscription == all

Resource group == all

Location == all

[+ Add filter](#)

Showing 1 to 4 of 4 records.

<input type="checkbox"/>	Name 	Type 	Kind 	Resource group 	Location 
<input type="checkbox"/>	contoso101	Storage account	StorageV2	RG1	East US
<input type="checkbox"/>	contoso102	Storage account	Storage	RG1	East US
<input type="checkbox"/>	contoso103	Storage account	BlobStorage	RG1	East US
<input type="checkbox"/>	contoso104	Storage account	FileStorage	RG1	East US

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can create a premium file share in

contoso101only
contoso104 only
contoso101 or contoso104 only
contoso101, contoso102, or contoso104 only
contoso101, contoso102, contoso103, or contoso104

Answer :

Answer Area

You can create a premium file share in

contoso101only
contoso104 only
contoso101 or contoso104 only
contoso101, contoso102, or contoso104 only
contoso101, contoso102, contoso103, or contoso104

You can use the Archive access tier in

contoso101only
contoso101 or contoso103 only
contoso101, contoso102, and contoso103 only
contoso101, contoso102, and contoso104 only
contoso101, contoso102, contoso103, and contoso104

Explanation:

Box 1: contoso104 only -

Premium file shares are hosted in a special purpose storage account kind, called a FileStorage account.

Box 2: contoso101, contoso102, and contoso103 only

Reference:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-create-premium-fileshare?tabs=azure-portal> <https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers>Question 139 (Question Set 3) 

HOTSPOT -

You have an Azure subscription named Subscription1.

In Subscription1, you create an Azure file share named share1.

You create a shared access signature (SAS) named SAS1 as shown in the following exhibit:

Allowed services ⓘ

Blob File Queue Table

Allowed resource types ⓘ

Service Container Object

Allowed permissions ⓘ

Read Write Delete List Add Create Update Process

Start and expiry date/time ⓘ

Start
2018-09-01 2:00:00 PM

End
2018-09-14 2:00:00 PM

(UTC+02:00) --- Current Timezone ---

Allowed IP addresses ⓘ

193.77.134.10-193.77.134.50

Allowed protocols ⓘ

HTTPS only HTTPS and HTTP

Signing key ⓘ

key1

Generate SAS and connection string

To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connect to the storage account, you [answer choice].

If on September 10, 2018, you run the net use command on a computer that has an IP address of

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connect to the storage account, you [answer choice].

If on September 10, 2018, you run the net use command on a computer that has an IP address of 193.77.134.50, and you use SAS1 as the password to connect to share1, you [answer choice].

will be prompted for credentials
will have no access
will have read, write, and list access
will have read-only access

--

will be prompted for credentials
will have no access
will have read, write, and list access
will have read-only access

will be prompted for credentials
will have no access
will have read, write, and list access
will have read-only access

Explanation:

Box 1: Will have no access -

The IP 193.77.134.1 does not have access on the SAS.
Box 2: Will have read, write, and list access
The net use command is used to connect to file shares.
Reference:
<https://docs.microsoft.com/en-us/azure/storage/common/storage-dotnet-shared-access-signature-part-1> <https://docs.microsoft.com/en-us/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows>

Question 140 (Question Set 3)



You have two Azure virtual machines named VM1 and VM2. You have two Recovery Services vaults named RSV1 and RSV2. VM2 is backed up to RSV1. You need to back up VM2 to RSV2. What should you do first?

- A. From the RSV1 blade, click Backup items and stop the VM2 backup
- B. From the RSV2 blade, click Backup. From the Backup blade, select the backup for the virtual machine, and then click Backup
- C. From the VM2 blade, click Disaster recovery, click Replication settings, and then select RSV2 as the Recovery Services vault
- D. From the RSV1 blade, click Backup Jobs and export the VM2 job

Answer : C

Reference:
<https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm>

Question 141 (Question Set 3)



You have a general-purpose v1 Azure Storage account named storage1 that uses locally-redundant storage (LRS). You need to ensure that the data in the storage account is protected if a zone fails. The solution must minimize costs and administrative effort. What should you do first?

- A. Create a new storage account.
- B. Configure object replication rules.
- C. Upgrade the account to general-purpose v2.
- D. Modify the Replication setting of storage1.

Answer : C

Reference:
<https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy>

Question 142 (Question Set 3)



You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Type	Performance
storage1	StorageV2	Standard
storage2	BlobStorage	Standard
storage3	BlockBlobStorage	Premium
storage4	FileStorage	Premium

You plan to manage the data stored in the accounts by using lifecycle management rules.

To which storage accounts can you apply lifecycle management rules?

- A. storage1 only
- B. storage1 and storage2 only
- C. storage3 and storage4 only
- D. storage1, storage2, and storage3 only
- E. storage1, storage2, storage3, and storage4

Answer : D

Reference:
<https://docs.microsoft.com/en-us/azure/storage/blobs/storage-lifecycle-management-concepts?tabs=azure-portal>

Question 143 (Question Set 3)



You create an Azure Storage account named contosostorage. You plan to create a file share named data. Users need to map a drive to the data file share from home computers that run Windows 10. Which outbound port should you open between the home computers and the data file share?

- A. 80
- B. 443

C. 445
D. 3389

Answer : C

Explanation:
Server Message Block (SMB) is used to connect to an Azure file share over the internet. The SMB protocol requires TCP port 445 to be open.

Incorrect Answers:

- A: Port 80 is required for HTTP to a web server
- B: Port 443 is required for HTTPS to a web server
- D: Port 3389443 is required for Remote desktop protocol (RDP) connections

Reference:
<https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files-windows>

Question 144 (Question Set 3)



You have an Azure subscription named Subscription1.
You have 5 TB of data that you need to transfer to Subscription1.
You plan to use an Azure Import/Export job.
What can you use as the destination of the imported data?

- A. Azure File Storage
- B. an Azure Cosmos DB database
- C. Azure Data Factory
- D. Azure SQL Database

Answer : A

Reference:
<https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-service>

Question 145 (Question Set 3)



HOTSPOT -
You have an Azure subscription that contains an Azure Storage account named storageaccount1.
You export storageaccount1 as an Azure Resource Manager template. The template contains the following sections.

```
{
  "type": "Microsoft.Storage/storageAccount",
  "apiVersion": "2019-06-01",
  "name": "storageaccount1",
  "location": "eastus",
  "sku": {
    "name": "Standard_LRS",
    "tier": "Standard"
  },
  "kind": "StorageV2",
  "properties": {
    "networkAcls": {
      "bypass": "AzureServices",
      "virtualNetworkRules": [],
      "ipRules": [],
      "defaultAction": "Allow",
    },
    "supportsHttpsTrafficOnly": true,
    "encryption": {
      "services": {
        "file": {
          "keyType": "Account",
          "enabled": true
        }
      }
    }
  }
}
```

Answer :

Answer Area

Statements	Yes	No
------------	-----	----

A server that has a public IP address of 131.107.103.10 can access storageaccount1

Individual blobs in storageaccount1 can be set to use the archive tier

Global administrations in Azure Active Directory (Azure AD) can access a file share hosted in storageaccount1 by using their Azure AD credentials

Statements	Yes	No
------------	-----	----

Reference:
<https://docs.microsoft.com/en-us/azure/templates/microsoft.storage/storageaccounts?tabs=json>

~~A server that has a public IP address of 131.107.103.10 can access storageaccount1~~

Question 146 (Question Set 3) 

You have an Azure subscription that contains a storage account named storage1.
 You have the devices shown in the following table.

Name	Platform
Device1	Windows 10
Device2	Linux
Device3	macOS

From which devices can you use AzCopy to copy data to storage1?

- A. Device 1 only
- B. Device1, Device2 and Device3
- C. Device1 and Device2 only
- D. Device1 and Device3 only

Answer : B

Question 147 (Question Set 3) 

You have an Azure Storage account named storage1 that contains a blob container named container1. You need to prevent new content added to container1 from being modified for one year. What should you configure?

- A. the access tier
- B. an access policy
- C. the Access control (IAM) settings
- D. the access level

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/storage/blobs/immutable-storage-overview?tabs=azure-portal>

Question 148 (Question Set 3) 

HOTSPOT -
 You have an Azure Storage account named storage1 that contains a blob container. The blob container has a default access tier of Hot. Storage1 contains a container named container1. You create lifecycle management rules in storage1 as shown in the following table.

Name	Rule scope	Blob type	Blob subtype	Rule block	Prefix match
Rule1	Limit blobs by using filters.	Block blobs	Base blobs	If base blobs were not modified for two days, move to archive storage. If base blobs were not modified for nine days, delete the blob.	container1/Dep1
Rule2	Apply to all blobs in storage1.	Block blobs	Base blobs	If base blobs were not modified for three days, move to cool storage. If base blobs were not modified for nine days, move to archive storage.	Not applicable

You perform the actions shown in the following table.

Date	Action
October 1	Upload three files named Dep1File1.docx, File2.docx, and File3.docx to container 1.
October 2	Edit Dep1File1.docx and File3.docx.
October 5	Edit File2.docx.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On October 10, you can read Dep1File1.docx.	<input type="radio"/>	<input type="radio"/>
On October 10, you can read File2.docx.	<input type="radio"/>	<input type="radio"/>
On October 10, you can read File3.docx.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements

Yes No

On October 10, you can read Dep1File1.docx.

On October 10, you can read File2.docx.

Question 149 (Question Set 3)

You are configuring Azure Active Directory (Azure AD) authentication for an Azure Storage account named storage1. You need to ensure that the members of a group named Group1 can upload files by using the Azure portal. The solution must use the principle of least privilege. Which two roles should you configure for storage1? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Storage Account Contributor
- B. Storage Blob Data Contributor
- C. Reader
- D. Contributor
- E. Storage Blob Data Reader

Answer : BC

Explanation:

To access blob data in the Azure portal with Azure AD credentials, a user must have the following role assignments:

* A data access role, such as Storage Blob Data Reader or Storage Blob Data Contributor

* The Azure Resource Manager Reader role, at a minimum

The Reader role is an Azure Resource Manager role that permits users to view storage account resources, but not modify them. It does not provide read permissions to data in Azure Storage, but only to account management resources. The Reader role is necessary so that users can navigate to blob containers in the Azure portal.

Note: in order from least to greatest permissions:

The Reader and Data Access role -
The Storage Account Contributor role
The Azure Resource Manager Contributor role
The Azure Resource Manager Owner role

Reference:

<https://docs.microsoft.com/en-us/azure/storage/blobs/assign-azure-role-data-access>

Question 150 (Question Set 3)

HOTSPOT -

You have an Azure Storage account named storage1 that stores images.

You need to create a new storage account and replicate the images in storage1 to the new account by using object replication.

How should you configure the new account? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Account type:

StorageV2 only
StorageV2 or FileStorage only
StorageV2 or BlobStorage only
StorageV2, BlobStorage, or FileStorage

Object type to create in the new account:

Container
File share
Table
Queue

Answer :

Answer Area

Account type:

StorageV2 only
StorageV2 or FileStorage only
StorageV2 or BlobStorage only
StorageV2, BlobStorage, or FileStorage

Object type to create in the new account:

Container
File share
Table
Queue

Question 151 (Question Set 3)



You have an on-premises server that contains a folder named D:\Folder1.
You need to copy the contents of D:\Folder1 to the public container in an Azure Storage account named contosodata.
Which command should you run?

- A. <https://contosodata.blob.core.windows.net/public>
- B. azcopy sync D:\Folder1 https://contosodata.blob.core.windows.net/public --snapshot
- C. azcopy copy D:\Folder1 https://contosodata.blob.core.windows.net/public --recursive
- D. az storage blob copy start-batch D:\Folder1 https://contosodata.blob.core.windows.net/public

Answer : C

Explanation:

The azcopy copy command copies a directory (and all of the files in that directory) to a blob container. The result is a directory in the container by the same name.

Incorrect Answers:

- B: The azcopy sync command replicates the source location to the destination location. However, the file is skipped if the last modified time in the destination is more recent.
- D: The az storage blob copy start-batch command copies multiple blobs to a blob container.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-blobs> <https://docs.microsoft.com/en-us/azure/storage/common/storage-ref-azcopy-copy>

Question 152 (Question Set 3)



You have an Azure subscription.

In the Azure portal, you plan to create a storage account named storage1 that will have the following settings:

- ☞ Performance: Standard
- ☞ Replication: Zone-redundant storage (ZRS)
- ☞ Access tier (default): Cool
- ☞ Hierarchical namespace: Disabled

You need to ensure that you can set Account kind for storage1 to BlockBlobStorage.

Which setting should you modify first?

- A. Performance
- B. Replication
- C. Access tier (default)
- D. Hierarchical namespace

Answer : A

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview> <https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-performance-tiers>

Question 153 (Question Set 3)



DRAG DROP -

You have an Azure subscription that contains the storage accounts shown in the following table.

Name	Azure Active Directory (Azure AD) authentication	Contents
storage1	Enabled	A blob container named container1 that has a public access level of No public access
storage2	Enabled	A file share named share1

You plan to use AzCopy to copy a blob from container1 directly to share1.

You need to identify which authentication method to use when you use AzCopy.

What should you identify for each account? To answer, drag the appropriate authentication methods to the correct accounts. Each method may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Methods

OAuth

Anonymous

A storage account access key

A shared access signature (SAS) token

Answer Area

storage1: Method

storage2: Method

Answer :

Methods

OAuth

Anonymous

A storage account access key

A shared access signature (SAS) token

Answer Area

storage1: A shared access signature (SAS) token

storage2: A shared access signature (SAS) token

Explanation:

Box 1: A shared access signature (SAS) token.

You can provide authorization credentials by using Azure Active Directory (AD), or by using a Shared Access Signature (SAS) token.

For Blob storage you can use Azure AD & SAS.

Note: In the current release, if you plan to copy blobs between storage accounts, you'll have to append a SAS token to each source URL. You can omit the SAS token only from the destination URL.

Box 2: A shared access signature (SAS) token.

For File storage you can only use SAS.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-use-azcopy-v10>

Question 154 (Question Set 3)



You create an Azure Storage account.

You plan to add 10 blob containers to the storage account.

For one of the containers, you need to use a different key to encrypt data at rest.

What should you do before you create the container?

- A. Generate a shared access signature (SAS).
- B. Modify the minimum TLS version.
- C. Rotate the access keys.
- D. Create an encryption scope.

Answer : D

Explanation:

Encryption scopes enable you to manage encryption with a key that is scoped to a container or an individual blob. You can use encryption scopes to create secure boundaries between data that resides in the same storage account but belongs to different customers.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview>

Question 155 (Testlet 3)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market.

Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

▪

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.

Use unmanaged standard storage for the hard disks of the virtual machines.

Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.

Designate a new user named Admin1 as the service admin for the Azure subscription.

Admin1 must receive email alerts regarding service outages.

Ensure that a new user named User3 can create network objects for the Azure subscription.

You need to implement a backup solution for App1 after the application is moved.

What should you create first?

A. a recovery plan

B. an Azure Backup Server

C. a backup policy

D. a Recovery Services vault

Answer : D

Explanation:

A Recovery Services vault is a logical container that stores the backup data for each protected resource, such as Azure VMs. When the backup job for a protected resource runs, it creates a recovery point inside the Recovery Services vault.

Scenario:

There are three application tiers, each with five virtual machines.

Move all the virtual machines for App1 to Azure.

Ensure that all the virtual machines for App1 are protected by backups.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/quick-backup-vm-portal>

Question 156 (Testlet 3)**Case study -**

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam.

You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market. Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

▪

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -**Planned Changes -**

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.

Use unmanaged standard storage for the hard disks of the virtual machines.

Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.

Designate a new user named Admin1 as the service admin for the Azure subscription.

Admin1 must receive email alerts regarding service outages.

Ensure that a new user named User3 can create network objects for the Azure subscription.

You need to move the blueprint files to Azure.

What should you do?

- A. Generate an access key, Map a drive, and then copy the files by using File Explorer.
- B. Use Azure Storage Explorer to copy the files.
- C. Use the Azure Import/Export service.
- D. Generate a shared access signature (SAS). Map a drive, and then copy the files by using File Explorer.

Answer : B

Explanation:

Azure Storage Explorer is a free tool from Microsoft that allows you to work with Azure Storage data on Windows, macOS, and Linux. You can use it to upload and download data from Azure blob storage.

Scenario:

Planned Changes include: move the existing product blueprint files to Azure Blob storage.

Technical Requirements include: Copy the blueprint files to Azure over the Internet.

Reference:

<https://docs.microsoft.com/en-us/azure/machine-learning/team-data-science-process/move-data-to-azure-blob-using-azure-storage-explorer>

Question 157 (Testlet 3)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided. To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study. At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market. Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

▪

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.

Use unmanaged standard storage for the hard disks of the virtual machines.

Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.

Designate a new user named Admin1 as the service admin for the Azure subscription.

Admin1 must receive email alerts regarding service outages.

Ensure that a new user named User3 can create network objects for the Azure subscription.

HOTSPOT -

You need to identify the storage requirements for Contoso.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
------------	-----	----

Contoso requires a storage account that supports Blob storage.

Contoso requires a storage account that supports Azure Table storage.

Answer :

Contoso requires a storage account that supports Azure File

Answer Area

Statements	Yes	No
------------	-----	----

Contoso requires a storage account that supports Blob storage.

Contoso requires a storage account that supports Azure Table storage.

Contoso requires a storage account that supports Azure File Storage.

Explanation:

Box 1: Yes -

Contoso is moving the existing product blueprint files to Azure Blob storage.

Use unmanaged standard storage for the hard disks of the virtual machines. We use Page Blobs for these.

Box 2: No -

Box 3: No -

Question 158 (Testlet 4)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant. The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

HOTSPOT -

You need to create container1 and share1.

Which storage accounts should you use for each resource? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

container1:

- storage2 only
- storage2 and storage3 only
- storage1, storage2, and storage3 only
- storage2, storage3, and storage4 only
- storage1, storage2, storage3, and storage4

share1:

- storage2 only
- storage4 only
- storage2 and storage4 only
- storage1, storage2, and storage4 only
- storage1, storage2, storage3, and storage4

Answer :

Answer Area

container1:

- storage2 only
- storage2 and storage3 only
- storage1, storage2, and storage3 only
- storage2, storage3, and storage4 only
- storage1, storage2, storage3, and storage4

share1:

- storage2 only
- storage4 only
- storage2 and storage4 only
- storage1, storage2, and storage4 only
- storage1, storage2, storage3, and storage4

Reference:

<https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-storage-tiers> <https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview>

Question 159 (Testlet 4)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam.

You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant. The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

HOTSPOT -

You need to create storage5. The solution must support the planned changes.

Which type of storage account should you use, and which account should you configure as the destination storage account? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Account kind:

BlobStorage
BlockBlobStorage
Storage (general purpose v1)
StorageV2 (general purpose v2)

Destination:

Storage1
Storage2
Storage3
Storage4

Answer :

Answer Area

Account kind:

BlobStorage
BlockBlobStorage
Storage (general purpose v1)
StorageV2 (general purpose v2)

Destination:

Storage1
Storage2
Storage3
Storage4

Reference:

<https://docs.microsoft.com/en-us/azure/storage/blobs/object-replication-configure?tabs=portal>

Question 160 (Testlet 4)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.
The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

You need to identify which storage account to use for the flow logging of IP traffic from VM5. The solution must meet the retention requirements.

Which storage account should you identify?

- A. storage1
- B. storage2
- C. storage3
- D. storage4

Answer : C

Explanation:

We use the BlobStorage account storage3 for retention.

Storage lifecycle management offers a rule-based policy that you can use to transition blob data to the appropriate access tiers or to expire data at the end of the data lifecycle.

Note: Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Reference:

<https://docs.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview> <https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-overview>

Question 161 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.

You need to deploy a YAML file to AKS1.

Solution: From Azure CLI, you run az aks.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Reference:

<https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough>

Question 162 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.

You need to deploy a YAML file to AKS1.

Solution: From Azure CLI, you run the kubectl client.
Does this meet the goal?

- A. Yes
B. No

Answer : A

Reference:
<https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough>

Question 163 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have

more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.

You need to deploy a YAML file to AKS1.

Solution: From Azure CLI, you run azcopy.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough>

Question 164 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1 that runs Windows Server 2016.

You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.

Solution: You create an Azure storage account and configure shared access signatures (SASs). You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the storage account as the source.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Explanation:
Instead: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.

Reference:
<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview>

Question 165 (Question Set 4)



HOTSPOT -
You have an Azure subscription named Subscription1. Subscription1 contains the resources in the following table.

Name	Type
RG1	Resource group
RG2	Resource group
VNet1	Virtual network
VNet2	Virtual network

VNet1 is in RG1. VNet2 is in RG2. There is no connectivity between VNet1 and VNet2.

An administrator named Admin1 creates an Azure virtual machine named VM1 in RG1. VM1 uses a disk named Disk1 and connects to VNet1. Admin1 then installs a custom application in VM1.

You need to move the custom application to VNet2. The solution must minimize administrative effort.

Which two actions should you perform? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

First action:

- Create a network interface in RG2.
Detach a network interface.
Delete VM1.
Move a network interface to RG2.

Second action:

- Attach a network interface.
Create a network interface in RG2.
Create a new virtual machine.
Move VM1 to RG2.

Answer :

Answer Area

First action:

- Create a network interface in RG2.
Detach a network interface.
Delete VM1.
Move a network interface to RG2.

Second action:

- Attach a network interface.
Create a network interface in RG2.
Create a new virtual machine.
Move VM1 to RG2.

Explanation:

We cannot just move a virtual machine between networks. What we need to do is identify the disk used by the VM, delete the VM itself while retaining the disk, and recreate the VM in the target virtual network and then attach the original disk to it.

Reference:

<https://blogs.technet.microsoft.com/canitpro/2014/06/16/step-by-step-move-a-vm-to-a-different-vnet-on-azure/> <https://4sysops.com/archives/move-an-azure-vm-to-another-virtual-network-vnet/#migrate-an-azure-vm-between-vnets>

Question 166 (Question Set 4)

You download an Azure Resource Manager template based on an existing virtual machine. The template will be used to deploy 100 virtual machines. You need to modify the template to reference an administrative password. You must prevent the password from being stored in plain text. What should you create to store the password?

- A. an Azure Key Vault and an access policy
- B. an Azure Storage account and an access policy
- C. a Recovery Services vault and a backup policy
- D. Azure Active Directory (AD) Identity Protection and an Azure policy

Answer : A

Explanation:

You can use a template that allows you to deploy a simple Windows VM by retrieving the password that is stored in a Key Vault. Therefore, the password is never put in plain text in the template parameter file.

Reference:

<https://azure.microsoft.com/en-us/resources/templates/101-vm-secure-password/>

Question 167 (Question Set 4)

HOTSPOT -

You have the App Service plans shown in the following table.

Name	Operating system	Location
ASP1	Windows	West US
ASP2	Windows	Central US
ASP3	Linux	West US

You plan to create the Azure web apps shown in the following table.

Name	Runtime stack	Location
WebApp1	.NET Core 3.0	West US
WebApp2	ASP.NET 4.7	West US

You need to identify which App Service plans can be used for the web apps.

What should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

WebApp1:	<input type="checkbox"/> ASP1 only <input type="checkbox"/> ASP3 only <input type="checkbox"/> ASP1 and ASP2 only <input type="checkbox"/> ASP1 and ASP3 only <input checked="" type="checkbox"/> ASP1, ASP2, and ASP3
WebApp2:	<input type="checkbox"/> ASP1 only <input type="checkbox"/> ASP3 only <input type="checkbox"/> ASP1 and ASP2 only <input type="checkbox"/> ASP1 and ASP3 only <input checked="" type="checkbox"/> ASP1, ASP2, and ASP3

Answer :

Answer Area

WebApp1:	<input type="checkbox"/> ASP1 only <input type="checkbox"/> ASP3 only <input type="checkbox"/> ASP1 and ASP2 only <input checked="" type="checkbox"/> ASP1 and ASP3 only <input type="checkbox"/> ASP1, ASP2, and ASP3
WebApp2:	<input checked="" type="checkbox"/> ASP1 only <input type="checkbox"/> ASP3 only <input type="checkbox"/> ASP1 and ASP2 only <input type="checkbox"/> ASP1 and ASP3 only <input type="checkbox"/> ASP1, ASP2, and ASP3

Explanation:

Box 1: ASP1 ASP3 -

ASP1, ASP3: ASP.NET Core apps can be hosted both on Windows or Linux.

Not ASP2: The region in which your app runs is the region of the App Service plan it's in.

Box 2: ASP1 -

ASP.NET apps can be hosted on Windows only.

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/quickstart-dotnetcore?pivots=platform-linux https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage#>

Question 168 (Question Set 4)



HOTSPOT -
You create a virtual machine scale set named Scale1. Scale1 is configured as shown in the following exhibit.

Create a virtual machine scale set

Basics Disks Networking Scaling Management Health Advanced

An Azure virtual machine scale set can automatically increase or decrease the number of VM instances that run your application. This automated and elastic behavior reduces the management overhead to monitor and optimize the performance of your application. [Learn more about VMSS scaling](#)

Instance

Initial instance count *

Scaling

Scaling policy Manual Custom

Minimum number of VMs *

Maximum number of VMs *

Scale out

CPU threshold (%)*

80

Duration in minutes*

5

Number of VMs to increase by*

2

Scale in

CPU threshold (%)*

30

Number of VMs to decrease by*

4

Diagnostic logs

Collect diagnostic logs from Autoscale Disabled Enabled

[Review + create](#)

[< Previous](#)

[Next: Management >](#)

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

If Scale1 is utilized at 85 percent for six minutes after it is deployed, Scale1 will be running [answer choice].

2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

If Scale1 is first utilized at 25 percent for six minutes after it is deployed, and then utilized at 50 percent for six minutes, Scale1 will be running [answer choice].

2 virtual machines
4 virtual machines
6 virtual machines
8 virtual machines
10 virtual machines

Answer :

Answer Area

If Scale1 is utilized at 85 percent for six minutes after it is deployed, Scale1 will be running [answer choice].

2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

If Scale1 is first utilized at 25 percent for six minutes after it is deployed, and then utilized at 50 percent for six minutes, Scale1 will be running [answer choice].

2 virtual machines
4 virtual machines
6 virtual machines
8 virtual machines
10 virtual machines

Explanation:

Question 169 (Question Set 4)

You plan to automate the deployment of a virtual machine scale set that uses the Windows Server 2016 Datacenter image. You need to ensure that when the scale set virtual machines are provisioned, they have web server components installed. Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Upload a configuration script
- B. Create an automation account
- C. Create an Azure policy
- D. Modify the extensionProfile section of the Azure Resource Manager template
- E. Create a new virtual machine scale set in the Azure portal

Answer : DE

Explanation:

Virtual Machine Scale Sets can be used with the Azure Desired State Configuration (DSC) extension handler. Virtual machine scale sets provide a way to deploy and manage large numbers of virtual machines, and can elastically scale in and out in response to load. DSC is used to configure the VMs as they come online so they are running the production software.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-dsc>

Question 170 (Question Set 4)

HOTSPOT - You have an Azure Kubernetes Service (AKS) cluster named AKS1 and a computer named Computer1 that runs Windows 10. Computer1 that has the Azure CLI installed. You need to install the kubectl client on Computer1. Which command should you run? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

az
docker
msiexec.exe
Install-Module

aks
/package
-name
pull

Install-cli

Answer :

Answer Area

az	▼
docker	
msiexec.exe	
Install-Module	

aks	▼
/package	
-name	
pull	

Question 171 (Question Set 4)



DRAG DROP -

You onboard 10 Azure virtual machines to Azure Automation State Configuration.

You need to use Azure Automation State Configuration to manage the ongoing consistency of the virtual machine configurations.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

Actions	Answer Area
Assign tags to the virtual machines	
Check the compliance status of the node	
Compile a configuration into a node configuration	(>)
Upload a configuration to Azure Automation State Configuration	(<)
Create a management group	

Answer :

Actions	Answer Area
Assign tags to the virtual machines	Upload a configuration to Azure Automation State Configuration
Check the compliance status of the node	Compile a configuration into a node configuration
Compile a configuration into a node configuration	(>)
Upload a configuration to Azure Automation State Configuration	(<)
Create a management group	Assign tags to the virtual machines

Explanation:

Step 1: Upload a configuration to Azure Automation State Configuration.

Import the configuration into the Automation account.

Step 2: Compile a configuration into a node configuration.

A DSC configuration defining that state must be compiled into one or more node configurations (MOF document), and placed on the Automation DSC Pull Server.

Step 3: Assign the node configuration

Then: Check the compliance status of the node

Each time Azure Automation State Configuration performs a consistency check on a managed node, the node sends a status report back to the pull server. You can view these reports on the page for that node.

On the blade for an individual report, you can see the following status information for the corresponding consistency check:

The report status :C" whether the node is "Compliant", the configuration "Failed", or the node is "Not Compliant"

Reference:

<https://docs.microsoft.com/en-us/azure/automation/automation-dsc-getting-started>

Question 172 (Question Set 4)

You have an Azure Resource Manager template named Template1 that is used to deploy an Azure virtual machine.
Template1 contains the following text:

```

"location": {
    "type": "String",
    "defaultValue": "eastus",
    "allowedValues": [
        "canadacentral",
        "eastus",
        "westeurope",
        "westus"
    ]
}

```

The variables section in Template1 contains the following text:

```
"location": "westeurope"
```

The resources section in Template1 contains the following text:

```

"type": "Microsoft.Compute/virtualMachines",
"apiVersion": "2018-10-01",
"name": "[variables('vmName')]",
"location": "westeurope",

```

You need to deploy the virtual machine to the West US location by using Template1.

What should you do?

- A. Modify the location in the resources section to westus
- B. Select West US during the deployment
- C. Modify the location in the variables section to westus

Answer : A

Question 173 (Question Set 4)



You create an App Service plan named Plan1 and an Azure web app named webapp1.

You discover that the option to create a staging slot is unavailable.

You need to create a staging slot for Plan1.

What should you do first?

- A. From Plan1, scale up the App Service plan
- B. From webapp1, modify the Application settings
- C. From webapp1, add a custom domain
- D. From Plan1, scale out the App Service plan

Answer : A

Explanation:

The app must be running in the Standard, Premium, or Isolated tier in order for you to enable multiple deployment slots.

If the app isn't already in the Standard, Premium, or Isolated tier, you receive a message that indicates the supported tiers for enabling staged publishing. At this point, you have the option to select Upgrade and go to the Scale tab of your app before continuing.

Scale up: Get more CPU, memory, disk space, and extra features like dedicated virtual machines (VMs), custom domains and certificates, staging slots, autoscaling, and more.

Incorrect:

Scale out: Increase the number of VM instances that run your app. You can scale out to as many as 30 instances

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots> <https://docs.microsoft.com/en-us/azure/app-service/manage-scale-up>

Question 174 (Question Set 4)



You plan to move a distributed on-premises app named App1 to an Azure subscription.

After the planned move, App1 will be hosted on several Azure virtual machines.

You need to ensure that App1 always runs on at least eight virtual machines during planned Azure maintenance.

What should you create?

- A. one virtual machine scale set that has 10 virtual machines instances
- B. one Availability Set that has three fault domains and one update domain
- C. one Availability Set that has 10 update domains and one fault domain
- D. one virtual machine scale set that has 12 virtual machines instances

Answer : C

Explanation:

An update domain is a logical group of underlying hardware that can undergo maintenance or be rebooted at the same time. As you create VMs within an availability set, the Azure platform automatically distributes your VMs across these update domains. This approach ensures that at least one instance of your application always remains running as the Azure platform undergoes periodic maintenance.

Reference:

<http://www.thatlazyadmin.com/azure-fault-update-domains/>

Question 175 (Question Set 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1 that runs Windows Server 2016.
You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.
Solution: You create an event subscription on VM1. You create an alert in Azure Monitor and specify VM1 as the source
Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

Instead: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview>

Question 176 (Question Set 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Overview blade, you move the virtual machine to a different subscription.
Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

You would need to redeploy the VM.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node>

Question 177 (Question Set 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Redeploy blade, you click Redeploy.
Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

When you redeploy a VM, it moves the VM to a new node within the Azure infrastructure and then powers it back on, retaining all your configuration options and associated resources.

References:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node>

Question 178 (Question Set 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.
You receive a notification that VM1 will be affected by maintenance.
You need to move VM1 to a different host immediately.
Solution: From the Update management blade, you click Enable.
Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:
You would need to redeploy the VM.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node>

Question 179 (Question Set 4)



You have an Azure subscription that contains a web app named webapp1. You need to add a custom domain named www.contoso.com to webapp1. What should you do first?

- A. Create a DNS record
- B. Add a connection string.
- C. Upload a certificate.
- D. Stop webapp1.

Answer : A

Explanation:
You can use either a CNAME record or an A record to map a custom DNS name to App Service.
Reference:
<https://docs.microsoft.com/en-us/Azure/app-service/app-service-web-tutorial-custom-domain>

Question 180 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.
You need to connect VM1 to VNET2.
Solution: You move VM1 to RG2, and then you add a new network interface to VM1.
Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:
Instead you should delete VM1. You recreate VM1, and then you add the network interface for VM1.
Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview>

Question 181 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

Answer : A

VM1 connects to VNET1.

You should delete VM1. You recreate VM1, and then you add the network interface for VM1.

Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot

Solution: You delete VM1. You recreate VM1, and then you create a new network interface for VM1 and connect it to VNET2.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview>

A. Yes



Question 182 (Question Set 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.

You need to connect VM1 to VNET2.

Solution: You turn off VM1, and then you add a new network interface to VM1.

Does this meet the goal?

A. Yes
B. No

Answer : B

Explanation:

Instead you should delete VM1. You recreate VM1, and then you add the network interface for VM1.

Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview>

Question 183 (Question Set 4)



HOTSPOT -

You have an Azure subscription named Subscription1 that contains the quotas shown in the following table.

Quota	Location	Usage
Standard BS Family vCPUs	West US	0 of 20
Standard D Family vCPUs	West US	0 of 20
Total Regional vCPUs	West US	0 of 20

You deploy virtual machines to Subscription1 as shown in the following table.

Name	Size	vCPUs	Location	Status
VM1	Standard_B2ms	2	West US	Running
VM2	Standard_B16ms	16	West US	Stopped (Deallocated)

You plan to deploy the virtual machines shown in the following table.

Name	Size	vCPUs
VM3	Standard_B2ms	1
VM4	Standard_D4s_v3	4
VM5	Standard_B16ms	16

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can deploy VM3 to West US.	<input type="radio"/>	<input type="radio"/>
You can deploy VM4 to West US.	<input type="radio"/>	<input type="radio"/>
You can deploy VM5 to West US.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
You can deploy VM3 to West US.	<input checked="" type="radio"/>	<input type="radio"/>
You can deploy VM4 to West US.	<input type="radio"/>	<input checked="" type="radio"/>
You can deploy VM5 to West US.	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

The total regional vCPUs is 20 so that means a maximum total of 20 vCPUs across all the different VM sizes. The deallocated VM with 16 vCPUs counts towards the total. VM20 and VM1 are using 18 of the maximum 20 vCPUs leaving only two vCPUs available.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/quotas>

Question 184 (Question Set 4)



HOTSPOT -
You have an Azure subscription that contains an Azure Availability Set named WEBPROD-AS-USE2 as shown in the following exhibit.

```
PS Azure:> az vm availability-set list --g RG1
[
{
  "id": "/subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/RG1/providers/Microsoft.Compute/availabilitySets/WEBPROD-AS-USE2",
  "location": "eastus2",
  "name": "WEBPROD-AS-USE2",
  "platformFaultDomainCount": 2,
  "platformUpdateDomainCount": 10,
  "proximityPlacementGroup": null,
  "resourceGroup": "RG1",
  "sku": {
    "capacity": null,
    "name": "Aligned",
    "tier": null
  },
  "statuses": null,
  "tags": {},
  "type": "Microsoft.Compute/availabilitySets",
  "virtualMachines": []
}
]
Azure:/
```

You add 14 virtual machines to WEBPROD-AS-USE2.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Answer : When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be [answer choice].

2	▼
---	---

Answer Area

When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be [answer choice].

2	▼
7	
10	
14	

If the server rack in the Azure datacenter that hosts WEBPROD-AS-USE2 experiences a power failure, the maximum number of unavailable virtual machines will be [answer choice].

2	▼
7	
10	
14	

Explanation:

Box 1: 2 -

There are 10 update domains. The 14 VMs are shared across the 10 update domains so four update domains will have two VMs and six update domains will have one VM. Only one update domain is rebooted at a time. Therefore, a maximum of two VMs will be offline.

Box 2: 7 -

There are 2 fault domains. The 14 VMs are shared across the 2 fault domains, so 7 VMs in each fault domain. A rack failure will affect one fault domain so 7 VMs will be offline.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability>

Question 185 (Question Set 4)



You deploy an Azure Kubernetes Service (AKS) cluster named Cluster1 that uses the IP addresses shown in the following table.

IP address	Assigned to
131.107.2.1	Load balancer front end
192.168.10.2	Kubernetes DNS service
172.17.7.1	Docket bridge address
10.0.10.11	Kubernetes cluster node

You need to provide internet users with access to the applications that run in Cluster1.

Which IP address should you include in the DNS record for Cluster1?

- A. 131.107.2.1
- B. 10.0.10.11
- C. 172.17.7.1
- D. 192.168.10.2

Answer : A

Question 186 (Question Set 4)



You have a deployment template named Template1 that is used to deploy 10 Azure web apps.
You need to identify what to deploy before you deploy Template1. The solution must minimize Azure costs.
What should you identify?

- A. five Azure Application Gateways
- B. one App Service plan
- C. 10 App Service plans
- D. one Azure Traffic Manager
- E. one Azure Application Gateway

Answer : B

Explanation:
You create Azure web apps in an App Service plan.

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/overview-hosting-plans>

Question 187 (Question Set 4)



HOTSPOT -

You plan to deploy an Azure container instance by using the following Azure Resource Manager template.

```
{
  "type": "Microsoft.ContainerInstance/containerGroups",
  "apiVersion": "2018-10-01",
  "name": "webprod",
  "location": "westus",
  "properties": {
    "containers": [
      {
        "name": "webprod",
        "properties": {
          "image": "microsoft/iis:nanoServer",
          "ports": [
            {
              "protocol": "TCP",
              "port": 80
            }
          ],
          "environmentVariables": [],
          "resources": {
            "requests": {
              "memoryInGB": 1.5,
              "cpu": 1
            }
          }
        }
      }
    ],
    "restartPolicy": "OnFailure",
    "ipAddress": {
      "ports": [
        {
          "protocol": "TCP",
          "port": 80
        }
      ]
    }
  }
}
```

Answer : 1

Answer Area

Internet users [answer choice].

can connect to the container from any device
cannot connect to the container
can only connect to the container from devices that run Windows

If Internet Information Services (IIS) in the container fail, [answer choice].

the container will restart automatically
the container will only restart manually
the container must be redeployed

Internet users [answer choice].

Question 188 (Question Set 4)

You have an Azure subscription that contains a virtual machine named VM1. VM1 hosts a line-of-business application that is available 24 hours a day. VM1 has one network interface and one managed disk. VM1 uses the D4s v3 size.

You plan to make the following changes to VM1:

- ☞ Change the size to D8s v3.
- ☞ Add a 500-GB managed disk.
- ☞ Add the Puppet Agent extension.
- ☞ Enable Desired State Configuration Management.

Which change will cause downtime for VM1?

- A. Enable Desired State Configuration Management
- B. Add a 500-GB managed disk
- C. Change the size to D8s v3
- D. Add the Puppet Agent extension

Answer : C

Explanation:

While resizing the VM it must be in a stopped state.

Reference:

<https://azure.microsoft.com/en-us/blog/resize-virtual-machines/>

Question 189 (Question Set 4)

You have an app named App1 that runs on an Azure web app named webapp1. The developers at your company upload an update of App1 to a Git repository named Git1. Webapp1 has the deployment slots shown in the following table.

Name	Function
webapp1-prod	Production
webapp1-test	Staging

You need to ensure that the App1 update is tested before the update is made available to users.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Swap the slots
- B. Deploy the App1 update to webapp1-prod, and then test the update
- C. Stop webapp1-prod
- D. Deploy the App1 update to webapp1-test, and then test the update
- E. Stop webapp1-test

Answer : AD

Question 190 (Question Set 4)



You have an Azure subscription named Subscription1 that has the following providers registered:

- Authorization
- Automation
- Resources
- Compute
- KeyVault
- Network
- Storage
- Billing
- Web

Subscription1 contains an Azure virtual machine named VM1 that has the following configurations:

- Private IP address: 10.0.0.4 (dynamic)
- Network security group (NSG): NSG1
- Public IP address: None
- Availability set: AVSet
- Subnet: 10.0.0.0/24
- Managed disks: No
- Location: East US

You need to record all the successful and failed connection attempts to VM1.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Enable Azure Network Watcher in the East US Azure region.
- B. Add an Azure Network Watcher connection monitor.
- C. Register the MicrosoftLogAnalytics provider.
- D. Create an Azure Storage account.
- E. Register the Microsoft.Insights resource provider.
- F. Enable Azure Network Watcher flow logs.

Answer : AEF

Explanation:

You can log network traffic that flows through an NSG with Network Watcher's NSG flow log capability.

- In the Azure portal, enable Network Watcher
- Register Insights provider. NSG flow logging requires the Microsoft.Insights provider.
- Enable NSG flow log. NSG flow log data is written to an Azure Storage account, Subscription1 has storage.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-portal>

Question 191 (Question Set 4)



You need to deploy an Azure virtual machine scale set that contains five instances as quickly as possible.

What should you do?

- A. Deploy five virtual machines. Modify the Availability Zones settings for each virtual machine.
- B. Deploy five virtual machines. Modify the Size setting for each virtual machine.
- C. Deploy one virtual machine scale set that is set to VM (virtual machines) orchestration mode.
- D. Deploy one virtual machine scale set that is set to ScaleSetVM orchestration mode.

Answer : D

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/orchestration-modes>

Question 192 (Question Set 4)



You plan to create the Azure web apps shown in the following table.

Name	Runtime stack
WebApp1	.NET Core 3.1(LTS)
WebApp2	ASP.NET V 4.8
WebApp3	PHP 7.3
WebApp4	Ruby 2.6

What is the minimum number of App Service plans you should create for the web apps?

- A. 1
 - B. 2
 - C. 3
 - D. 4
- Answer : A

Question 193 (Question Set 4)



HOTSPOT -
You have a pay-as-you-go Azure subscription that contains the virtual machines shown in the following table.

Name	Resource group	Daily cost
VM1	RG1	20 euros
VM2	RG2	30 euros

You create the budget shown in the following exhibit.



BUDGET SUMMARY

Name	Budget1
Scope	RG1 (Resource group)
Filters	-
Ammount	1,000.00 EUR
Budget period	Resets billing month
Start date	6/20/2019
End date	6/19/2021

BUDGET ALERTS

Alert conditions	% OF BUDGET	AMOUNT	ACTION GROUP	ACTION GROUP
	50%	€500	AG1	1 Email
	70%	€700	AG2	1 SMS
	100%	€1,000	AG3	1 Azure app
Alert recipients (email)	User1@Contoso.com			

The AG1 action group contains a user named admin@contoso.com only.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

Hot Area:

Answer Area

When the maximum amount in Budget1 is reached, [answer choice].

VM1 and VM2 are turned off
VM1 and VM2 continue to run
VM1 is turned off, and VM2 continues to run

Based on the current usage costs of the virtual machines, [answer choice].

no email notifications will be sent each month
one email notification will be sent each month
two email notifications will be sent each month
three email notifications will be sent each month

Answer :

Answer Area

When the maximum amount in Budget1 is reached, [answer choice].

VM1 and VM2 are turned off
VM1 and VM2 continue to run
VM1 is turned off, and VM2 continues to run

Based on the current usage costs of the virtual machines, [answer choice].

no email notifications will be sent each month
one email notification will be sent each month
two email notifications will be sent each month
three email notifications will be sent each month

Explanation:

Box 1: VM1 and VM2 continue to run

The budget alerts are for Resource Group RG1, which include VM1, but not VM2. However, when the budget thresholds you've created are exceeded, only notifications are triggered. None of your resources are affected and your consumption isn't stopped.

Box 2: one email notification will be sent each month.

Budget alerts for Resource Group RG1, which include VM1, but not VM2. VM1 consumes 20 Euro/day. The 50%, 500 Euro limit, will be reached in 25 days, and an email will be sent.

The 70% and 100% alert conditions will not be reached within a month, and they don't trigger email actions anyway.

Credit alerts: Credit alerts are generated automatically at 90% and at 100% of your Azure credit balance. Whenever an alert is generated, it's reflected in cost alerts and in the email sent to the account owners. 90% and 100% will not be reached though.

Reference:

<https://docs.microsoft.com/en-us/azure/cost-management-billing/costs/cost-mgt-alerts-monitor-usage-spending> <https://docs.microsoft.com/en-gb/azure/cost-management-billing/costs/tutorial-acm-create-budgets>

Question 194 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1.

Solution: From the Subscriptions blade, you select the subscription, and then click Programmatic deployment.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

From the RG1 blade, click Deployments. You see a history of deployment for the resource group.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell>

Question 195 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region
RG1	Resource group	West US
RG2	Resource group	East Asia
storage1	Storage account	West US
storage2	Storage account	East Asia
VM1	Virtual machine	West US
VNET1	Virtual network	West US
VNET2	Virtual network	East Asia

VM1 connects to VNET1.

You need to connect VM1 to VNET2.

Solution: You create a new network interface, and then you add the network interface to VM1.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

You should delete VM1. You recreate VM1, and then you add the network interface for VM1.

Note: When you create an Azure virtual machine (VM), you must create a virtual network (VNet) or use an existing VNet. You can change the subnet a VM is connected to after it's created, but you cannot change the VNet.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/network-overview>

Question 196 (Question Set 4)



You have an Azure Active Directory (Azure AD) tenant named adatum.com that contains the users shown in the following table.

Name	Role
User1	None
User2	Global administrator
User3	Cloud device administrator
User4	Intune administrator

Adatum.com has the following configurations:

- ⇒ Users may join devices to Azure AD is set to User1.
- ⇒ Additional local administrators on Azure AD joined devices is set to None.

You deploy Windows 10 to a computer named Computer1. User1 joins Computer1 to adatum.com.

You need to identify the local Administrator group membership on Computer1.

Which users are members of the local Administrators group?

- A. User1 only
- B. User2 only
- C. User1 and User2 only
- D. User1, User2, and User3 only
- E. User1, User2, User3, and User4

Answer : C

Explanation:

Users may join devices to Azure AD - This setting enables you to select the users who can register their devices as Azure AD joined devices. The default is All.

Additional local administrators on Azure AD joined devices - You can select the users that are granted local administrator rights on a device. Users added here are added to the Device Administrators role in Azure AD. Global administrators, here User2, in Azure AD and device owners are granted local administrator rights by default.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal>

Question 197 (Question Set 4)



HOTSPOT -

You have Azure subscriptions named Subscription1 and Subscription2.

Subscription1 has following resource groups:

Name	Region	Lock type
RG1	West Europe	None
RG2	West Europe	Read Only

RG1 includes a web app named App1 in the West Europe location.

Subscription2 contains the following resource groups:

Name	Region	Lock type
RG3	East Europe	Delete
RG4	Central US	none

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

- | Statements | Yes | No |
|--------------------------|-----------------------|-----------------------|
| App1 can be moved to RG2 | <input type="radio"/> | <input type="radio"/> |
| App1 can be moved to RG3 | <input type="radio"/> | <input type="radio"/> |
| App1 can be moved to RG4 | <input type="radio"/> | <input type="radio"/> |

Answer :

Answer Area

- | Statements | Yes | No |
|--------------------------|----------------------------------|----------------------------------|
| App1 can be moved to RG2 | <input type="radio"/> | <input checked="" type="radio"/> |
| App1 can be moved to RG3 | <input checked="" type="radio"/> | <input type="radio"/> |
| App1 can be moved to RG4 | <input checked="" type="radio"/> | <input type="radio"/> |

Explanation:

Box 1: No -
RG2 is read only. ReadOnly means authorized users can read a resource, but they cannot delete or update the resource.

Box 2: Yes -

Box 3: Yes -

Note:
App Service resources are region-specific and cannot be moved directly across regions. You can move the App Service resource by creating a copy of your existing App Service resource in the target region, then move your content over to the new app. You can then delete the source app and App Service plan.

To make copying your app easier, you can clone an individual App Service app into an App Service plan in another region.

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/manage-move-across-regions> <https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-limitations/app-service-move-limitations>

Question 198 (Question Set 4)



HOTSPOT -
You have an Azure subscription named Subscription1 that contains the following resource group:

- Name: RG1
- Region: West US
- Tag: `:C@value1`

You assign an Azure policy named Policy1 to Subscription1 by using the following configurations:

- Exclusions: None
- Policy definition: Append a tag and its value to resources
- Assignment name: Policy1
- Parameters:
- Tag name: tag2

Tag value: value2 -

After Policy1 is assigned, you create a storage account that has the following configuration:

- Name: storage1
- Location: West US
- Resource group: RG1
- Tags: `:tag3 :value3`

You need to identify which tags are assigned to each resource.

What should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Tags assigned to RG1:

"tag1": "value1" only
"tag2": "value2" only
"tag1": "value1" and "tag2": "value2"

Tags assigned to storage1:

"tag3": "value3" only
"tag1": "value1" and "tag3": "value3" only
"tag2": "value2" and "tag3": "value3" only
"tag1": "value1", "tag2": "value2", and "tag3": "value3"

Answer :

Answer Area

Tags assigned to RG1:

"tag1": "value1" only
"tag2": "value2" only
"tag1": "value1" and "tag2": "value2"

Tags assigned to storage1:

"tag3": "value3" only
"tag1": "value1" and "tag3": "value3" only
"tag2": "value2" and "tag3": "value3" only
"tag1": "value1", "tag2": "value2", and "tag3": "value3"

Explanation:

Box 1: "tag1": "value1" only
 Box 2: "tag2": "value2" and "tag3": "value3" only

Tags applied to the resource group are not inherited by the resources in that resource group.

Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags>

Question 199 (Question Set 4)

HOTSPOT -

You have an Azure subscription named Subscription1.

In Subscription1, you create an alert rule named Alert1.

The Alert1 action group is configured as shown in the following exhibit.

```
ResourceGroupName      : default-activitylogalerts
GroupShortName        : AG1
Enabled               : True
EmailReceivers        : {Action1_ "EmailAction"}
SmsReceivers          : {Action1_ "SMSAction"}
WebhookReceivers      : {}
Id                   : /subscriptions/a4fde29b-d56a-4f6c-8298-
6c53cd0b720c/resourceGroups/
default-activitylogalerts/providers/microsoft.insights/actionGroups/ActionGroup1
Name                 : ActionGroup1
Type                 : Microsoft.Insights/ActionGroups
Location             : Global
Tags                : {}
```

Alert1 alert criteria triggered every minute.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The number of email messages that Alert1 will send in an hour is

0
4
6
12
60

The number of SMS messages that Alert2 will send in an hour is

0
4
6
12
60

Answer :

Answer Area

The number of email messages that Alert1 will send in an hour is

0
4
6
12
60

The number of SMS messages that Alert2 will send in an hour is

0
4
6
12
60

Explanation:

Box 1: 60 -
One alert per minute will trigger one email per minute.

Box 2: 12 -
No more than 1 SMS every 5 minutes can be send, which equals 12 per hour.
Note: Rate limiting is a suspension of notifications that occurs when too many are sent to a particular phone number, email address or device. Rate limiting ensures that alerts are manageable and actionable.
The rate limit thresholds are:
 ☈ SMS: No more than 1 SMS every 5 minutes.
 ☈ Voice: No more than 1 Voice call every 5 minutes.
 ☈ Email: No more than 100 emails in an hour.
 ☈ Other actions are not rate limited.
 Reference:
<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-rate-limiting>

Question 200 (Question Set 4)



You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
RG1	Resource group	West Europe	Not applicable
RG2	Resource group	North Europe	Not applicable
Vault1	Recovery Services vault	West Europe	RG1

You create virtual machines in Subscription1 as shown in the following table.

Name	Resource group	Region	Operating system
VM1	RG1	West Europe	Windows Server 2016
VM2	RG1	North Europe	Windows Server 2016
VM3	RG2	West Europe	Windows Server 2016
VMA	RG1	West Europe	Ubuntu Server 18.04
VMB	RG1	North Europe	Ubuntu Server 18.04
VMC	RG2	West Europe	Ubuntu Server 18.04

You plan to use Vault1 for the backup of as many virtual machines as possible.

Which virtual machines can be backed up to Vault1?

- A. VM1 only
- B. VM3 and VMC only
- C. VM1, VM2, VM3, VMA, VMB, and VMC
- D. VM1, VM3, VMA, and VMC only
- E. VM1 and VM3 only


Answer : D

Explanation:

To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines. If you have virtual machines in several regions, create a Recovery Services vault in each region.

Reference:

<https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault>

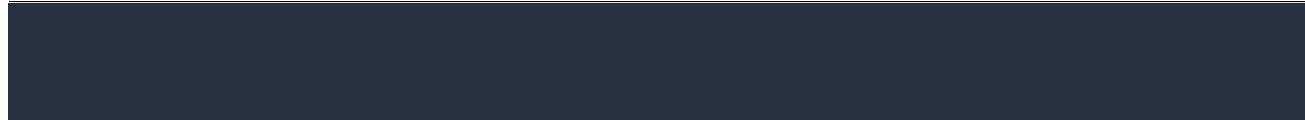

Microsoft Azure Administrator v1.0 (AZ-104) - Full Access

Question 201 (Question Set 4)



You have an Azure Kubernetes Service (AKS) cluster named AKS1.
You need to configure cluster autoscaler for AKS1.
Which two tools should you use? Each correct answer presents a complete solution.
NOTE: Each correct selection is worth one point.

- A. the kubectl command
- B. the az aks command
- C. the Set-AzVm cmdlet
- D. the Azure portal
- E. the Set-AzAks cmdlet

Answer : AB

Explanation:

A: The following example uses the kubectl autoscale command to autoscale the number of pods in the azure-vote-front deployment. If average CPU utilization across all pods exceeds 50% of their requested usage, the autoscaler increases the pods up to a maximum of 10 instances. A minimum of 3 instances is then defined for the deployment: kubectl autoscale deployment azure-vote-front --cpu-percent=50 --min=3 --max=10

B: Use the az aks update command to enable and configure the cluster autoscaler on the node pool for the existing cluster.

Reference:

<https://docs.microsoft.com/en-us/azure/aks/tutorial-kubernetes-scale> <https://docs.microsoft.com/en-us/azure/aks/cluster-autoscaler>

Question 202 (Question Set 4)



You create the following resources in an Azure subscription:
☞ An Azure Container Registry instance named Registry1
☞ An Azure Kubernetes Service (AKS) cluster named Cluster1
You create a container image named App1 on your administrative workstation.
You need to deploy App1 to Cluster1.
What should you do first?

- A. Run the docker push command.
- B. Create an App Service plan.
- C. Run the az acr build command.
- D. Run the az aks create command.

Answer : C

Explanation:

You should sign in and push a container image to Container Registry.

Run the az acr build command to build and push the container image. az acr build \
--image contoso-website \
--registry \$ACR_NAME \
--file Dockerfile .

Reference:

<https://docs.microsoft.com/en-us/learn/modules/aks-deploy-container-app/5-exercise-deploy-app>

Question 203 (Question Set 4)



You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	Not applicable	Central US
RG2	Resource group	Not applicable	West US
VMSS1	Virtual machine scale set	RG2	West US
Proximity1	Proximity placement group	RG1	Central US
Proximity2	Proximity placement group	RG2	West US
Proximity3	Proximity placement group	RG1	Central US

You need to configure a proximity placement group for VMSS1.

Which proximity placement groups should you use?

- A. Proximity2 only
- B. Proximity1, Proximity2, and Proximity3
- C. Proximity1 only
- D. Proximity1 and Proximity3 only

Answer : A

Explanation:

Resource Group location of VMSS1 is the RG2 location, which is West US.

Only Proximity2, which also in RG2, is location in West US

Reference:

<https://azure.microsoft.com/en-us/blog/introducing-proximity-placement-groups/>

Question 204 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1.

Solution: From the Subscriptions blade, you select the subscription, and then click Resource providers.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Question 205 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1.

Solution: From the RG1 blade, you click Automation script.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

From the RG1 blade, click Deployments. You see a history of deployment for the resource group.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell>

Question 206 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1.

Solution: From the RG1 blade, you click Deployments.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:
From the RG1 blade, click Deployments. You see a history of deployment for the resource group.

Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/template-tutorial-create-first-template?tabs=azure-powershell>

Question 207 (Question Set 4)



You have an Azure subscription named Subscription1.
You deploy a Linux virtual machine named VM1 to Subscription1.
You need to monitor the metrics and the logs of VM1.
What should you use?

- A. Azure HDInsight
- B. Linux Diagnostic Extension (LAD) 3.0
- C. the AzurePerformanceDiagnostics extension
- D. Azure Analysis Services

Answer : B

Explanation:
The Linux Diagnostic Extension should be used which downloads the Diagnostic Extension (LAD) agent on Linux server.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/diagnostics-linux>

Question 208 (Question Set 4)



HOTSPOT -
You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.
You install and configure a web server and a DNS server on VM1.
VM1 has the effective network security rules shown in the following exhibit:

Network Interface: vm1441		Effective security rules	Topology			
		NIC Public IP: 52.160.123.200	NIC Private IP: 10.0.6.4			
		Accelerated networking: Disabled				
Inbound port rules		Outbound port rules	Application security groups	Load balancing		
■ Network security group VM1-nsg (attached to network interface: vm1441)		Add inbound port rule				
Impacts 0 subnets, 1 network interfaces						
Priority	Name	Port	Protocol	Source	Destination	Action
100	Rule2	50-60	Any	Any	Any	✖ Deny
300	⚠ RDP	3389	TCP	Any	Any	● Allow
400	Rule1	50-500	Any	Any	Any	● Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	● Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	● Allow
65500	DenyAllInBound	Any	Any	Any	Any	✖ Deny

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Internet users [answer choice].

■ can connect to only the DNS server on VM1
■ can connect to only the web server on VM1
■ can connect to the web server and the DNS server on VM1
■ cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Internet users [answer choice].

■ can connect to only the DNS server on VM1
■ can connect to only the web server on VM1
■ can connect to the web server and the DNS server on VM1
■ cannot connect to the web server and the DNS server on VM1

Answer :

Answer Area

Internet users [answer choice].

can connect to only the DNS server on VM1
can connect to only the web server on VM1
can connect to the web server and the DNS server on VM1
cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Internet users [answer choice].

can connect to only the DNS server on VM1
can connect to only the web server on VM1
can connect to the web server and the DNS server on VM1
cannot connect to the web server and the DNS server on VM1

Explanation:

Box 1:

Rule2 blocks ports 50-60, which includes port 53, the DNS port. Internet users can reach to the Web server, since it uses port 80.

Box 2:

If Rule2 is removed internet users can reach the DNS server as well.

Note: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

Question 209 (Question Set 4)



You plan to deploy three Azure virtual machines named VM1, VM2, and VM3. The virtual machines will host a web app named App1.

You need to ensure that at least two virtual machines are available if a single Azure datacenter becomes unavailable.

What should you deploy?

- A. all three virtual machines in a single Availability Zone
- B. all virtual machines in a single Availability Set
- C. each virtual machine in a separate Availability Zone
- D. each virtual machine in a separate Availability Set

Answer : C

Explanation:

Use availability zones to protect from datacenter level failures.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/manage-availability>

Question 210 (Question Set 4)

You have an Azure virtual machine named VM1 that runs Windows Server 2019.

You save VM1 as a template named Template1 to the Azure Resource Manager library.

You plan to deploy a virtual machine named VM2 from Template1.

What can you configure during the deployment of VM2?

- A. operating system
- B. administrator username
- C. virtual machine size
- D. resource group

Answer : B

Explanation:

When deploying a virtual machine from a template, you must specify:

- ☞ the Resource Group name and location for the VM
- ☞ the administrator username and password
- ☞ an unique DNS name for the public IP

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/ps-template>

Question 211 (Question Set 4)

You have an Azure subscription that contains an Azure virtual machine named VM1. VM1 runs a financial reporting app named App1 that does not support multiple active instances.

At the end of each month, CPU usage for VM1 peaks when App1 runs.

You need to create a scheduled runbook to increase the processor performance of VM1 at the end of each month.

What task should you include in the runbook?

- A. Add the Azure Performance Diagnostics agent to VM1.
- B. Modify the VM size property of VM1.
- C. Add VM1 to a scale set.
- D. Increase the vCPU quota for the subscription.
- E. Add a Desired State Configuration (DSC) extension to VM1.

Answer : E

Reference:
<https://docs.microsoft.com/en-us/azure/automation/automation-quickstart-dsc-configuration>

Question 212 (Question Set 4)



You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template. You need to ensure that NGINX is available on all the virtual machines after they are deployed. What should you use?

- A. Deployment Center in Azure App Service
- B. A Desired State Configuration (DSC) extension
- C. The New-AzConfigurationAssignment cmdlet
- D. a Microsoft Intune device configuration profile

Answer : B

Explanation:

Azure virtual machine extensions are small packages that run post-deployment configuration and automation on Azure virtual machines. In the following example, the Azure CLI is used to deploy a custom script extension to an existing virtual machine, which installs a Nginx webserver. az vm extension set --resource-group myResourceGroup --vm-name myVM --name customScript --publisher Microsoft.Azure.Extensions --settings '{"commandToExecute": "apt-get install -y nginx"}'

Note:

There are several versions of this question in the exam. The question has two correct answers:

1. a Desired State Configuration (DSC) extension
2. Azure Custom Script Extension

The question can have other incorrect answer options, including the following:

- ⇒ the Publish-AzVMDscConfiguration cmdlet
- ⇒ Azure Application Insights

Reference:

<https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration>

Question 213 (Question Set 4)



HOTSPOT -

You deploy an Azure Kubernetes Service (AKS) cluster that has the network profile shown in the following exhibit.

Network profile	
Type (plugin)	Basic (Kubnet)
Pod CIDR	10.244.0.0/16
Service CIDR	10.0.0.0/16
DNS service IP	10.0.0.10
Docker bridge CIDR	172.17.0.1/16
Network options	
HTTP application routing	<input type="radio"/> Enabled <input checked="" type="radio"/> Disabled

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Containers will be assigned an IP address in the [answer choice] subnet.

	▼
10.244.0.0/16	
10.0.0.0/16	
172.17.0.1/16	

Answer : Services in the AKS cluster will be assigned an IP address in the [answer choice] subnet.

	▼
10.244.0.0/16	

Answer Area

Containers will be assigned an IP address in the [answer choice] subnet.

	▼
10.244.0.0/16	
10.0.0.0/16	
172.17.0.1/16	

Services in the AKS cluster will be assigned an IP address in the [answer choice] subnet.

	▼
10.244.0.0/16	
10.0.0.0/16	
172.17.0.1/16	

Explanation:

Box 1: 10.244.0.0/16 -
The Pod CIDR.

Note: The --pod-cidr should be a large address space that isn't in use elsewhere in your network environment. This range includes any on-premises network ranges if you connect, or plan to connect, your Azure virtual networks using Express Route or a Site-to-Site VPN connection.
This address range must be large enough to accommodate the number of nodes that you expect to scale up to. You can't change this address range once the cluster is deployed if you need more addresses for additional nodes.

Box 2: 10.0.0.0/16 -
The --service-cidr is used to assign internal services in the AKS cluster an IP address.
Reference:
<https://docs.microsoft.com/en-us/azure/aks/configure-kubenet>

Question 214 (Question Set 4)



HOTSPOT -
You have the App Service plan shown in the following exhibit.

Default Auto created scale condition

Delete warning ! The very last or default recurrence rule cannot be deleted. Instead, you can disable autoscale to turn off autoscale

Scale mode Scale based on a metric Scale to a specific instance count

Rules			
Scale out	When	homepage	(Maximum) CpuPercentage > 85
			Increase count by 1
Scale in	When	homepage	(Average) CpuPercentage < 30
			Decrease count by 1
+ Add a rule			
Instance limits	Minimum	Maximum	Default
	1	5	1
Schedule	This scale condition is executed when none of the other scale condition(s) match		

The scale-in settings for the App Service plan are configured as shown in the following exhibit.

Operator *	Metric threshold to trigger scale action * ⓘ
Less than	30 %
Duration (in minutes) *	5 ⓘ
Time grain (in mins) ⓘ	1
Time grain statistic *	Average ⓘ
Action	
Operation *	Decrease count by
Instance count *	Cool down (minutes) * ⓘ
1 ⓘ	5

The scale out rule is configured with the same duration and cool down tile as the scale in rule.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

If after deployment CPU usage is 70 percent for one hour and then reaches 90 percent for five minutes, at that time the total number of instances will be [answer choice].

1
2
3
4
5

If after deployment the CPU maintains constant usage of 90 percent for one hour, and then the average CPU usage is below 25 percent for nine minutes, at that point the number of instances will be [answer choice].

1
2
3
4
5

Answer :

If after deployment CPU usage is 70 percent for one hour and then reaches 90 percent for five minutes, at that time the total number of instances will be [answer choice].

1
2
3
4

Question 215 (Question Set 4)

You have an Azure virtual machine named VM1 that runs Windows Server 2019. The VM was deployed using default drive settings.

You sign in to VM1 as a user named User1 and perform the following actions:

- ☞ Create files on drive C.
- ☞ Create files on drive D.
- ☞ Modify the screen saver timeout.
- ☞ Change the desktop background.

You plan to redeploy VM1.

Which changes will be lost after you redeploy VM1?


- A. the modified screen saver timeout
- B. the new desktop background
- C. the new files on drive D
- D. the new files on drive C

Answer : C

Question 216 (Question Set 4)

You have an Azure subscription.

You have an on-premises virtual machine named VM1. The settings for VM1 are shown in the exhibit. (Click the Exhibit tab.)

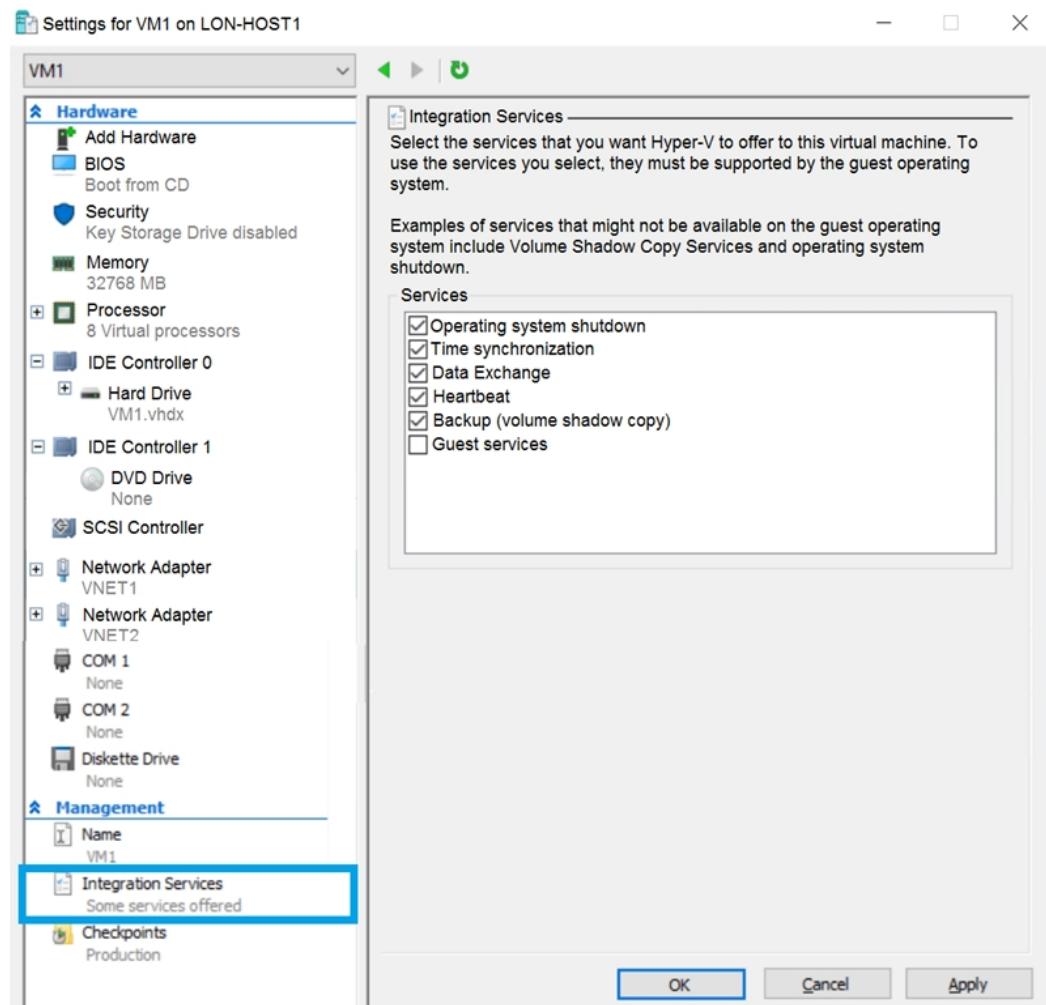

You need to ensure that you can use the disks attached to VM1 as a template for Azure virtual machines.

What should you modify on VM1?

- A. the memory
- B. the network adapters
- C. the hard drive
- D. the processor
- E. Integration Services

Answer : C

Explanation:

From the exhibit we see that the disk is in the VHDX format. Before you upload a Windows virtual machine (VM) from on-premises to Microsoft Azure, you must prepare the virtual hard disk (VHD or VHDX). Azure supports only generation 1 VMs that are in the VHD file format and have a fixed sized disk. The maximum size allowed for the VHD is 1,023 GB. You can convert a generation 1 VM from the VHDX file system to VHD and from a dynamically expanding disk to fixed-sized.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/prepare-for-upload-vhd-image>

Question 217 (Question Set 4)



HOTSPOT -

You have an Azure subscription that contains a virtual machine scale set. The scale set contains four instances that have the following configurations:

↳ Operating system: Windows Server 2016

↳ Size: Standard_D1_v2

You run the get-azvmss cmdlet as shown in the following exhibit:

```
PS Azure:> (Get-AzVmss -Name WebProd -ResourceGroupName RG1).VirtualMachineProfile.OsProfile.WindowsConfiguration
ProvisionVMAgent      : True
EnableAutomaticUpdates : False
TimeZone              :
AdditionalUnattendContent :
WinRM                :

Azure:/ PS Azure:> Get-AzVmss -Name WebProd -ResourceGroupName RG1 | Select -ExpandProperty UpgradePolicy
Mode RollingUpgradePolicy AutomaticOSUpgradePolicy
-----
Automatic             Microsoft.Azure.Management.Compute.Models.AutomaticOSUpgradePolicy
Azure:/ PS Azure:> []
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

When an administrator changes the virtual machine size, the size will be changed on up to [answer choice] virtual machines simultaneously.

0
1
2
4

When a new build of the Windows Server 2016 image is released, the new build will be deployed to up to [answer choice] virtual machines simultaneously.

0
1
2
4

Answer :

Answer Area

When an administrator changes the virtual machine size, the size will be changed on up to [answer choice] virtual machines simultaneously.

0
1
2
4

When a new build of the Windows Server 2016 image is released, the new build will be deployed to up to [answer choice] virtual machines simultaneously.

0
1
2
4

Explanation:

The Get-AzVmssVM cmdlet gets the model view and instance view of a Virtual Machine Scale Set (VMSS) virtual machine.

Box 1: 0 -

The enableAutomaticUpdates parameter is set to false. To update existing VMs, you must do a manual upgrade of each existing VM.

Box 2: 4 -

Enabling automatic OS image upgrades on your scale set helps ease update management by safely and automatically upgrading the OS disk for all instances in the scale set.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-upgrade-scale-set> <https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets>

Question 218 (Question Set 4)

You have an Azure subscription named Subscription1 that is used by several departments at your company. Subscription1 contains the resources in the following table:

Name	Type
storage1	Storage account
RG1	Resource group
container1	Blob container
share1	File share

Another administrator deploys a virtual machine named VM1 and an Azure Storage account named storage2 by using a single Azure Resource Manager template.

You need to view the template used for the deployment.

From which blade can you view the template that was used for the deployment?

- A. VM1
- B. RG1
- C. storage2
- D. container1

Answer : B

Explanation:

View template from deployment history

1. Go to the resource group for your new resource group. Notice that the portal shows the result of the last deployment. Select this link.

The screenshot shows the Azure Resource Group 'exportsite' overview page. On the left, there's a navigation bar with 'Overview' selected. In the center, under the 'Essentials' section, it shows 'Subscription name (change)', 'Microsoft Azure Consumption', and 'Subscription ID'. To the right, there's a 'Deployments' section with the text '1 Succeeded' highlighted by a red box. At the top of the page, there are buttons for 'Add', 'Columns', 'Delete', 'Refresh', and 'Move'.

2. You see a history of deployments for the group. In your case, the portal probably lists only one deployment. Select this deployment.

DEPLOYMENT NAME STATUS

Microsoft.WebSiteSQLDatabased1... ✓ Succeeded

3. The portal displays a summary of the deployment. The summary includes the status of the deployment and its operations and the values that you provided for parameters. To see the template that you used for the deployment, select View template.

Microsoft Azure < exportsite - Deployments > Microsoft.WebSiteSQLDatabased13386b0-9908 Deployment

Summary

DEPLOYMENT DATE	7/5/2017 4:01:15 PM
STATUS	Succeeded
DURATION	1 minute 30 seconds
RESOURCE GROUP	exportsite
RELATED	Events

Question 219 (Question Set 4)

You have an Azure web app named App1. App1 has the deployment slots shown in the following table:

Name	Function
webapp1-prod	Production
webapp1-test	Staging

In webapp1-test, you test several changes to App1.

You back up App1.

You swap webapp1-test for webapp1-prod and discover that App1 is experiencing performance issues.

You need to revert to the previous version of App1 as quickly as possible.

What should you do?

- A. Redeploy App1
- B. Swap the slots
- C. Clone App1
- D. Restore the backup of App1

Answer : B

Explanation:

When you swap deployment slots, Azure swaps the Virtual IP addresses of the source and destination slots, thereby swapping the URLs of the slots. We can easily revert the deployment by swapping back.

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots>

Question 220 (Question Set 4)

HOTSPOT -

You have an Azure subscription named Subscription1. Subscription1 contains two Azure virtual machines VM1 and VM2. VM1 and VM2 run Windows Server 2016.

VM1 is backed up daily by Azure Backup without using the Azure Backup agent.

VM1 is affected by ransomware that encrypts data.

You need to restore the latest backup of VM1.

To which location can you restore the backup? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can perform a file recovery of VM1 to:

VM1 only
VM1 or a new Azure virtual machine only
VM1 and VM2 only
A new Azure virtual machine only
Any Windows computer that has Internet connectivity

You can restore VM1 to:

VM1 only
VM1 or a new Azure virtual machine only
VM1 and VM2 only
Any Windows computer that has Internet connectivity

Answer :

Answer Area

You can perform a file recovery of VM1 to:

VM1 only
VM1 or a new Azure virtual machine only
VM1 and VM2 only
A new Azure virtual machine only
Any Windows computer that has Internet connectivity

You can restore VM1 to:

VM1 only
VM1 or a new Azure virtual machine only
VM1 and VM2 only
Any Windows computer that has Internet connectivity

Explanation:

Note: The new VM must be in the same region.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms>

Question 221 (Question Set 4)



You plan to back up an Azure virtual machine named VM1.

You discover that the Backup Pre-Check status displays a status of Warning.

What is a possible cause of the Warning status?

- A. VM1 is stopped.
- B. VM1 does not have the latest version of the Azure VM Agent (WaAppAgent.exe) installed.
- C. VM1 has an unmanaged disk.
- D. A Recovery Services vault is unavailable.

Answer : B

Explanation:

The Warning state indicates one or more issues in VM2's configuration that might lead to backup failures and provides recommended steps to ensure successful backups. Not having the latest VM Agent installed, for example, can cause backups to fail intermittently and fails in this class of issues.

Reference:

<https://azure.microsoft.com/en-us/blog/azure-vm-backup-pre-checks/>

Question 222 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.

You receive a notification that VM1 will be affected by maintenance.

You need to move VM1 to a different host immediately.

Solution: From the Overview blade, you move the virtual machine to a different resource group.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

You would need to redeploy the VM.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node>

Question 223 (Question Set 4)



HOTSPOT -

You have an Azure subscription.

You plan to use Azure Resource Manager templates to deploy 50 Azure virtual machines that will be part of the same availability set.

You need to ensure that as many virtual machines as possible are available if the fabric fails or during servicing.

How should you configure the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{  
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",  
  "contentVersion": "1.0.0.0",  
  "parameters": {},  
  "resources": [  
    {  
      "type": "Microsoft.Compute/availabilitySets",  
      "name": "ha",  
      "apiVersion": "2017-12-01",  
      "location": "eastus",  
      "properties": {  
        "platformFaultDomainCount":   
        "platformUpdateDomainCount":   
      }  
    }  
  ]  
}
```

Answer :

Answer Area

```
{  
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",  
  "contentVersion": "1.0.0.0",  
  "parameters": {},  
  "resources": [  
    {  
      "type": "Microsoft.Compute/availabilitySets",  
      "name": "ha",  
      "apiVersion": "2017-12-01",  
      "location": "eastus",  
      "properties": {  
        "platformFaultDomainCount": ,  
        "platformUpdateDomainCount": 
```

0
1
2
3
4

Question 224 (Question Set 4) 

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1 that runs Windows Server 2016.

You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.

Solution: You create an Azure Log Analytics workspace and configure the Agent configuration settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Alerts in Azure Monitor can identify important information in your Log Analytics repository. They are created by alert rules that automatically run log searches at regular intervals, and if results of the log search match particular criteria, then an alert record is created and it can be configured to perform an automated response.

The Log Analytics agent collects monitoring data from the guest operating system and workloads of virtual machines in Azure, other cloud providers, and on-premises. It collects data into a Log Analytics workspace.

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response> <https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview>

Question 225 (Question Set 4) 

HOTSPOT -

You have an Azure subscription.

You deploy a virtual machine scale set that is configured as shown in the following exhibit.

Create a virtual machine scale set

Basics Disks Networking Scaling Management Health Advanced

An Azure virtual machine scale set can automatically increase or decrease the number of VM instances that run your application. This automated and elastic behavior reduces the management overhead to monitor and optimize the performance of your application. [Learn more about VMSS scaling](#)

Instance

Initial instance count *

Scaling

Scaling policy Manual Custom

Minimum number of VMs *

Maximum number of VMs *

Scale out

CPU threshold (%) *

Duration in minutes *

Number of VMs to increase by *

Scale in

CPU threshold (%) *

Number of VMs to decrease by *

Diagnostic logs

Collect diagnostic logs from Autoscale Disabled Enabled

Scale-In policy

Configure the order in which virtual machines are selected for deletion during a scale-in operation.

[Learn more about scale-in policies.](#)

Scale-in policy

Use the drop-down menus to select the answer choice that answers each question based on the information presented in the graphic

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

At 9:00 AM, the scale set starts and CPU utilization is 90 percent for 15 minutes. How many virtual machine instances will be running at 9:15 AM?

Answer:

	▼
2	
3	
4	
5	

At 10:00 AM, the scale set has five virtual machine instances running and CPU utilization falls to less than 15 percent for 60 minutes. How many virtual machine instances will be running at 11:00 AM?

	▼
1	
2	
3	
4	

Answer Area

At 9:00 AM, the scale set starts and CPU utilization is 90 percent for 15 minutes. How many virtual machine instances will be running at 9:15 AM?

2
3



Question 226 (Question Set 4)

You have web apps in the West US, Central US and East US Azure regions.
You have the App Service plans shown in the following table.

Name	Operating system	Location	SKU and size
ASP1	Windows	West US	Standard S1
ASP2	Linux	Central US	Premium V2 P1v2
ASP3	Linux	East US	Premium V2 P1v2
ASP4	Linux	East US	Premium V2 P1v2

You plan to create an additional App Service plan named ASP5 that will use the Linux operating system.

You need to identify in which of the currently used locations you can deploy ASP5.

What should you recommend?

- A. West US, Central US, or East US
- B. Central US only
- C. East US only
- D. West US only

Answer : A

Reference:
<https://docs.microsoft.com/en-us/azure/app-service/app-service-plan-manage>

Question 227 (Question Set 4)



You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.
What should you use?

- A. the New-AzConfigurationAssignment cmdlet
- B. a Desired State Configuration (DSC) extension
- C. Azure Active Directory (Azure AD) Application Proxy
- D. Azure Application Insights

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview>

Question 228 (Question Set 4)



HOTSPOT -
You have an Azure subscription that contains the resources shown in the following table.

Name	Type
ManagementGroup1	Management group
RG1	Resource group
9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75	Subscription ID
Tag1	Tag

In Azure Cloud Shell, you need to create a virtual machine by using an Azure Resource Manager (ARM) template.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm
New-AzResource
New-AzTemplateSpec
New-AzResourceGroupDeployment

-Tag Tag1'
-ResourceGroupName RG1'
-GroupName ManagementGroup1'
-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" '
- adminUsername LocalAdministrator -adminPassword \$adminPassword -dnsLabelPrefix ContosoVM1

Answer :

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm
New-AzResource
New-AzTemplateSpec
New-AzResourceGroupDeployment

-Tag Tag1'
-ResourceGroupName RG1'
-GroupName ManagementGroup1'
-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" '
- adminUsername LocalAdministrator -adminPassword \$adminPassword -dnsLabelPrefix ContosoVM1

Reference:

<https://docs.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-6.6.0>

Question 229 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You deploy an Azure Kubernetes Service (AKS) cluster named AKS1.

You need to deploy a YAML file to AKS1.

Solution: From Azure Cloud Shell, you run az aks.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

To deploy a YAML file, the command is:

```
kubectl apply -f <file_name>.yaml
```

Reference:

<https://docs.microsoft.com/en-us/azure/aks/kubernetes-walkthrough>

Question 230 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1 that runs Windows Server 2016.

You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.

Solution: You create an Azure Log Analytics workspace and configure the data settings. You add the Microsoft Monitoring Agent VM extension to VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

You must install the Microsoft Monitoring Agent on VM1, and not the Microsoft Monitoring Agent VM extension.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview>

Question 231 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1 that runs Windows Server 2016.

You need to create an alert in Azure when more than two error events are logged to the System event log on VM1 within an hour.

Solution: You create an Azure Log Analytics workspace and configure the data settings. You install the Microsoft Monitoring Agent on VM1. You create an alert in Azure Monitor and specify the Log Analytics workspace as the source.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Alerts in Azure Monitor can identify important information in your Log Analytics repository. They are created by alert rules that automatically run log searches at regular intervals, and if results of the log search match particular criteria, then an alert record is created and it can be configured to perform an automated response.

The Log Analytics agent collects monitoring data from the guest operating system and workloads of virtual machines in Azure, other cloud providers, and on-premises. It collects data into a Log Analytics workspace.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/learn/tutorial-response> <https://docs.microsoft.com/en-us/azure/azure-monitor/platform/agents-overview>

Question 232 (Question Set 4)




You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
Vault1	Recovery services vault	RG1	East US
VM1	Virtual machine	RG1	East US
VM2	Virtual machine	RG1	West US

All virtual machines run Windows Server 2016.

On VM1, you back up a folder named Folder1 as shown in the following exhibit.

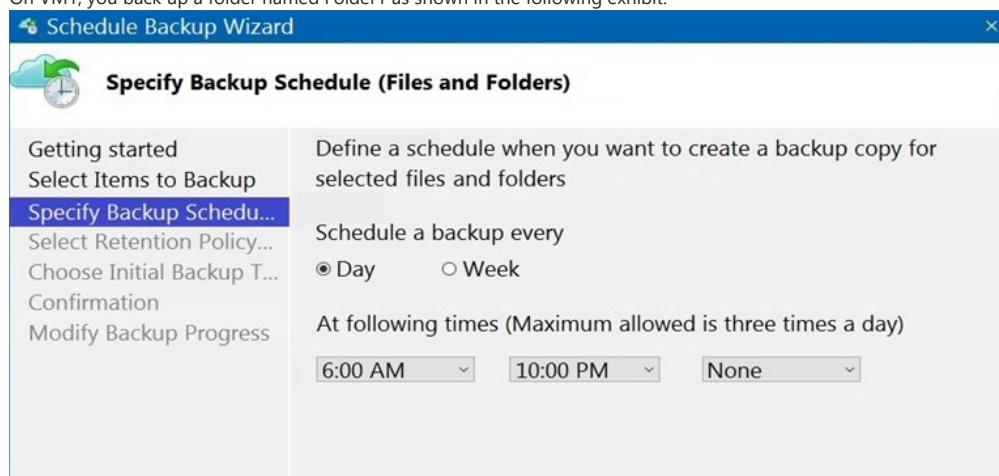

You plan to restore the backup to a different virtual machine.

You need to restore the backup to VM2.

What should you do first?

- A. From VM1, install the Windows Server Backup feature.
- B. From VM2, install the Microsoft Azure Recovery Services Agent.
- C. From VM1, install the Microsoft Azure Recovery Services Agent.
- D. From VM2, install the Windows Server Backup feature.

Answer : B

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-windows-server>

Question 233 (Question Set 4)



HOTSPOT -

You have an Azure subscription.

You need to use an Azure Resource Manager (ARM) template to create a virtual machine that will have multiple data disks.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{  
  "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",  
  "parameters": {  
    "numberOfDataDisks": {  
      "type": "int",  
      "metadata": {  
        "description": "The number of dataDisks to create."  
      }  
    },  
    ...  
  },  
  "resources": [  
    {  
      "type": "Microsoft.Compute/virtualMachines",  
      "apiVersion": "2017-03-30",  
      ...  
      "properties": {  
        "storageProfile": {  
          ...  


|                |   |
|----------------|---|
| "copy": [      | ▼ |
| "copyIndex": [ |   |
| "dependsOn": [ |   |

  
          { "name": "dataDisks",  
            "count": "[parameters('numberOfDataDisks')]",  
            "input": {  
              "diskSizeGB": 1023,  
              "lun": 

|             |   |
|-------------|---|
| "[copy      | ▼ |
| "[copyIndex |   |
| "[dependsOn |   |

  
            "createOption": "Empty"  
          ...  
        }  
      }  
    }  
  ]  
}
```

Answer :

Answer Area

```
{  
  "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",  
  "parameters": {  
    "numberOfDataDisks": {  
      "type": "int",  
      "metadata": {  
        "description": "The number of dataDisks to create."  
      }  
    },  
    ...  
  },  
  "resources": [  
    {  
      "type": "Microsoft.Compute/virtualMachines",  
      "apiVersion": "2017-03-30",  
      ...  
      "properties": {  
        "storageProfile": {  
          ...  


|                |   |
|----------------|---|
| "copy": [      | ▼ |
| "copyIndex": [ |   |
| "dependsOn": [ |   |

  
          { "name": "dataDisks",  
            "count": "[parameters('numberOfDataDisks')]",  
            "input": {  
              "diskSizeGB": 1023,  
              "lun": 

|             |   |
|-------------|---|
| "[copy      | ▼ |
| "[copyIndex |   |
| "[dependsOn |   |

  
            "createOption": "Empty"  
          ...  
        }  
      }  
    }  
  ]  
}
```

Question 234 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	<i>Not applicable</i>
RG2	Resource group	West Europe	<i>Not applicable</i>
RG3	Resource group	North Europe	<i>Not applicable</i>
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
 You need to create a new network interface named NIC2 for VM1.

Solution: You create NIC2 in RG1 and West US.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:
 The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
 Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface>

Question 235 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	<i>Not applicable</i>
RG2	Resource group	West Europe	<i>Not applicable</i>
RG3	Resource group	North Europe	<i>Not applicable</i>
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.
 You need to create a new network interface named NIC2 for VM1.

Solution: You create NIC2 in RG2 and Central US.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:
 The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.
 Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface>

Question 236 (Question Set 4)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Location	Resource group
RG1	Resource group	East US	<i>Not applicable</i>
RG2	Resource group	West Europe	<i>Not applicable</i>
RG3	Resource group	North Europe	<i>Not applicable</i>
VNET1	Virtual network	Central US	RG1
VM1	Virtual machine	West US	RG2

Subscription1 also includes a virtual network named VNET2. VM1 connects to a virtual network named VNET2 by using a network interface named NIC1.

You need to create a new network interface named NIC2 for VM1.

Solution: You create NIC2 in RG2 and West US.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

The virtual machine you attach a network interface to and the virtual network you connect it to must exist in the same location, here West US, also referred to as a region.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface>

Question 237 (Question Set 4)



You develop the following Azure Resource Manager (ARM) template to create a resource group and deploy an Azure Storage account to the resource group.

```
{  
    "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",  
    "contentVersion": "1.0.0.0",  
    "resources": [  
        {  
            "type": "Microsoft.Resources/resourceGroups",  
            "apiVersion": "2018-05-01",  
            "location": "eastus",  
            "name": "RG1"  
        },  
        {  
            "type": "Microsoft.Resources/deployments",  
            "apiVersion": "2017-05-10",  
            "dependsOn": [  
                "RG1"  
            ],  
            "properties": {  
                "mode": "Incremental"  
            }  
        }  
    ]  
}
```

Answer : B

Explanation:
Deployment scope.
You can target your deployment to a resource group, subscription, management group, or tenant. Depending on the scope of the deployment, you use different commands.
To deploy to a resource group, use New-AzResourceGroupDeployment.
Incorrect:
Not C: To deploy to a tenant, use New-AzTenantDeployment.
Not D: To deploy to a subscription, use New-AzSubscriptionDeployment which is an alias of the New-AzDeployment cmdlet.
To deploy to a management group, use New-AzManagementGroupDeployment.
Not A: The New-AzResource cmdlet creates an Azure resource, such as a website, Azure SQL Database server, or Azure SQL Database, in a resource group.
Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/templates/deploy-powershell>

Question 238 (Question Set 4)



HOTSPOT -

You have an Azure App Service app named WebApp1 that contains two folders named Folder1 and Folder2.

You need to configure a daily backup of WebApp1. The solution must ensure that Folder2 is excluded from the backup.

What should you create first, and what should you use to exclude Folder2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

First create:

- An Azure Storage account
- A Backup vault
- A Recovery Services vault
- A resource group

To exclude Folder2, use:

- A _backup.filter file
- A backup policy
- A lock
- A WebJob

Answer :

Answer Area

First create:

- An Azure Storage account
- A Backup vault
- A Recovery Services vault
- A resource group

To exclude Folder2, use:

- A _backup.filter file
- A backup policy
- A lock
- A WebJob

Explanation:

Question 239 (Question Set 4)



You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template. You need to ensure that NGINX is available on all the virtual machines after they are deployed. What should you use?

- A. the Publish-AzVMDscConfiguration cmdlet
- B. Azure Application Insights
- C. Azure Custom Script Extension
- D. a Microsoft Endpoint Manager device configuration profile

Answer : C

Explanation:

Use Azure Resource Manager templates to install applications into virtual machine scale sets with the Custom Script Extension.

Note: The Custom Script Extension downloads and executes scripts on Azure VMs. This extension is useful for post deployment configuration, software installation, or any other configuration / management task.

To see the Custom Script Extension in action, create a scale set that installs the NGINX web server and outputs the hostname of the scale set VM instance.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/tutorial-install-apps-template>

Question 240 (Question Set 4)



HOTSPOT -

You have an Azure subscription. The subscription contains a virtual machine that runs Windows 10.

You need to join the virtual machine to an Active Directory domain.

How should you complete the Azure Resource Manager (ARM) template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{  
    "apiVersion": "2017-03-30",  
    "type": "Extensions",  
    "Microsoft.Compute/VirtualMachines",  
    "Microsoft.Compute/virtualMachines/extensions",  
    "name": "[concat(parameters('VName'), '/joindomain')]",  
    "location": "[parameter('location')]",  
    "properties": {  
        "publisher": "Microsoft.Compute",  
        "type": "JsonADDomainExtension",  
        "typeHandlerVersion": "1.3",  
        "autoUpgradeMinorVersion": true,  
        "settings": {  
            "Name": "[parameters('domainName')]",  
            "User": "[parameters('domainusername')]",  
            "Restart": "true",  
            "Options": "3"  
        },  
        "ProtectedSettings": {  
            "Settings": {},  
            "Statuses": {}  
        }  
    }  
}
```

Answer :

Answer Area

```
{  
    "apiVersion": "2017-03-30",  
    "type": "Extensions",  
    "Microsoft.Compute/VirtualMachines",  
    "Microsoft.Compute/virtualMachines/extensions",  
    "name": "[concat(parameters('VName'), '/joindomain')]",  
    "location": "[parameter('location')]",  
    "properties": {  
        "publisher": "Microsoft.Compute",  
        "type": "JsonADDomainExtension",  
        "typeHandlerVersion": "1.3",  
        "autoUpgradeMinorVersion": true,  
        "settings": {  
            "Name": "[parameters('domainName')]",  
            "User": "[parameters('domainusername')]",  
            "Restart": "true",  
            "Options": "3"  
        },  
        "ProtectedSettings": {  
            "Settings": {},  
            "Statuses": {}  
        }  
    }  
}
```

Explanation:

Box 1: "Microsoft.Compute/VirtualMachines/extensions",
The following JSON example uses the Microsoft.Compute/virtualMachines/extensions resource type to install the Active Directory domain join extension.
Parameters are used that you specify at deployment time. When the extension is deployed, the VM is joined to the specified managed domain.

Box 2: "ProtectedSettings":{
Example:

```
{
  "apiVersion": "2015-06-15",
  "type": "Microsoft.Compute/virtualMachines/extensions",
  "name": "[concat(parameters('dnsLabelPrefix'),'/joindomain')]",
  "location": "[parameters('location')]",
  "dependsOn": [
    "[concat('Microsoft.Compute/virtualMachines/', parameters('dnsLabelPrefix'))]"
  ],
  "properties": {
    "publisher": "Microsoft.Compute",
    "type": "JsonADDomainExtension",
    "typeHandlerVersion": "1.3",
    "autoUpgradeMinorVersion": true,
    "settings": {
      "Name": "[parameters('domainToJoin')]",
      "OUPath": "[parameters('ouPath')]",
      "User": "[concat(parameters('domainToJoin'), '\\\\', parameters('domainUsername'))]",
      "Restart": "true",
      "Options": "[parameters('domainJoinOptions')]"
    },
    "protectedSettings": {
      "Password": "[parameters('domainPassword')]"
    }
  }
}
Reference:
https://docs.microsoft.com/en-us/azure/active-directory-domain-services/join-windows-vm-template
```

Question 241 (Question Set 4)



You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	<i>Not applicable</i>	Central US
RG2	Resource group	<i>Not applicable</i>	West US
VMSS1	Virtual machine scale set	RG2	West US
Proximity1	Proximity placement group	RG1	West US
Proximity2	Proximity placement group	RG2	Central US
Proximity3	Proximity placement group	RG1	Central US

You need to configure a proximity placement group for VMSS1.

Which proximity placement groups should you use?

- A. Proximity2 only
- B. Proximity1, Proximity2, and Proximity3
- C. Proximity1 only
- D. Proximity1 and Proximity3 only

Answer : C

Explanation:

Resource Group location of VMSS1 is the RG2 location, which is West US.

Only Proximity1, which also in RG2, is located in West US

Note: When you assign your virtual machines to a proximity placement group, the virtual machines are placed in the same data center, resulting in lower and deterministic latency for your applications.

Reference:

<https://azure.microsoft.com/en-us/blog/introducing-proximity-placement-groups/>

Question 242 (Testlet 5)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.

All the resources used by Litware are hosted on-premises.

Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -

The network contains an Active Directory forest named litware.com. All domain controllers are configured as DNS servers and host the litware.com DNS zone.

Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.

Litware.com contains a user named User1.

All the offices connect by using private connections.

Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.

All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.

The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -

Litware plans to implement the following changes:

Deploy Azure ExpressRoute to the Montreal office.

Migrate the virtual machines hosted on Server1 and Server2 to Azure.

Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).

Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -

Litware must meet the following technical requirements:

Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.

Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.

Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.

Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.

Connect the New York office to VNet1 over the Internet by using an encrypted connection.

Create a workflow to send an email message when the settings of VM4 are modified.

Create a custom Azure role named Role1 that is based on the Reader role.

Minimize costs whenever possible.

You discover that VM3 does NOT meet the technical requirements.

You need to verify whether the issue relates to the NSGs.

What should you use?

- A. Diagram in VNet1
- B. Diagnostic settings in Azure Monitor
- C. Diagnose and solve problems in Traffic Manager profiles
- D. The security recommendations in Azure Advisor
- E. IP flow verify in Azure Network Watcher

Answer : E

Explanation:

Scenario: Contoso must meet technical requirements including:

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.

IP flow verify checks if a packet is allowed or denied to or from a virtual machine. The information consists of direction, protocol, local IP, remote IP, local port, and remote port. If the packet is denied by a security group, the name of the rule that denied the packet is returned. While any source or destination IP can be chosen, IP flow verify helps administrators quickly diagnose connectivity issues from or to the internet and from or to the on-premises environment.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-ip-flow-verify-overview>

Question 243 (Question Set 5)



HOTSPOT -

You have an Azure subscription named Sub1.

You plan to deploy a multi-tiered application that will contain the tiers shown in the following table.

Tier	Accessible from the Internet	Number of virtual machines
Front-end web server	Yes	10
Business logic	No	100
Microsoft SQL Server database	No	5

You need to recommend a networking solution to meet the following requirements:

- ☞ Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines.
- ☞ Protect the web servers from SQL injection attacks.

Which Azure resource should you recommend for each requirement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines:

an application gateway that uses the Standard tier
an application gateway that uses the WAF tier
an internal load balancer
a network security group (NSG)
a public load balancer

Protect the web servers from SQL injection attacks:

an application gateway that uses the Standard tier
an application gateway that uses the WAF tier
an internal load balancer
a network security group (NSG)
a public load balancer

Answer :

Answer Area

Ensure that communication between the web servers and the business logic tier spreads equally across the virtual machines:

an application gateway that uses the Standard tier
an application gateway that uses the WAF tier
an internal load balancer
a network security group (NSG)
a public load balancer

Protect the web servers from SQL injection attacks:

an application gateway that uses the Standard tier
an application gateway that uses the WAF tier
an internal load balancer
a network security group (NSG)
a public load balancer

Explanation:

Box 1: an internal load balancer

Azure Internal Load Balancer (ILB) provides network load balancing between virtual machines that reside inside a cloud service or a virtual network with a regional scope.

Box 2: an application gateway that uses the WAF tier

Azure Web Application Firewall (WAF) on Azure Application Gateway provides centralized protection of your web applications from common exploits and vulnerabilities. Web applications are increasingly targeted by malicious attacks that exploit commonly known vulnerabilities.

Reference:

<https://docs.microsoft.com/en-us/azure/web-application-firewall/ag/ag-overview>

Question 244 (Question Set 5)



Your company has three offices. The offices are located in Miami, Los Angeles, and New York. Each office contains datacenter. You have an Azure subscription that contains resources in the East US and West US Azure regions. Each region contains a virtual network. The virtual networks are peered. You need to connect the datacenters to the subscription. The solution must minimize network latency between the datacenters. What should you create?

- A. three Azure Application Gateways and one On-premises data gateway
- B. three virtual hubs and one virtual WAN
- C. three virtual WANs and one virtual hub

D. three On-premises data gateways and one Azure Application Gateway

Answer : C

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-about>

Question 245 (Question Set 5)



HOTSPOT -

You plan to deploy five virtual machines to a virtual network subnet.
Each virtual machine will have a public IP address and a private IP address.
Each virtual machine requires the same inbound and outbound security rules.
What is the minimum number of network interfaces and network security groups that you require? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Minimum number of network interfaces:

5
10
15
20

Minimum number of network security groups:

1
2
5
10

Answer :

Answer Area

Minimum number of network interfaces:

5
10
15
20

Minimum number of network security groups:

1
2
5
10

Explanation:

Box 1: 5 -
A public and a private IP address can be assigned to a single network interface.

Box 2: 1 -
You can associate zero, or one, network security group to each virtual network subnet and network interface in a virtual machine. The same network security group can be associated to as many subnets and network interfaces as you choose.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface-addresses>

Question 246 (Question Set 5)



You have an Azure subscription that contains the resources shown in the following table.

Name	Type
LB1	Load balancer
VM1	Virtual machine
VM2	Virtual machine

LB1 is configured as shown in the following table.

Name	Type	Value
bepool1	Backend pool	VM1, VM2
LoadBalancerFrontEnd	Frontend IP configuration	Public IP address
hprobe1	Health probe	Protocol: TCP Port: 80 Interval: 5 seconds Unhealthy threshold: 2
rule1	Load balancing rule	IP version: IPv4 Frontend IP address: LoadBalancerFrontEnd Port: 80 Backend Port: 80 Backend pool: bepool1 Health probe: hprobe1

You plan to create new inbound NAT rules that meet the following requirements:

- ☞ Provide Remote Desktop access to VM1 from the internet by using port 3389.
- ☞ Provide Remote Desktop access to VM2 from the internet by using port 3389.

What should you create on LB1 before you can create the new inbound NAT rules?

- A. a frontend IP address
- B. a load balancing rule
- C. a health probe
- D. a backend pool

Answer : A

Question 247 (Question Set 5)



HOTSPOT -

You have Azure virtual machines that run Windows Server 2019 and are configured as shown in the following table.

Name	Private IP address	Public IP address	Virtual network name	DNS suffix configured in Windows Server
VM1	10.1.0.4	52.186.85.63	VNET1	Adatum.com
VM2	10.1.0.5	13.92.168.13	VNET1	Contoso.com

You create a private Azure DNS zone named adatum.com. You configure the adatum.com zone to allow auto registration from VNET1.

Which A records will be added to the adatum.com zone for each virtual machine? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

A records for VM1:

None
Private IP address only
Public IP address only
Private IP address and public IP address

A records for VM2:

None
Private IP address only
Public IP address only
Private IP address and public IP address

Answer :

Answer Area

A records for VM1:

None
Private IP address only
Public IP address only
Private IP address and public IP address

A records for VM2:

None
Private IP address only
Public IP address only
Private IP address and public IP address

Explanation:

The virtual machines are registered (added) to the private zone as A records pointing to their private IP addresses.

Reference:

<https://docs.microsoft.com/en-us/azure/dns/private-dns-overview> <https://docs.microsoft.com/en-us/azure/dns/private-dns-scenarios>

Question 248 (Question Set 5)



HOTSPOT -

You have an Azure virtual network named VNet1 that connects to your on-premises network by using a site-to-site VPN. VNet1 contains one subnet named Sunet1.

Subnet1 is associated to a network security group (NSG) named NSG1. Subnet1 contains a basic internal load balancer named ILB1. ILB1 has three Azure virtual machines in the backend pool.

You need to collect data about the IP addresses that connects to ILB1. You must be able to run interactive queries from the Azure portal against the collected data.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resource to create:

An Azure Event Grid
 An Azure Log Analytics workspace
 An Azure Storage account

Resource on which to enable diagnostics:

ILB1
 NSG1
 The Azure virtual machines

Answer :

Answer Area

Resource to create:

An Azure Event Grid
An Azure Log Analytics workspace
 An Azure Storage account

Resource on which to enable diagnostics:

ILB1
 NSG1
 The Azure virtual machines

Explanation:

Box 1: An Azure Log Analytics workspace

In the Azure portal you can set up a Log Analytics workspace, which is a unique Log Analytics environment with its own data repository, data sources, and solutions

Box 2: ILB1 -

Reference:

<https://docs.microsoft.com/en-us/azure/log-analytics/log-analytics-quick-create-workspace> <https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-diagnostics>

Question 249 (Question Set 5) ✖

You have the Azure virtual networks shown in the following table.

Name	Address space	Subnet	Resource group Azure region
VNet1	10.11.0.0/16	10.11.0.0/17	West US
VNet2	10.11.0.0/17	10.11.0.0/25	West US
VNet3	10.10.0.0/22	10.10.1.0/24	East US
VNet4	192.168.16.0/22	192.168.16.0/24	North Europe

To which virtual networks can you establish a peering connection from VNet1?

- A. VNet2 and VNet3 only
- B. VNet2 only
- C. VNet3 and VNet4 only
- D. VNet2, VNet3, and VNet4

Answer : C

Explanation:

Address spaces must not overlap to enable VNet Peering.

Incorrect Answers:

A, B, D: The address space for VNet2 overlaps with VNet1. We therefore cannot establish a peering between VNet2 and VNet1.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/tutorial-connect-virtual-networks-portal> <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq#vnet-peering>

Question 250 (Question Set 5) ✖

You have an Azure subscription that contains a virtual network named VNet1. VNet1 contains four subnets named Gateway, Perimeter, NVA, and Production. The NVA subnet contains two network virtual appliances (NVAs) that will perform network traffic inspection between the Perimeter subnet and the Production subnet. You need to implement an Azure load balancer for the NVAs. The solution must meet the following requirements:

- ☞ The NVAs must run in an active-active configuration that uses automatic failover.
- ☞ The load balancer must load balance traffic to two services on the Production subnet. The services have different IP addresses.
- Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Deploy a basic load balancer
- B. Deploy a standard load balancer
- C. Add two load balancing rules that have HA Ports and Floating IP enabled
- D. Add two load balancing rules that have HA Ports enabled and Floating IP disabled
- E. Add a frontend IP configuration, a backend pool, and a health probe
- F. Add a frontend IP configuration, two backend pools, and a health probe

Answer : BCF

Explanation:

A standard load balancer is required for the HA ports.

Two backend pools are needed as there are two services with different IP addresses.

Floating IP rule is used where backend ports are reused.

Incorrect Answers:

E: HA Ports are not available for the basic load balancer.

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-overview> <https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-multivip-overview>

Question 251 (Question Set 5)



You have an Azure subscription named Subscription1 that contains two Azure virtual networks named VNet1 and VNet2. VNet1 contains a VPN gateway named VPNGW1 that uses static routing. There is a site-to-site VPN connection between your on-premises network and VNet1.

On a computer named Client1 that runs Windows 10, you configure a point-to-site VPN connection to VNet1.

You configure virtual network peering between VNet1 and VNet2. You verify that you can connect to VNet2 from the on-premises network. Client1 is unable to connect to VNet2.

You need to ensure that you can connect Client1 to VNet2.

What should you do?

- A. Download and re-install the VPN client configuration package on Client1.
- B. Select Allow gateway transit on VNet1.
- C. Select Allow gateway transit on VNet2.
- D. Enable BGP on VPNGW1

Answer : A

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-point-to-site-routing>

Question 252 (Question Set 5)



HOTSPOT -

You have an Azure subscription. The subscription contains virtual machines that run Windows Server 2016 and are configured as shown in the following table.

Name	Virtual network	DNS suffix configured in Windows Server
VM1	VNET2	Contoso.com
VM2	VNET2	None
VM3	VNET2	Adatum.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named contoso.com.

You create a virtual network link for contoso.com as shown in the following exhibit.

link1
contoso.com

□ X

Save Discard Delete Access Control (IAM) Tags

Link name
link1

Link state
Completed

Provisioning state
Succeeded

Virtual network details

Virtual network id
</subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/RG2/provi...>

Virtual network
[VNET2](#)

Configuration
 Enable auto registration [①](#)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Answer:
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
When VM1 starts, a record for VM1 is added to the contoso.com DNS zone.	<input checked="" type="radio"/>	<input type="radio"/>
When VM2 starts, a record for VM2 is added to the contoso.com DNS zone.	<input checked="" type="radio"/>	<input type="radio"/>
When VM3 starts, a record for VM3 is added to the adatum.com DNS zone.	<input type="radio"/>	<input checked="" type="radio"/>

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances> <https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration>

Question 253 (Question Set 5) ✖

You have an Azure subscription that contains the resources in the following table.

Name	Type	Azure region	Resource group
VNet1	Virtual network	West US	RG2
VNet2	Virtual network	West US	RG1
VNet3	Virtual network	East US	RG1
NSG1	Network security group (NSG)	East US	RG2

To which subnets can you apply NSG1?

- A. the subnets on VNet1 only
- B. the subnets on VNet2 and VNet3 only
- C. the subnets on VNet2 only
- D. the subnets on VNet3 only
- E. the subnets on VNet1, VNet2, and VNet3

Answer : D

Explanation:
All Azure resources are created in an Azure region and subscription. A resource can only be created in a virtual network that exists in the same region and subscription as the resource.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-vnet-plan-design-arm>

Question 254 (Question Set 5)



DRAG DROP -

You have an Azure subscription that contains two virtual networks named VNet1 and VNet2. Virtual machines connect to the virtual networks. The virtual networks have the address spaces and the subnets configured as shown in the following table.

Virtual network	Address space	Subnet	Peering
VNet1	10.1.0.0/16	10.1.0.0/24 10.1.1.0/26	VNet2
VNet2	10.2.0.0/16	10.2.0.0/24	VNet1

You need to add the address space of 10.33.0.0/16 to VNet1. The solution must ensure that the hosts on VNet1 and VNet2 can communicate.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Remove VNet1.	
Add the 10.33.0.0/16 address space to VNet1.	
Create a new virtual network named VNet1.	(>)
On the peering connection in VNet2, allow gateway transit.	(<)
Recreate peering between VNet1 and VNet2.	
On the peering connection in VNet1, allow gateway transit.	
Remove peering between VNet1 and VNet2.	



Answer :

Actions	Answer Area
Remove VNet1.	Remove peering between VNet1 and VNet2.
Add the 10.33.0.0/16 address space to VNet1.	Add the 10.33.0.0/16 address space to VNet1.
Create a new virtual network named VNet1.	(>)
On the peering connection in VNet2, allow gateway transit.	(<)
Recreate peering between VNet1 and VNet2.	Recreate peering between VNet1 and VNet2.
On the peering connection in VNet1, allow gateway transit.	
Remove peering between VNet1 and VNet2.	



Explanation:

Step 1: Remove peering between VNet1 and VNet2.

You can't add address ranges to, or delete address ranges from a virtual network's address space once a virtual network is peered with another virtual network.

To add or remove address ranges, delete the peering, add or remove the address ranges, then re-create the peering.

Step 2: Add the 10.44.0.0/16 address space to VNet1.
 Step 3: Recreate peering between VNet1 and VNet2
 Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering>

Question 255 (Question Set 5)



HOTSPOT -
 You have an Azure subscription that contains the resource groups shown in the following table.

Name	Location
RG1	West US
RG2	East US

RG1 contains the resources shown in the following table.

Name	Type	Location
storage1	Storage account	West US
VNet1	Virtual network	West US
NIC1	Network interface	West US
Disk1	Disk	West US
VM1	Virtual machine	West US

VM1 is running and connects to NIC1 and Disk1. NIC1 connects to VNET1.

RG2 contains a public IP address named IP2 that is in the East US location. IP2 is not assigned to a virtual machine.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can move storage1 to RG2.	<input type="radio"/>	<input type="radio"/>
You can move NIC1 to RG2.	<input type="radio"/>	<input type="radio"/>
If you move IP2 to RG1, the location of IP2 will change.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
You can move storage1 to RG2.	<input checked="" type="radio"/>	<input type="radio"/>
You can move NIC1 to RG2.	<input type="radio"/>	<input checked="" type="radio"/>
If you move IP2 to RG1, the location of IP2 will change.	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

Box 1: Yes -

You can move storage -

Box 2: No -

You can't move to a new resource group a NIC that is attached to a virtual machine.

Box 3: No -

Azure Public IPs are region specific and can't be moved from one region to another.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources> <https://docs.microsoft.com/en-us/azure/virtual-network/move-across-regions-publicip-powershell>

Question 256 (Question Set 5) 

You have an Azure web app named webapp1.
You have a virtual network named VNET1 and an Azure virtual machine named VM1 that hosts a MySQL database. VM1 connects to VNET1.
You need to ensure that webapp1 can access the data hosted on VM1.
What should you do?

- A. Deploy an internal load balancer
- B. Peer VNET1 to another virtual network
- C. Connect webapp1 to VNET1
- D. Deploy an Azure Application Gateway

Answer : D

Question 257 (Question Set 5)



You create an Azure VM named VM1 that runs Windows Server 2019. VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

Resource group (change)

- Status : Stopped (deallocated)
- Location : West Europe
- Subscription (change)
- Subscription ID : 80f9d59c-629e-4346-b577-8b7e1ef1316a

Computer name : (start VM to view)
Operating system : Windows
Size : Standard DS2 v2 (2 vcpus, 7 GiB memory)
Ephemeral OS disk : N/A
Public IP address : VM1-ip
Private IP address : 10.0.0.4
Virtual network/subnet : VNET1/default
DNS name : Configure

Tags (change) : Click here to add tags

Show data for last: 1 hour 6 hours 12 hours 1 day 7 days 30 days

CPU (average)

Percentage-CPU (Avg) vm1 --

Network (total)

You need to enable Desired State Configuration for VM1.

What should you do first?

- Connect to VM1.
- Start VM1.
- Capture a snapshot of VM1.
- Configure a DNS name for VM1.

Answer : B

Explanation:

Status is Stopped (Deallocated). The DSC extension for Windows requires that the target virtual machine is able to communicate with Azure. The VM needs to be started.

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-windows>

Question 258 (Question Set 5)



You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers. You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines. You need to ensure that visitors are serviced by the same web server for each request. What should you configure?

- Floating IP (direct server return) to Disabled
- Session persistence to None
- Floating IP (direct server return) to Enabled
- Session persistence to Client IP

Answer : D

Explanation:

With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer For Sticky Sessions set Session persistence to Client IP or to Client IP and protocol.

On the following image you can see sticky session configuration:

Note:

- ☐ Client IP and protocol specifies that successive requests from the same client IP address and protocol combination will be handled by the same virtual machine.
- ☐ Client IP specifies that successive requests from the same client IP address will be handled by the same virtual machine.

Reference:

<https://cloudopszone.com/configure-azure-load-balancer-for-sticky-sessions/>

Question 259 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following resources:

- ☐ A virtual network that has a subnet named Subnet1
 - ☐ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
 - ☐ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
- NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
- ☐ Priority: 100
 - ☐ Source: Any
 - ☐ Source port range: *
 - ☐ Destination: *
 - ☐ Destination port range: 3389
 - ☐ Protocol: UDP
 - ☐ Action: Allow

VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.

You need to be able to establish Remote Desktop connections from the internet to VM1.

Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the Any source to the *destination for port range 3389 and uses the TCP protocol. You remove NSG-VM1 from the network interface of VM1.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Explanation:

The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.

Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection>

Question 260 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following resources:

- ☐ A virtual network that has a subnet named Subnet1
 - ☐ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
 - ☐ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
- NSG-Subnet1 has the default inbound security rules only.
NSG-VM1 has the default inbound security rules and the following custom inbound security rule:
- ☐ Priority: 100
 - ☐ Source: Any
 - ☐ Source port range: *
 - ☐ Destination: *
 - ☐ Destination port range: 3389

Protocol: UDP -

■

- ☐ Action: Allow

VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.

You need to be able to establish Remote Desktop connections from the internet to VM1.

Solution: You add an inbound security rule to NSG-Subnet1 that allows connections from the internet source to the VirtualNetwork destination for port range 3389 and uses the UDP protocol.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Explanation:

The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.

Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection>

Question 261 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following resources:

- ⇒ A virtual network that has a subnet named Subnet1
 - ⇒ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
 - ⇒ A virtual machine named VM1 that has the required Windows Server configurations to allow Remote Desktop connections
- NSG-Subnet1 has the default inbound security rules only.
- NSG-VM1 has the default inbound security rules and the following custom inbound security rule:

- ⇒ Priority: 100
- ⇒ Source: Any
- ⇒ Source port range: *
- ⇒ Destination: *
- ⇒ Destination port range: 3389
- ⇒ Protocol: UDP
- ⇒ Action: Allow

VM1 has a public IP address and is connected to Subnet1. NSG-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.

You need to be able to establish Remote Desktop connections from the internet to VM1.

Solution: You add an inbound security rule to NSG-Subnet1 and NSG-VM1 that allows connections from the internet source to the VirtualNetwork destination for port range 3389 and uses the TCP protocol. Does this meet the goal?

- A. Yes
B. No

Answer : A

Explanation:

The default port for RDP is TCP port 3389. A rule to permit RDP traffic must be created automatically when you create your VM.

Note on NSG-Subnet1: Azure routes network traffic between all subnets in a virtual network, by default.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection>

Question 262 (Question Set 5)



HOTSPOT -

You have a virtual network named VNet1 that has the configuration shown in the following exhibit.

```
Name          : VNet1
ResourceGroupName : Production
Location       : westus
Id            : /subscriptions/14d26092-8e42-4ea7-b770-
9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/virtualNetworks/VNet1
Etag          : W/"76f7edd6-d022-455b-aeae-376059318e5d"
ResourceGuid   : 562696cc-b2ba-4cc5-9619-0a735d6c34c7
ProvisioningState : Succeeded
Tags          :
AddressSpace  : {
    "AddressPrefixes": [
        "10.2.0.0/16"
    ]
}
DhcpOptions    : {}
Subnets        : [
    {
        "Name": "default",
        "Etag": "W/\\"76f7edd6-d022-455b-aeae-376059318e5d\\\"",
        "Id": "/subscriptions/14d26092-8e42-4ea7-b770-
9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/
virtualNetworks/VNet1/subnets/default",
        "AddressPrefix": "10.2.0.0/24",
        "IpConfigurations": [],
        "ResourceNavigationLinks": [],
        "ServiceEndpoints": [],
        "ProvisioningState": "Succeeded"
    }
]
VirtualNetworkPeerings : []
EnableDDoSProtection : false
EnableVmProtection    : false
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

add a network interface
add a subnet
add an address space
delete a subnet
delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

add a network interface
add a subnet
add an address space
delete a subnet
delete an address space

Answer :

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

add a network interface
add a subnet
add an address space
delete a subnet
delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

add a network interface
add a subnet
add an address space
delete a subnet
delete an address space

Explanation:

Box 1: add an address space -

Your IaaS virtual machines (VMs) and PaaS role instances in a virtual network automatically receive a private IP address from a range that you specify, based on the address space of the subnet they are connected to. We need to add the 192.168.1.0/24 address space.

Box 2: add a network interface -

The 10.2.1.0/24 network exists. We need to add a network interface.

Reference:

<https://docs.microsoft.com/en-us/office365/enterprise/designing-networking-for-microsoft-azure-iaas>

Question 263 (Question Set 5)



You have an Azure subscription that contains a virtual network named VNET1. VNET1 contains the subnets shown in the following table.

Name	Connected virtual machines
Subnet1	VM1, VM2
Subnet2	VM3, VM4
Subnet3	VM5, VM6

Each virtual machine uses a static IP address.

You need to create network security groups (NSGs) to meet following requirements:

- ⇒ Allow web requests from the internet to VM3, VM4, VM5, and VM6.
- ⇒ Allow all connections between VM1 and VM2.
- ⇒ Allow Remote Desktop connections to VM1.
- ⇒ Prevent all other network traffic to VNET1.

What is the minimum number of NSGs you should create?

- A. 1
- B. 3
- C. 4
- D. 12

Answer : C

Explanation:

Each network security group also contains default security rules.

Note: A network security group (NSG) contains a list of security rules that allow or deny network traffic to resources connected to Azure Virtual Networks (VNet). NSGs can be associated to subnets, individual VMs (classic), or individual network interfaces (NIC) attached to VMs (Resource Manager).

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#default-security-rules>

Question 264 (Question Set 5)



You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VM1	Virtual machine	RG1

The Not allowed resource types Azure policy that has policy enforcement enabled is assigned to RG1 and uses the following parameters:

Microsoft.Network/virtualNetworks

Microsoft.Compute/virtualMachines

In RG1, you need to create a new virtual machine named VM2, and then connect VM2 to VNET1.

What should you do first?

- A. Remove Microsoft.Compute/virtualMachines from the policy.
- B. Create an Azure Resource Manager template
- C. Add a subnet to VNET1.
- D. Remove Microsoft.Network/virtualNetworks from the policy.

Answer : A

Explanation:

The Not allowed resource types Azure policy prohibits the deployment of specified resource types. You specify an array of the resource types to block.

Virtual Networks and Virtual Machines are prohibited.

Reference:

<https://docs.microsoft.com/en-us/azure/governance/policy/samples/not-allowed-resource-types>

Question 265 (Question Set 5)



Your company has an Azure subscription named Subscription1.

The company also has two on-premises servers named Server1 and Server2 that run Windows Server 2016. Server1 is configured as a DNS server that has a primary DNS zone named adatum.com.

Adatum.com contains 1,000 DNS records.

You manage Server1 and Subscription1 from Server2. Server2 has the following tools installed:

- ⇒ The DNS Manager console
- ⇒ Azure PowerShell
- ⇒ Azure CLI 2.0

You need to move the adatum.com zone to an Azure DNS zone in Subscription1. The solution must minimize administrative effort.

What should you use?

- A. Azure CLI
- B. Azure PowerShell
- C. the Azure portal
- D. the DNS Manager console

Answer : B

Explanation:

Step 1: Installing the DNS migration script

Open an elevated PowerShell window (Administrative mode) and run following command `install-script PrivateDnsMigrationScript`

Step 2: Running the script -

Execute following command to run the script

`PrivateDnsMigrationScript.ps1 -`

Reference:

<https://docs.microsoft.com/en-us/azure/dns/private-dns-migration-guide>

Question 266 (Question Set 5)



You have a public load balancer that balances ports 80 and 443 across three virtual machines named VM1, VM2, and VM3.

You need to direct all the Remote Desktop Protocol (RDP) connections to VM3 only.

What should you configure?

- A. an inbound NAT rule
- B. a new public load balancer for VM3
- C. a frontend IP configuration
- D. a load balancing rule

Answer : A

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/tutorial-load-balancer-port-forwarding-portal> <https://pixelrobots.co.uk/2017/08/azure-load-balancer-for-rds/>

Question 267 (Question Set 5)



HOTSPOT -

You have an Azure subscription named Subscription1 that contains the virtual networks in the following table.

Name	Subnets
VNet1	Subnet11, Subnet12
VNet2	Subnet13

Subscription1 contains the virtual machines in the following table.

Name	Subnet	Availability set
VM1	Subnet11	AS1
VM2	Subnet11	AS1
VM3	Subnet11	<i>Not applicable</i>
VM4	Subnet11	<i>Not applicable</i>
VM5	Subnet12	<i>Not applicable</i>
VM6	Subnet12	<i>Not applicable</i>

In Subscription1, you create a load balancer that has the following configurations:

- ⇒ Name: LB1
- ⇒ SKU: Basic
- ⇒ Type: Internal
- ⇒ Subnet: Subnet12
- ⇒ Virtual network: VNET1

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
LB1 can balance the traffic between VM1 and VM2.	<input type="radio"/>	<input type="radio"/>
LB1 can balance the traffic between VM3 and VM4.	<input type="radio"/>	<input type="radio"/>
LB1 can balance the traffic between VM5 and VM6.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
LB1 can balance the traffic between VM1 and VM2.	<input checked="" type="radio"/>	<input type="radio"/>
LB1 can balance the traffic between VM3 and VM4.	<input type="radio"/>	<input checked="" type="radio"/>
LB1 can balance the traffic between VM5 and VM6.	<input type="radio"/>	<input checked="" type="radio"/>

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-standard-overview>

Question 268 (Question Set 5)



HOTSPOT -

You have an Azure virtual machine that runs Windows Server 2019 and has the following configurations:

- > Name: VM1
- > Location: West US
- > Connected to: VNET1
- > Private IP address: 10.1.0.4
- > Public IP addresses: 52.186.85.63
- > DNS suffix in Windows Server: Adatum.com

You create the Azure DNS zones shown in the following table.

Name	Type	Location
Adatum.pri	Private	West Europe
Contoso.pri	Private	Central US
Adatum.com	Public	West Europe
Contoso.com	Public	North Europe

You need to identify which DNS zones you can link to VNET1 and the DNS zones to which VM1 can automatically register.

Which zones should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

DNS zones that you can link to VNET1:

Adatum.com only
Adatum.pri and adatum.com only
The private zones only
The public zones only

DNS zones to which VM1 can automatically register:

Adatum.com only
Adatum.pri and adatum.com only
The private zones only
The public zones only

Answer :

Answer Area

DNS zones that you can link to VNET1:

Adatum.com only
Adatum.pri and adatum.com only
The private zones only
The public zones only

DNS zones to which VM1 can automatically register:

Adatum.com only
Adatum.pri and adatum.com only
The private zones only
The public zones only

Reference:

<https://docs.microsoft.com/en-us/azure/dns/private-dns-overview>

Question 269 (Question Set 5)



DRAG DROP -

You have an on-premises network that you plan to connect to Azure by using a site-to-site VPN.

In Azure, you have an Azure virtual network named VNET1 that uses an address space of 10.0.0.0/16. VNET1 contains a subnet named Subnet1 that uses an address space of 10.0.0.0/24. You need to create a site-to-site VPN to Azure.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choice is correct. You will receive credit for any of the correct orders you select.

Select and Place:

Actions

Create a local gateway.

Create a VPN gateway.

Create a gateway subnet.

Create a custom DNS server.

Create a VPN connection.

Create an Azure Content Delivery Network (CDN) profile.

Answer Area

Answer :

Actions

Create a local gateway.

Create a VPN gateway.

Create a gateway subnet.

Create a custom DNS server.

Create a VPN connection.

Create an Azure Content Delivery Network (CDN) profile.

Answer Area

Create a gateway subnet.

Create a VPN gateway.

Create a local gateway.

Create a VPN connection.

Question 270 (Question Set 5)



You have an Azure subscription that contains the resources in the following table.

Name	Type	Details
VNet1	Virtual network	<i>Not applicable</i>
Subnet1	Subnet	Hosted on VNet1
VM1	Virtual machine	On Subnet1
VM2	Virtual machine	On Subnet1

VM1 and VM2 are deployed from the same template and host line-of-business applications.

You configure the network security group (NSG) shown in the exhibit. (Click the Exhibit tab.)

[Move](#) [Delete](#) [Refresh](#)

Resource group (change) : RG1lod9053488	Custom security rules : 1 inbound, 1 outbound
Location : East US	Associated with : 0 subnets, 0 network interfaces
Subscription (change) : Microsoft AZ	
Subscription ID : ac344a74-f85a-4b2e-8057-642088faaf20	
Tags (change) : Click here to add tags	

Inbound security rules

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
100	Port_80	80	TCP	Internet	Any	<input checked="" type="radio"/> Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	<input checked="" type="radio"/> Allow
65001	Allow AzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	<input checked="" type="radio"/> Allow
65500	DenyAllInBound	Any	Any	Any	Any	<input checked="" type="radio"/> Deny

Answer : C

Outbound security rules

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
Explanation:	You can associate or dissociate a network security group from a network interface or subnet.					
100	DenyWebSites	80	TCP	Any	Internet	<input checked="" type="radio"/> Deny
Reference:	https://docs.microsoft.com/en-us/azure/virtual-network/manage-network-security-group					
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	<input checked="" type="radio"/> Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	<input checked="" type="radio"/> Allow

Question 271 (Question Set 5)

You have two subscriptions named Subscription1 and Subscription2. Each subscription is associated to a different Azure AD tenant. Subscription1 contains a virtual network named VNet1. VNet1 contains an Azure virtual machine named VM1 and has an IP address space of 10.0.0.0/16. Subscription2 contains a virtual network named VNet2. VNet2 contains an Azure virtual machine named VM2 and has an IP address space of 10.10.0.0/24. You need to connect VNet1 to VNet2. What should you do first?

- A. Move VM1 to Subscription2.
- B. Move VNet1 to Subscription2.
- C. Modify the IP address space of VNet2.
- D. Provision virtual network gateways.

Answer : D

Explanation:
The virtual networks can be in the same or different regions, and from the same or different subscriptions. When connecting VNets from different subscriptions, the subscriptions do not need to be associated with the same Active Directory tenant.
Configuring a VNet-to-VNet connection is a good way to easily connect VNets. Connecting a virtual network to another virtual network using the VNet-to-VNet connection type (VNet2VNet) is similar to creating a Site-to-Site IPsec connection to an on-premises location. Both connectivity types use a VPN gateway to provide a secure tunnel using IPsec/IKE, and both function the same way when communicating.
The local network gateway for each VNet treats the other VNet as a local site. This lets you specify additional address space for the local network gateway in order to route traffic.
Reference:
https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal

Question 272 (Question Set 5)

You plan to create an Azure virtual machine named VM1 that will be configured as shown in the following exhibit.

Create a virtual machine

⚠ Changing Basic options may reset selections you have made. Review all options prior to creating the virtual machine.

Basics Disks Networking Management Advanced Tags Review + create

Create a virtual machine that runs Linux or Windows. Select an image from Azure marketplace or use your own customized image.

Complete the Basics tab then Review + create to provision a virtual machine with default parameters or review each tab for full customization.

Looking for classic VMs? [Create VM from Azure Marketplace](#)

PROJECT DETAILS

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

* Subscription <small> ⓘ</small>	MyDev-Test Subscription
* Resource group <small> ⓘ</small>	RG1
	Create new

INSTANCE DETAILS

* Virtual machine name <small> ⓘ</small>	VM1
* Region <small> ⓘ</small>	(US) West US 2
Availability options <small> ⓘ</small>	No infrastructure redundancy required
* Image <small> ⓘ</small>	Windows Server 2016 Datacenter
Browse all public and private images	
Azure Spot instance <small> ⓘ</small>	<input type="radio"/> Yes <input checked="" type="radio"/> No
* Size <small> ⓘ</small>	Standard DS1 v2 1 vcpu, 3.5 GiB memory (ZAR 632.47/month) Change size

The planned disk configurations for VM1 are shown in the following exhibit.

Basics Disks Networking Management Advanced Tags Review + create

Azure VMs have one operating system disk and a temporary disk for short-term storage. You can attach additional data disks. The size of the VM determines the type of storage you can use and the number of data disks allowed. [Learn more](#)

Disk options

* OS disk type <small> ⓘ</small>	Standard HDD
The selected VM size supports premium disks. We recommend Premium SSD for high IOPS workloads. Virtual machines with Premium SSD disks qualify for the 99.9% connectivity SLA.	

Enable Ultra Disk compatibility (Preview) ⓘ Yes No
 Ultra Disks are only available when using Managed Disks.

Data disks

You can add and configure additional data disks for your virtual machine or attach existing disks. This VM also comes with a temporary disk.
Answer: A,C

Explanation:
A: Adding unmanaged data disks is currently not supported at the time of VM creation. You can add them after the VM is created.
C: When you create a VM for an Availability Zone, Under Settings > High availability, select one of the numbered zones from the Availability zone dropdown.

Advanced

Use managed disks <small> ⓘ</small>	<input checked="" type="radio"/> No <input type="radio"/> Yes
* Storage account <small> ⓘ</small>	(new) rg1 disks799
	Create new

Settings X

Availability Zone.
Select answer presents part of the solution.

High availability

Availability zone 2

Storage

Use managed disks No Yes

Network

* Virtual network (new) myResourceGroup9-vnet

* Subnet default (172.16.4.0/24)

* Public IP address >

Question 273 (Question Set 5) ✖

HOTSPOT -
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group	Location
RG1	Resource group	Not applicable	Central US
RG2	Resource group	Not applicable	West US
RG3	Resource group	Not applicable	East US
VMSS1	Virtual machine scale set	RG1	West US

VMSS1 is set to VM (virtual machines) orchestration mode.

You need to deploy a new Azure virtual machine named VM1, and then add VM1 to VMSS1.

Which resource group and location should you use to deploy VM1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resource group: ▼

RG1 only
RG2 only
RG1 or RG2 only
RG1, RG2, or RG3

Location: ▼

West US only
Central US only
Central US or West US only
East US, Central US, or West US

Answer :

Answer Area

Resource group: RG1 only
RG2 only
RG1 or RG2 only
RG1, RG2, or RG3

Location:

Question 274 (Question Set 5)



HOTSPOT -

You have an Azure subscription that contains three virtual networks named VNET1, VNET2, and VNET3. Peering for VNET1 is configured as shown in the following exhibit.

VNET1 | Peering
Virtual network

NAME	PEERING STATUS	PEER	GATEWAY TRANSIT	...
Peering1	Connected	VNET2	Disabled	...
Peering1	Connected	VNET3	Disabled	...

Peering for VNET2 is configured as shown in the following exhibit.

VNET2 | Peering
Virtual network

NAME	PEERING STATUS	PEER	GATEWAY TRANSIT	...
Peering1	Connected	VNET1	Disabled	...

Peering for VNET3 is configured as shown in the following exhibit.

VNET3 | Peering
Virtual network

NAME	PEERING STATUS	PEER	GATEWAY TRANSIT	...
Peering1	Connected	VNET1	Disabled	...

How can packets be routed between the virtual networks? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Packets from VNET1 can be routed to:

VNET2 only
VNET3 only
VNET2 and VNET3

Packets from VNET2 can be routed to:

VNET1 only
VNET3 only
VNET1 and VNET3

Answer :

Answer Area

Packets from VNET1 can be routed to:

VNET2 only
VNET3 only
VNET2 and VNET3

Packets from VNET2 can be routed to:

VNET1 only
VNET3 only
VNET1 and VNET3

Explanation:

Box 1. VNET2 and VNET3 -

Box 2: VNET1 -

Gateway transit is disabled.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview>

Question 275 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.

From Azure, you download and install the VPN client configuration package on a computer named Computer2.

You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.

Solution: You modify the Azure Active Directory (Azure AD) authentication policies.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

Instead export the client certificate from Computer1 and install the certificate on Computer2.

Note:

Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site>

Question 276 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.

From Azure, you download and install the VPN client configuration package on a computer named Computer2.

You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.

Solution: You join Computer2 to Azure Active Directory (Azure AD).

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

A client computer that connects to a VNet using Point-to-Site must have a client certificate installed.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site>

Question 277 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.

Another administrator plans to create several network security groups (NSGs) in the subscription.

You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.

Solution: You create a resource lock, and then you assign the lock to the subscription.

Does this meet the goal?

A. Yes

B. No

Answer : B

Question 278 (Question Set 5)



You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.

You have a computer named Computer1 that runs Windows 10. Computer1 is connected to the Internet.

You add a network interface named vm1173 to VM1 as shown in the exhibit. (Click the Exhibit tab.)

Network Interface: vm1173		Effective security rules	Topology			
Virtual network/subnet: RG1-vnet/default	networking: Disabled	Public IP: VM1-ip	Private IP: 10.0.0.5 Accelerated			
Inbound port rules		Outbound port rules	Application security groups			
Network security group VM1-nsg (attached to network interface: vm1173) Impacts 0 subnets, 1 network interfaces		Add inbound port rule				
PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINA...	ACTION
300	RDP	3389	TCP	Any	Any	Allow ...
65000	AllowVnetInBound	Any	Any	VirtualN...	VirtualN...	Allow ...
65001	AllowAzureLoadB...	Any	Any	AzureLo...	Any	Allow ...
65500	DenyAllInBound	Any	Any	Any	Any	Deny ...

From Computer1, you attempt to connect to VM1 by using Remote Desktop, but the connection fails.

You need to establish a Remote Desktop connection to VM1.

What should you do first?

- A. Change the priority of the RDP rule
- B. Attach a network interface
- C. Delete the DenyAllInBound rule
- D. Start VM1

Answer : D

Explanation:

Incorrect Answers:

A: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. RDP already has the lowest number and thus the highest priority.

B: The network interface has already been added to VM.

C: The Outbound rules are fine.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

Question 279 (Question Set 5)



You have the Azure virtual machines shown in the following table.

Name	IP address	Connected to
VM1	10.1.0.4	VNET1/Subnet1
VM2	10.1.10.4	VNET1/Subnet2
VM3	172.16.0.4	VNET2/SubnetA
VM4	10.2.0.8	VNET3/SubnetB

A DNS service is installed on VM1.

You configure the DNS servers settings for each virtual network as shown in the following exhibit.

Save Discard

DNS servers ⓘ

Default (Azure-provided)

Custom

10.1.0.4	...
Add DNS server	...

You need to ensure that all the virtual machines can resolve DNS names by using the DNS service on VM1.

What should you do?

- A. Configure a conditional forwarder on VM1
- B. Add service endpoints on VNET1
- C. Add service endpoints on VNET2 and VNET3
- D. Configure peering between VNET1, VNET2, and VNET3

Answer : D

Explanation:

Virtual network peering enables you to seamlessly connect networks in Azure Virtual Network. The virtual networks appear as one for connectivity purposes. The traffic between virtual machines uses the Microsoft backbone infrastructure.

Incorrect Answers:

B, C: Virtual Network (VNet) service endpoint provides secure and direct connectivity to Azure services over an optimized route over the Azure backbone network. Endpoints allow you to secure your critical Azure service resources to only your virtual networks. Service Endpoints enables private IP addresses in the VNet to reach the endpoint of an Azure service without needing a public IP address on the VNet.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-service-endpoints-overview> <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-peering-overview>

Question 280 (Question Set 5)



HOTSPOT -

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Connected to subnet
VM1	172.16.1.0/24
VM2	172.16.2.0/24

You add inbound security rules to a network security group (NSG) named NSG1 as shown in the following table.

Priority	Source	Destination	Protocol	Port	Action
100	172.16.1.0/24	172.16.2.0/24	TCP	Any	Allow
101	Any	172.16.2.0/24	TCP	Any	Deny

You run Azure Network Watcher as shown in the following exhibit.

Resource group *

RG1

Source type *

Virtual machine

* Virtual machine

VM1

Destination

Select a virtual machine Specify manually

Resource group *

RG1

Virtual machine *

VM2

Probe Settings

Protocol

TCP ICMP

Destination port *

8080

Advanced settings

Check

Status

! Unreachable

Agent extension version
1.4

Source virtual machine
[VM1](#)

You run Network Watcher again as shown in the following exhibit.

Source type *

* Virtual machine

Destination
 Select a virtual machine Specify manually

Resource group *

Answers:

Answer Area

Statements	Yes	No
NSG1 limits VM1 traffic	<input type="radio"/>	<input checked="" type="radio"/>
NSG1 applies to VM2	<input checked="" type="radio"/>	<input type="radio"/>
VM1 and VM2 connect to the same virtual network	<input type="radio"/>	<input checked="" type="radio"/>

VM1

Explanation:

[Grid view](#) [Topology view](#)

Box 1: No -

It limits traffic to VM2, but not VM1 traffic.

Hops

Box 2: Yes -

Yes, the destination is VM2.

NAME	IP ADDRESS	STATUS	NEXT HOP IP ADDRESS	RTT FROM SOURCE (...)
VM1	172.16.1.4		172.16.2.4	0
VM2	172.16.2.4		-	-

Question 281 (Question Set 5)

You have the Azure virtual network named VNet1 that contains a subnet named Subnet1. Subnet1 contains three Azure virtual machines. Each virtual machine has a public IP address. The virtual machines host several applications that are accessible over port 443 to users on the Internet.

Your on-premises network has a site-to-site VPN connection to VNet1.

You discover that the virtual machines can be accessed by using the Remote Desktop Protocol (RDP) from the Internet and from the on-premises network.

You need to prevent RDP access to the virtual machines from the Internet, unless the RDP connection is established from the on-premises network. The solution must ensure that all the applications can still be accessed by the Internet users.

What should you do?

- A. Modify the address space of the local network gateway
- B. Create a deny rule in a network security group (NSG) that is linked to Subnet1
- C. Remove the public IP addresses from the virtual machines
- D. Modify the address space of Subnet1

Answer : B

Explanation:

You can use a site-to-site VPN to connect your on-premises network to an Azure virtual network. Users on your on-premises network connect by using the RDP or SSH protocol over the site-to-site VPN connection. You don't have to allow direct RDP or SSH access over the internet.

Reference:

<https://docs.microsoft.com/en-us/azure/security/fundamentals/network-best-practices>

Question 282 (Question Set 5)

You have an Azure subscription that contains the resources in the following table.

Name	Type
ASG1	Application security group
NSG1	Network security group (NSG)
Subnet1	Subnet
VNet1	Virtual network
NIC1	Network interface
VM1	Virtual machine

Subnet1 is associated to VNet1. NIC1 attaches VM1 to Subnet1.

You need to apply ASG1 to VM1.

What should you do?

- A. Associate NIC1 to ASG1
- B. Modify the properties of ASG1
- C. Modify the properties of NSG1

Answer : A

Explanation:

Application Security Group can be associated with NICs.

References:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#application-security-groups>

Question 283 (Question Set 5)



You have an Azure subscription named Subscription1 that contains an Azure virtual network named VNet1. VNet1 connects to your on-premises network by using Azure ExpressRoute.

You plan to prepare the environment for automatic failover in case of ExpressRoute failure.

You need to connect VNet1 to the on-premises network by using a site-to-site VPN. The solution must minimize cost.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Create a connection
- B. Create a local site VPN gateway
- C. Create a VPN gateway that uses the VpnGw1 SKU
- D. Create a gateway subnet
- E. Create a VPN gateway that uses the Basic SKU

Answer : ADE

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal>

Question 284 (Question Set 5)



HOTSPOT -

You have peering configured as shown in the following exhibit.

Virtual networks			
VNet 6 - Peerings			
Add		Edit columns	
<input type="button" value="Filter by name"/>		<input type="button" value="Add"/>	
NAME	PEERING STATUS	PEER	GATEWAY TRANSIT
test1-vnet	Disconnected	vNET1	Enabled
testVNET1	Disconnected	vNET2	Disabled
vNET1	Disconnected	vNET3	Enabled
vNET2	Disconnected	vNET4	Enabled
vNET3	Disconnected	vNET5	Enabled
vNET4	Disconnected	vNET6	Enabled
vNET5	Disconnected		
vNET6	Disconnected		

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Hosts on vNET6 can communicate with hosts on [answer choice].

vNET6 only
vNET6 and vNET1 only
vNET6, vNET1, and vNET2 only
all the virtual networks in the subscription

Answer: To change the status of the peering

Answer Area

Hosts on vNET6 can communicate with hosts on [answer choice].

vNET6 only
vNET6 and vNET1 only
vNET6, vNET1, and vNET2 only
all the virtual networks in the subscription

To change the status of the peering connection to vNET1 to **Connected**, you must first [answer choice].

add a service endpoint
add a subnet
delete peering1
modify the address space

Explanation:

Box 1: vNET6 only -
Peering status to both VNet1 and Vnet2 are disconnected.

Box 2: delete peering1 -
Peering to Vnet1 is Enabled but disconnected. We need to update or re-create the remote peering to get it back to Initiated state.
Reference:
<https://blog.kloud.com.au/2018/10/19/address-space-maintenance-with-vnet-peering/>

Question 285 (Question Set 5)



HOTSPOT -
You have an Azure subscription that contains the resources in the following table.

Name	Type
VM1	Virtual machine
VM2	Virtual machine
LB1	Load balancer (Basic SKU)

You install the Web Server server role (IIS) on VM1 and VM2, and then add VM1 and VM2 to LB1.

LB1 is configured as shown in the LB1 exhibit. (Click the LB1 tab.)

Essentials ^

Resource group (change)	Backend pool
VMRG	Backend1 (2 virtual machines)
Location	Health probe
West Europe	Probe1(HTTP:80/Probe1.htm)
Subscription name (change)	Load balancing rule
Azure Pass	Rule1 (TCP/80)
Subscription ID	NAT rules
e65d2b22-fde8	-
SKU	Public IP address
Basic	104.40.178.194 (LB1)

Rule1 is configured as shown in the Rule1 exhibit. (Click the Rule1 tab.)

* Name

* IP Version
 IPv4 IPv6

* Frontend IP address [?](#)
 [▼](#)

Protocol
 TCP UDP

* Port

* Backend port [?](#)

Backend pool [?](#)
 [▼](#)

Health probe [?](#)
 [▼](#)

Session persistence [?](#)
 [▼](#)

Idle timeout (minutes) [?](#)
 4

Floating IP (direct server return) [?](#)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 is in the same availability set as VM2.	<input type="radio"/>	<input type="radio"/>
If Probe1.htm is present on VM1 and VM2, LB1 will balance TCP port 80 between VM1 and VM2.	<input type="radio"/>	<input type="radio"/>
If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.	<input type="radio"/>	<input type="radio"/>

Answer :

~~If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.~~

Answer Area

Statements	Yes	No
VM1 is in the same availability set as VM2.	<input type="radio"/>	<input type="radio"/>
If Probe1.htm is present on VM1 and VM2, LB1 will balance TCP port 80 between VM1 and VM2.	<input type="radio"/>	<input type="radio"/>
If you delete Rule1, LB1 will balance all the requests between VM1 and VM2 for all the ports.	<input type="radio"/>	<input type="radio"/>

Explanation:

Box 1: Yes -

A Basic Load Balancer supports virtual machines in a single availability set or virtual machine scale set.

Box 2: Yes -

When using load-balancing rules with Azure Load Balancer, you need to specify health probes to allow Load Balancer to detect the backend endpoint status. The configuration of the health probe and probe responses determine which backend pool instances will receive new flows. You can use health probes to detect the failure of an application on a backend endpoint. You can also generate a custom response to a health probe and use the health probe for flow control to manage load or planned downtime. When a health probe fails, Load Balancer will stop sending new flows to the respective unhealthy instance. Outbound connectivity is not impacted, only inbound connectivity is impacted.

Box 3: No -

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/skus>

<https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-custom-probe-overview>

Question 286 (Question Set 5)



HOTSPOT -

You have an Azure virtual machine named VM1 that connects to a virtual network named VNet1. VM1 has the following configurations:

- ⇒ Subnet: 10.0.0.0/24
- ⇒ Availability set: AVSet
- ⇒ Network security group (NSG): None
- ⇒ Private IP address: 10.0.0.4 (dynamic)
- ⇒ Public IP address: 40.90.219.6 (dynamic)

You deploy a standard, Internet-facing load balancer named slb1.

You need to configure slb1 to allow connectivity to VM1.

Which changes should you apply to VM1 as you configure slb1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Before you create a backend pool on slb1, you must:

<input type="checkbox"/> Create and assign an NSG to VM1
<input type="checkbox"/> Remove the public IP address from VM1
<input type="checkbox"/> Change the private IP address of VM1 to static

Before you can connect to VM1 from slb1, you must:

<input type="checkbox"/> Create and configure an NSG
<input type="checkbox"/> Remove the public IP address from VM1
<input type="checkbox"/> Change the private IP address of VM1 to static

Answer :

Answer Area

Before you create a backend pool on slb1, you must:

<input type="checkbox"/> Create and assign an NSG to VM1
<input checked="" type="checkbox"/> Remove the public IP address from VM1
<input type="checkbox"/> Change the private IP address of VM1 to static

Before you can connect to VM1 from slb1, you must:

<input checked="" type="checkbox"/> Create and configure an NSG
<input type="checkbox"/> Remove the public IP address from VM1
<input type="checkbox"/> Change the private IP address of VM1 to static

Explanation:

Change the private IP address of VM1 to static

Box 1: Remove the public IP address from VM1

Note: A public load balancer can provide outbound connections for virtual machines (VMs) inside your virtual network. These connections are accomplished by translating their private IP addresses to public IP addresses. Public Load Balancers are used to load balance internet traffic to your VMs.

Box 2: Create and configure an NSG

NSGs are used to explicitly permit allowed traffic. If you do not have an NSG on a subnet or NIC of your virtual machine resource, traffic is not allowed to reach this resource.

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-overview>

Question 287 (Question Set 5)



You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Location
VNET1	Virtual network	East US
IP1	Public IP address	West Europe
RT1	Route table	North Europe

You need to create a network interface named NIC1.

In which location can you create NIC1?

- A. East US and North Europe only
- B. East US only

- C. East US, West Europe, and North Europe
 D. East US and West Europe only

Answer : B

Explanation:

Before creating a network interface, you must have an existing virtual network in the same location and subscription you create a network interface in.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface>

Question 288 (Question Set 5)



You have Azure virtual machines that run Windows Server 2019 and are configured as shown in the following table.

Name	Virtual network name	DNS suffix configured in Windows Server
VM1	VNET1	Contoso.com
VM2	VNET2	Contoso.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named contoso.com.

For contoso.com, you create a virtual network link named link1 as shown in the exhibit. (Click the Exhibit tab.)

link1
contoso.com

Save Discard Delete Access Control (IAM) Tags

Link name
link1

Link state
Completed

Provisioning state
Succeeded

Virtual network details

Virtual network id
</subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/RG2/provi...>

Virtual network
VNET1

Configuration

Enable auto registration

You discover that VM1 can resolve names in contoso.com but cannot resolve names in adatum.com. VM1 can resolve other hosts on the Internet.

You need to ensure that VM1 can resolve host names in adatum.com.

What should you do?

- A. Update the DNS suffix on VM1 to be adatum.com
- B. Configure the name servers for adatum.com at the domain registrar
- C. Create an SRV record in the contoso.com zone
- D. Modify the Access control (IAM) settings for link1

Answer : A

Explanation:

If you use Azure Provided DNS then appropriate DNS suffix will be automatically applied to your virtual machines. For all other options you must either use Fully Qualified Domain Names (FQDN) or manually apply appropriate DNS suffix to your virtual machines.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances>

Question 289 (Question Set 5)



HOTSPOT -

You plan to use Azure Network Watcher to perform the following tasks:

- ⇒ Task1: Identify a security rule that prevents a network packet from reaching an Azure virtual machine.
- ⇒ Task2: Validate outbound connectivity from an Azure virtual machine to an external host.

Which feature should you use for each task? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.
Hot Area:

Answer Area

Task1:

IP flow verify
Next hop
Packet capture
Security group view
Traffic Analytics

Task2:

Connection troubleshoot
IP flow verify
Next hop
NSG flow logs
Traffic Analytics

Answer :

Answer Area

Task1:

IP flow verify
Next hop
Packet capture
Security group view
Traffic Analytics

Task2:

Connection troubleshoot
IP flow verify
Next hop
NSG flow logs
Traffic Analytics

Explanation:

Box 1: IP flow verify -

At some point, a VM may become unable to communicate with other resources, because of a security rule. The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which.

Box 2: Connection troubleshoot -

Diagnose outbound connections from a VM: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URL, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does. Learn more about how to troubleshoot connections using connection-troubleshoot.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview>

Question 290 (Question Set 5)



HOTSPOT -

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Operating system	Subnet	Virtual network
VM1	Windows Server 2019	Subnet1	VNET1
VM2	Windows Server 2019	Subnet2	VNET1
VM3	Red Hat Enterprise Linux 7.7	Subnet3	VNET1

You configure the network interfaces of the virtual machines to use the settings shown in the following table.

Name	DNS server
VM1	None
VM2	192.168.10.15
VM3	192.168.10.15

From the settings of VNET1 you configure the DNS servers shown in the following exhibit.

DNS servers ⓘ

- Default (Azure-provided)
- Custom

193.77.134.10	...
Add DNS ser	...

The virtual machines can successfully connect to the DNS server that has an IP address of 192.168.10.15 and the DNS server that has an IP address of 193.77.134.10.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 connects to 193.77.134.10 for DNS queries.	<input type="radio"/>	<input type="radio"/>
VM2 connects to 193.77.134.10 for DNS queries.	<input type="radio"/>	<input type="radio"/>
VM3 connects to 192.168.10.15 for DNS queries.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
VM1 connects to 193.77.134.10 for DNS queries.	<input checked="" type="radio"/>	<input type="radio"/>
VM2 connects to 193.77.134.10 for DNS queries.	<input type="radio"/>	<input checked="" type="radio"/>
VM3 connects to 192.168.10.15 for DNS queries.	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: Yes -
You can specify DNS server IP addresses in the VNet settings. The setting is applied as the default DNS server(s) for all VMs in the VNet.

Box 2: No -
You can set DNS servers per VM or cloud service to override the default network settings.

Box 3: Yes -
You can set DNS servers per VM or cloud service to override the default network settings.
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq#name-resolution-dns>

Question 291 (Question Set 5)



HOTSPOT -
You have an Azure subscription that contains the resource groups shown in the following table.

Name	Lock name	Lock type
RG1	None	None
RG2	Lock	Delete

RG1 contains the resources shown in the following table.

Name	Type	Lock name	Lock type
storage2	Storage account	Lock1	Delete
VNET2	Virtual network	Lock2	Read-only
IP2	Public IP address	None	None

You need to identify which resources you can move from RG1 to RG2, and which resources you can move from RG2 to RG1.

Which resources should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Resources that you can move from RG1 to RG2:

None
IP1 only
IP1 and storage1 only
IP1 and VNET1 only
IP1, VNET2, and storage1

Resources that you can move from RG2 to RG1:

None
IP2 only
IP2 and storage2 only
IP2 and VNET2 only
IP2, VNET2, and storage2

Answer :

Answer Area

Resources that you can move from RG1 to RG2:

None
IP1 only
IP1 and storage1 only
IP1 and VNET1 only
IP1, VNET2, and storage1

Resources that you can move from RG2 to RG1:

None
IP2 only
IP2 and storage2 only
IP2 and VNET2 only
IP2, VNET2, and storage2

Explanation:

Box 1: IP1, Storage1 -
IP addresses and storage accounts can be moved.
Virtual networks cannot be moved.
There is no lock on RG1.

Box 2: None -
There is a delete lock on RG2.

Note: When you apply a lock at a parent scope, all resources within that scope inherit the same lock. Even resources you add later inherit the lock from the parent.

The most restrictive lock in the inheritance takes precedence.

CannotDelete means authorized users can still read and modify a resource, but they can't delete the resource.

ReadOnly means authorized users can read a resource, but they can't delete or update the resource. Applying this lock is similar to restricting all authorized users to the permissions granted by the Reader role.

Reference:
<https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/lock-resources> <https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/move-support-resources>

Question 292 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	None	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:

- Name: LB1
- Type: Internal
- SKU: Standard
- Virtual network: VNET1

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.

Solution: You create a Basic SKU public IP address, associate the address to the network interface of VM1, and then start VM1.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Explanation:

A Backend Pool configured by IP address has the following limitations:

- Standard load balancer only

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management>

Question 293 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	None	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:

- Name: LB1
- Type: Internal
- SKU: Standard
- Virtual network: VNET1

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.

Solution: You create a Standard SKU public IP address, associate the address to the network interface of VM1, and then stop VM2.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Explanation:

A Backend Pool configured by IP address has the following limitations:

- Standard load balancer only

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management>

Question 294 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	None	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:

- ⇒ Name: LB1
- ⇒ Type: Internal
- ⇒ SKU: Standard
- ⇒ Virtual network: VNET1

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.

Solution: You create two Standard SKU public IP addresses and associate a Standard SKU public IP address to the network interface of each virtual machine.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

A Backend Pool configured by IP address has the following limitations:

- ⇒ Standard load balancer only

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/backend-pool-management>

Question 295 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.

From Azure, you download and install the VPN client configuration package on a computer named Computer2.

You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.

Solution: You export the client certificate from Computer1 and install the certificate on Computer2.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site>

Question 296 (Question Set 5)



You have an Azure virtual machine named VM1.

The network interface for VM1 is configured as shown in the exhibit. (Click the Exhibit tab.)

Network Interface: vm1175 Effective security rules Topology 0
 Virtual network/subnet: RG5-vnet/default Public IP: 40.127.109.108 Private IP: 172.16.1.4 Accelerated networking: Disabled

APPLICATION SECURITY GROUPS 0

[Configure the application security groups](#)

INBOUND PORT RULES 0

Network security group VM1-nsg (attached to network interface: vm1175)
 Impacts 0 subnets. 1 network interfaces

Add inbound port rule

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION	...
300	RDP	3389	TCP	Any	Any	<input checked="" type="radio"/> Allow	...
400	Rule1	80	TCP	Any	Any	<input type="radio"/> Deny	...
500	Rule2	80,443	TCP	Any	Any	<input type="radio"/> Deny	...
1000	Rule4	50-100,400-500	UDP	Any	Any	<input checked="" type="radio"/> Allow	...
2000	Rule5	50-5000	Any	Any	VirtualNetwork	<input type="radio"/> Deny	...
3000	Rule6	150-300	Any	Any	Any	<input checked="" type="radio"/> Allow	...
4000	Rule3	60-500	Any	Any	VirtualNetwork	<input checked="" type="radio"/> Allow	...
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	<input checked="" type="radio"/> Allow	...
65001	AllowAzureLoadBalancerInBo...	Any	Any	AzureLoadBal...	Any	<input checked="" type="radio"/> Allow	...
65500	DenyAllInBound	Any	Any	Any	Any	<input type="radio"/> Deny	...

Explanation:
 Answer : C
 HTTPS uses port 443.
 Rule2, with priority 500, denies HTTPS traffic.
 Rule2, with priority 500, denies HTTPS traffic.
 Note: Priority is a number between 100 and 4000. Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops.
 You need to ensure that users can connect to the website from the Internet.
 What should you do?
 There are several versions of this question in the exam. The question has two possible correct answers:
 1. Change the priority of Rule3 to 450.
 A. Modify the protocol of Rule4.
 2. For Rule5, change the Action to Allow and change the priority to 401.
 Other incorrect answer options you may see on the exam include the following:
 C. For Rule6, change the Action to Allow and change the priority to 401.
 D. Create a new inbound rule that allows TCP protocol 443 and configure the rule to have a priority of 501.
 => For Rule4, change the protocol from UDP to Any.
 Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview>

Question 297 (Question Set 5)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.
 Another administrator plans to create several network security groups (NSGs) in the subscription.
 You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.
 Solution: From the Resource providers blade, you unregister the Microsoft.ClassicNetwork provider.
 Does this meet the goal?

A. Yes
 B. No

Answer : B

Explanation:
 You should use a policy definition.
 Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.
 Reference:
<https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition>

Question 298 (Question Set 5)

HOTSPOT -
 You manage two Azure subscriptions named Subscription1 and Subscription2.
 Subscription1 has following virtual networks:

Name	Address space	Location
VNET1	10.10.10.0/24	West Europe
VNET2	172.16.0.0/16	West US

The virtual networks contain the following subnets:

Name	Address space	In virtual network
Subnet11	10.10.10.0/24	VNET1
Subnet21	172.16.0.0/18	VNET2
Subnet22	172.16.128.0/18	VNET2

Subscription2 contains the following virtual network:

- ⇒ Name: VNETA
- ⇒ Address space: 10.10.128.0/17
- ⇒ Location: Canada Central

VNETA contains the following subnets:

Name	Address space
SubnetA1	10.10.130.0/24
SubnetA2	10.10.131.0/24

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	<input type="radio"/>	<input type="radio"/>
VNET1 and VNET2 can be peered.	<input type="radio"/>	<input type="radio"/>
VNET1 and VNETA can be peered.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	<input checked="" type="radio"/>	<input type="radio"/>
VNET1 and VNET2 can be peered.	<input checked="" type="radio"/>	<input type="radio"/>
VNET1 and VNETA can be peered.	<input type="radio"/>	<input checked="" type="radio"/>

Explanation:

Box 1: Yes -
With VNet-to-VNet you can connect Virtual Networks in Azure across different regions.

Box 2: Yes -
Azure supports the following types of peering:
⇒ Virtual network peering: Connect virtual networks within the same Azure region.
⇒ Global virtual network peering: Connecting virtual networks across Azure regions.

Box 3: No -
The virtual networks you peer must have non-overlapping IP address spaces.
Reference:
<https://azure.microsoft.com/en-us/blog/vnet-to-vnet-connecting-virtual-networks-in-azure-across-different-regions/> <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints>

Question 299 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

Priority	Name	Port	Protocol	Source	Destination	Action
100	Allow_131.107.100.50	443	TCP	131.107.100.50	VirtualNetwork	Allow
200	BlockAllOther443	443	Any	Any	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.

You verify that the Load Balancer rules are configured correctly.

You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a cost of 64999.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Reference:

<https://fastreroute.com/azure-network-security-groups-explained/>

Question 300 (Question Set 5)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

Priority	Name	Port	Protocol	Source	Destination	Action
100	Allow_131.107.100.50	443	TCP	131.107.100.50	VirtualNetwork	Allow
200	BlockAllOther443	443	Any	Any	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.

You verify that the Load Balancer rules are configured correctly.

You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You delete the BlockAllOther443 inbound security rule.

Does this meet the goal?

- A. Yes

B. No

Answer : B

Reference:
<https://fastreroute.com/azure-network-security-groups-explained/>



Microsoft Azure Administrator v1.0 (AZ-104) - Full Access

Question 301 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

Priority	Name	Port	Protocol	Source	Destination	Action
100	Allow_131.107.100.50	443	TCP	131.107.100.50	VirtualNetwork	Allow
200	BlockAllOther443	443	Any	Any	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.

You verify that the Load Balancer rules are configured correctly.

You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You modify the priority of the Allow_131.107.100.50 inbound security rule.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

The rule currently has the highest priority.

Reference:

<https://fastreroute.com/azure-network-security-groups-explained/>

Question 302 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.

Another administrator plans to create several network security groups (NSGs) in the subscription.

You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.

Solution: You assign a built-in policy definition to the subscription.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition>

Question 303 (Question Set 5)



You have an Azure subscription.

You plan to deploy an Azure Kubernetes Service (AKS) cluster to support an app named App1. On-premises clients connect to App1 by using the IP address of the pod.

For the AKS cluster, you need to choose a network type that will support App1.

What should you choose?

- A. kubenet
 B. Azure Container Networking Interface (CNI)
 C. Hybrid Connection endpoints
 D. Azure Private Link

Answer : B

Explanation:

With Azure CNI, every pod gets an IP address from the subnet and can be accessed directly. These IP addresses must be unique across your network space.

Incorrect Answers:

A: The kubenet networking option is the default configuration for AKS cluster creation. With kubenet, nodes get an IP address from the Azure virtual network subnet. Pods receive an IP address from a logically different address space to the Azure virtual network subnet of the nodes. Network address translation (NAT) is then configured so that the pods can reach resources on the Azure virtual network.

C, D: AKS only supports Kubelet networking and Azure Container Networking Interface (CNI) networking

Reference:

<https://docs.microsoft.com/en-us/azure/aks/concepts-network>

Question 304 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Public IP SKU	Connected to	Status
VM1	None	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:

- Name: LB1
- Type: Internal
- SKU: Standard
- Virtual network: VNET1

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.

Solution: You disassociate the public IP address from the network interface of VM2.

Does this meet the goal?

- A. Yes
 B. No

Answer : B

Question 305 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.

Another administrator plans to create several network security groups (NSGs) in the subscription.

You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.

Solution: You configure a custom policy definition, and then you assign the policy to the subscription.

Does this meet the goal?

- A. Yes
 B. No

Answer : A

Explanation:

Resource policy definition used by Azure Policy enables you to establish conventions for resources in your organization by describing when the policy is enforced and what effect to take. By defining conventions, you can control costs and more easily manage your resources.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-policy/policy-definition>

Question 306 (Question Set 5)



You have two Azure virtual networks named VNet1 and VNet2. VNet1 contains an Azure virtual machine named VM1. VNet2 contains an Azure virtual machine named VM2. VM1 hosts a frontend application that connects to VM2 to retrieve data. Users report that the frontend application is slower than usual. You need to view the average round-trip time (RTT) of the packets from VM1 to VM2. Which Azure Network Watcher feature should you use?

- A. IP flow verify
- B. Connection troubleshoot
- C. Connection monitor
- D. NSG flow logs

Answer : C

Explanation:

The connection monitor capability monitors communication at a regular interval and informs you of reachability, latency, and network topology changes between the VM and the endpoint.

Incorrect Answers:

A: The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which security rule allowed or denied the communication, so that you can resolve the problem.

B: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does.

D: The NSG flow log capability allows you to log the source and destination IP address, port, protocol, and whether traffic was allowed or denied by an NSG.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview>

Question 307 (Question Set 5)

**HOTSPOT -**

You have an Azure subscription that contains the public load balancers shown in the following table.

Name	SKU
LB1	Basic
LB2	Standard

You plan to create six virtual machines and to load balance requests to the virtual machines. Each load balancer will load balance three virtual machines.

You need to create the virtual machines for the planned solution.

How should you create the virtual machines? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The virtual machines that will be load balanced by using LB1 must:

be connected to the same virtual network
be created in the same resource group
be created in the same availability set or virtual machine scale set
run the same operating system

The virtual machines that will be load balanced by using LB2 must:

be connected to the same virtual network
be created in the same resource group
be created in the same availability set or virtual machine scale set
run the same operating system

Answer :

Answer Area

The virtual machines that will be load balanced by using LB1 must:

- be connected to the same virtual network
- be created in the same resource group
- be created in the same availability set or virtual machine scale set
- run the same operating system

The virtual machines that will be load balanced by using LB2 must:

- be connected to the same virtual network
- be created in the same resource group

Question 308 (Question Set 5)



HOTSPOT -

You have an on-premises data center and an Azure subscription. The data center contains two VPN devices. The subscription contains an Azure virtual network named VNet1. VNet1 contains a gateway subnet.

You need to create a site-to-site VPN. The solution must ensure that if a single instance of an Azure VPN gateway fails, or a single on-premises VPN device fails, the failure will not cause an interruption that is longer than two minutes.

What is the minimum number of public IP addresses, virtual network gateways, and local network gateways required in Azure? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Public IP addresses:

1
2
3
4

Virtual network gateways:

1
2
3
4

Local network gateways:

1
2
3
4

Answer :

Answer Area

Public IP addresses:

▼
1
2
3
4

Virtual network gateways:

▼
1
2
3
4

Local network gateways:

▼
1
2
3
4

Explanation:

Box 1: 4 -

Two public IP addresses in the on-premises data center, and two public IP addresses in the VNET.

The most reliable option is to combine the active-active gateways on both your network and Azure, as shown in the diagram below.

Azure VPN Gateway

Question 309 (Question Set 5)

✖

You have an Azure subscription that contains two virtual machines as shown in the following table.

Name	Operating system	Location	IP address	DNS server
VM1	Windows Server 2019	West Europe	10.0.0.4	Default (Azure-provided)
VM2	Windows Server 2019	West Europe	10.0.0.5	Default (Azure-provided)

You perform a reverse DNS lookup for 10.0.0.4 from VM2.

Which FQDN will be returned?

- A. vm1.core.windows.net
- B. vm1.azure.com
- C. vm1.westeurope.cloudapp.azure.com
- D. vm1.internal.cloudapp.net

Answer : B

Question 310 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

Home > VM2 - Networking

VM2 - Networking

Virtual machine

Search (Ctrl+ /) Attach network interface Detach network interface

Network Interface: VM2-NIC1 Effective security rules Topology

Virtual network/subnet: Vnet1/Subnet11 NIC Public IP: - NIC Private IP: 10.240.11.5 Accelerated networking: Disabled

Inbound port rules Outbound port rules Application security groups Load balancing

Network security group NSG2 (attached to network interface: Subnet11)
Impacts 1 subnets, 0 network interfaces

Add inbound port rule

Priority	Name	Port	Protocol	Source	Destination	Action
100	Allow_131.107.100.50	443	TCP	131.107.100.50	VirtualNetwork	✓ Allow ...
200	BlockAllOther443	443	Any	Any	Any	✗ Deny ...
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	✓ Allow ...
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	✓ Allow ...
65500	DenyAllInBound	Any	Any	Any	Any	✗ Deny ...

Settings

- Networking
- Disks
- Size
- Security

Answer : A
Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/network-security-groups-overview>

Question 311 (Question Set 5)

You have an Azure subscription that contains a policy-based virtual network gateway named GW1 and a virtual network named VNet1. You need to ensure that you can configure a point-to-site connection from an on-premises computer to VNet1. Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Add a service endpoint to VNet1
- B. Reset GW1
- C. Create a route-based virtual network gateway
- D. Add a connection to GW1
- E. Delete GW1
- F. Add a public IP address space to VNet1

Answer : CE

Explanation:

C: A VPN gateway is used when creating a VPN connection to your on-premises network.
Route-based VPN devices use any-to-any (wildcard) traffic selectors, and let routing/forwarding tables direct traffic to different IPsec tunnels. It is typically built on router platforms where each IPsec tunnel is modeled as a network interface or VTI (virtual tunnel interface).
E: Policy-based VPN devices use the combinations of prefixes from both networks to define how traffic is encrypted/decrypted through IPsec tunnels. It is typically built on firewall devices that perform packet filtering. IPsec tunnel encryption and decryption are added to the packet filtering and processing engine.

Incorrect Answers:

F: Point-to-Site connections do not require a VPN device or a public-facing IP address.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/create-routebased-vpn-gateway-portal> <https://docs.microsoft.com/en-us/azure/vpn-gateway/connect-multiple-policybased-rm-ps>

Question 312 (Question Set 5)

HOTSPOT -

You have an Azure subscription that contains the resources in the following table:

Name	Type
VMRG	Resource group
VNet1	Virtual network
VNet2	Virtual network
VM5	Virtual machine connected to VNet1
VM6	Virtual machine connected to VNet2

In Azure, you create a private DNS zone named adatum.com. You set the registration virtual network to VNet2. The adatum.com zone is configured as shown in the following exhibit:

Resource group ([change](#))
vmrg

Name server 1
-

Subscription ([change](#))
[Azure Pass](#)

Name server 2
-

Subscription ID
a4fde29b-d56a-4f6c-8298-6c53cd0b720c

Name server 3
-

Name server 4
-

Tags ([change](#))
[Click here to add tags](#)

Search record sets

Name	Type	TTL	VALUE
@	SOA	3600	Email: azuredns-hostmaster.microsoft.com Host: internal.cloudapp.net Refresh: 3600 Retry: 300 Expire: 2419200 Minimum TTL: 300 Serial number: 1
vm1	A	3600	10.1.0.4
vm9	A	3600	10.1.0.12

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Answer : The A record for VM5 will be registered automatically in the adatum.com zone.	<input type="radio"/>	<input checked="" type="radio"/>

Answer Area

Statements	Yes	No
The A record for VM5 will be registered automatically in the adatum.com zone.	<input checked="" type="radio"/>	<input type="radio"/>
VM5 can resolve VM9.adatum.com.	<input type="radio"/>	<input checked="" type="radio"/>
VM6 can resolve VM9.adatum.com.	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: No -
Azure DNS provides automatic registration of virtual machines from a single virtual network that's linked to a private zone as a registration virtual network. VM5 does not belong to the registration virtual network though.

Box 2: No -
Forward DNS resolution is supported across virtual networks that are linked to the private zone as resolution virtual networks. VM5 does belong to a resolution virtual network.

Box 3: Yes -
VM6 belongs to registration virtual network, and an A (Host) record exists for VM9 in the DNS zone.
By default, registration virtual networks also act as resolution virtual networks, in the sense that DNS resolution against the zone works from any of the virtual machines within the registration virtual network.
Reference:
<https://docs.microsoft.com/en-us/azure/dns/private-dns-overview>

Question 313 (Question Set 5)



HOTSPOT -
You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Location
VNET1	West US
VNET2	West US
VNET3	East US

The subscription contains the private DNS zones shown in the following table.

Name	Location
Zone1.com	West US
Zone2.com	West US
Zone3.com	East US

You add virtual network links to the private DNS zones as shown in the following table.

Name	Private DNS zone	Virtual network	Enable auto registration
Link1	Zone1.com	VNET1	Yes
Link2	Zone2.com	VNET2	No
Link3	Zone3.com	VNET3	No

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area**Statements Yes No**

You can enable auto registration for Link2.

You can add a virtual network link for VNET1 to Zone3.com.

You can add a virtual network link for VNET2 to Zone1.com and enable auto registration.

Answer :

Answer Area**Statements Yes No**

You can enable auto registration for Link2.

You can add a virtual network link for VNET1 to Zone3.com.

You can add a virtual network link for VNET2 to Zone1.com and enable auto registration.

Reference:
<https://docs.microsoft.com/en-us/azure/dns/private-dns-virtual-network-links> <https://docs.microsoft.com/en-us/azure/dns/private-dns-autoregistration>

Question 314 (Question Set 5)



HOTSPOT -
You have an Azure subscription.
You plan to use an Azure Resource Manager template to deploy a virtual network named VNET1 that will use Azure Bastion.
How should you complete the template? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{  
  "type": "Microsoft.Network/virtualNetworks",  
  "name": "VNET1",  
  "apiVersion": "2019-02-01",  
  "location": "[resourceGroup().location]",  
  "properties": {  
    "addressSpace": {  
      "addressPrefixes": ["10.10.10.0/24"]  
    },  
    "subnets": [  
      {  
        "name": : ▼  
        AzureBastionSubnet  
        AzureFirewallSubnet  
        LAN01  
        RemoteAccessSubnet  
  
        "properties": {  
          "addressPrefix": : ▼  
          10.10.10.0/27  
          10.10.10.0/29  
          10.10.10.0/30  
        }  
      },  
      {  
        "name": "LAN02",  
        "properties": {  
          "addressPrefix": "10.10.10.128/25"  
        }  
      }  
    ]  
  }  
}
```

Answer :

Answer Area

```
{  
  "type": "Microsoft.Network/virtualNetworks",  
  "name": "VNET1",  
  "apiVersion": "2019-02-01",  
  "location": "[resourceGroup().location]",  
  "properties": {  
    "addressSpace": {  
      "addressPrefixes": ["10.10.10.0/24"]  
    },  
    "subnets": [  
      {  
        "name": "Subnet1",  
        "cidr": "10.10.10.0/28",  
        "prefixLength": 28,  
        "ipConfigurations": [  
          {  
            "name": "IPConfig1",  
            "privateIpAddress": "10.10.10.2",  
            "publicIpAddress": "10.10.10.2",  
            "subnet": "Subnet1",  
            "ipAddressSpace": "10.10.10.0/28",  
            "ipAllocationMethod": "Dynamic",  
            "networkInterface": "NIC1",  
            "ipConfiguration": "IPConfig1",  
            "ipAddress": "10.10.10.2",  
            "ipAddressType": "Private",  
            "ipAddressFamily": "IPv4",  
            "ipAddressUsageId": 1  
          }  
        ]  
      }  
    ]  
  }  
}
```

Question 315 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You manage a virtual network named VNet1 that is hosted in the West US Azure region.

VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.

You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.

Solution: From Azure Network Watcher, you create a packet capture.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Network Watcher variable packet capture allows you to create packet capture sessions to track traffic to and from a virtual machine. Packet capture helps to diagnose network anomalies both reactively and proactively. Other uses include gathering network statistics, gaining information on network intrusions, to debug client-server communications and much more.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-packet-capture-overview>

Question 316 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You manage a virtual network named VNet1 that is hosted in the West US Azure region.

VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.

You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.

Solution: From Azure Network Watcher, you create a connection monitor.

Does this meet the goal?

- A. Yes
- B. No

Answer : A

Reference:

<https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/>

Question 317 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You manage a virtual network named VNet1 that is hosted in the West US Azure region.

VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.

You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.

Solution: From Performance Monitor, you create a Data Collector Set (DCS).

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

Use the Connection Monitor feature of Azure Network Watcher.

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview>

Question 318 (Question Set 5)



DRAG DROP -
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vm1	Virtual machine	Uses a basic public IP address
vm2	Virtual machine	Uses a basic public IP address
nsg1	Network security group (NSG)	Allows incoming traffic from port 443
lb1	Azure Standard Load Balancer	Not applicable

You need to load balance HTTPS connections to vm1 and vm2 by using lb1.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions**Answer Area**

Remove nsg1.

Remove the public IP addresses from vm1 and vm2.

Create a health probe and backend pool on lb1.

Create an availability set.

Create a load balancing rule on lb1.



Answer :

Actions**Answer Area**

Remove nsg1.

Remove the public IP addresses from vm1 and vm2.

Create a health probe and backend pool on lb1.

Create a load balancing rule on lb1.



Create an availability set.

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/tutorial-load-balancer-standard-public-zone-redundant-portal>

Question 319 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You manage a virtual network named VNet1 that is hosted in the West US Azure region.

VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.

You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.

Solution: From Azure Monitor, you create a metric on Network In and Network Out.
Does this meet the goal?

- A. Yes
B. No

Answer : B

Reference:
<https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/>

Question 320 (Question Set 5)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

Priority	Name	Port	Protocol	Source	Destination	Action
100	Allow_131.107.100.50	443	TCP	131.107.100.50	VirtualNetwork	Allow
200	BlockAllOther441	443	Any	Any	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail.

You verify that the Load Balancer rules are configured correctly.

You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a priority of 64999.

Does this meet the goal?

- A. Yes
B. No

Answer : B

Reference:
<https://fastreroute.com/azure-network-security-groups-explained/>

Question 321 (Question Set 5)

DRAG DROP -

You have an Azure subscription that contains two on-premises locations named site1 and site2.

You need to connect site1 and site2 by using an Azure Virtual WAN.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Create a virtual hub.

Create VPN sites.

Connect the virtual networks to the hub.

Answer Area**Actions****Answer Area**

Create a Virtual WAN resource.

Create a virtual hub.

Create VPN sites.

Connect the VPN sites to the hub.

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-wan/virtual-wan-site-to-site-portal>

Question 322 (Question Set 5)



HOTSPOT -
 You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Peered with	DNS server
VNET1	VNET2	Default (Azure-provided)
VNET2	VNET1	10.10.0.4

You have the virtual machines shown in the following table.

Name	IP address	Network interface	Connects to
Server1	10.10.0.4	NIC1	VNET1/Subnet1
Server2	172.16.0.4	NIC2	VNET1/Subnet2
Server3	192.168.0.4	NIC3	VNET2/Subnet2

You have the virtual network interfaces shown in the following table.

Name	DNS server
NIC1	Inherit from virtual network
NIC2	10.10.0.4
NIC3	Inherit from virtual network

Server1 is a DNS server that contains the resources shown in the following table.

Name	Type	Value
contoso.com	Primary DNS zone	Not applicable
Host1.contoso.com	A record	131.107.10.15

You have an Azure private DNS zone named contoso.com that has a virtual network link to VNET2 and the records shown in the following table.

Name	Type	Value
Host1	A record	131.107.200.20
Host2	A record	131.107.50.50

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Server2 resolves host2.contoso.com to 131.107.50.50.	<input type="radio"/>	<input type="radio"/>
Server2 resolves host1.contoso.com to 131.107.10.15.	<input type="radio"/>	<input type="radio"/>
Server3 resolves host2.contoso.com to 131.107.50.50.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
Server2 resolves host2.contoso.com to 131.107.50.50.	<input checked="" type="radio"/>	<input type="radio"/>
Server2 resolves host1.contoso.com to 131.107.10.15.	<input type="radio"/>	<input checked="" type="radio"/>
Server3 resolves host2.contoso.com to 131.107.50.50.	<input checked="" type="radio"/>	<input type="radio"/>

Question 323 (Question Set 5)



You have a virtual network named VNet1 as shown in the exhibit. (Click the Exhibit tab.)

Refresh
 Move
 Delete

Resource group (change) Production	Address space 10.2.0.0/16			
Location West US	DNS servers Azure provided DNS service			
Subscription (change) Production subscription				
Subscription ID 14d26092-8e42-4ea7-b770-9dcef70fb1ea				
Tags (change) Click here to add tags				
Connected devices				
<div style="border: 1px solid #ccc; padding: 2px; display: flex; align-items: center;"> <input type="text" value="Search connected devices"/> </div>				
DEVICE	↑ TYPE	↑ IP ADDRESS	↑ SUBNET	↑
No results.				

No devices are connected to VNet1.

You plan to peer VNet1 to another virtual network named VNet2. VNet2 has an address space of 10.2.0.0/16.

You need to create the peering.

What should you do first?

- A. Modify the address space of VNet1.
- B. Add a gateway subnet to VNet1.
- C. Create a subnet on VNet1 and VNet2.
- D. Configure a service endpoint on VNet2.

Answer : A

Explanation:

The virtual networks you peer must have non-overlapping IP address spaces. The exhibit indicates that VNet1 has an address space of 10.2.0.0/16, which is the same as VNet2, and thus overlaps. We need to change the address space for VNet1.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints> <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-faq>

Question 324 (Question Set 5)



You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	10.0.0.5	VNET1

VNET1 is linked to a private DNS zone named contoso.com that contains the records shown in the following table.

Name	Type	TTL	Value	Auto registered
comp1	TXT	3600	10.0.0.5	False
comp2	A	3600	10.0.0.5	False
comp3	CNAME	3600	comp1.contoso.com	False
comp4	PTR	3600	10.0.0.5	False

You need to ping VM2 from VM1.

Which DNS names can you use to ping VM2?

- A. comp2.contoso.com and comp4.contoso.com only
- B. comp1.contoso.com, comp2.contoso.com, comp3.contoso.com, and comp4.contoso.com
- C. comp2.contoso.com only
- D. comp1.contoso.com and comp2.contoso.com only
- E. comp1.contoso.com, comp2.contoso.com, and comp4.contoso.com only

Answer : B

Reference:
<https://medium.com/azure-architects/exploring-azure-private-dns-be65de08f780> [https://simplesdns.plus/help/dns-record-types](https://simpledns.plus/help/dns-record-types)

Question 325 (Question Set 5)



HOTSPOT -

You have a network security group (NSG) named NSG1 that has the rules defined in the exhibit. (Click the Exhibit tab.)

```
PS C:\> Get-AzNetworkSecurityGroup -Name "NSG1" -ResourceGroupName "RG1" | Select -ExpandProperty SecurityRules
```

Name	:	ALLOW_HTTPS
Id	:	/subscriptions/09d06b22-ff51-48b7-a8be-947f15cbd69d/resourceGroups/RG1/providers/Microsoft.Network/networkSecurityGroups/NSG1/securityRules/ALLOW_HTTPS
Etag	:	W/"8e3e9995-aa78-41e2-bfea-44b50c389873"
ProvisioningState	:	Succeeded
Description	:	
Protocol	:	TCP
SourcePortRange	:	{*}
DestinationPortRange	:	{443}
SourceAddressPrefix	:	{*}
DestinationAddressPrefix	:	{*}
SourceApplicationSecurityGroups	:	[]
DestinationApplicationSecurityGroups	:	[]
Access	:	Allow
Priority	:	100
Direction	:	Inbound
 Name	:	DENY_PING
Id	:	/subscriptions/09d06b22-ff51-48b7-a8be-947f15cbd69d/resourceGroups/RG1/providers/Microsoft.Network/networkSecurityGroups/NSG1/securityRules/DENY_PING
Etag	:	W/"8e3e9995-aa78-41e2-bfea-44b50c389873"
ProvisioningState	:	Succeeded
Description	:	
Protocol	:	ICMP
SourcePortRange	:	{*}
DestinationPortRange	:	{*}
SourceAddressPrefix	:	{VirtualNetwork}
DestinationAddressPrefix	:	{*}
SourceApplicationSecurityGroups	:	[]
DestinationApplicationSecurityGroups	:	[]
Access	:	Deny
Priority	:	111
Direction	:	Outbound

NSG1 is associated to a subnet named Subnet1. Subnet1 contains the virtual machines shown in the following table.

Name	IP address
VM1	10.1.0.10
VM2	10.1.0.11

You need to add a rule to NSG1 to ensure that VM1 can ping VM2. The solution must use the principle of least privilege.

How should you configure the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Direction:	<input type="button" value="▼"/>
Inbound	
Outbound	
Source:	<input type="button" value="▼"/>
Any	
10.1.0.10	
10.1.0.11	
10.1.0.10; 10.1.0.11	
10.1.0.0/28	
Destination:	<input type="button" value="▼"/>
Any	
10.1.0.10	
10.1.0.11	
10.1.0.10; 10.1.0.11	
10.1.0.0/28	
Priority:	<input type="button" value="▼"/>
110	
111	
112	

Answer :

Answer Area

Direction:	<input type="button" value="▼"/>
Inbound	
Outbound	
Source:	<input type="button" value="▼"/>
Any	
10.1.0.10	
10.1.0.11	
10.1.0.10; 10.1.0.11	
10.1.0.0/28	
Destination:	<input type="button" value="▼"/>
Any	
10.1.0.10	
10.1.0.11	
10.1.0.10; 10.1.0.11	
10.1.0.0/28	
Priority:	<input type="button" value="▼"/>
110	
111	
112	

Reference:

<https://www.thomasmaurer.ch/2019/09/how-to-enable-ping-icmp-echo-on-an-azure-vm/>

Question 326 (Question Set 5)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a computer named Computer1 that has a point-to-site VPN connection to an Azure virtual network named VNet1. The point-to-site connection uses a self-signed certificate.

From Azure, you download and install the VPN client configuration package on a computer named Computer2.

You need to ensure that you can establish a point-to-site VPN connection to VNet1 from Computer2.

Solution: On Computer2, you set the Startup type for the IPSec Policy Agent service to Automatic.

Does this meet the goal?

- A. Yes
- B. No

Answer : B

Explanation:

Each client computer that connects to a VNet using Point-to-Site must have a client certificate installed. You generate a client certificate from the self-signed root certificate, and then export and install the client certificate. If the client certificate is not installed, authentication fails.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-certificates-point-to-site>

Question 327 (Question Set 5)



You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers.

You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines.

You need to ensure that visitors are serviced by the same web server for each request.

What should you configure?

- A. Session persistence to Client IP and protocol
- B. Protocol to UDP
- C. Session persistence to None
- D. Floating IP (direct server return) to Enabled

Answer : A

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/load-balancer-distribution-mode?tabs=azure-portal>

Question 328 (Question Set 5)



You have an Azure subscription that uses the public IP addresses shown in the following table.

Name	IP version	SKU	IP address assignment	Availability zone
IP1	IPv6	Basic	Static	Not applicable
IP2	IPv6	Basic	Dynamic	Not applicable
IP3	IPv6	Standard	Static	Zone-redundant

You need to create a public Azure Standard Load Balancer.

Which public IP addresses can you use?

- A. IP1, IP2, and IP3
- B. IP2 only
- C. IP3 only
- D. IP1 and IP3 only

Answer : C

Explanation:

Matching SKUs are required for load balancer and public IP resources. You can't have a mixture of Basic SKU resources and standard SKU resources.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/ip-services/public-ip-addresses>

Question 329 (Question Set 5)



You have an Azure subscription.

You are deploying an Azure Kubernetes Service (AKS) cluster that will contain multiple pods. The pods will use kubernetes networking.

You need to restrict network traffic between the pods.

What should you configure on the AKS cluster?

- A. the Azure network policy
- B. the Calico network policy
- C. pod security policies

D. an application security group

Answer : B

Reference:
<https://docs.microsoft.com/en-us/azure/aks/use-network-policies>

Question 330 (Question Set 5)



HOTSPOT -

You have an Azure subscription that contains a virtual network named VNet1. VNet1 uses an IP address space of 10.0.0.0/16 and contains the VPN Gateway and subnets in the following table:

Name	IP address range
Subnet0	10.0.0.0/24
Subnet1	10.0.1.0/24
Subnet2	10.0.2.0/24
GatewaySubnet	10.0.254.0/24

Subnet1 contains a virtual appliance named VM1 that operates as a router.

You create a routing table named RT1.

You need to route all inbound traffic from the VPN gateway to VNet1 through VM1.

How should you configure RT1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Address prefix	<input type="checkbox"/> 10.0.0.0/16
	<input type="checkbox"/> 10.0.1.0/24
	<input type="checkbox"/> 10.0.254.0/24
Next hop type	<input type="checkbox"/> Virtual appliance
	<input type="checkbox"/> Virtual network
	<input type="checkbox"/> Virtual network gateway
Assigned to	<input type="checkbox"/> GatewaySubnet
	<input type="checkbox"/> Subnet0
	<input type="checkbox"/> Subnet1 and Subnet2

Answer :

Answer Area

Address prefix


Question 331 (Question Set 5)

You have five Azure virtual machines that run Windows Server 2016. The virtual machines are configured as web servers. You have an Azure load balancer named LB1 that provides load balancing services for the virtual machines. You need to ensure that visitors are serviced by the same web server for each request. What should you configure?

- A. Floating IP (direct server return) to Enabled
- B. Floating IP (direct server return) to Disabled
- C. a health probe
- D. Session persistence to Client IP and Protocol

Answer : D

Explanation:
With Sticky Sessions when a client starts a session on one of your web servers, session stays on that specific server. To configure An Azure Load-Balancer For Sticky Sessions set Session persistence to Client IP.
On the following image you can see sticky session configuration:

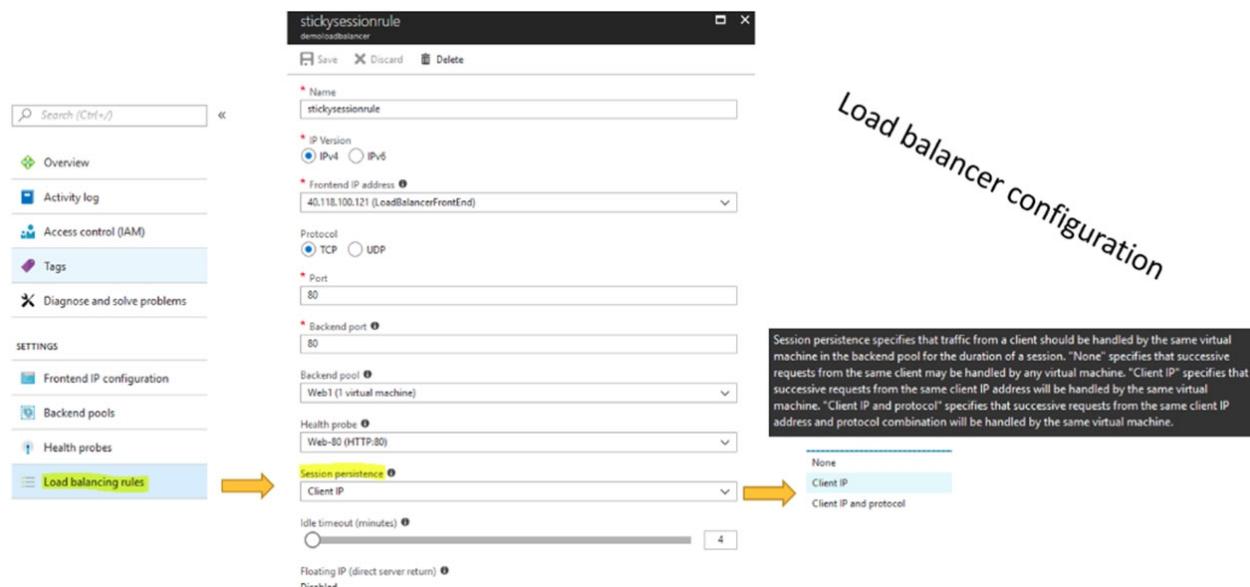

Note:

There are several versions of this question in the exam. The question can have other incorrect answer options, including the following:

1. Idle Time-out (minutes) to 20
2. Protocol to UDP

Reference:

<https://cloudopszone.com/configure-azure-load-balancer-for-sticky-sessions/>

Question 332 (Question Set 5)

HOTSPOT -
You have an Azure subscription that contains the virtual machines shown in the following table:

Name	Operating system	Connects to
VM1	Windows Server 2019	Subnet1
VM2	Windows Server 2019	Subnet2

VM1 and VM2 use public IP addresses. From Windows Server 2019 on VM1 and VM2, you allow inbound Remote Desktop connections. Subnet1 and Subnet2 are in a virtual network named VNET1.

The subscription contains two network security groups (NSGs) named NSG1 and NSG2. NSG1 uses only the default rules.

NSG2 uses the default rules and the following custom incoming rule:

⇒ Priority: 100

- ⇒ Name: Rule1
- ⇒ Port: 3389
- ⇒ Protocol: TCP
- ⇒ Source: Any
- ⇒ Destination: Any
- ⇒ Action: Allow

NSG1 is associated to Subnet1. NSG2 is associated to the network interface of VM2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
From the Internet, you can connect to VM1 by using Remote Desktop.	<input type="radio"/>	<input type="radio"/>
From the Internet, you can connect to VM2 by using Remote Desktop.	<input type="radio"/>	<input type="radio"/>
From VM1, you can connect to VM2 by using Remote Desktop	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
From the Internet, you can connect to VM1 by using Remote Desktop.	<input type="radio"/>	<input checked="" type="radio"/>
From the Internet, you can connect to VM2 by using Remote Desktop.	<input checked="" type="radio"/>	<input type="radio"/>
From VM1, you can connect to VM2 by using Remote Desktop	<input type="radio"/>	<input type="radio"/>

Question 333 (Question Set 5)



You have an Azure subscription that contains two virtual machines named VM1 and VM2.

You create an Azure load balancer.

You plan to create a load balancing rule that will load balance HTTPS traffic between VM1 and VM2.

Which two additional load balancer resources should you create before you can create the load balancing rule? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. a frontend IP address
- B. an inbound NAT rule
- C. a virtual network
- D. a backend pool
- E. a health probe

Answer : DE

Reference:
<https://docs.microsoft.com/en-us/azure/load-balancer/components>

Question 334 (Question Set 5)



You have an on-premises network that contains a database server named dbserver1.

You have an Azure subscription.

You plan to deploy three Azure virtual machines. Each virtual machine will be deployed to a separate availability zone.

You need to configure an Azure VPN gateway for a site-to-site VPN. The solution must ensure that the virtual machines can connect to dbserver1.

Which type of public IP address SKU and assignment should you use for the gateway?

- A. a basic SKU and a static IP address assignment
- B. a standard SKU and a static IP address assignment

C. a basic SKU and a dynamic IP address assignment

Answer : C

Explanation:
VPN gateway supports only Dynamic.

Note: VPN gateway requires a public IP address for its configuration. A public IP address is used as the external connection point of the VPN. Specify in the values for Public IP address. These settings specify the public IP address object that gets associated to the VPN gateway. The public IP address is dynamically assigned to this object when the VPN gateway is created. The only time the Public IP address changes is when the gateway is deleted and re-created.

Reference:
<https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal>

Question 335 (Question Set 5)



HOTSPOT -
You have the Azure virtual machines shown in the following table.

Name	IP address	Virtual network
VM1	10.0.0.4	VNET1
VM2	172.16.0.4	VNET2
VM3	192.168.0.4	VNET3
VM4	192.168.0.5	VNET3

VNET1, VNET2, and VNET3 are peered.

Name	Type	Value
Server1	A	131.107.2.3
Server2	A	131.107.2.4

VNET1 and VNET2 are linked to an Azure private DNS zone named contoso.com that contains the records shown in the following table.

Name	Type	Value
Server1	A	131.107.3.3
Server2	A	131.107.3.4

The virtual networks are configured to use the DNS servers shown in the following table.

Virtual network	DNS server
VNET1	Default (Azure-provided)
VNET2	Custom: 192.168.0.5
VNET3	Custom: 192.168.0.5

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Statements

Yes No

From VM1, server1.contoso.com resolves to 131.107.3.3.

From VM2, server1.contoso.com resolves to 131.107.3.3.

From VM3, server2.contoso.com resolves to 131.107.2.4.

Answer :

Statements**Yes** **No**

From VM1, server1.contoso.com resolves to 131.107.3.3.

From VM2, server1.contoso.com resolves to 131.107.3.3.

From VM3, server2.contoso.com resolves to 131.107.2.4.

Explanation:

Box 1: Yes -
 VM1 is in VNET1. In VNET1 Server1 resolves to 131.107.3.3

Name	Type	Value
Server1	A	131.107.3.3
Server2	A	131.107.3.4

Question 336 (Question Set 5)



HOTSPOT -
 You have two Azure virtual machines as shown in the following table.

Name	Operating system	Private IP address	Public IP address	DNS suffix configured in the operating system	Connected to
vm1	Windows Server 2019	10.0.1.4	131.107.50.20	Contoso.com	vnet1
vm2	SUSE Linux Enterprise Server 15 (SLES) SP2	10.0.1.5	131.107.90.80	None	vnet1

You create the Azure DNS zones shown in the following table.

Name	Type
Contoso.com	DNS zone
Fabrikam.com	Private DNS zone

You perform the following actions:

⇒ For fabrikam.com, you add a virtual network link to vnet1 and enable auto registration.

⇒ For contoso.com, you assign vm1 and vm2 the Owner role.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Statements**Yes** **No**

The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.

The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.

The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.

Answer :

Statements**Yes** **No**

The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.

The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.

The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.

Explanation:

Box 1: Yes -
The DNS zone uses the Public IP address of vm1.

Box 2: Yes -
Fabrikam.com is a Private DNS zone. The private IP address is used.

Note: The Azure DNS private zones auto registration feature manages DNS records for virtual machines deployed in a virtual network. When you link a virtual network with a private DNS zone with this setting enabled, a DNS record gets created for each virtual machine deployed in the virtual network.

For each virtual machine, an A record and a PTR record are created. DNS records for newly deployed virtual machines are also automatically created in the linked private DNS zone.

Note: If you use Azure Provided DNS then appropriate DNS suffix will be automatically applied to your virtual machines. For all other options you must either use

Fully Qualified Domain Names (FQDN) or manually apply appropriate DNS suffix to your virtual machines.

Box 3: Yes -

Reference:
<https://docs.microsoft.com/en-us/azure/dns/dns-zones-records>
<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-name-resolution-for-vms-and-role-instances>

Question 337 (Question Set 5)



You have an on-premises datacenter and an Azure subscription.

You plan to connect the datacenter to Azure by using ExpressRoute.

You need to deploy an ExpressRoute gateway. The solution must meet the following requirements:

- Support up to 10 Gbps of traffic.
- Support availability zones.
- Support FastPath.
- Minimize costs.

Which SKU should you deploy?

- A. ERGw1AZ
- B. ERGw2
- C. ErGw3
- D. ErGw3AZ

Answer : D

Explanation:

ErGw3Az supports FastPath.

The following table shows the features supported across each gateway type.

Gateway SKU	VPN Gateway and ExpressRoute coexistence	FastPath	Max Number of Circuit Connections
Standard SKU/ERGw1Az	Yes	No	4
High Perf SKU/ERGw2Az	Yes	No	8
Ultra Performance SKU/ErGw3Az	Yes	Yes	16

Note: ExpressRoute virtual network gateways can use the following SKUs:

Standard -

HighPerformance -

UltraPerformance -

ErGw1Az -

ErGw2Az -

ErGw3Az -

Reference:

<https://docs.microsoft.com/en-us/azure/expressroute/expressroute-about-virtual-network-gateways>

Question 338 (Question Set 5)



HOTSPOT -

You have a virtual network named VNET1 that contains the subnets shown in the following table:

Name	Subnet	Network security group (NSG)
Subnet1	10.10.1.0/24	NSG1
Subnet2	10.10.2.0/24	None

You have Azure virtual machines that have the network configurations shown in the following table:

Name	Subnet	IP address	NSG
VM1	Subnet1	10.10.1.5	NSG2
VM2	Subnet2	10.10.2.5	None
VM3	Subnet2	10.10.2.6	None

For NSG1, you create the inbound security rule shown in the following table:

Priority	Source	Destination	Destination port	Action
101	10.10.2.0/24	10.10.1.0/24	TCP/1433	Allow

For NSG2, you create the inbound security rule shown in the following table:

Priority	Source	Destination	Destination port	Action
125	10.10.2.5	10.10.1.5	TCP/1433	Block

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM2 can connect to the TCP port 1433 services on VM1.	<input type="radio"/>	<input type="radio"/>
VM1 can connect to the TCP port 1433 services on VM2.	<input type="radio"/>	<input type="radio"/>
VM2 can connect to the TCP port 1433 services on VM3.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
VM2 can connect to the TCP port 1433 services on VM1.	<input checked="" type="radio"/>	<input type="radio"/>
VM1 can connect to the TCP port 1433 services on VM2.	<input type="radio"/>	<input checked="" type="radio"/>
VM2 can connect to the TCP port 1433 services on VM3.	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: Yes -

The inbound security rule for NSG1 allows TCP port 1433 from 10.10.2.0/24 (or Subnet2 where VM2 and VM3 are located) to 10.10.1.0/24 (or Subnet1 where VM1 is located) while the inbound security rule for NSG2 blocks TCP port 1433 from 10.10.2.5 (or VM2) to 10.10.1.5 (or VM1). However, the NSG1 rule has a higher priority (or lower value) than the NSG2 rule.

Box 2: Yes -

No rule explicitly blocks communication from VM1. The default rules, which allow communication, are thus applied.

Box 3: Yes -

No rule explicitly blocks communication between VM2 and VM3 which are both on Subnet2. The default rules, which allow communication, are thus applied.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

Question 339 (Question Set 5)



HOTSPOT -

You have an Azure subscription named Subscription1.

Subscription1 contains the virtual machines in the following table:

Name	IP address
VM1	10.0.1.4
VM2	10.0.2.4
VM3	10.0.3.4

Subscription1 contains a virtual network named VNet1 that has the subnets in the following table:

Name	Address space	Connected virtual machine
Subnet1	10.0.1.0/24	VM1
Subnet2	10.0.2.0/24	VM2
Subnet3	10.0.3.0/24	VM3

VM3 has multiple network adapters, including a network adapter named NIC3. IP forwarding is enabled on NIC3. Routing is enabled on VM3.

You create a route table named RT1 that contains the routes in the following table:

Address prefix	Next hop type	Next hop address
10.0.1.0/24	Virtual appliance	10.0.3.4
10.0.2.0/24	Virtual appliance	10.0.3.4

You apply RT1 to Subnet1 and Subnet2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements

Yes

No

VM3 can establish a network connection to VM1.

If VM3 is turned off, VM2 can establish a network connection to VM1.

VM1 can establish a network connection to VM2.

Answer :

Answer Area

Statements	Yes	No
VM3 can establish a network connection to VM1.	<input checked="" type="radio"/>	<input type="radio"/>
If VM3 is turned off, VM2 can establish a network connection to VM1.	<input type="radio"/>	<input checked="" type="radio"/>
VM1 can establish a network connection to VM2.	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

IP forwarding enables the virtual machine a network interface is attached to:

- ☈ Receive network traffic not destined for one of the IP addresses assigned to any of the IP configurations assigned to the network interface.
- ☈ Send network traffic with a different source IP address than the one assigned to one of a network interface's IP configurations.

The setting must be enabled for every network interface that is attached to the virtual machine that receives traffic that the virtual machine needs to forward. A virtual machine can forward traffic whether it has multiple network interfaces or a single network interface attached to it.

Prev | Next

Question 340 (Question Set 5)



Your on-premises network contains an SMB share named Share1.
You have an Azure subscription that contains the following resources:

- ☈ A web app named webapp1
- ☈ A virtual network named VNET1

You need to ensure that webapp1 can connect to Share1.

What should you deploy?

- A. an Azure Application Gateway
- B. an Azure Active Directory (Azure AD) Application Proxy
- C. an Azure Virtual Network Gateway

Answer : C

Explanation:

A Site-to-Site VPN gateway connection can be used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel.
This type of connection requires a VPN device, a VPN gateway, located on-premises that has an externally facing public IP address assigned to it.

Incorrect Answers:

- B: Application Proxy is a feature of Azure AD that enables users to access on-premises web applications from a remote client.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal>

Question 341 (Question Set 5)



You plan to deploy several Azure virtual machines that will run Windows Server 2019 in a virtual machine scale set by using an Azure Resource Manager template.
You need to ensure that NGINX is available on all the virtual machines after they are deployed.

What should you use?

- A. the Publish-AzVMDscConfiguration cmdlet
- B. Azure Application Insights
- C. Azure Custom Script Extension
- D. the New-AzConfigurationAssignment cmdlet

Answer : C

Explanation:

Note:

There are several versions of this question in the exam. The question has two correct answers:

1. a Desired State Configuration (DSC) extension
2. Azure Custom Script Extension

The question can have other incorrect answer options, including the following:

- ☈ Deployment Center in Azure App Service
- ☈ a Microsoft Intune device configuration profile

Reference:

<https://docs.microsoft.com/en-us/azure/architecture/framework/devops/automation-configuration>

Question 342 (Question Set 5)



Your on-premises network contains a VPN gateway.

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
vgw1	Virtual network gateway	Gateway for Site-to-Site VPN to the on-premises network
storage1	Storage account	Standard performance tier
Vnet1	Virtual network	Enabled forced tunneling
VM1	Virtual machine	Connected to Vnet1

You need to ensure that all the traffic from VM1 to storage1 travels across the Microsoft backbone network.

What should you configure?

- A. a network security group (NSG)
- B. service endpoints
- C. Azure Peering Service
- D. Azure Firewall

Answer : A

Question 343 (Question Set 5)



You plan to deploy route-based Site-to-Site VPN connections between several on-premises locations and an Azure virtual network. Which tunneling protocol should you use?

- A. IKEv1
- B. PPTP
- C. IKEv2
- D. L2TP

Answer : C

Explanation:

A Site-to-Site (S2S) VPN gateway connection is used to connect your on-premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel. IKEv2 supports 10 S2S connections, while IKEv1 only supports 1.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-classic-portal> <https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-connect-multiple-policybased-rm-ps>

Question 344 (Testlet 6)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.

All the resources used by Litware are hosted on-premises.

Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -

The network contains an Active Directory forest named litware.com. All domain controllers are configured as DNS servers and host the litware.com DNS zone.

Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.

Litware.com contains a user named User1.

All the offices connect by using private connections.

Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.

All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.

The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -

Litware plans to implement the following changes:

Deploy Azure ExpressRoute to the Montreal office.

Migrate the virtual machines hosted on Server1 and Server2 to Azure.

Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).

Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -

Litware must meet the following technical requirements:

Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.

Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.

Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.

Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.

Connect the New York office to VNet1 over the Internet by using an encrypted connection.

Create a workflow to send an email message when the settings of VM4 are modified.

Create a custom Azure role named Role1 that is based on the Reader role.

Minimize costs whenever possible.

You need to ensure that VM1 can communicate with VM4. The solution must minimize the administrative effort.

What should you do?

- A. Create an NSG and associate the NSG to VM1 and VM4.
- B. Establish peering between VNET1 and VNET3.
- C. Assign VM4 an IP address of 10.0.1.5/24.
- D. Create a user-defined route from VNET1 to VNET3.

Answer : C

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal>

Question 345 (Testlet 6)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam.

You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more

information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section,

you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.

All the resources used by Litware are hosted on-premises.

Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -

The network contains an Active Directory forest named litware.com. All domain controllers are configured as DNS servers and host the litware.com DNS zone.

Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.

Litware.com contains a user named User1.

All the offices connect by using private connections.

Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.

All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.

The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -

Litware plans to implement the following changes:

Deploy Azure ExpressRoute to the Montreal office.

Migrate the virtual machines hosted on Server1 and Server2 to Azure.

Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).

Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -

Litware must meet the following technical requirements:

Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.

Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.

Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.

Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.

Connect the New York office to VNet1 over the Internet by using an encrypted connection.

Create a workflow to send an email message when the settings of VM4 are modified.

Create a custom Azure role named Role1 that is based on the Reader role.

Minimize costs whenever possible.

HOTSPOT -

You need to meet the connection requirements for the New York office.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

From the Azure portal:

- Create an ExpressRoute circuit only.
- Create a virtual network gateway only.
- Create a virtual network gateway and a local network gateway.
- Create an ExpressRoute circuit and an on-premises data gateway.
- Create a virtual network gateway and an on-premises data gateway.

In the New York office:

- Deploy ExpressRoute.
- Deploy a DirectAccess server.
- Implement a Web Application Proxy.
- Configure a site-to-site VPN connection.

Answer :

Answer Area

From the Azure portal:

Create an ExpressRoute circuit only.
Create a virtual network gateway only.
Create a virtual network gateway and a local network gateway.
Create an ExpressRoute circuit and an on-premises data gateway.
Create a virtual network gateway and an on-premises data gateway.

In the New York office:

Deploy ExpressRoute.
Deploy a DirectAccess server.
Implement a Web Application Proxy.
Configure a site-to-site VPN connection.

Explanation:

Box 1: Create a virtual network gateway and a local network gateway.

Azure VPN gateway. The VPN gateway service enables you to connect the VNet to the on-premises network through a VPN appliance. For more information, see

Connect an on-premises network to a Microsoft Azure virtual network. The VPN gateway includes the following elements:

⇒ Virtual network gateway. A resource that provides a virtual VPN appliance for the VNet. It is responsible for routing traffic from the on-premises network to the VNet.


⇒ Local network gateway. An abstraction of the on-premises VPN appliance. Network traffic from the cloud application to the on-premises network is routed through this gateway.

⇒ Connection. The connection has properties that specify the connection type (IPSec) and the key shared with the on-premises VPN appliance to encrypt traffic.

⇒ Gateway subnet. The virtual network gateway is held in its own subnet, which is subject to various requirements, described in the Recommendations section below.

Box 2: Configure a site-to-site VPN connection

On-premises create a site-to-site connection for the virtual network gateway and the local network gateway.

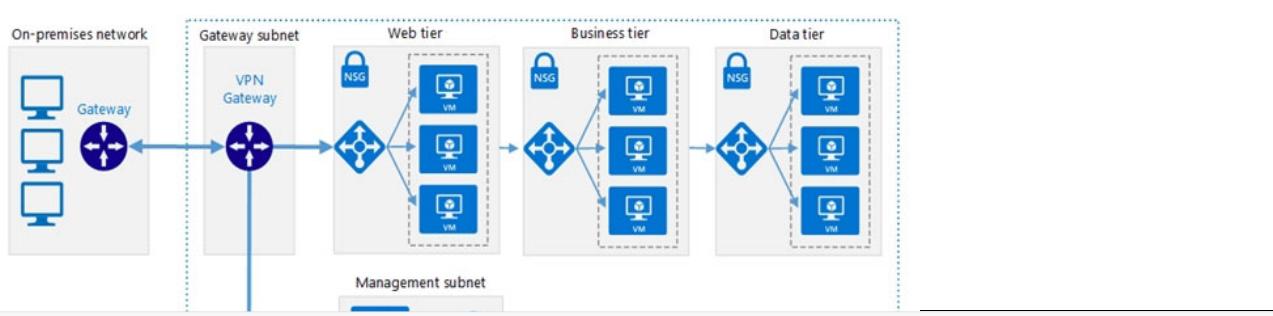

Question 346 (Testlet 7)

Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market. Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.

Use unmanaged standard storage for the hard disks of the virtual machines.

Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.

Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:

Ensure that only users who are part of a group named Pilot can join devices to Azure AD.

Designate a new user named Admin1 as the service admin for the Azure subscription.

Admin1 must receive email alerts regarding service outages.

Ensure that a new user named User3 can create network objects for the Azure subscription.

HOTSPOT -

You need to recommend a solution for App1. The solution must meet the technical requirements.

What should you include in the recommendation? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Number of virtual networks:

1
2
3

Number of subnets per virtual network:

1
2
3

Answer :

Answer Area

Number of virtual networks:


1
2
3

Number of subnets per virtual network:

1
2
3

Explanation:

This reference architecture shows how to deploy VMs and a virtual network configured for an N-tier application, using SQL Server on Windows for the data tier.

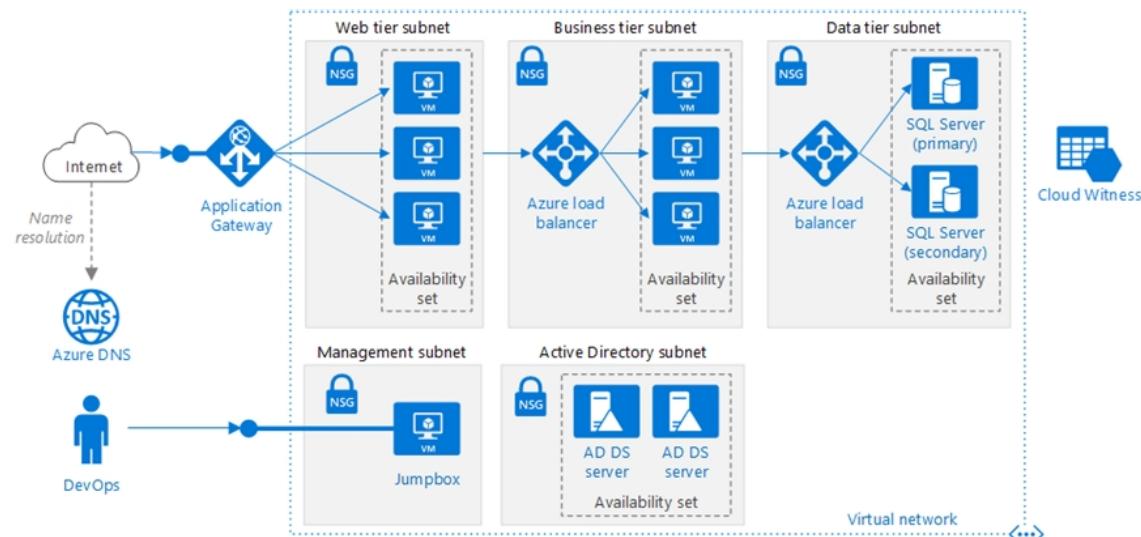

Scenario: You have a public-facing application named App1. App1 is comprised of the following three tiers:

- ⇒ A SQL database
- ⇒ A web front end
- ⇒ A processing middle tier

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Technical requirements include:

Question 347 (Testlet 7)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Contoso, Ltd. is a manufacturing company that has offices worldwide. Contoso works with partner organizations to bring products to market. Contoso products are manufactured by using blueprint files that the company authors and maintains.

Existing Environment -

Currently, Contoso uses multiple types of servers for business operations, including the following:

File servers

Domain controllers

Microsoft SQL Server servers

Your network contains an Active Directory forest named contoso.com. All servers and client computers are joined to Active Directory.

You have a public-facing application named App1. App1 is comprised of the following three tiers:

A SQL database

A web front end

A processing middle tier -

Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Requirements -

Planned Changes -

Contoso plans to implement the following changes to the infrastructure:

Move all the tiers of App1 to Azure.

Move the existing product blueprint files to Azure Blob storage.

Create a hybrid directory to support an upcoming Microsoft 365 migration project.

Technical Requirements -

Contoso must meet the following technical requirements:

Move all the virtual machines for App1 to Azure.

Minimize the number of open ports between the App1 tiers.

Ensure that all the virtual machines for App1 are protected by backups.

Copy the blueprint files to Azure over the Internet.

Ensure that the blueprint files are stored in the archive storage tier.

Ensure that partner access to the blueprint files is secured and temporary.

Prevent user passwords or hashes of passwords from being stored in Azure.
 Use unmanaged standard storage for the hard disks of the virtual machines.
 Ensure that when users join devices to Azure Active Directory (Azure AD), the users use a mobile phone to verify their identity.
 Minimize administrative effort whenever possible.

User Requirements -

Contoso identifies the following requirements for users:
 Ensure that only users who are part of a group named Pilot can join devices to Azure AD.
 Designate a new user named Admin1 as the service admin for the Azure subscription.
 Admin1 must receive email alerts regarding service outages.
 Ensure that a new user named User3 can create network objects for the Azure subscription.

You are planning the move of App1 to Azure.

You create a network security group (NSG).

You need to recommend a solution to provide users with access to App1.

What should you recommend?

- A. Create an incoming security rule for port 443 from the Internet. Associate the NSG to the subnet that contains the web servers.
- B. Create an outgoing security rule for port 443 from the Internet. Associate the NSG to the subnet that contains the web servers.
- C. Create an incoming security rule for port 443 from the Internet. Associate the NSG to all the subnets.
- D. Create an outgoing security rule for port 443 from the Internet. Associate the NSG to all the subnets.

Answer : A

Explanation:

Incoming and the web server subnet only, as users access the web front end by using HTTPS only.
 Note Scenario: You have a public-facing application named App1. App1 is comprised of the following three tiers:
 ☈ A SQL database
 ☈ A web front end
 ☈ A processing middle tier
 Each tier is comprised of five virtual machines. Users access the web front end by using HTTPS only.

Question 348 (Testlet 8)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided. To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study. At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -
 Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant. The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

HOTSPOT -

You implement the planned changes for NSG1 and NSG2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area:**Statements****Yes****No**

From VM1, you can establish a Remote Desktop session to VM2.

From VM2, you can ping VM3.

Answer : From VM2, you can establish a Remote Desktop session to VM3.

Answer Area:**Statements****Yes****No**

From VM1, you can establish a Remote Desktop session to VM2.

From VM2, you can ping VM3.

From VM2, you can establish a Remote Desktop session to VM3.

Explanation:

Box 1: No -

NSG2 blocks RDP to VM2 -

Box 2: Yes -

ICMP is not blocked -

Box 3: No -

NSG2 blocks RDP from VM2 -

Reference:
<https://docs.microsoft.com/en-us/azure/virtual-network/network-security-group-how-it-works>

Question 349 (Testlet 8)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant. The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.

What should you do first?

- A. Redeploy VM1 and VM2 to the same availability zone.
- B. Connect VM2 to VNET1/Subnet1.
- C. Create a new NSG and associate the NSG to VNET1/Subnet1.
- D. Redeploy VM1 and VM2 to the same availability set.

Answer : B

Explanation:

Need to connect VM2 to VNET1/Subnet1.

Scenario: Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1.

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2

Question 350 (Testlet 8)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

You need to add VM1 and VM2 to the backend pool of LB1.

What should you do first?

A) Associate VM2 to VNET1/Subnet1.

B) Re-deploy VM1 and VM2 to the same availability zone.

C) Re-deploy VM1 and VM2 to different availability sets VNET1/Subnet1.

D) Create a new NSG and associate the NSG to VNET1/Subnet1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

Reference:

<https://docs.microsoft.com/en-us/azure/load-balancer/quickstart-load-balancer-standard-internal-portal>

Question 351 (Question Set 6)



You have an Azure subscription that has a Recovery Services vault named Vault1. The subscription contains the virtual machines shown in the following table:

Name	Operating system	Auto-shutdown
VM1	Windows Server 2012 R2	Off
VM2	Windows Server 2016	19:00
VM3	Ubuntu Server 18.04 LTS	Off
VM4	Windows 10	19:00

You plan to schedule backups to occur every night at 23:00.

Which virtual machines can you back up by using Azure Backup?

- A. VM1 and VM3 only
- B. VM1, VM2, VM3 and VM4
- C. VM1 and VM2 only
- D. VM1 only

Answer : B

Explanation:

Azure Backup supports backup of 64-bit Windows server operating system from Windows Server 2008.

Azure Backup supports backup of 64-bit Windows 10 operating system.

Azure Backup supports backup of 64-bit Ubuntu Server operating system from Ubuntu 12.04.

Azure Backup supports backup of VM that are shutdown or offline.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-support-matrix-iaas> <https://docs.microsoft.com/en-us/azure/virtual-machines/linux/endorsed-distros>

Question 352 (Question Set 6)



HOTSPOT -

You create a Recovery Services vault backup policy named Policy1 as shown in the following exhibit:

Policy1

■■■ Associated items ■■■ Delete ■■■ Save ■■■ Discard

Backup schedule

* Frequency * Time * Timezone

Retention range

Retention of daily backup point

* At For
 Day(s)

Retention of weekly backup point

* On * At For
 Week(s)

Retention of monthly backup point

Week Based Day Based

* On * At For
 Month(s)

Retention of yearly backup point

Week Based Day Based

* In * On * At For
 Year(s)

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The backup that occurs on Sunday, March 1, will be retained for [answer choice].

▼
30 days
10 weeks
36 months
10 years

The backup that occurs on Sunday, November 1, will be retained for [answer choice].

▼
30 days
10 weeks
36 months
10 years

Answer :

Answer Area

The backup that occurs on Sunday, March 1, will be retained for [answer choice].

▼
30 days
10 weeks
36 months
10 years

The backup that occurs on Sunday, November 1, will be retained for [answer choice].

▼
30 days
10 weeks
36 months
10 years

Explanation:

Box 1: 10 years -
The yearly backup point occurs to 1 March and its retention period is 10 years.

Box 2: 36 months -
The monthly backup point occurs on the 1st of every month and its retention period is 36 months.

Question 353 (Question Set 6)



You have the Azure virtual machines shown in the following table:

Name	Azure region
VM1	West Europe
VM2	West Europe
VM3	North Europe
VM4	North Europe

You have a Recovery Services vault that protects VM1 and VM2.

You need to protect VM3 and VM4 by using Recovery Services.

What should you do first?

- A. Create a new Recovery Services vault
- B. Create a storage account
- C. Configure the extensions for VM3 and VM4
- D. Create a new backup policy

Answer : A

Explanation:

A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services

Reference:

<https://docs.microsoft.com/en-us/azure/site-recovery/azure-to-azure-tutorial-enable-replicatio>

Question 354 (Question Set 6)



HOTSPOT -

You have an Azure subscription that contains an Azure Storage account named storage1 and the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group1

You plan to monitor storage1 and to configure email notifications for the signals shown in the following table.

Name	Type	Users to notify
Ingress	Metric	User1 and User3 only
Egress	Metric	User1 only
Delete storage account	Activity log	User1, User2, and User3
Restore blob ranges	Activity log	User1 and User3 only

You need to identify the minimum number of alert rules and action groups required for the planned monitoring.

How many alert rules and action groups should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Alert rules:

1
2
3
4

Action groups:

1
2
3
4

Answer :

Answer Area

Question 355 (Question Set 6)



You have an Azure subscription that contains the identities shown in the following table.

Name	Type	Member of
User1	User	<i>None</i>
User2	User	Group1
Principal1	Managed identity	<i>None</i>
Principal2	Managed identity	Group1

User1, Principal1, and Group1 are assigned the Monitoring Reader role.

An action group named AG1 has the Email Azure Resource Manager Role notification type and is configured to email the Monitoring Reader role.

You create an alert rule named Alert1 that uses AG1.

You need to identify who will receive an email notification when Alert1 is triggered.

Who should you identify?

- A. User1 and Principal1 only
- B. User1, User2, Principal1, and Principal2
- C. User1 only
- D. User1 and User2 only

Answer : C

Explanation:

Email will only be sent to Azure AD user members of the Monitoring Reader role. Email will not be sent to Azure AD groups or service principals.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/action-groups>

Question 356 (Question Set 6)



HOTSPOT -

You have an Azure virtual machine named VM1 and a Recovery Services vault named Vault1.

You create a backup policy named Policy1 as shown in the exhibit. (Click the Exhibit tab.)

Policy1

Associated items Delete Save Discard

Backup schedule

* Frequency: Daily * Time: 2:00 AM * Timezone: (UTC) Coordinated Universal Time

Retention range

Retention of daily backup point.

* At: 2:00 AM For: 5 Day(s)

Retention of weekly backup point.

* On: Sunday * At: 2:00 AM For: 20 Week(s)

Retention of monthly backup point.

Week Based Day Based

* On: 2 * At: 2:00 AM For: 24 Month(s)

Retention of yearly backup point.

Answer:

Answer Area

January 8 at 2:00 PM (14:00):

5
6
8
9

Year(s)

AM.

For example, select the appropriate options in the answer area.

January 15 at 2:00 PM (14:00):

5
8
17
19

Explanation:

Box 1: 6 - 5 latest daily recovery points, which includes the weekly backup from the previous Sunday, plus the monthly recovery point.

Box 2: 8 - 5 latest daily recovery points, plus two weekly backups, plus the monthly recovery point.

Reference: <https://social.technet.microsoft.com/Forums/azure/en-US/8a4aa-4bad-ac65-471c4d422e94/daily-monthly-yearly-recovery-points-and-storage-used?forum=windowsazureonlinebackup>

5
8

Question 357 (Question Set 6)



HOTSPOT - You have the web apps shown in the following table.

Name	Web framework	Hosting environment
App1	Microsoft ASP.NET	An on-premises physical server that runs Windows Server 2019 and has Internet Information Services (IIS) configured
App2	Microsoft ASP.NET Core	An Azure virtual machine that runs Windows Server 2019 and has Internet Information Services (IIS) configured

You need to monitor the performance and usage of the apps by using Azure Application Insights. The solution must minimize modifications to the application code.

What should you do on each app? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

App1:

	▼
Install the Log Analytics agent	
Install the Azure Monitor agent	
Use the Application Insights SDK	
Install the Application Insights Agent	

App2:

	▼
Install the Log Analytics agent	
Install the Azure Monitor agent	
Use the Application Insights SDK	
Install the Application Insights Agent	

Answer :

Answer Area

App1:

	▼
Install the Log Analytics agent	
Install the Azure Monitor agent	
Use the Application Insights SDK	
Install the Application Insights Agent	

App2:

	▼
Install the Log Analytics agent	
Install the Azure Monitor agent	
Use the Application Insights SDK	
Install the Application Insights Agent	

Reference:
<https://docs.microsoft.com/en-us/azure/azure-monitor/app/azure-web-apps>

Question 358 (Question Set 6)



You have an Azure virtual machine named VM1. You use Azure Backup to create a backup of VM1 named Backup1. After creating Backup1, you perform the following changes to VM1:
④ Modify the size of VM1.
④ Copy a file named Budget.xls to a folder named Data.
④ Reset the password for the built-in administrator account.
④ Add a data disk to VM1.

An administrator uses the Replace existing option to restore VM1 from Backup1. You need to ensure that all the changes to VM1 are restored. Which change should you perform again?

- A. Modify the size of VM1.
- B. Reset the password for the built-in administrator account.
- C. Add a data disk.
- D. Copy Budget.xls to Data.

Answer : D

Reference:
<https://docs.microsoft.com/en-us/azure/backup/about-azure-vm-restore>

Question 359 (Question Set 6)



HOTSPOT -
You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com that contains the users shown in the following table.

Name	Member of	Role assigned
User1	Group1	None
User2	Group2	None
User3	Group1, Group2	User administrator

You enable password reset for contoso.onmicrosoft.com as shown in the Password Reset exhibit. (Click the Password Reset tab.)

Self service password reset enabled ⓘ

None Selected All

Select group >

Group2

i These settings only apply to end users in your organization. Admins are always enabled for self-service password reset and are required to use two authentication methods to reset their password. Click here to learn more about administrator password policies.

You configure the authentication methods for password reset as shown in the Authentication Methods exhibit. (Click the Authentication Methods tab.)

Number of methods required to reset ⓘ

 1 2

Methods available to users

- Mobile app notification
- Mobile app code
- Email
- Mobile phone
- Office phone
- Security questions

Number of questions required to register ⓘ

 3 4 5

Number of questions required to reset ⓘ

 3 4 5

Select security questions



10 security questions selected

ⓘ These settings only apply to end users in your organization. Admins are always enabled for self-service password reset and are required to use two authentication methods to reset their password. Click here to learn more about administrator password policies.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Answer: Each correct selection is worth one point.

Answer Area**Statements****Yes****No**

After User2 answers three security questions correctly, he can reset his password immediately.



If User1 forgets her password, she can reset the password by using the mobile phone app.



User3 can add security questions to the password reset process



Explanation:

Box 1: No -
Two methods are required.Box 2: No -
Self-service password reset is only enabled for Group2, and User1 is not a member of Group2.Box 3: Yes -
As a User Administrator, User3 can add security questions to the reset process.Reference:
<https://docs.microsoft.com/en-us/azure/active-directory/authentication/quickstart-sspr> <https://docs.microsoft.com/en-us/azure/active-directory/authentication/active-directory-passwords-faq>

Question 360 (Question Set 6)



Your company has a main office in London that contains 100 client computers.

Three years ago, you migrated to Azure Active Directory (Azure AD).

The company's security policy states that all personal devices and corporate-owned devices must be registered or joined to Azure AD.

A remote user named User1 is unable to join a personal device to Azure AD from a home network.

You verify that User1 was able to join devices to Azure AD in the past.

You need to ensure that User1 can join the device to Azure AD.

What should you do?

- A. Assign the User administrator role to User1.
 B. From the Device settings blade, modify the Maximum number of devices per user setting.
 C. Create a point-to-site VPN from the home network of User1 to Azure.
 D. From the Device settings blade, modify the Users may join devices to Azure AD setting.

Answer : B

Explanation:

The Maximum number of devices setting enables you to select the maximum number of devices that a user can have in Azure AD. If a user reaches this quota, they will not be able to add additional devices until one or more of the existing devices are removed.

Incorrect Answers:

C: Azure AD Join enables users to join their devices to Active Directory from anywhere as long as they have connectivity with the Internet.

D: The Users may join devices to Azure AD setting enables you to select the users who can join devices to Azure AD. Options are All, Selected and None. The default is All.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/devices/device-management-azure-portal> <http://techgenix.com/pros-and-cons-azure-ad-join/>

Question 361 (Question Set 6)



HOTSPOT -

You have two Azure App Service app named App1 and App2. Each app has a production deployment slot and a test deployment slot.

The Backup Configuration settings for the production slots are shown in the following table.

App	Backup Every	Start backup schedule from	Retention (Days)	Keep at least one backup
App1	1 Days	January 6, 2021	0	Yes
App2	1 Days	January 6, 2021	30	Yes

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On January 15, 2021, App1 will have only one backup in storage.	<input type="radio"/>	<input type="radio"/>
On February 6, 2021, you can access the backup of the App2 test slot from January 15, 2021.	<input type="radio"/>	<input type="radio"/>
On January 15, 2021, you can restore the App2 production slot backup from January 6 to the App2 test slot.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
On January 15, 2021, App1 will have only one backup in storage.	<input checked="" type="radio"/>	<input type="radio"/>
On February 6, 2021, you can access the backup of the App2 test slot from January 15, 2021.	<input checked="" type="radio"/>	<input type="radio"/>
On January 15, 2021, you can restore the App2 production slot backup from January 6 to the App2 test slot.	<input checked="" type="radio"/>	<input type="radio"/>

Question 362 (Question Set 6)



HOTSPOT -

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant is synced to the on-premises Active Directory domain. The domain contains the users shown in the following table.

Name	Role
SecAdmin1	Security administrator
BillAdmin1	Billing administrator
User1	Reports reader

You enable self-service password reset (SSPR) for all users and configure SSPR to have the following authentication methods:

- ⇒ Number of methods required to reset: 2
- ⇒ Methods available to users: Mobile phone, Security questions
- ⇒ Number of questions required to register: 3
- ⇒ Number of questions required to reset: 3

You select the following security questions:

- ⇒ What is your favorite food?
- ⇒ In what city was your first job?
- ⇒ What was the name of your first pet?

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
SecAdmin1 must answer the following question during the self-service password reset: In what city was your first job?	<input type="radio"/>	<input type="radio"/>
BillAdmin1 must answer the following question during the self-service password reset: What is your favorite food?	<input type="radio"/>	<input type="radio"/>
User1 must answer the following question during the self-service password reset: What was the name of your first pet?	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
SecAdmin1 must answer the following question during the self-service password reset: In what city was your first job?	<input type="radio"/>	<input checked="" type="radio"/>
BillAdmin1 must answer the following question during the self-service password reset: What is your favorite food?	<input checked="" type="radio"/>	<input type="radio"/>
User1 must answer the following question during the self-service password reset: What was the name of your first pet?	<input checked="" type="radio"/>	<input type="radio"/>

Explanation:

Box 1: No -

Administrator accounts are special accounts with elevated permissions. To secure them, the following restrictions apply to changing passwords of administrators:

On-premises enterprise administrators or domain administrators cannot reset their password through Self-service password reset (SSPR). They can only change their password in their on-premises environment. Thus, we recommend not syncing on-prem AD admin accounts to Azure AD. An administrator cannot use secret Questions & Answers as a method to reset password.

Box 2: Yes -

Self-service password reset (SSPR) is an Azure Active Directory feature that enables employees to reset their passwords without needing to contact IT staff.

Box 3: Yes -

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-sspr-deployment>

Question 363 (Question Set 6)



Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.

You need to create new user accounts in external.contoso.onmicrosoft.com.

Solution: You instruct User1 to create the user accounts.

Does that meet the goal?

- A. Yes
- B. No

Answer : A

Explanation:

Only a global administrator can add users to this tenant.

Reference:

<https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad>

Question 364 (Question Set 6)



You have an existing Azure subscription that contains 10 virtual machines.

You need to monitor the latency between your on-premises network and the virtual machines.

What should you use?

- A. Service Map
- B. Connection troubleshoot
- C. Network Performance Monitor
- D. Effective routes

Answer : C

Explanation:

Network Performance Monitor is a cloud-based hybrid network monitoring solution that helps you monitor network performance between various points in your network infrastructure. It also helps you monitor network connectivity to service and application endpoints and monitor the performance of Azure ExpressRoute.

You can monitor network connectivity across cloud deployments and on-premises locations, multiple data centers, and branch offices and mission-critical multitier applications or microservices. With Performance Monitor, you can detect network issues before users complain.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/insights/network-performance-monitor>


Question 365 (Question Set 6)



HOTSPOT -

You have an Azure App Service plan named ASP1.

CPU usage for ASP1 is shown in the following exhibit.

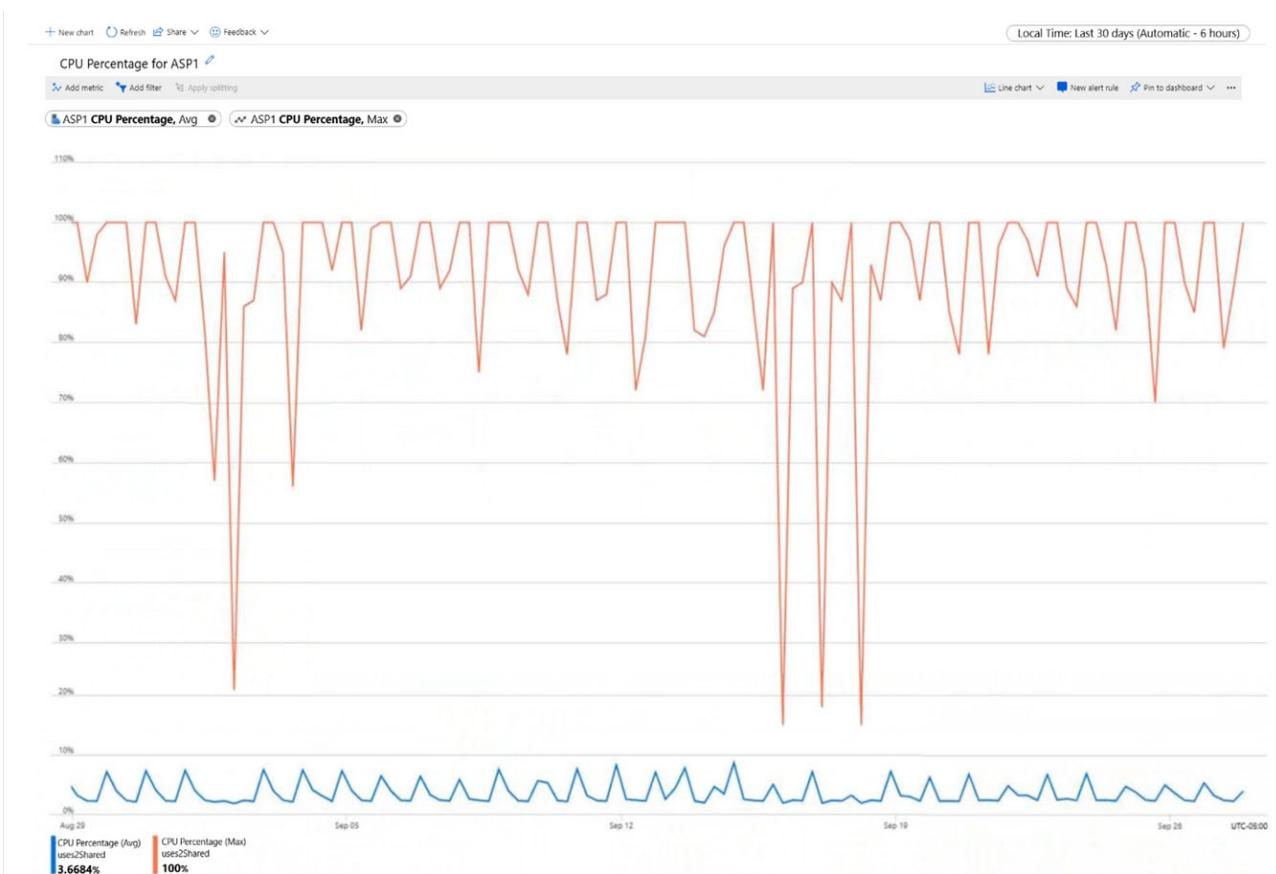

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The average CPU percentage is calculated [answer choice] per day

Answer :

▼
once
four times

Answer Area

The average CPU percentage is calculated [answer choice] per day

▼
once
four times
six times
24 times

ASP1 must be [answer choice] to optimize CPU usage

▼
scaled up
scaled down
scaled out

Explanation:

Box 1: four times -

From the exhibit we see that the time granularity is 6 hours: Last 30 days (Automatic - 6 hours).
CPU Percentage Last days Automatic - hours

Box 2: scaled up -

Scale up when:

- * You see that your workloads are hitting some performance limit such as CPU or I/O limits.
 - * You need to quickly react to fix performance issues that can't be solved with classic database optimization.
 - * You need a solution that allows you to change service tiers to adapt to changing latency requirements.
- Reference:
<https://docs.microsoft.com/en-us/azure/azure-monitor/essentials/metrics-troubleshoot> <https://azure.microsoft.com/en-us/overview/scaling-out-vs-scaling-up>

Question 366 (Question Set 6)



DRAG DROP -

You have an Azure Linux virtual machine that is protected by Azure Backup.

One week ago, two files were deleted from the virtual machine.

You need to restore the deleted files to an on-premises Windows Server 2016 computer as quickly as possible.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Download and run the script to mount a drive on the local computer	
Select a restore point that contains the deleted files	
From the Azure portal, click Restore VM from the vault	
From the Azure portal, click File Recovery from the vault	
Mount a VHD	
Copy the files by using AZCopy	
Copy the files by using File Explorer	



Answer :

Actions	Answer Area
	From the Azure portal, click File Recovery from the vault
	Select a restore point that contains the deleted files
From the Azure portal, click Restore VM from the vault	
	Download and run the script to mount a drive on the local computer
Mount a VHD	
Copy the files by using AZCopy	
	Copy the files by using File Explorer



Explanation:

Step 1: From the Azure portal, click File Recovery from the vault

Step 2. Select a restore point that contains the deleted files

Step 3: Download and run the script to mount a drive on the local computer

Generate and download script to browse and recover files:

Step 4: Copy the files using File Explorer!

After the disks are attached, use Windows File Explorer to browse the new volumes and files. The restore files functionality provides access to all files in a recovery point. Manage the files via File Explorer as you would for normal files.

Step 1-3 below:

To restore files or folders from the recovery point, go to the virtual machine and perform the following steps:

1. Sign in to the Azure portal and in the left pane, select Virtual machines. From the list of virtual machines, select the virtual machine to open that virtual machine's dashboard.

2. In the virtual machine's menu, select Backup to open the Backup dashboard.

3. In the Backup dashboard menu, select File Recovery.

The File Recovery menu opens.

Home > Virtual machines > myVMH1 | Backup >

File Recovery

myvmh1

✓ Step 1: Select recovery point

8/2/2020, 11:31:09 AM [Latest] (Cras... ▾)

→ Step 2: Download script to browse and recover files

This script will mount the disks from the selected recovery point **as local drives on the machine where it is run**. These drives will remain mounted for 12 hours.

Download Script *

Requires password to run

Unmount Disks

4. From the Select recovery point drop-down menu, select the recovery point that holds the files you want. By default, the latest recovery point is already selected.

5. Select Download Executable (for Windows Azure VMs) or Download Script (for Linux Azure VMs, a python script is generated) to download the software used to copy files from the recovery point.

Running the script and identifying volumes:

For Linux machines, a python script is generated. Download the script and copy it to the relevant/compatible Linux server.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm> <https://docs.microsoft.com/en-us/azure/backup/backup-automation#restore-files-from-an-azure-vm-backup>



HOTSPOT -

You purchase a new Azure subscription named Subscription1.
 You create a virtual machine named VM1 in Subscription1. VM1 is not protected by Azure Backup.
 You need to protect VM1 by using Azure Backup. Backups must be created at 01:00 and stored for 30 days.
 What should you do? To answer, select the appropriate options in the answer area.
 NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Location in which to store the backups:

A blob container
A file share
A Recovery Services vault
A storage account

Object to use to configure the protection for VM1:

A backup policy
A batch job
A batch schedule
A recovery plan

Answer :

Answer Area

Location in which to store the backups:

A blob container
A file share
A Recovery Services vault
A storage account

Object to use to configure the protection for VM1:

A backup policy
A batch job
A batch schedule
A recovery plan

Explanation:

Box 1: A Recovery Services vault

You can set up a Recovery Services vault and configure backup for multiple Azure VMs.

Box 2: A backup policy -

In Choose backup policy, do one of the following:

- ☞ Leave the default policy. This backs up the VM once a day at the time specified, and retains backups in the vault for 30 days.
- ☞ Select an existing backup policy if you have one.
- ☞ Create a new policy, and define the policy settings.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm>**Question 368 (Question Set 6)**

You have an Azure virtual machine named VM1.

Azure collects events from VM1.

You are creating an alert rule in Azure Monitor to notify an administrator when an error is logged in the System event log of VM1.

Which target resource should you monitor in the alert rule?

- A. virtual machine extension
- B. virtual machine
- C. metric alert
- D. Azure Log Analytics workspace

Answer : D

Explanation:

For the first step to create the new alert rule, under the Create Alert section, you are going to select your Log Analytics workspace as the resource, since this is a log based alert signal.

Reference:

<https://docs.microsoft.com/en-us/windows-server/storage/storage-spaces/configure-azure-monitor>

Question 369 (Question Set 6)



You have an Azure subscription that contains 100 virtual machines.

You regularly create and delete virtual machines.

You need to identify unattached disks that can be deleted.

What should you do?

- A. From Azure Cost Management, view Cost Analysis
- B. From Azure Advisor, modify the Advisor configuration
- C. From Microsoft Azure Storage Explorer, view the Account Management properties
- D. From Azure Cost Management, view Advisor Recommendations

Answer : D

Explanation:

From Home > Cost Management + Billing > Cost Management, scroll down on the options and select View Recommendations:

[Home](#) > [Cost Management + Billing](#) > [Cost Management](#)

Cost Management: Subscription

Search (Ctrl+ /) Try preview Go to Cloudyn Help

Overview

- Access control
- Diagnose and solve problems

Cost Management

- Cost analysis
- Cost alerts
- Budgets
- Advisor recommendations
- Cloudyn

Products + services

- Azure subscriptions
- Azure reservations

Settings

- Configuration
- Exports
- Connectors for AWS (Preview)

Support + troubleshooting

Analyze cloud costs
Break down and analyze costs to identify anomalies and drive a deeper understanding of cost and usage patterns.
[Learn more](#)

Monitor with budgets
Create a budget to control costs and configure alerts to warn teams about impending budget overages.
[Learn more](#)

Open cost analysis

Create budget

Optimize with recommendations
View Advisor recommendations to identify unused or underutilized resources. Take action to reduce waste.
[Learn more](#)

View recommendations

Azure Cost Management / Advisor -

From here you will see the recommendations for your subscription, if you have orphaned disks, they will be listed.

Reference:

<https://codeserendipity.com/2020/07/08/microsoft-azure-find-unattached-disks-that-can-be-deleted-and-other-recommendations/>

Question 370 (Question Set 6)



You have an Azure web app named webapp1.

Users report that they often experience HTTP 500 errors when they connect to webapp1.

You need to provide the developers of webapp1 with real-time access to the connection errors. The solution must provide all the connection error details.

What should you do first?

- A. From webapp1, enable Web server logging
- B. From Azure Monitor, create a workbook
- C. From Azure Monitor, create a Service Health alert
- D. From webapp1, turn on Application Logging

Answer : A

Question 371 (Question Set 6)



You have an Azure web app named App1.

You need to monitor the availability of App1 by using a multi-step web test.

What should you use in Azure Monitor?

- A. Azure Service Health
- B. Azure Application Insights
- C. the Diagnostic settings
- D. metrics

Answer : B

Explanation:

Upload the web test -

1. In the Application Insights portal on the Availability pane select Add Classic test, then select Multi-step as the SKU.
2. Upload your multi-step web test.
3. Set the test locations, frequency, and alert parameters.
4. Select Create.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/app/availability-multistep>

Question 372 (Question Set 6)



HOTSPOT -

You have an Azure subscription that has diagnostic logging enabled and is configured to send logs to a Log Analytics workspace.

You are investigating a service outage.

You need to view the event time, the event name, and the affected resources.

How should you complete the query? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

AzureActivity
Heartbeat
NetworkMonitoring
Perf

| Where Level == 'Critical'

TimeGenerated, OperationNameValue, _ResourceId
extend
join
print
project

Answer :

Answer Area

AzureActivity
Heartbeat
NetworkMonitoring
Perf

| Where Level == 'Critical'

TimeGenerated, OperationNameValue, _ResourceId
extend
join
print
project

Explanation:

Box 1: AzureActivity -

The AzureActivity table has entries from the Azure activity log, which provides insight into subscription-level or management group-level events occurring in Azure. Let's see only Critical entries during a specific week. The where operator is common in the Kusto Query Language, where filters a table to rows that match specific criteria. The following example uses multiple commands. First, the query retrieves all records for the table. Then, it filters the data for only records that are in the time range. Finally, it filters those results for only records that have a Critical level.

```
AzureActivity
| where TimeGenerated > datetime(10-01-2020) and TimeGenerated < datetime(10-07-2020)
| where Level == 'Critical'
Incorrect:  
not Perf: The Perf table has performance data that's collected from virtual machines that run the Log Analytics agent.
```

Box 2: | project -
Select a subset of columns: project.
Use project to include only the columns you want. Building on the preceding example, let's limit the output to certain columns:

```
AzureActivity
| where TimeGenerated > datetime(10-01-2020) and TimeGenerated < datetime(10-07-2020)
| where Level == 'Critical'
| project TimeGenerated, Level, OperationNameValue, ResourceGroup, _ResourceId
Reference:  
https://github.com/MicrosoftDocs/dataexplorer-docs/blob/main/data-explorer/kusto/query/tutorial.md
```

Question 373 (Question Set 6)



You have a Recovery Services vault named RSV1. RSV1 has a backup policy that retains instant snapshots for five days and daily backup for 14 days. RSV1 performs daily backups of VM1. VM1 hosts a static website that was updated eight days ago. You need to recover VM1 to a point eight days ago. The solution must minimize downtime. What should you do first?

- A. Deallocate VM1.
- B. Restore VM1 by using the Replace existing restore configuration option.
- C. Delete VM1.
- D. Restore VM1 by using the Create new restore configuration option.

Answer : B

Explanation:

Replace existing:

You can restore a disk, and use it to replace a disk on the existing VM.

The current VM must exist. If it's been deleted, this option can't be used.

Azure Backup takes a snapshot of the existing VM before replacing the disk, and stores it in the staging location you specify. Existing disks connected to the VM are replaced with the selected restore point. The snapshot is copied to the vault, and retained in accordance with the retention policy.

After the replace disk operation, the original disk is retained in the resource group. You can choose to manually delete the original disks if they aren't needed.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms>

Question 374 (Question Set 6)



HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
storage1	Storage account
Workspace1	Log Analytics workspace
DB1	Azure SQL database

You plan to create a data collection rule named DCR1 in Azure Monitor.

Which resources can you set as data sources in DCR1, and which resources can you set as destinations in DCR1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Data sources:

VM1 only
VM1 and storage1 only
VM1, storage1, and DB1 only
VM1, storage1, Workspace1, and DB1

Answer :

Answer Area

Data sources:

VM1 only
VM1 and storage1 only
VM1, storage1, and DB1 only
VM1, storage1, Workspace1, and DB1

Destinations:

storage1 only
Workspace1 only
Workspace1 and storage1 only
Workspace1, storage1, and DB1 only1

Explanation:

Box 1: VM1 only -

A virtual machine may have an association to multiple DCRs, and a DCR may have multiple virtual machines associated to it.
In the Resources tab, add the resources (virtual machines, virtual machine scale sets, Arc for servers) that should have the Data Collection Rule applied.

Box 2: Workspace1 only -

On the Destination tab, add one or more destinations for the data source. You can select multiple destinations of same or different types, for instance multiple Log Analytics workspaces (i.e. "multi-homing").

Note: The Data Collection Rules (or DCR) improve on a few key areas of data collection from VMs including like better control and scoping of data collection (e.g. collect from a subset of VMs for a single workspace), collect once and send to both Log Analytics and Azure Monitor Metrics, send to multiple workspaces (multi-homing for Linux), improved Windows event filtering, and improved extension management.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/agents/data-collection-rule-azure-monitor-agent>

Question 375 (Question Set 6)



HOTSPOT -

You have the role assignment file shown in the following exhibit.

```
[  
  {  
    "RoleAssignmentId": "e3108585-0e5d-4572-91a3-aa5d2df73999",  
    "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff",  
    "DisplayName": "User1",  
    "SignInName": "User1@contoso.onmicrosoft.com",  
    "RoleDefinitionName": "Owner",  
    ...  
  },  
  {  
    "RoleAssignmentId": "3bab4763-16a9-4d5d-9fcf-eee0cc31a21e",  
    "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG2",  
    "DisplayName": "User2",  
    "SignInName": "User2@contoso.onmicrosoft.com",  
    "RoleDefinitionName": "Owner",  
    ...  
  },  
  {  
    "RoleAssignmentId": "a071c023-40a3-4b7f-8680-1109b40270c5",  
    "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG1/providers/  
Microsoft.Compute/virtualMachines/VM1",  
    "DisplayName": "User3",  
    "SignInName": "User3@contoso.onmicrosoft.com",  
    "RoleDefinitionName": "Owner",  
    ...  
  },  
  {  
    "RoleAssignmentId": "c5b9e7da-76d4-4888-93b5-8afb2bb780b4",  
    "Scope": "/subscriptions/fb960108-fcdc-499b-886e-d9c31d3f26ff/resourceGroups/RG1",  
    "DisplayName": "User4",  
    "SignInName": "User4@contoso.onmicrosoft.com",  
    "RoleDefinitionName": "Contributor",  
    ...  
  }  
]
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

[Answer choice] assigned the Owner role for VM1

User3 is	▼
User3 and User4 are	▼
User1 and User3 are	▼
User1, User3, and User4 are	▼
User1, User2, User3, and User4	▼

Answer: [Answer choice] can create a virtual machine in RG1

User1 and User4	▼
User1, User2, and User3	▼
User1, User2, and User4	▼
User1, User3, and User4	▼
User1, User2, User3, and User4	▼

Answer Area

[Answer choice] assigned the Owner role for VM1

	▼
User3 is	

Question 376 (Question Set 6)

HOTSPOT -

You have the following custom role-based access control (RBAC) role.

```
{
  "id": "b988327b-7dae-4d00-8925-1cc14fd68be4",
  "properties": {
    "roleName": "Role1",
    "description": "",
    "assignableScopes": [
      "/subscriptions/c691ad84-99f2-42fd-949b-58afd7ef6ab3"
    ],
    "permissions": [
      {
        "actions": [
          "Microsoft.Resources/subscription/resourceGroups/resources/read",
          "Microsoft.Resources/subscription/resourceGroups/read",
          "Microsoft.Resourcehealth/*",
          "Microsoft.Authorization/*/read",
          "Microsoft.Compute/*/read",
          "Microsoft.Support/*",
          "Microsoft.Authorization/*/read",
          "Microsoft.Network/virtualNetworks/read",
          "Microsoft.Resources/deployments/*",
          "Microsoft.Resources/subscription/resourceGroups/read",
          "Microsoft.Storage/storageAccounts/read",
          "Microsoft.Compute/virtualMachines/start/action",
          "Microsoft.Compute/virtualMachines/powerOff/action",
          "Microsoft.Compute/virtualMachines/deallocate/action",
          "Microsoft.Compute/virtualMachines/restart/action",
          "Microsoft.Compute/virtualMachines/*",
          "Microsoft.Compute/disks/*",
          "Microsoft.Compute/availabilitySets/*",
          "Microsoft.Network/virtualNetworks/subnets/join/action",
          "Microsoft.Network/virtualNetworks/subnets/read",
          "Microsoft.Network/virtualNetworks/subnets/virtualMachines/read",
          "Microsoft.Network/networkInterfaces/*",
          "Microsoft.Compute/snapshots/*"
        ]
      },
      {
        "notAction": [
          "Microsoft.Authorization/*/Delete",
          "Microsoft.Authorization/*/Write",
          "Microsoft.Authorization/elevateAccess/Action"
        ]
      }
    ]
  }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements

Yes	No
-----	----

<input type="radio"/>	<input type="radio"/>
-----------------------	-----------------------

<input type="radio"/>	<input type="radio"/>
-----------------------	-----------------------

<input type="radio"/>	<input type="radio"/>
-----------------------	-----------------------

Users that are assigned Role1 can assign Role1 to users.

Users that are assigned Role1 can deploy new virtual machines.

Users that are assigned Role1 can set a static IP address on a virtual machine.

Answer :

Answer Area

Statements	Yes	No
Users that are assigned Role1 can assign Role1 to users.	<input type="radio"/>	<input checked="" type="radio"/>
Users that are assigned Role1 can deploy new virtual machines.	<input type="radio"/>	<input checked="" type="radio"/>
Users that are assigned Role1 can set a static IP address on a virtual machine.	<input checked="" type="radio"/>	<input type="radio"/>

Question 377 (Question Set 6)



HOTSPOT -

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Contains subnet1 and subnet2
subnet1	Subnet	IP address space 10.3.0.0/24
subnet2	Subnet	IP address space 10.4.0.0/24
NSG1	Network security group (NS)	None
vm1	Virtual machine	IP address 10.3.0.15
vm2	Virtual machine	IP address 10.4.0.16
storage1	Storage account	None

NSG1 is configured as shown in the following exhibit.

^ Essentials JSON View

Resource group (change) : RG1 Custom security rules : 1 inbound, 2 outbound

Location : East US 2 Associated with : 1 subnets, 0 network interfaces

Subscription (change) : Microsoft Azure Sponsorship

Subscription ID :

Tags (change) : Click here to add tags

▼ Inbound security rules

Priority	Name	Port	Protocol	Source	Destination	Action
110	HTTPS_VM1_Deny	443	TCP	Internet	10.3.0.15	✖ Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	✓ Allow
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	✓ Allow
65500	DenyAllInBound	Any	Any	Any	Any	✖ Deny

▼ Outbound security rules

Priority	Name	Port	Protocol	Source	Destination	Action
145	Storage_Access	443	TCP	VirtualNetwork	Storage	✓ Allow
150	Block_Internet	Any	Any	VirtualNetwork	Internet	✖ Deny
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	✓ Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	✓ Allow
65500	DenyAllOutBound	Any	Any	Any	Any	✖ Deny

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
VM1 can access storage1.	<input type="radio"/>	<input type="radio"/>
VM2 can access VM1 by using the HTTPS protocol.	<input type="radio"/>	<input type="radio"/>
The security rules for NSG1 apply to any virtual machine on VNET1.	<input type="radio"/>	<input type="radio"/>

Answer :

Answer Area

Statements	Yes	No
VM1 can access storage1.	<input checked="" type="radio"/>	<input type="radio"/>
VM2 can access VM1 by using the HTTPS protocol.	<input type="radio"/>	<input checked="" type="radio"/>
The security rules for NSG1 apply to any virtual machine on VNET1.	<input type="radio"/>	<input checked="" type="radio"/>

Question 378 (Question Set 6)



You have an Azure subscription named Subscription1 that contains two Azure virtual networks named VNet1 and VNet2. VNet1 contains a VPN gateway named VPNGW1 that uses static routing. There is a site-to-site VPN connection between your on-premises network and VNet1.

On a computer named Client1 that runs Windows 10, you configure a point-to-site VPN connection to VNet1.

You configure virtual network peering between VNet1 and VNet2. You verify that you can connect to VNet2 from the on-premises network. Client1 is unable to connect to VNet2.

You need to ensure that you can connect Client1 to VNet2.

What should you do?

- A. Select Use the remote virtual network's gateway or Route Server on VNet1 to VNet2 peering.
- B. Select Use the remote virtual network's gateway or Route Server on VNet2 to VNet1 peering.
- C. Download and re-install the VPN client configuration package on Client1.
- D. Enable BGP on VPNGW1.

Answer : C

Question 379 (Question Set 6)



HOTSPOT -

You have two Azure subscriptions named Sub1 and Sub2. Sub1 is in a management group named MG1. Sub2 is in a management group named MG2. You have the resource groups shown in the following table.

Name	Subscription
RG1	Sub1
RG2	Sub2

You have the virtual machines shown in the following table.

Name	Resource group
VM1	RG1
VM2	RG2
VM3	RG2

You assign roles to users as shown in the following table.

User	Role	Resource
User1	Virtual Machine Contributor	MG1
User1	Virtual Machine User Login	Sub2
User2	Virtual Machine Contributor	MG2
User2	Virtual Machine User Login	Sub1
User2	Virtual Machine User Login	VM3

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

- | Statements | Yes | No |
|---|-----------------------|-----------------------|
| User1 can sign in to VM1. | <input type="radio"/> | <input type="radio"/> |
| User2 can manage disks and disk snapshots of VM1. | <input type="radio"/> | <input type="radio"/> |
| User2 can manage disks and disk snapshots of VM3. | <input type="radio"/> | <input type="radio"/> |

Answer :

Answer Area

- | Statements | Yes | No |
|---|----------------------------------|----------------------------------|
| User1 can sign in to VM1. | <input checked="" type="radio"/> | <input type="radio"/> |
| User2 can manage disks and disk snapshots of VM1. | <input type="radio"/> | <input checked="" type="radio"/> |
| User2 can manage disks and disk snapshots of VM3. | <input type="radio"/> | <input checked="" type="radio"/> |

Question 380 (Question Set 6)



You have an Azure Active Directory (Azure AD) tenant that is linked to 10 Azure subscriptions.
You need to centrally monitor user activity across all the subscriptions.
What should you use?

- A. Azure Application Insights Profiler
- B. access reviews
- C. Activity log filters
- D. a Log Analytics workspace

Answer : D

Question 381 (Question Set 6)



DRAG DROP -
You have an Azure subscription that contains a virtual machine name VM1.
VM1 has an operating system disk named Disk1 and a data disk named Disk2.
You need to back up Disk2 by using Azure Backup.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.
Select and Place:

Actions**Answer Area**

- Configure a managed identity
- Create an Azure Backup vault
- Create a Recovery Services vault
- Delegate permissions for the vault
- Create a backup policy and configure the backup



Answer :

Actions**Answer Area**

-
-
- Create a Recovery Services vault
- Delegate permissions for the vault
-



Create an Azure Backup vault

Create a backup policy and configure the backup

Configure a managed identity

Question 382 (Question Set 6)



You have a subnet named Subnet1 that contains Azure virtual machines. A network security group (NSG) named NSG1 is associated to Subnet1. NSG1 only contains the default rules. You need to create a rule in NSG1 to prevent the hosts on Subnet1 from connecting to the Azure portal. The hosts must be able to connect to other internet hosts. To what should you set Destination in the rule?

- A. Application security group
- B. IP Addresses
- C. Service Tag
- D. Any

Answer : C

Question 383 (Question Set 6)



You have an Azure subscription named Subscription1 that contains an Azure Log Analytics workspace named Workspace1. You need to view the error events from a table named Event. Which query should you run in Workspace1?

- A. search in (Event) "error"
- B. Event | where EventType is "error"
- C. select * from Event where EventType == "error"
- D. Get-Event Event | where \${_.EventType} == "error"

Answer : A

Question 384 (Question Set 6)



You have an Azure App Service web app named App1. You need to collect performance traces for App1. What should you use?

- A. Azure Application Insights Profiler

- B. the Activity log
 C. the Deployment center
 D. the Diagnose and solve problems settings

Answer : B

Question 385 (Testlet 9)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.

All the resources used by Litware are hosted on-premises.

Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -

The network contains an Active Directory forest named litware.com. All domain controllers are configured as DNS servers and host the litware.com DNS zone.

Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.

Litware.com contains a user named User1.

All the offices connect by using private connections.

Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.

All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.

The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -

Litware plans to implement the following changes:

Deploy Azure ExpressRoute to the Montreal office.

Migrate the virtual machines hosted on Server1 and Server2 to Azure.

Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).

Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -

Litware must meet the following technical requirements:

Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

▪

Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.

Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.

Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.

Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.

Connect the New York office to VNet1 over the Internet by using an encrypted connection.

Create a workflow to send an email message when the settings of VM4 are modified.

Create a custom Azure role named Role1 that is based on the Reader role.

Minimize costs whenever possible.

HOTSPOT -

You need to implement Role1.

Which command should you run before you create Role1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

<input type="checkbox"/> Find-RoleCapability	<input type="checkbox"/> -Name "Reader"
<input type="checkbox"/> Get-AzureADDirectoryRole	<input type="checkbox"/> ConvertFrom-Json
<input checked="" type="checkbox"/> Get-AzRoleDefinition	<input type="checkbox"/> ConvertFrom-String
<input type="checkbox"/> Get-AzResourceProvider	<input type="checkbox"/> ConvertTo-Json
	<input type="checkbox"/> ConvertTo-Xml

Answer :

Answer Area

<input type="checkbox"/> Find-RoleCapability	<input type="checkbox"/> -Name "Reader"
<input type="checkbox"/> Get-AzureADDirectoryRole	<input type="checkbox"/> ConvertFrom-Json
<input checked="" type="checkbox"/> Get-AzRoleDefinition	<input checked="" type="checkbox"/> ConvertFrom-String
<input type="checkbox"/> Get-AzResourceProvider	<input type="checkbox"/> ConvertTo-Json
	<input type="checkbox"/> ConvertTo-Xml

Question 386 (Testlet 9)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

Litware, Inc. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The Montreal office has 2,000 employees. The Seattle office has 1,000 employees. The New York office has 200 employees.

All the resources used by Litware are hosted on-premises.

Litware creates a new Azure subscription. The Azure Active Directory (Azure AD) tenant uses a domain named litware.onmicrosoft.com. The tenant uses the Premium P1 pricing tier.

Existing Environment -

The network contains an Active Directory forest named litware.com. All domain controllers are configured as DNS servers and host the litware.com DNS zone. Litware has finance, human resources, sales, research, and information technology departments. Each department has an organizational unit (OU) that contains all the accounts of that respective department. All the user accounts have the department attribute set to their respective department. New users are added frequently.

Litware.com contains a user named User1.

All the offices connect by using private connections.

Litware has data centers in the Montreal and Seattle offices. Each office has a firewall that can be configured as a VPN device.

All infrastructure servers are virtualized. The virtualization environment contains the servers in the following table.

Name	Role	Contains virtual machine
Server1	VMware vCenter server	VM1
Server2	Hyper-V host	VM2

Litware uses two web applications named App1 and App2. Each instance on each web application requires 1 GB of memory.

The Azure subscription contains the resources in the following table.

Name	Type
VNet1	Virtual network
VM3	Virtual machine
VM4	Virtual machine

The network security team implements several network security groups (NSGs)

Requirements -

Planned Changes -

Litware plans to implement the following changes:

Deploy Azure ExpressRoute to the Montreal office.

Migrate the virtual machines hosted on Server1 and Server2 to Azure.
 Synchronize on-premises Active Directory to Azure Active Directory (Azure AD).
 Migrate App1 and App2 to two Azure web apps named WebApp1 and WebApp2.

Technical Requirements -

Litware must meet the following technical requirements:

Ensure that WebApp1 can adjust the number of instances automatically based on the load and can scale up to five instances.

■ Ensure that VM3 can establish outbound connections over TCP port 8080 to the applications servers in the Montreal office.

■ Ensure that routing information is exchanged automatically between Azure and the routers in the Montreal office.

■ Enable Azure Multi-Factor Authentication (MFA) for the users in the finance department only.

■ Ensure that webapp2.azurewebsites.net can be accessed by using the name app2.litware.com.

■ Connect the New York office to VNet1 over the Internet by using an encrypted connection.

■ Create a workflow to send an email message when the settings of VM4 are modified.

■ Create a custom Azure role named Role1 that is based on the Reader role.

■ Minimize costs whenever possible.

You need to recommend a solution to automate the configuration for the finance department users. The solution must meet the technical requirements.

What should you include in the recommendation?

- A. Azure AD B2C
- B. dynamic groups and conditional access policies
- C. Azure AD Identity Protection
- D. an Azure logic app and the Microsoft Identity Management (MIM) client

Answer : B

Explanation:

Scenario: Ensure Azure Multi-Factor Authentication (MFA) for the users in the finance department only.

The recommendation is to use conditional access policies that can then be targeted to groups of users, specific applications, or other conditions.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-mfa-userstates>

Question 387 (Testlet 10)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant. The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

HOTSPOT -

You need to configure Azure Backup to back up the file shares and virtual machines.

What is the minimum number of Recovery Services vaults and backup policies you should create? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Recovery Services vaults

	▼
1	
2	
3	
4	
7	

Backup policies

	▼
1	
2	
3	
4	
5	
6	

Answer :

Answer Area

Recovery Services vaults

	▼
1	
2	
3	
4	
7	

Backup policies

	▼
1	
2	
3	
4	
5	
6	

Explanation:

Box 1: 3 -
If you have data sources in multiple regions, create a Recovery Services vault for each region.
The File Shares and VMs are located in three Regions: West US, East US, Central US.

Box 2: 6 -
A backup policy is scoped to a vault. For each vault we need one backup policy for File Shares and one backup policy for VM.
Note:
Back up the Azure file shares and virtual machines by using Azure Backup

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1

Question 388 (Testlet 10)



Case study -

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study -

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview -

General Overview -

Contoso, Ltd. is a consulting company that has a main office in Montreal and branch offices in Seattle and New York.

Environment -

Existing Environment -

Contoso has an Azure subscription named Sub1 that is linked to an Azure Active Directory (Azure AD) tenant. The network contains an on-premises Active Directory domain that syncs to the Azure AD tenant.

The Azure AD tenant contains the users shown in the following table.

Name	Type	Role
User1	Member	None
User2	Guest	None
User3	Member	None
User4	Member	None

Sub1 contains two resource groups named RG1 and RG2 and the virtual networks shown in the following table.

Name	Subnet	Peered with
VNET1	Subnet1, Subnet2	VNET2
VNET2	Subnet1	VNET1, VNET3
VNET3	Subnet1	VNET2
VNET4	Subnet1	None

User1 manages the resources in RG1. User4 manages the resources in RG2.

Sub1 contains virtual machines that run Windows Server 2019 as shown in the following table

Name	IP address	Location	Connected to
VM1	10.0.1.4	West US	VNET1/Subnet1
VM2	10.0.2.4	West US	VNET1/Subnet2
VM3	172.16.1.4	Central US	VNET2/Subnet1
VM4	192.168.1.4	West US	VNET3/Subnet1
VM5	10.0.22.4	East US	VNET4/Subnet1

No network security groups (NSGs) are associated to the network interfaces or the subnets.

Sub1 contains the storage accounts shown in the following table.

Name	Kind	Location	File share	Identity-based access for file share
storage1	Storage (general purpose v1)	West US	sharea	Azure Active Directory Domain Services (Azure AD DS)
storage2	StorageV2 (general purpose v2)	East US	shareb, sharec	Disabled
storage3	BlobStorage	East US 2	Not applicable	Not applicable
storage4	FileStorage	Central US	shared	Azure Active Directory Domain Services (Azure AD DS)

Requirements -

Planned Changes -

Contoso plans to implement the following changes:

Create a blob container named container1 and a file share named share1 that will use the Cool storage tier.

Create a storage account named storage5 and configure storage replication for the Blob service.

Create an NSG named NSG1 that will have the custom inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
500	3389	TCP	10.0.2.0/24	Any	Deny
1000	Any	ICMP	Any	VirtualNetwork	Allow

Associate NSG1 to the network interface of VM1.

Create an NSG named NSG2 that will have the custom outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
200	3389	TCP	10.0.0.0/16	VirtualNetwork	Deny
400	Any	ICMP	10.0.2.0/24	10.0.1.0/24	Allow

Associate NSG2 to VNET1/Subnet2.

Technical Requirements -

Contoso must meet the following technical requirements:

Create container1 and share1.

Use the principle of least privilege.

Create an Azure AD security group named Group4.

Back up the Azure file shares and virtual machines by using Azure Backup.

Trigger an alert if VM1 or VM2 has less than 20 GB of free space on volume C.

Enable User1 to create Azure policy definitions and User2 to assign Azure policies to RG1.

Create an internal Basic Azure Load Balancer named LB1 and connect the load balancer to VNET1/Subnet1

Enable flow logging for IP traffic from VM5 and retain the flow logs for a period of eight months.

Whenever possible, grant Group4 Azure role-based access control (Azure RBAC) read-only permissions to the Azure file shares.

DRAG DROP -

You need to configure the alerts for VM1 and VM2 to meet the technical requirements.

Which three actions should you perform in sequence? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Create a Log Analytics workspace.	
Configure the Diagnostic settings.	
Create an alert rule.	
Collect Windows performance counters from the Log Analytics agents.	
Answer: Create an Azure SQL database.	 

Actions	Answer Area
Configure the Diagnostic settings.	Create an alert rule. Create an Azure SQL database. Create a Log Analytics workspace.
Collect Windows performance counters from the Log Analytics agents.	

The interface shows a comparison between two sets of actions. On the left, under 'Actions', there are two items: 'Configure the Diagnostic settings.' and 'Collect Windows performance counters from the Log Analytics agents.'. On the right, under 'Answer Area', there are three items: 'Create an alert rule.', 'Create an Azure SQL database.', and 'Create a Log Analytics workspace.'. Navigation arrows (up, down, left, right) are positioned between the two columns to facilitate moving items between them.