



<http://algs4.cs.princeton.edu>


2.4 PRIORITY QUEUES

- ▶ *API and elementary implementations*
- ▶ *binary heaps*
- ▶ *heapsort*
- ▶ *event-driven simulation*

Complete binary tree

Binary tree. Empty **or** node with links to left and right binary trees.

Complete tree. Perfectly balanced, except for bottom level.

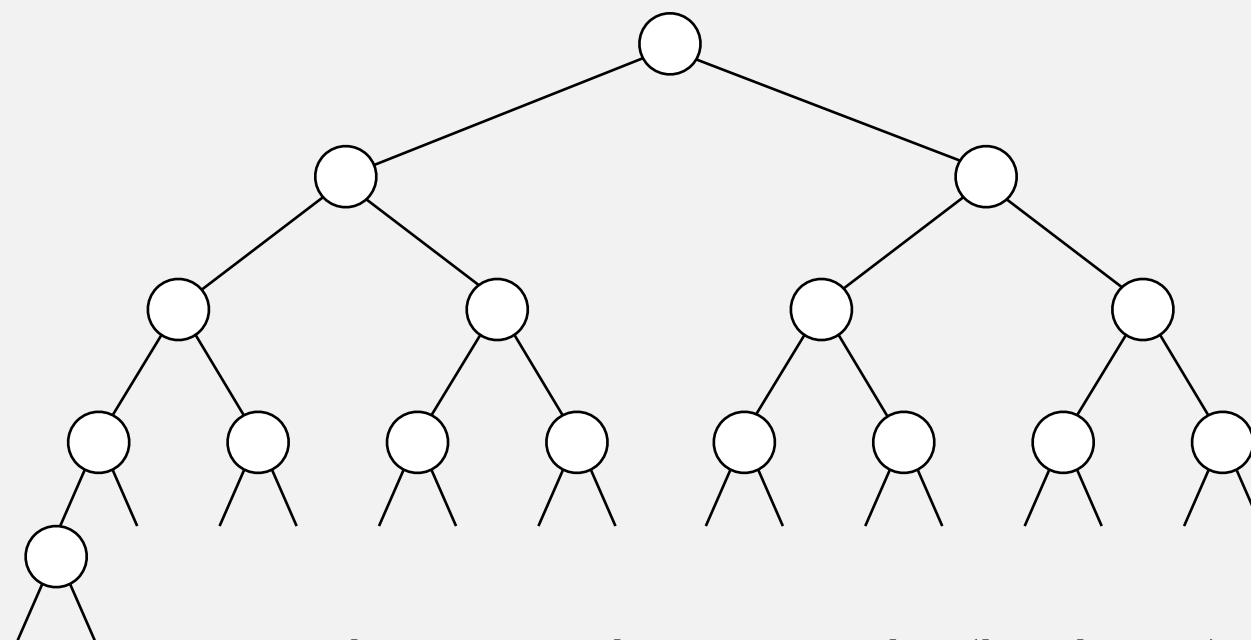

complete tree with $N = 16$ nodes (height = 4)

Property. Height of complete tree with N nodes is $\lceil \lg N \rceil$.

Pf. Height increases only when N is a power of 2.

A complete binary tree in nature



Hyphaene Compressa - Doum Palm

© Shlomit Pinter

Binary heap representations


Binary heap. Array representation of a heap-ordered complete binary tree.

Heap-ordered binary tree.

- Keys in nodes.
- Parent's key no smaller than children's keys.

Array representation.

- Indices start at 1.
- Take nodes in **level** order.
- No explicit links needed!

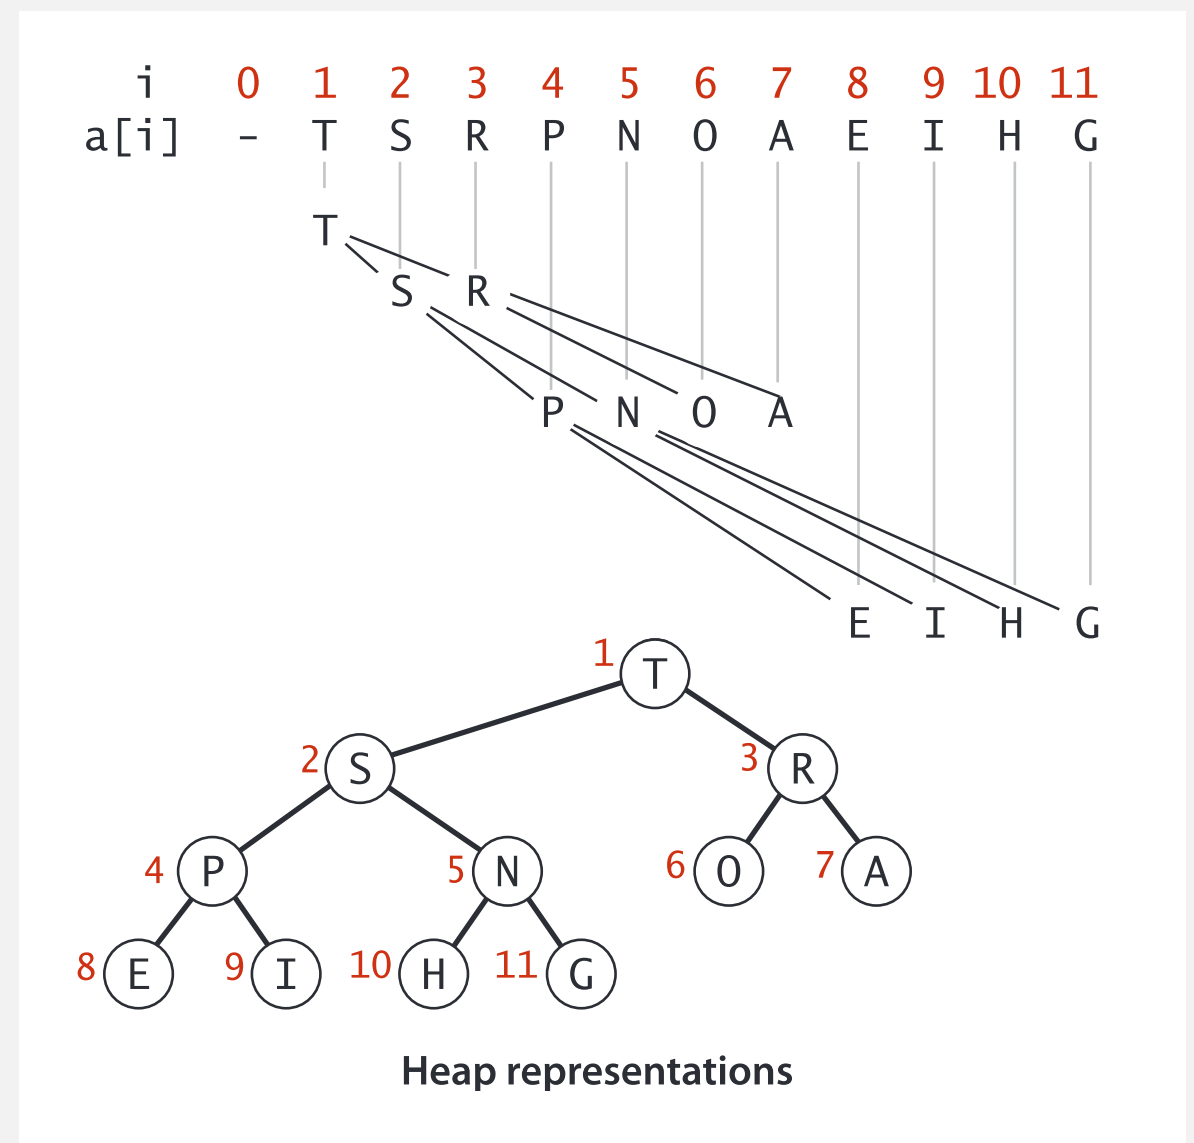


Binary heap properties

Proposition. Largest key is $a[1]$, which is root of binary tree.

Proposition. Can use array indices to move through tree.

- Parent of node at k is at $k/2$.
- Children of node at k are at $2k$ and $2k+1$.

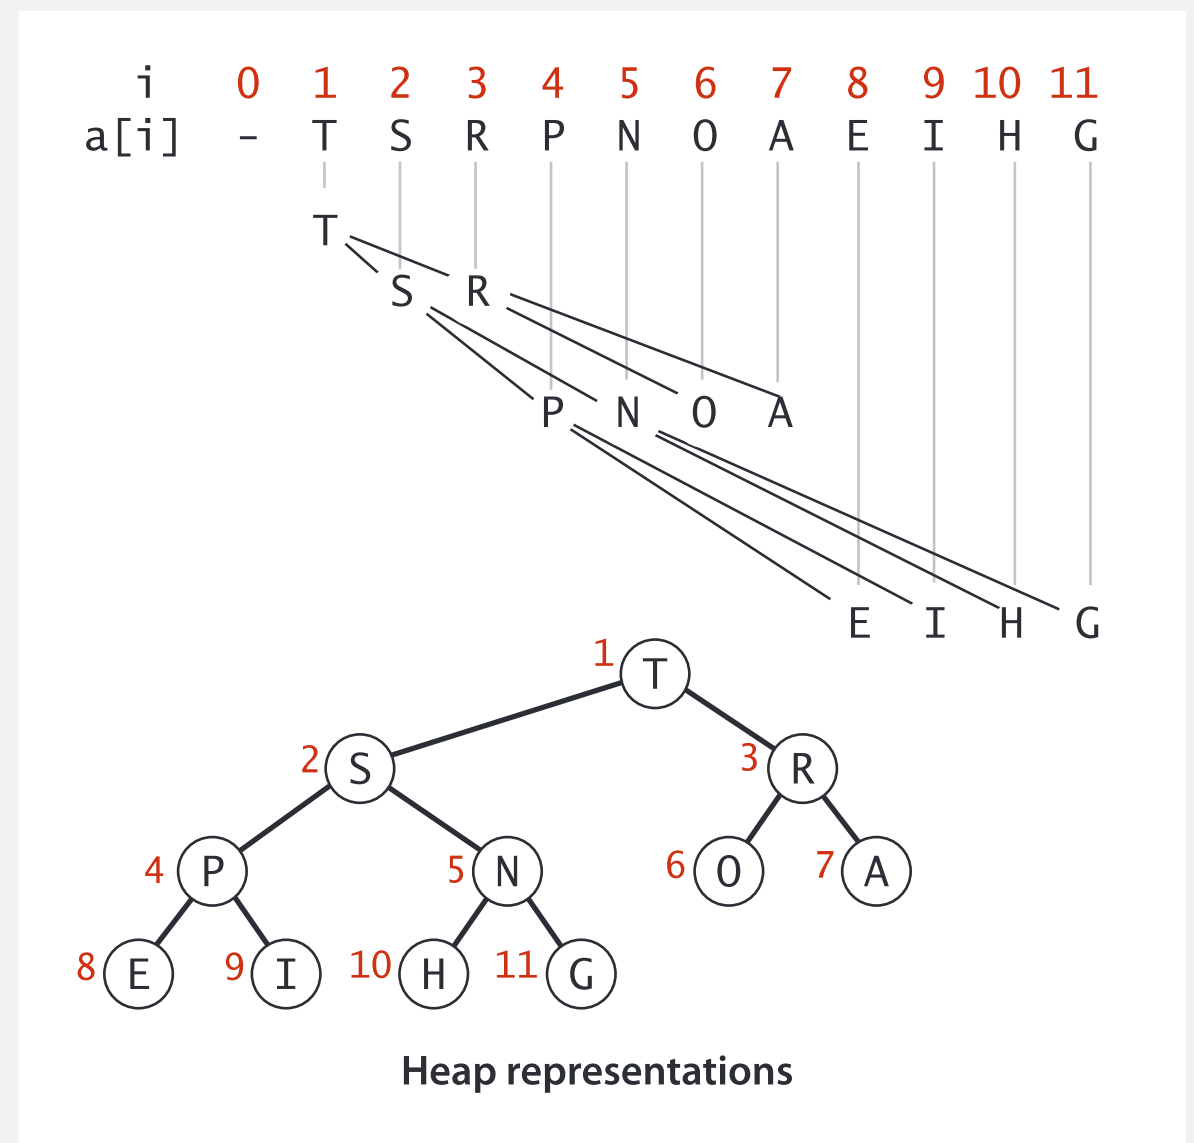


Binary heap demo

Insert. Add node at end, then swim it up.

Remove the maximum. Exchange root with node at end, then sink it down.

heap ordered

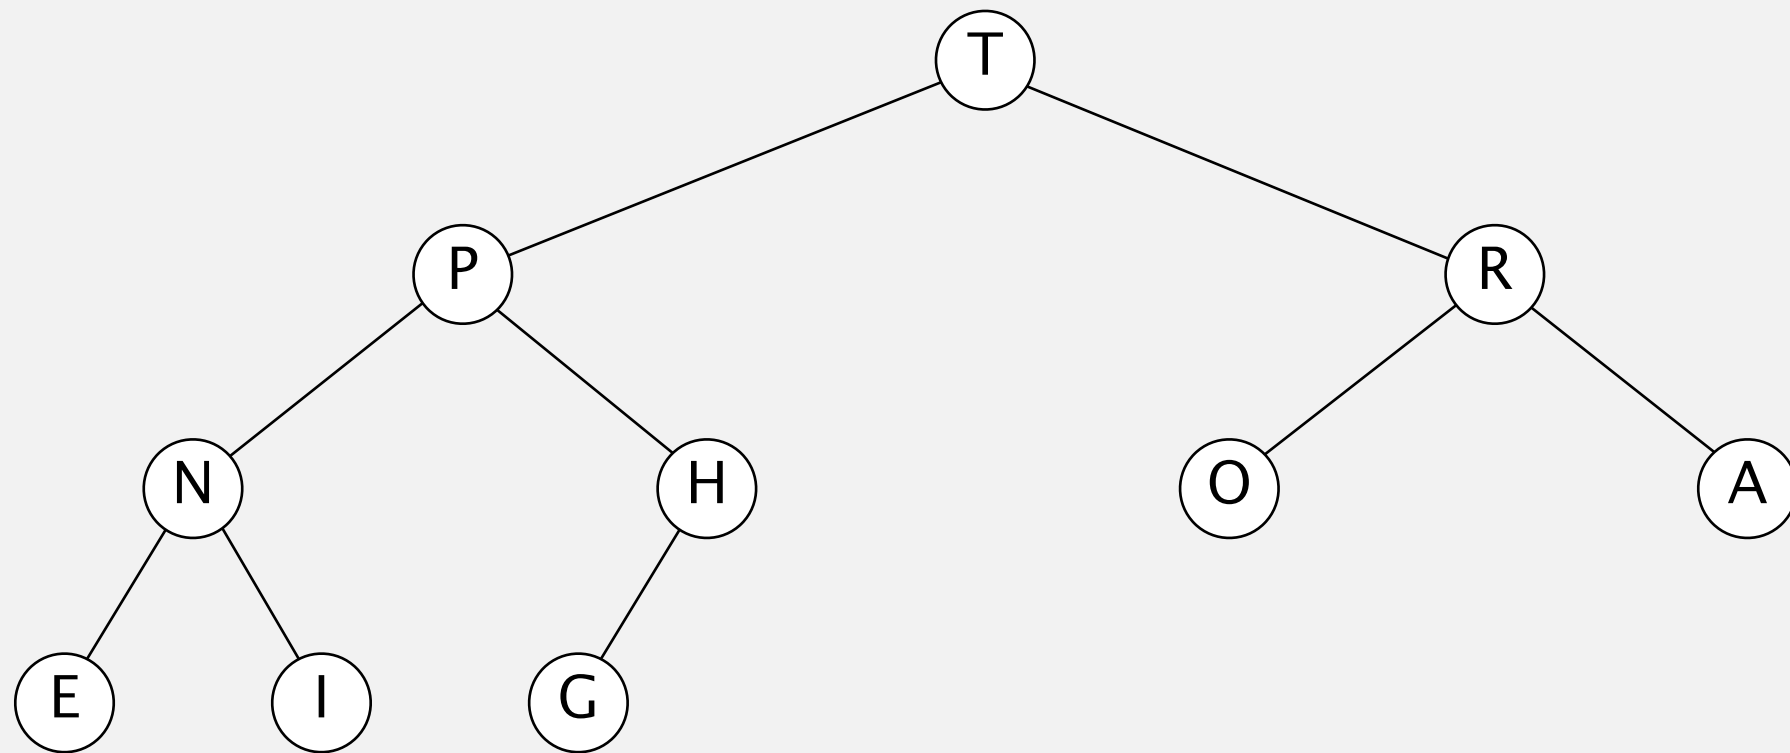


Binary heap demo

Insert. Add node at end, then swim it up.

Remove the maximum. Exchange root with node at end, then sink it down.

heap ordered

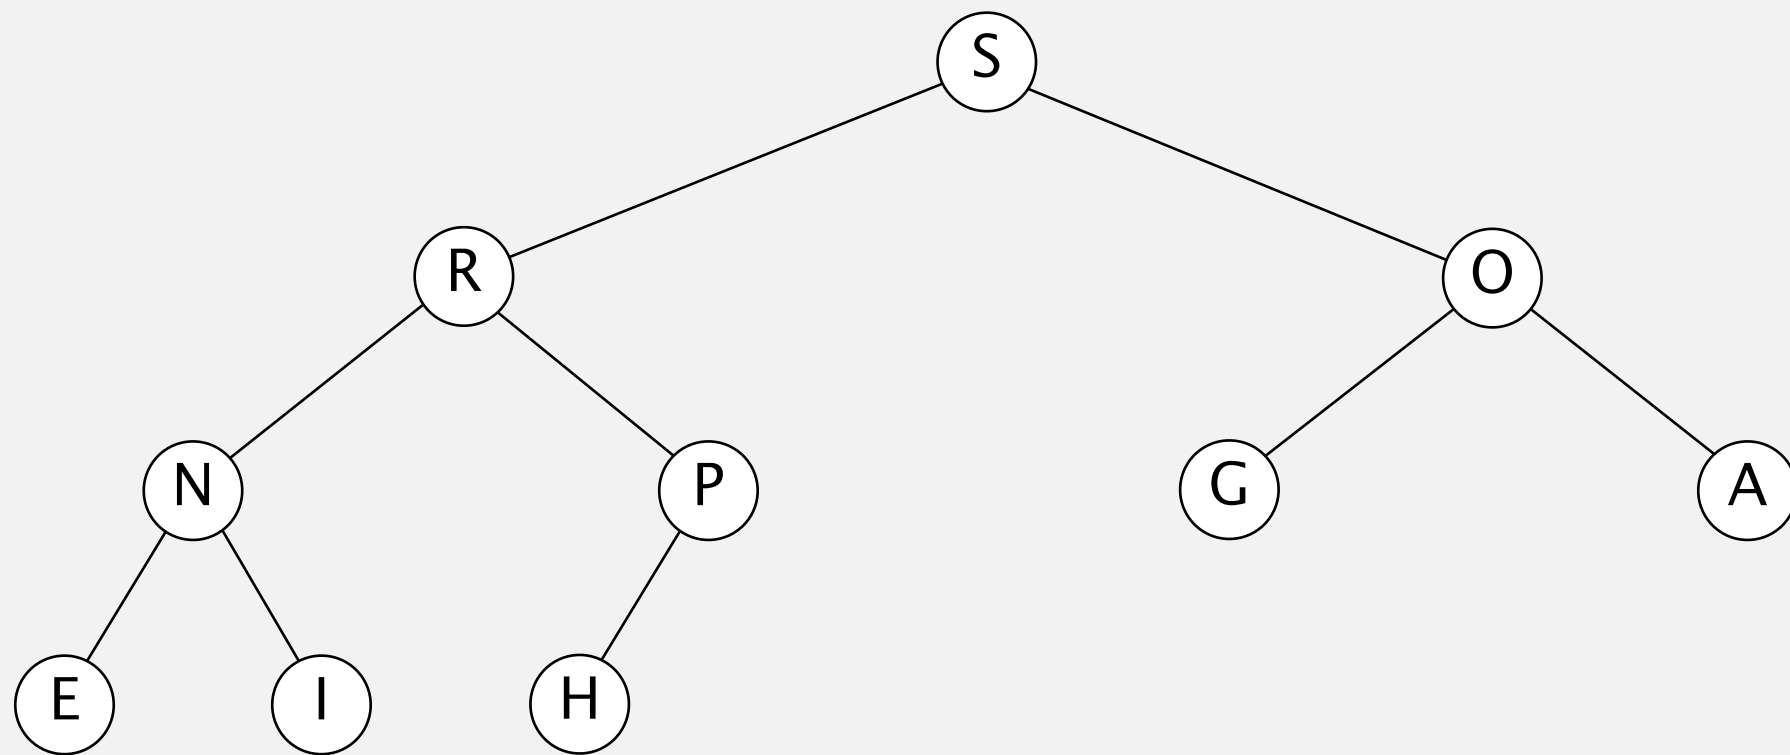

Promotion in a heap


Scenario. Child's key becomes **larger** key than its parent's key.

To eliminate the violation:

- Exchange key in child with key in parent.
- Repeat until heap order restored.

```
private void swim(int k)
{
    while (k > 1 && less(k/2, k))
    {
        exch(k, k/2);
        k = k/2;
    }
}
```

parent of node at k is at k/2

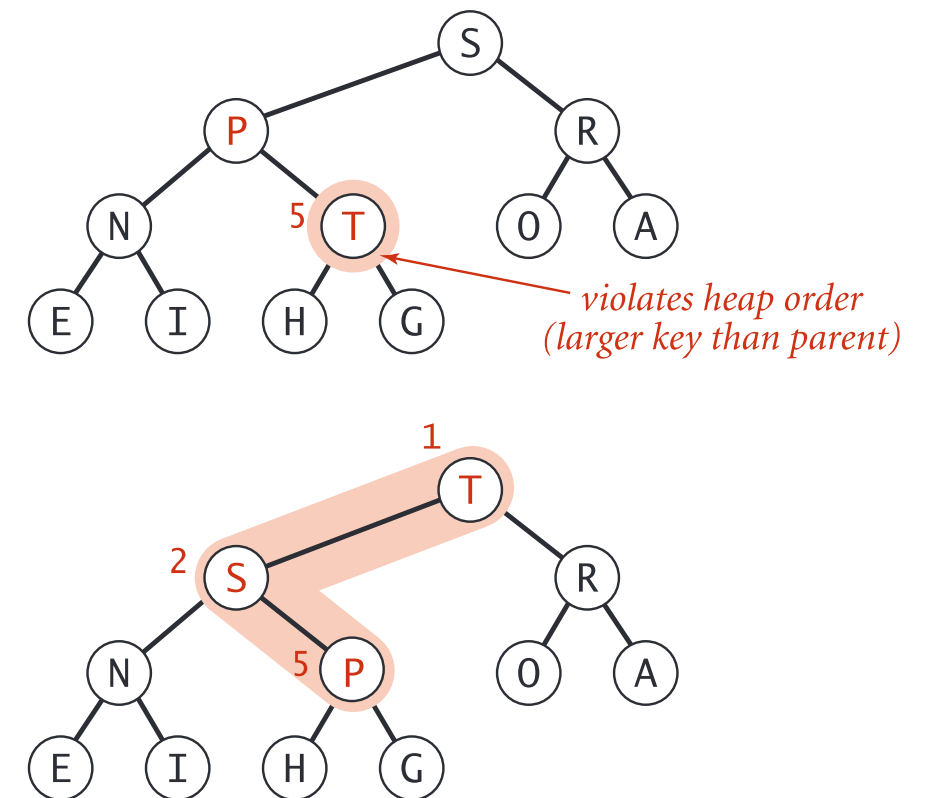

Peter principle. Node promoted to level of incompetence.




Insertion in a heap

Insert. Add node at end, then swim it up.

Cost. At most $1 + \lg N$ compares.

```
public void insert(Key x)
{
    pq[++N] = x;
    swim(N);
}
```

insert

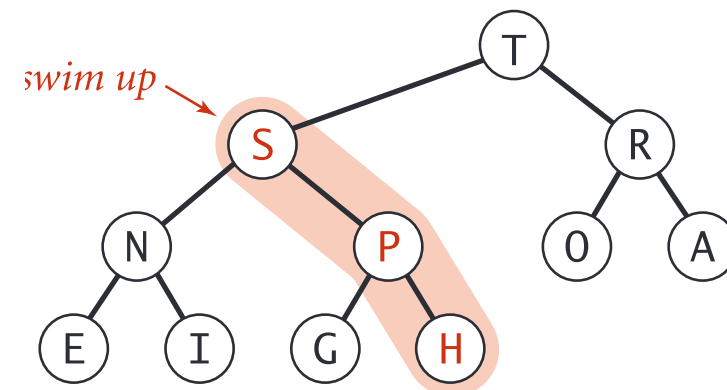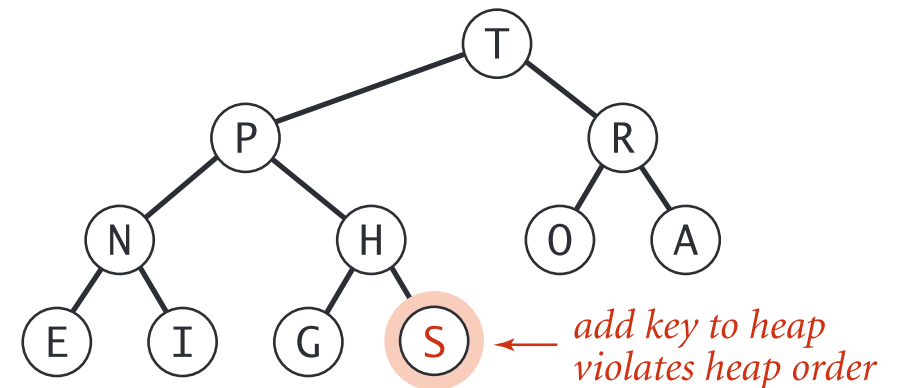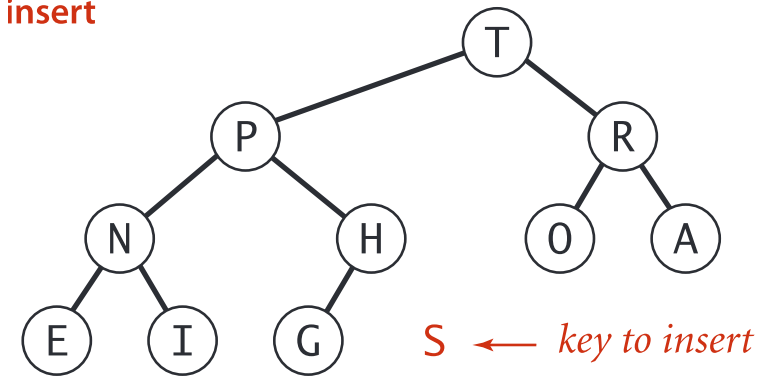

Demotion in a heap

Scenario. Parent's key becomes **smaller** than one (or both) of its children's.


To eliminate the violation:

why not smaller child?

- Exchange key in parent with key in larger child.
- Repeat until heap order restored.

```
private void sink(int k)
{
    while (2*k <= N)
    {
        int j = 2*k;
        if (j < N && less(j, j+1)) j++;
        if (!less(k, j)) break;
        exch(k, j);
        k = j;
    }
}
```

children of node at k
are 2k and 2k+1

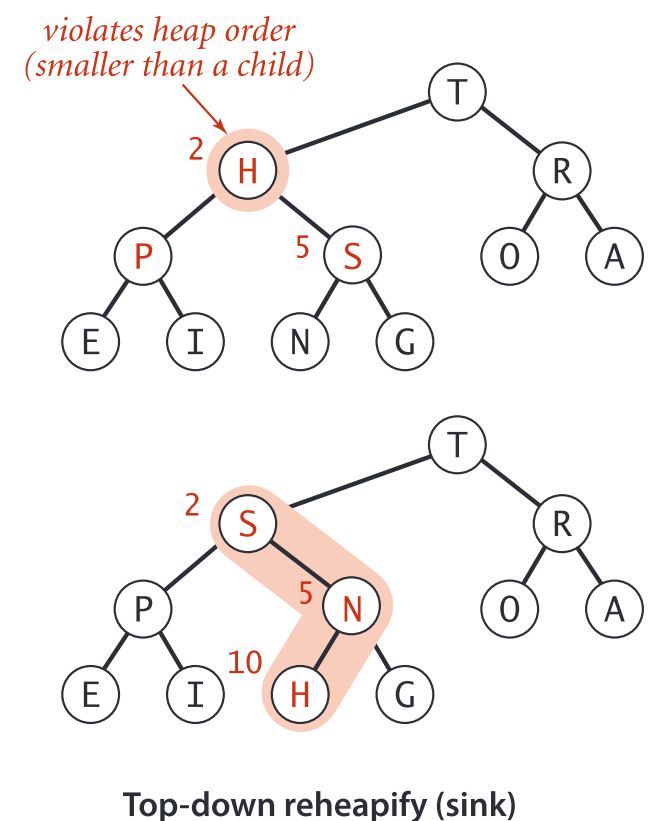


Power struggle. Better subordinate promoted.

Delete the maximum in a heap

Delete max. Exchange root with node at end, then sink it down.

Cost. At most $2 \lg N$ compares.

```
public Key delMax()
{
    Key max = pq[1];
    exch(1, N--);
    sink(1);
    pq[N+1] = null; ← prevent loitering
    return max;
}
```

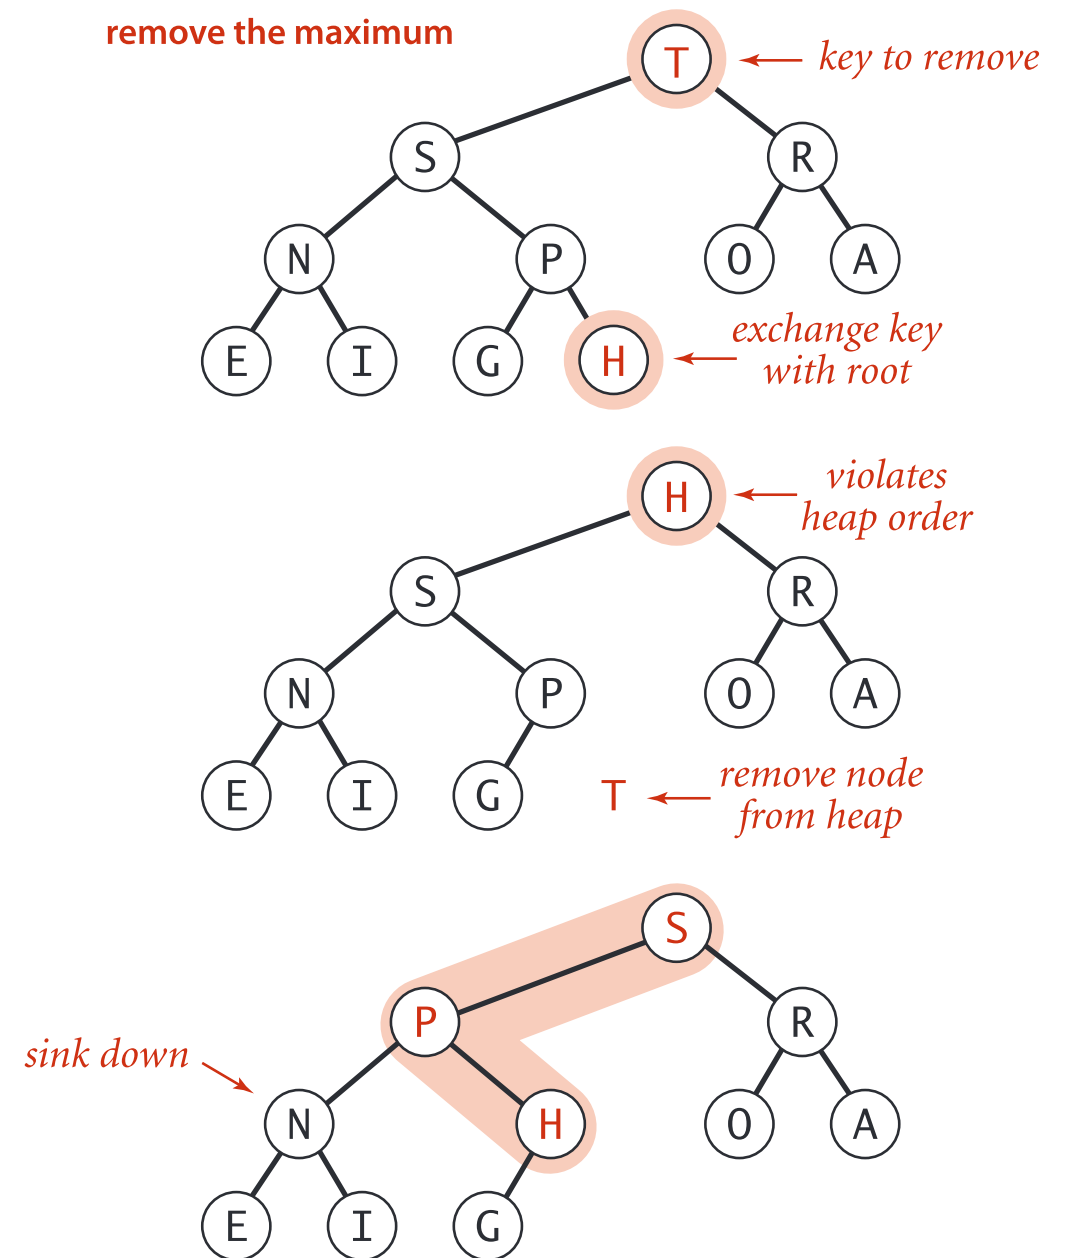

Binary heap: Java implementation

```
public class MaxPQ<Key extends Comparable<Key>>
{
    private Key[] pq;
    private int N;
```

```
    public MaxPQ(int capacity)
    {    pq = (Key[]) new Comparable[capacity+1];    }
```

← fixed capacity
(for simplicity)

```
    public boolean isEmpty()
    {    return N == 0;    }
    public void insert(Key key)
    public Key delMax()
    {    /* see previous code */    }
```

← PQ ops

```
    private void swim(int k)
    private void sink(int k)
    {    /* see previous code */    }
```

← heap helper functions

```
    private boolean less(int i, int j)
    {    return pq[i].compareTo(pq[j]) < 0;    }
    private void exch(int i, int j)
    {    Key t = pq[i]; pq[i] = pq[j]; pq[j] = t;    }
}
```

← array helper functions

Priority queues implementation cost summary


implementation	insert	del max	max
unordered array	1	N	N
ordered array	N	1	1
binary heap	$\log N$	$\log N$	1

order-of-growth of running time for priority queue with N items

Binary heap: practical improvements

Half-exchanges in sink and swim.

- Reduces number of array accesses.
- Worth doing.

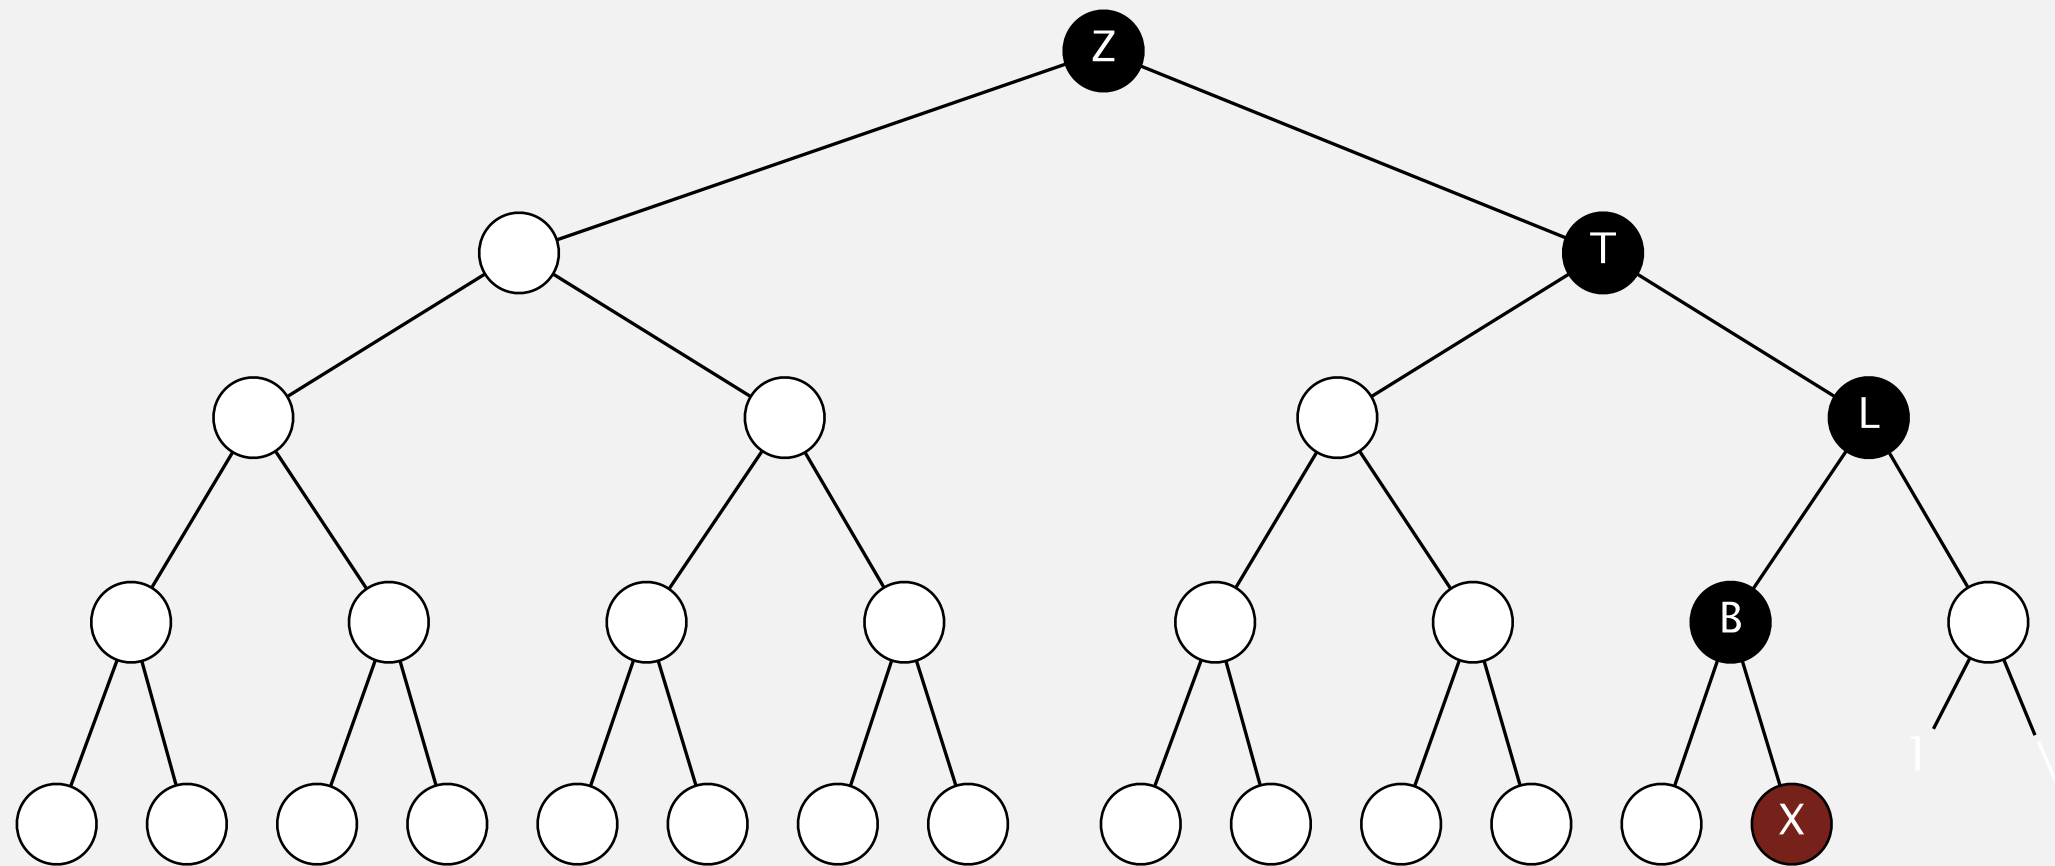


Binary heap: practical improvements

Floyd's sink-to-bottom trick.

- Sink key at root all the way to bottom. ← 1 compare per node
- Swim key back up. ← some extra compares and exchanges
- Fewer compares; more exchanges.
- Worthwhile depending on cost of compare and exchange.




R. W. Floyd
1978 Turing award

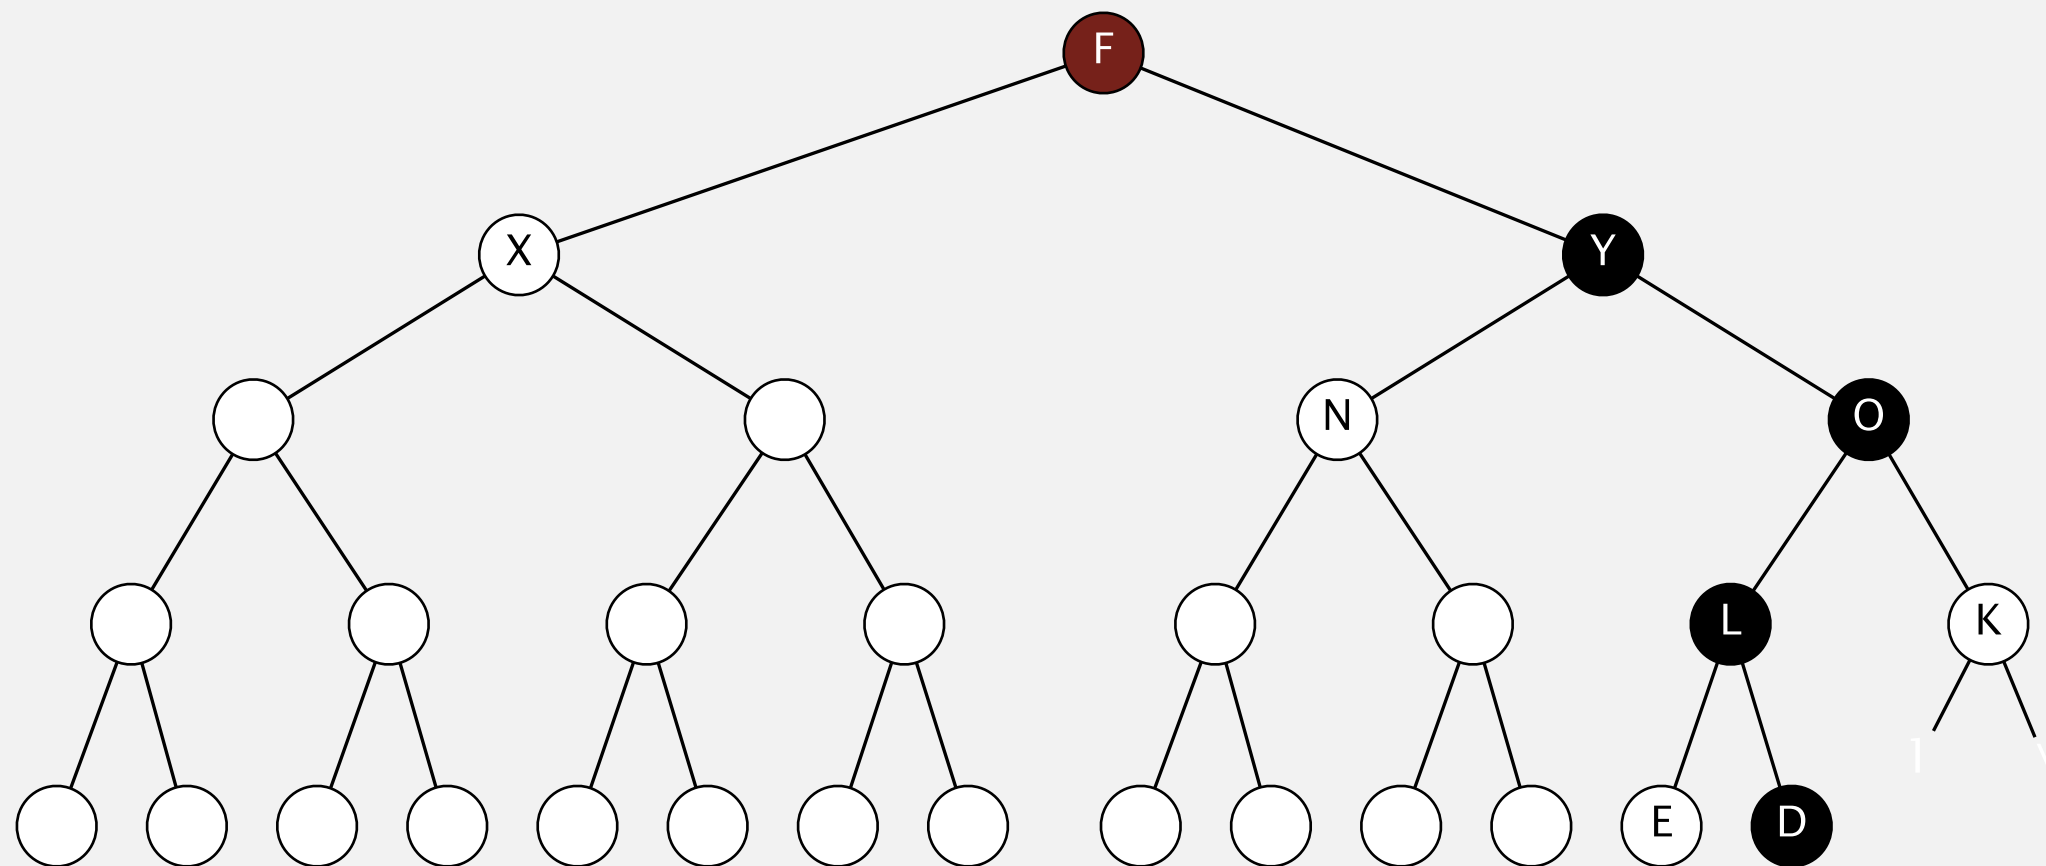

Binary heap: practical improvements

Multiway heaps.


- Complete d -way tree.
- Parent's key no smaller than its children's keys.
- Swim takes $\log_d N$ compares; sink takes $d \log_d N$ compares.
- Sweet spot: $d = 4$.

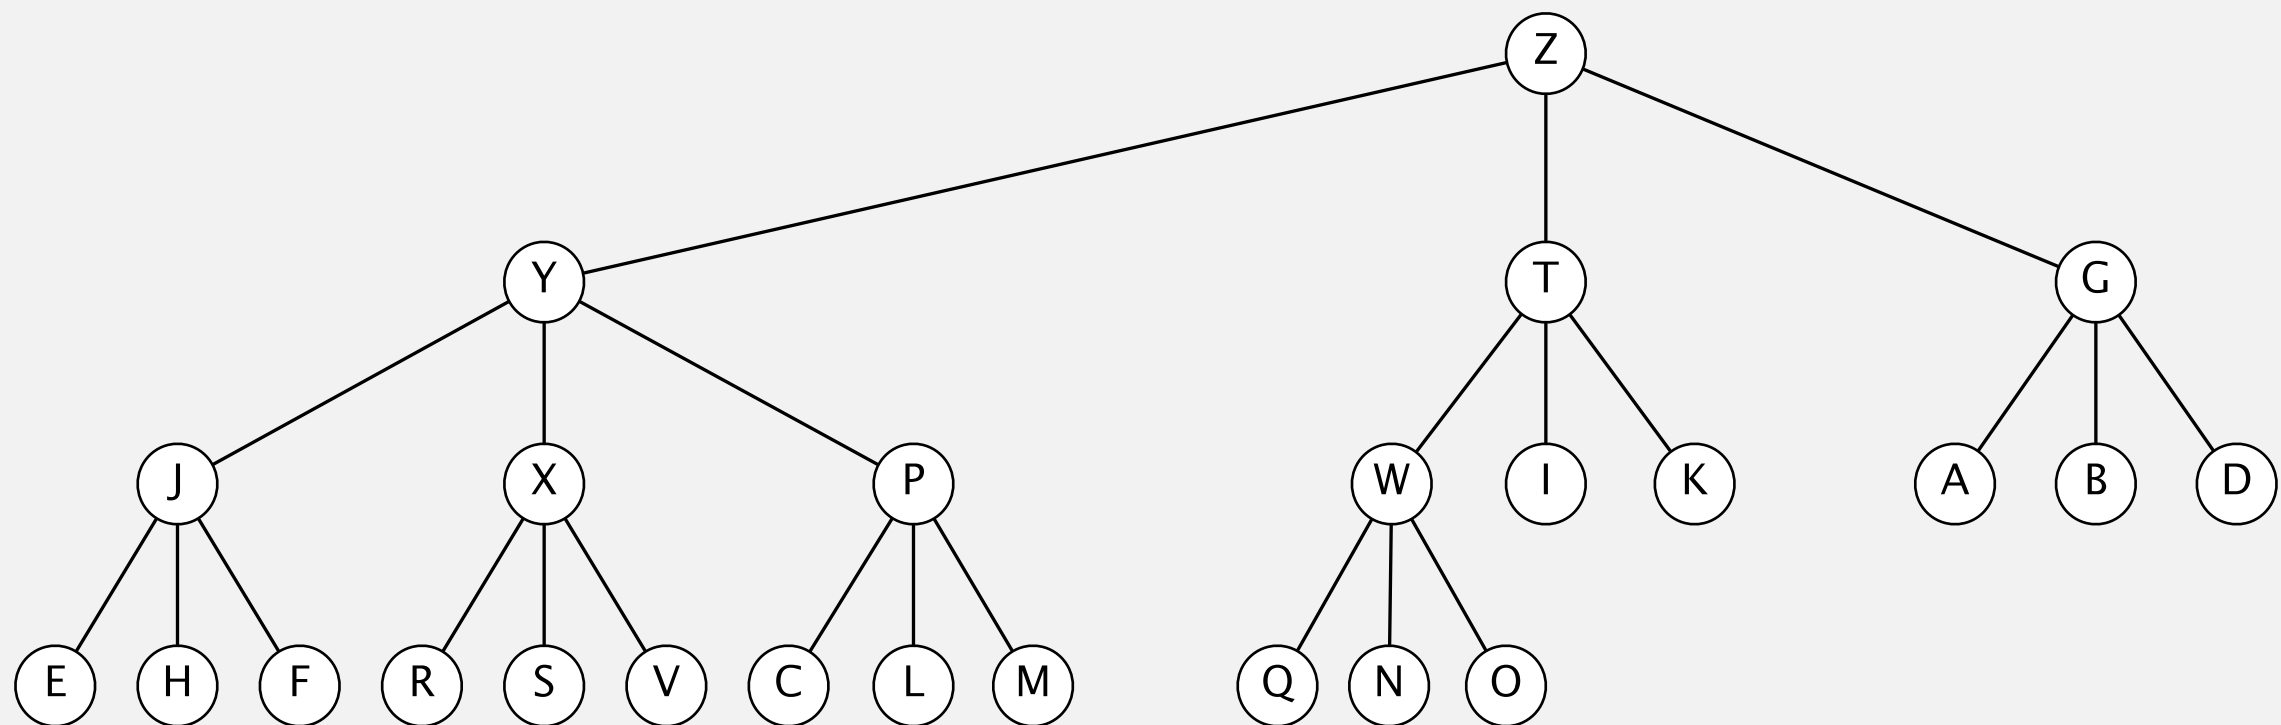

3-way heap

Binary heap: practical improvements



Caching. Binary heap is not cache friendly.

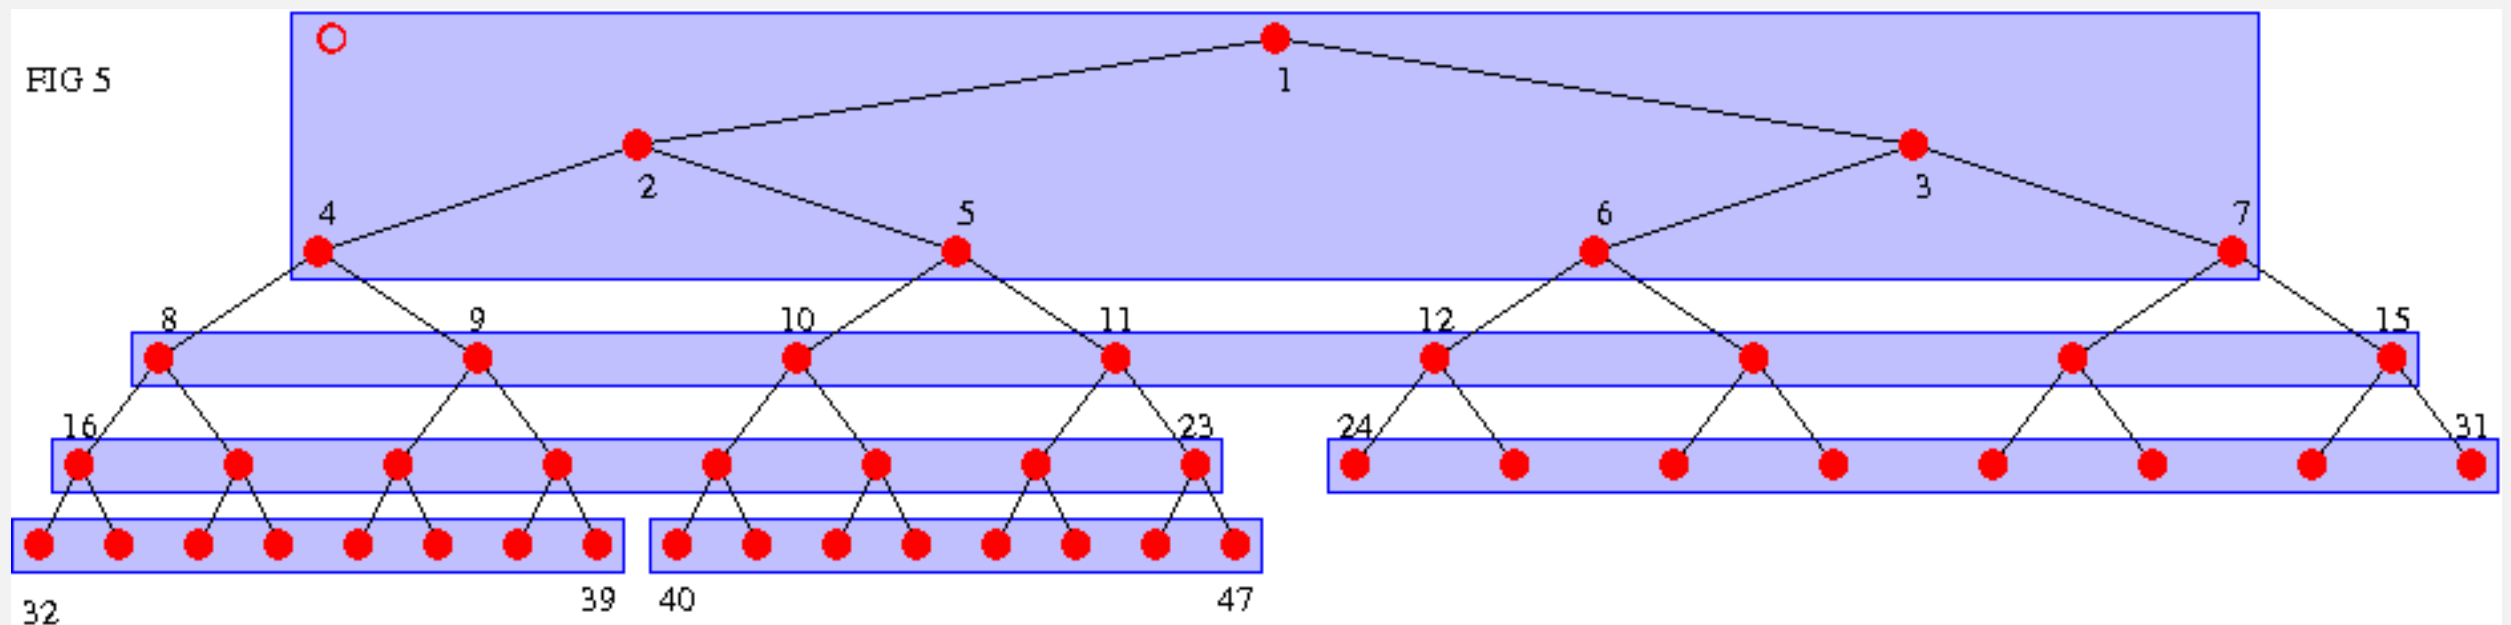

Binary heap: practical improvements

Caching. Binary heap is not cache friendly.

- Cache-aligned d -heap.
- Funnel heap.
- B-heap.
- ...

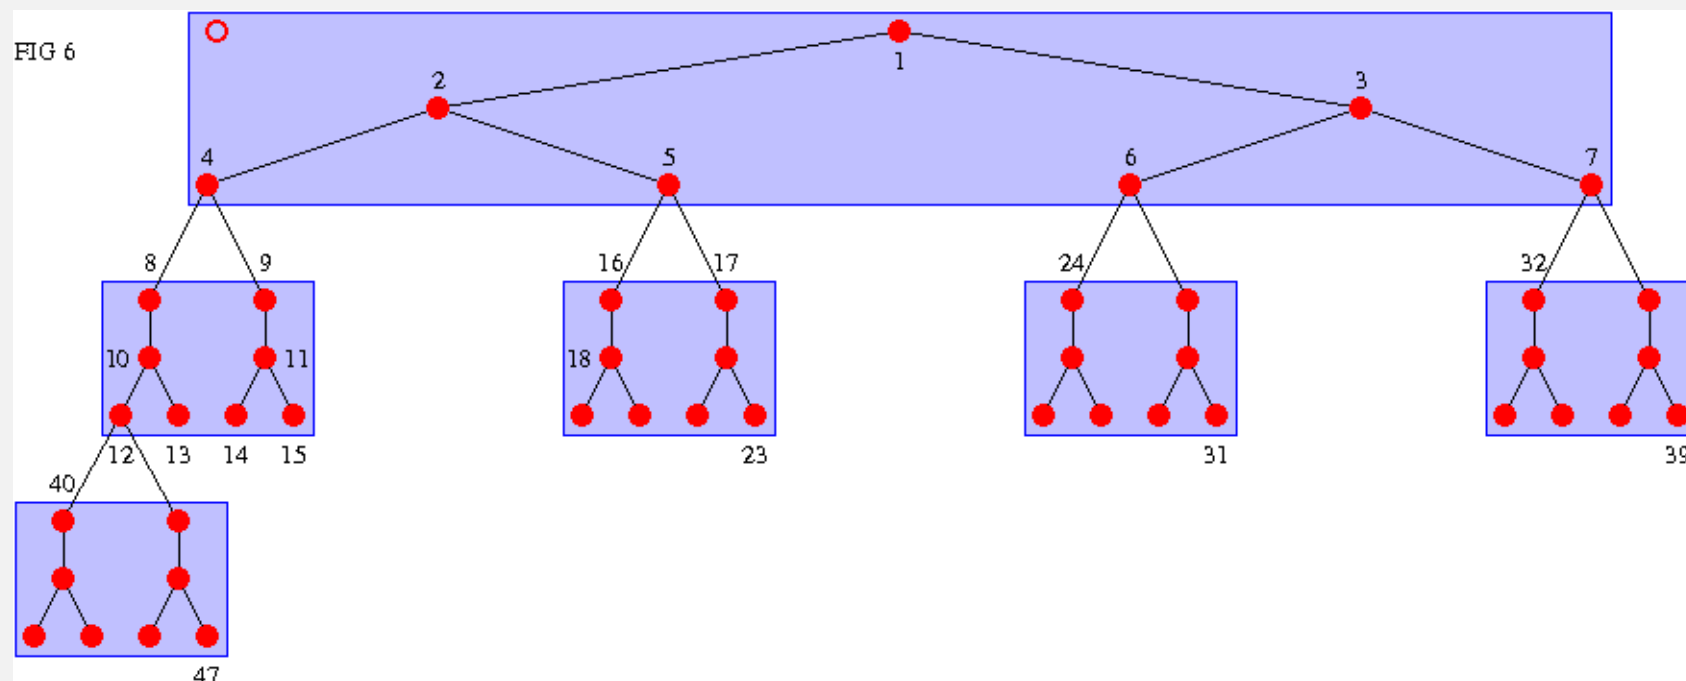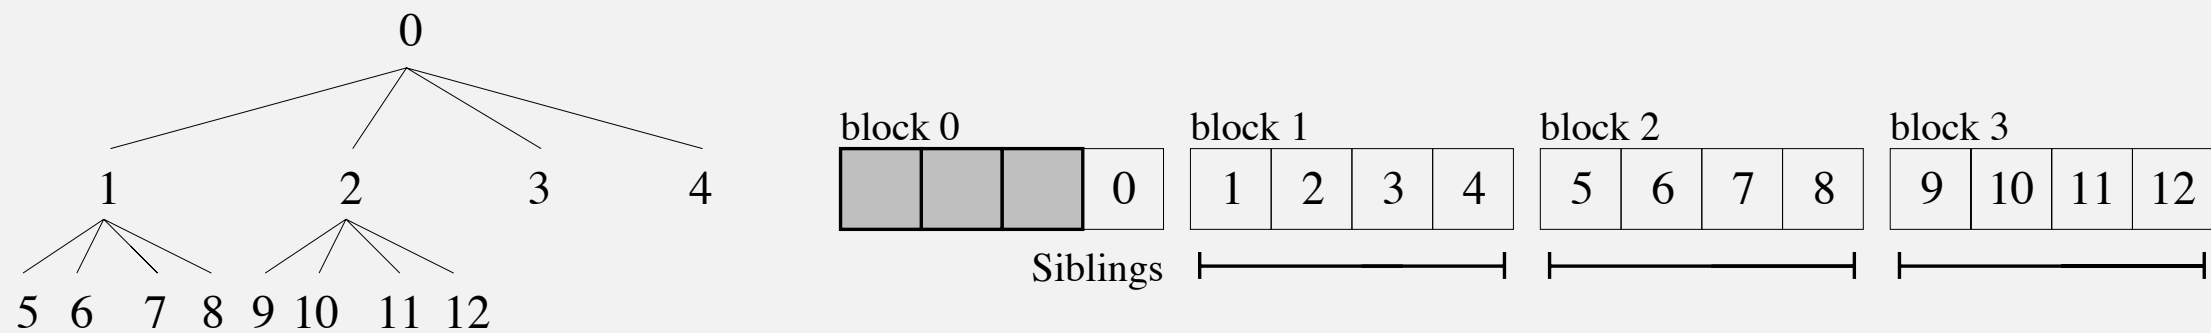

Priority queues implementation cost summary

implementation	insert	del max	max
unordered array	1	N	N
ordered array	N	1	1
binary heap	$\log N$	$\log N$	1
d-ary heap	$\log_d N$	$d \log_d N$	1
Fibonacci	1	$\log N^\dagger$	1
Brodal queue	1	$\log N$	1
impossible	1	1	1

← why impossible?

† amortized

order-of-growth of running time for priority queue with N items

Binary heap considerations

Underflow and overflow.

- Underflow: throw exception if deleting from empty PQ.
- Overflow: add no-arg constructor and use resizing array.

leads to log N
amortized time per op
(how to make worst case?)

Minimum-oriented priority queue.

- Replace less() with greater().
- Implement greater().

Other operations.

- Remove an arbitrary item.
- Change the priority of an item.

can implement efficiently with sink() and swim()
[stay tuned for Prim/Dijkstra]

Immutability of keys.

- Assumption: client does not change keys while they're on the PQ.
- Best practice: use immutable keys.

Immutability: implementing in Java

Data type. Set of values and operations on those values.

Immutable data type. Can't change the data type value once created.

```
public final class Vector {  
    private final int N;  
    private final double[] data;  
  
    public Vector(double[] data) {  
        this.N = data.length;  
        this.data = new double[N];  
        for (int i = 0; i < N; i++)  
            this.data[i] = data[i];  
    }  
  
    ...  
}
```

- ← can't override instance methods
- ← instance variables private and final
- ← defensive copy of mutable instance variables
- ← instance methods don't change instance variables

Immutable. String, Integer, Double, Color, Vector, Transaction, Point2D.

Mutable. StringBuilder, Stack, Counter, Java array.

Immutability: properties

Data type. Set of values and operations on those values.

Immutable data type. Can't change the data type value once created.

Advantages.

- Simplifies debugging.
- Safer in presence of hostile code.
- Simplifies concurrent programming.
- Safe to use as key in priority queue or symbol table.



Disadvantage. Must create new object for each data type value.

“Classes should be immutable unless there's a very good reason to make them mutable.... If a class cannot be made immutable, you should still limit its mutability as much as possible.”

— Joshua Bloch (Java architect)

