



<http://algs4.cs.princeton.edu>

3.2 BINARY SEARCH TREES

- ▶ *BSTs*
- ▶ *ordered operations*
- ▶ *deletion*



<http://algs4.cs.princeton.edu>

3.2 BINARY SEARCH TREES


- ▶ *BSTs*
- ▶ *ordered operations*
- ▶ *deletion*

Binary search trees

Definition. A BST is a **binary tree** in **symmetric order**.


A binary tree is either:

- Empty.
- Two disjoint binary trees (left and right).

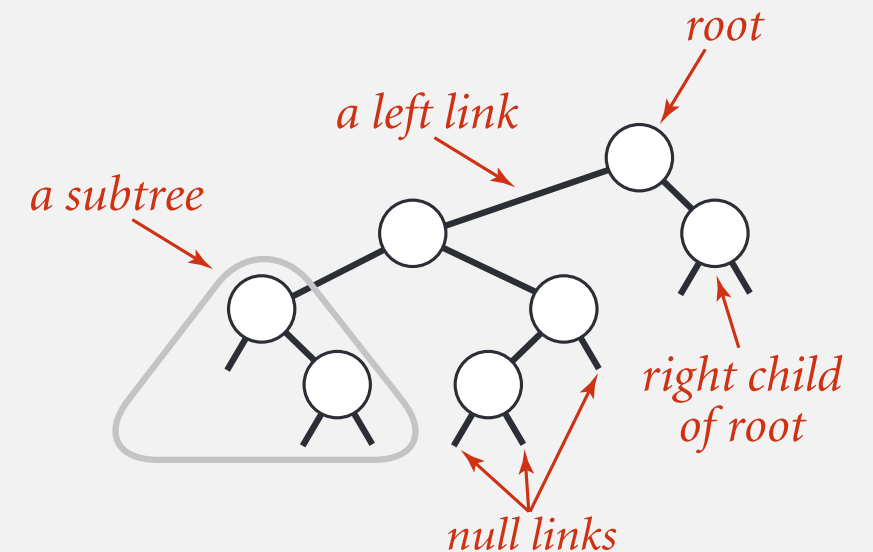

Symmetric order. Each node has a key, and every node's key is:


- Larger than all keys in its left subtree.
- Smaller than all keys in its right subtree.

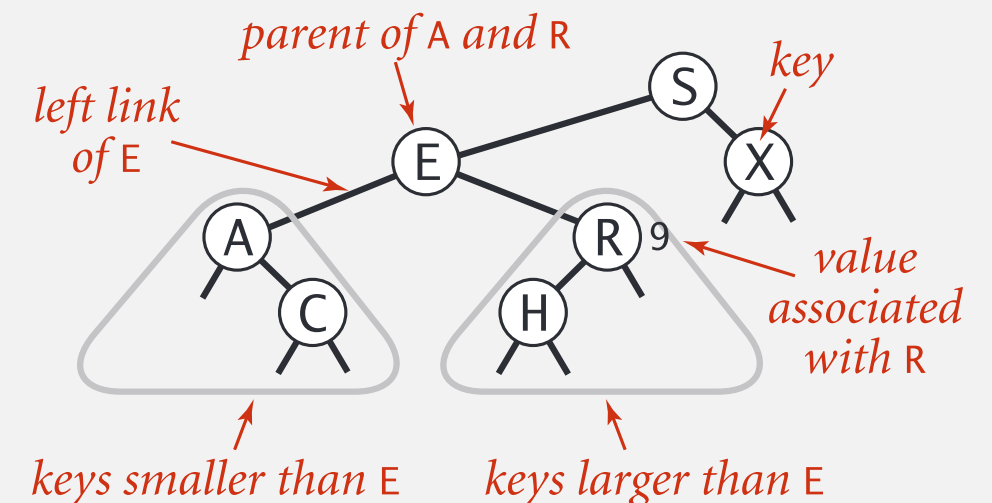

Binary search tree demo

Search. If less, go left; if greater, go right; if equal, search hit.


successful search for H

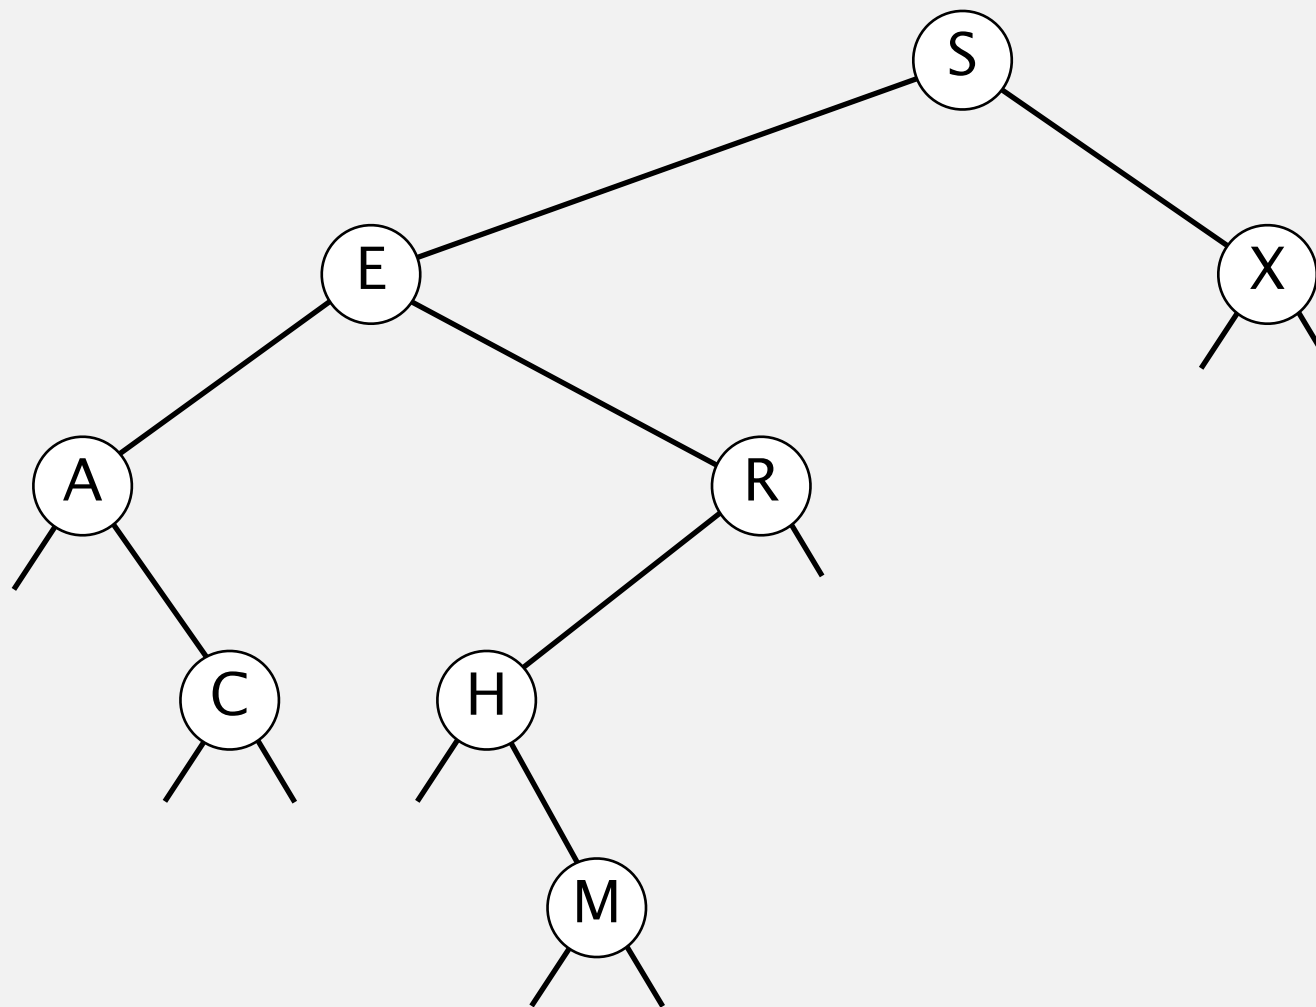

Binary search tree demo

Insert. If less, go left; if greater, go right; if null, insert.

insert G

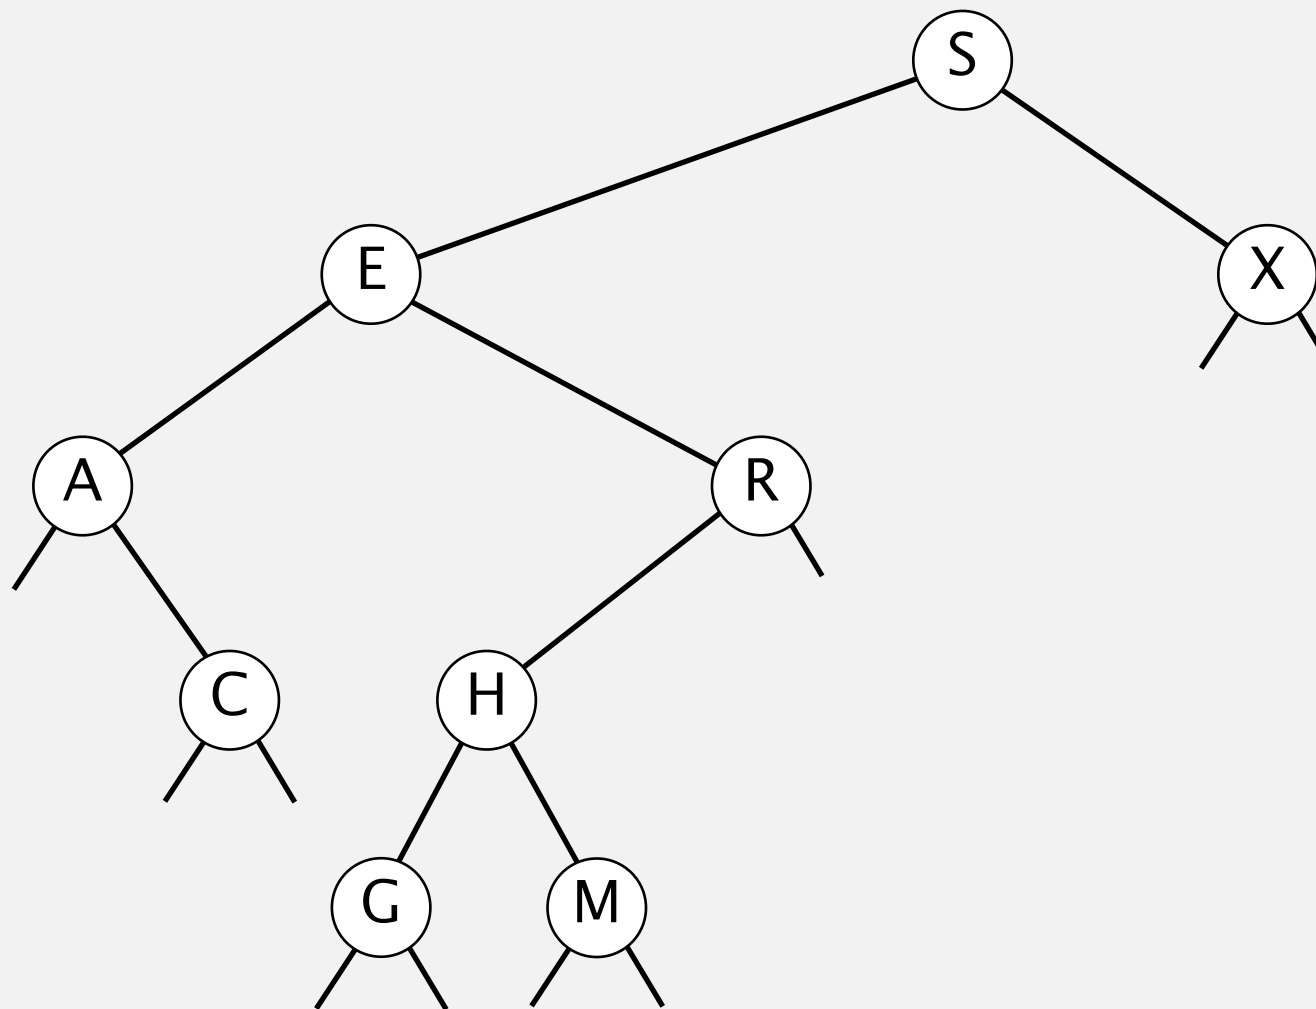

BST representation in Java

Java definition. A BST is a reference to a root Node.


A Node is composed of four fields:

- A Key and a Value.
- A reference to the left and right subtree.

↑ smaller keys ↑ larger keys

```
private class Node
{
    private Key key;
    private Value val;
    private Node left, right;
    public Node(Key key, Value val)
    {
        this.key = key;
        this.val = val;
    }
}
```

Key and Value are generic types; Key is Comparable

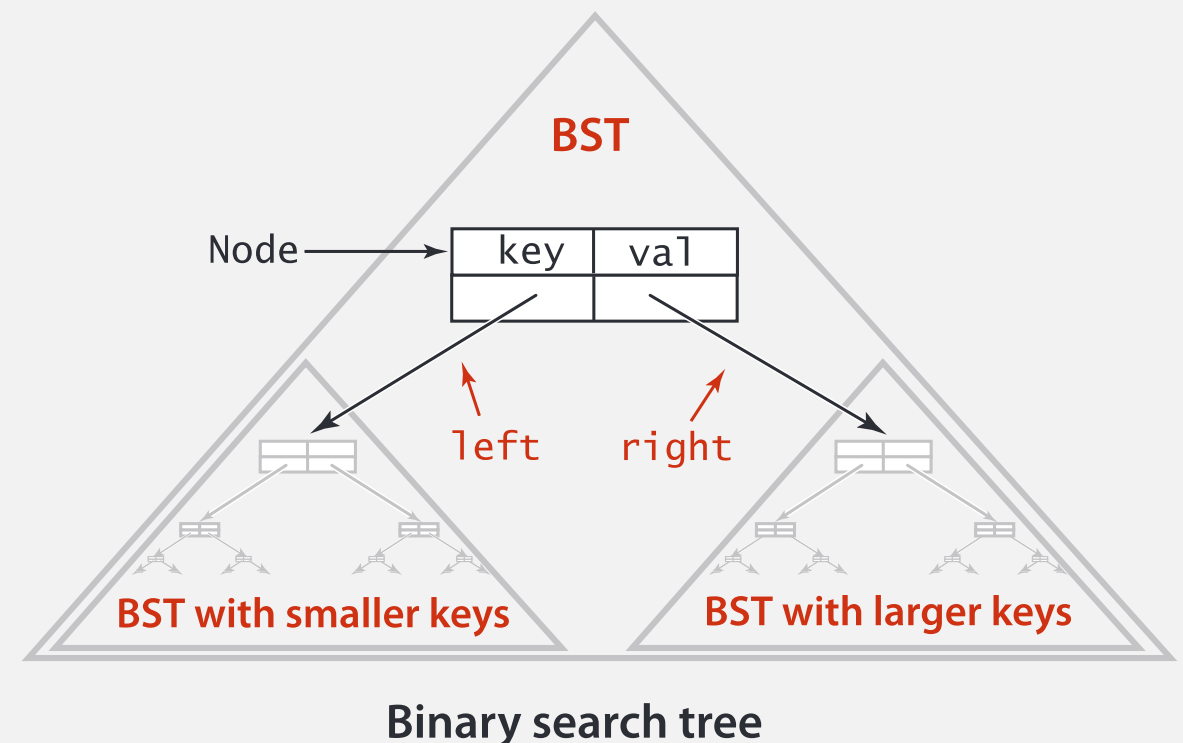

BST implementation (skeleton)

```
public class BST<Key extends Comparable<Key>, Value>
{
    private Node root;

    private class Node
    { /* see previous slide */ }

    public void put(Key key, Value val)
    { /* see next slides */ }

    public Value get(Key key)
    { /* see next slides */ }

    public void delete(Key key)
    { /* see next slides */ }

    public Iterable<Key> iterator()
    { /* see next slides */ }
}
```

← root of BST

BST search: Java implementation

Get. Return value corresponding to given key, or null if no such key.

```
public Value get(Key key)
{
    Node x = root;
    while (x != null)
    {
        int cmp = key.compareTo(x.key);
        if      (cmp < 0) x = x.left;
        else if (cmp > 0) x = x.right;
        else if (cmp == 0) return x.val;
    }
    return null;
}
```

Cost. Number of compares is equal to 1 + depth of node.


BST insert

Put. Associate value with key.

Search for key, then two cases:

- Key in tree \Rightarrow reset value.
- Key not in tree \Rightarrow add new node.

inserting L

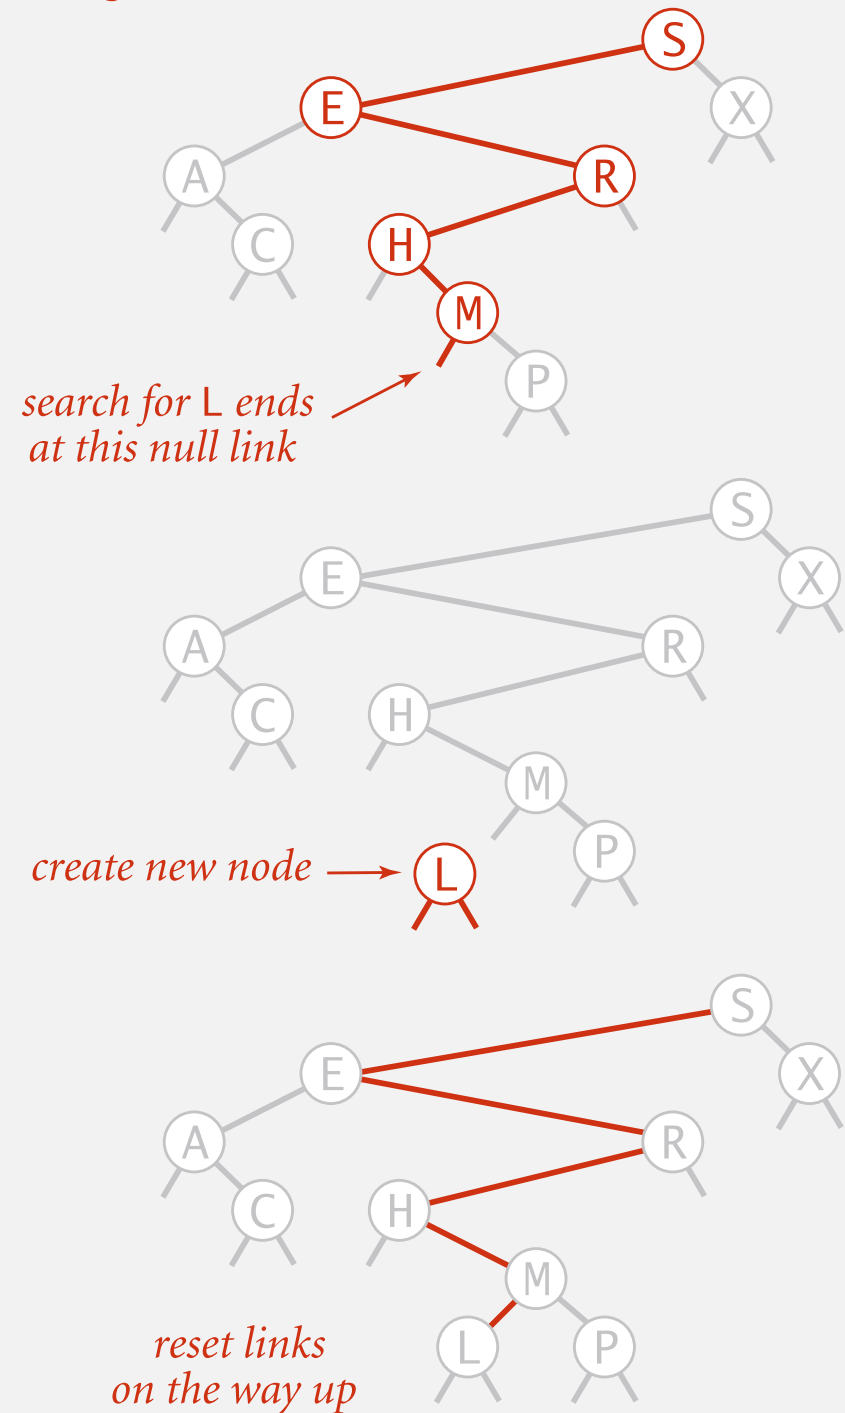

Insertion into a BST

BST insert: Java implementation

Put. Associate value with key.

```
public void put(Key key, Value val)
{   root = put(root, key, val); }

private Node put(Node x, Key key, Value val)
{
    if (x == null) return new Node(key, val);
    int cmp = key.compareTo(x.key);
    if      (cmp < 0)
        x.left  = put(x.left,  key, val);
    else if (cmp > 0)
        x.right = put(x.right, key, val);
    else if (cmp == 0)
        x.val = val;
    return x;
}
```


concise, but tricky,
recursive code;
read carefully!

Cost. Number of compares is equal to 1 + depth of node.


Tree shape

- Many BSTs correspond to same set of keys.
- Number of compares for search/insert is equal to $1 + \text{depth of node}$.


best case

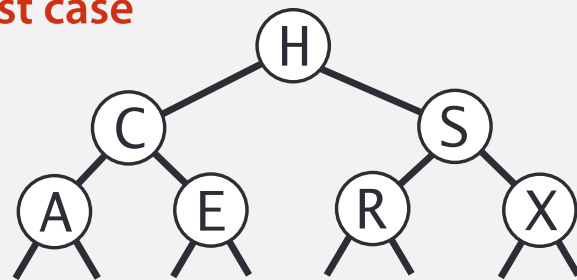

typical case

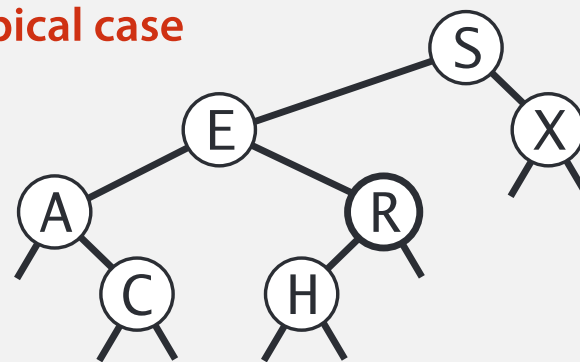

worst case

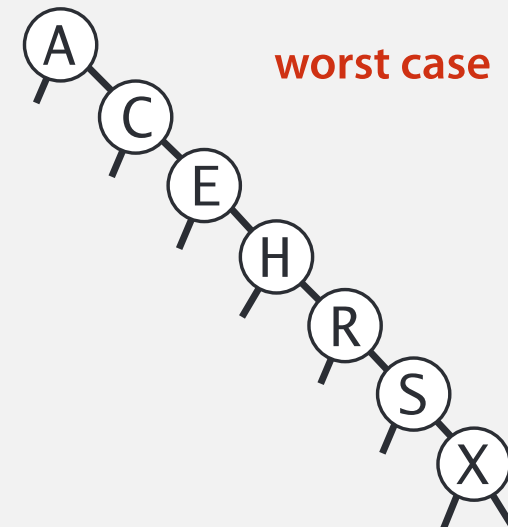


Bottom line. Tree shape depends on order of insertion.

BST insertion: random order visualization

Ex. Insert keys in random order.

N = 255
max = 16
avg = 9.1
opt = 7.0

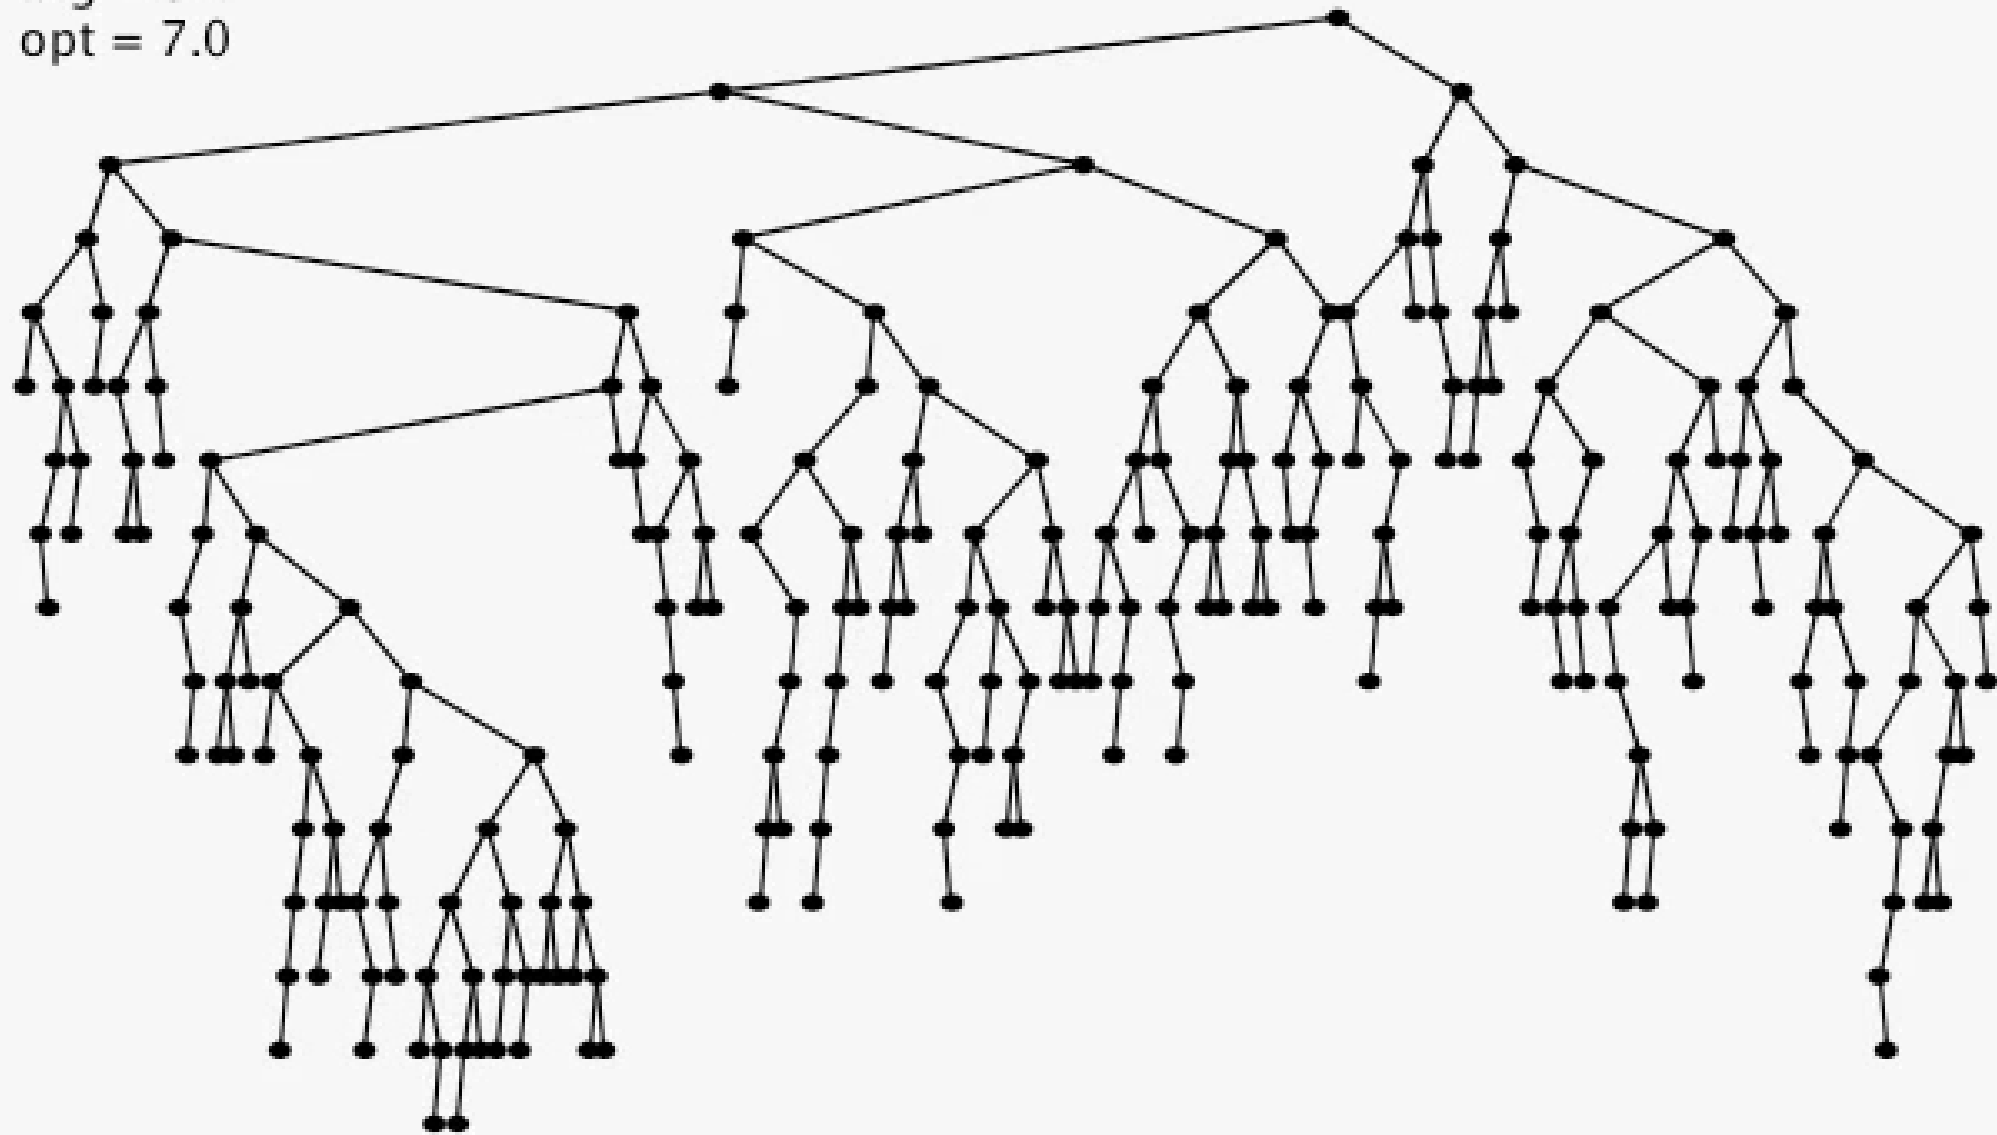

Sorting with a binary heap

Q. What is this sorting algorithm?

0. Shuffle the array of keys.
1. Insert all keys into a BST.
2. Do an inorder traversal of BST.


A. It's not a sorting algorithm (if there are duplicate keys)!

Q. OK, so what if there are no duplicate keys?

Q. What are its properties?

Correspondence between BSTs and quicksort partitioning

0	1	2	3	4	5	6	7	8	9	10	11	12	13
P	S	E	U	D	O	M	Y	T	H	I	C	A	L
P	S	E	U	D	O	M	Y	T	H	I	C	A	L
H	L	E	A	D	O	M	C	I	P	T	Y	U	S
D	C	E	A	H	O	M	L	I	P	T	Y	U	S
A	C	D	E	H	O	M	L	I	P	T	Y	U	S
A	C	D	E	H	O	M	L	I	P	T	Y	U	S
A	C	D	E	H	O	M	L	I	P	T	Y	U	S
A	C	D	E	H	O	M	L	I	P	T	Y	U	S
A	C	D	E	H	I	M	L	O	P	T	Y	U	S
A	C	D	E	H	I	M	L	O	P	T	Y	U	S
A	C	D	E	H	I	L	M	O	P	T	Y	U	S
A	C	D	E	H	I	L	M	O	P	S	T	U	Y
A	C	D	E	H	I	L	M	O	P	S	T	U	Y
A	C	D	E	H	I	L	M	O	P	S	T	U	Y
A	C	D	E	H	I	L	M	O	P	S	T	U	Y
A	C	D	E	H	I	L	M	O	P	S	T	U	Y

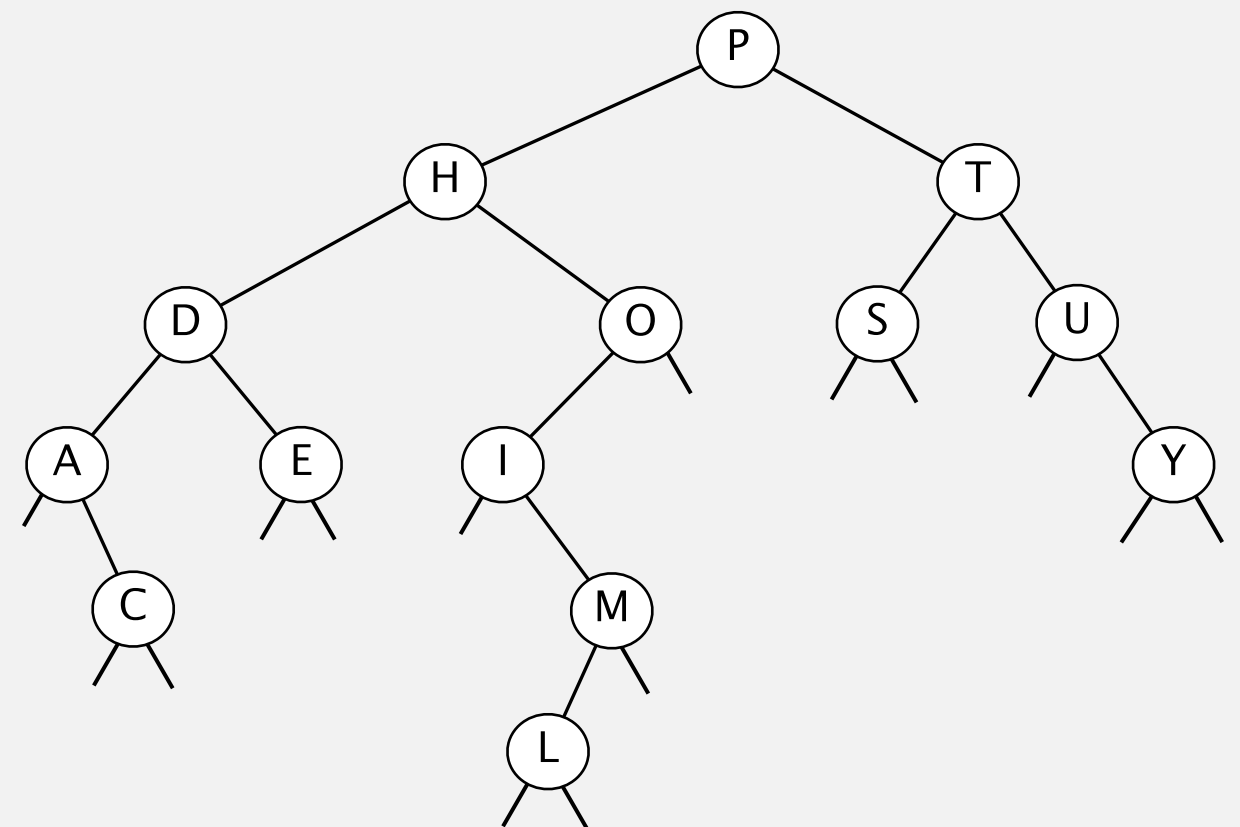

Remark. Correspondence is 1–1 if array has no duplicate keys.

BSTs: mathematical analysis

Proposition. If N distinct keys are inserted into a BST in **random** order, the expected number of compares for a search/insert is $\sim 2 \ln N$.

Pf. 1–1 correspondence with quicksort partitioning.

Proposition. [Reed, 2003] If N distinct keys are inserted in random order, expected height of tree is $\sim 4.311 \ln N$.

How Tall is a Tree?

Bruce Reed
CNRS, Paris, France
reed@moka.ccr.jussieu.fr

ABSTRACT


Let H_n be the height of a random binary search tree on n nodes. We show that there exists constants $\alpha = 4.31107\dots$ and $\beta = 1.95\dots$ such that $\mathbf{E}(H_n) = \alpha \log n - \beta \log \log n + O(1)$. We also show that $\text{Var}(H_n) = O(1)$.

But... Worst-case height is N .

[exponentially small chance when keys are inserted in random order]

ST implementations: summary

implementation	guarantee		average case		operations on keys
	search	insert	search hit	insert	
sequential search (unordered list)	N	N	$\frac{1}{2} N$	N	<code>equals()</code>
binary search (ordered array)	$\lg N$	N	$\lg N$	$\frac{1}{2} N$	<code>compareTo()</code>
BST	N	N	$1.39 \lg N$	$1.39 \lg N$	<code>compareTo()</code>



Why not shuffle to ensure a (probabilistic) guarantee of $4.311 \ln N$?