



SQL AUTO INCREMENT Field

[< Previous](#)[Next >](#)

AUTO INCREMENT Field

Auto-increment allows a unique number to be generated automatically when a new record is inserted into a table.

Often this is the primary key field that we would like to be created automatically every time a new record is inserted.

Syntax for MySQL

The following SQL statement defines the "Personid" column to be an auto-increment primary key field in the "Persons" table:

```
CREATE TABLE Persons (  
    Personid int NOT NULL AUTO_INCREMENT,  
    LastName varchar(255) NOT NULL,  
    FirstName varchar(255),  
    Age int,  
    PRIMARY KEY (Personid)  
);
```

MySQL uses the AUTO_INCREMENT keyword to perform an auto-increment feature.

By default, the starting value for AUTO_INCREMENT is 1, and it will increment by 1 for each new record.

To let the AUTO_INCREMENT sequence start with another value, use the following SQL statement:

```
ALTER TABLE Persons AUTO_INCREMENT=100;
```

To insert a new record into the "Persons" table, we will NOT have to specify a value for the "Personid" column (a unique value will be added automatically):

```
INSERT INTO Persons (FirstName,LastName)  
VALUES ('Lars','Monsen');
```

The SQL statement above would insert a new record into the "Persons" table. The "Personid" column would be assigned a unique value. The "FirstName" column would be set to "Lars" and the "LastName" column would be set to "Monsen".

Syntax for SQL Server

The following SQL statement defines the "Personid" column to be an auto-increment primary key field in the "Persons" table:

```
CREATE TABLE Persons (  
    Personid int IDENTITY(1,1) PRIMARY KEY,  
    LastName varchar(255) NOT NULL,  
    FirstName varchar(255),
```

```
Age int  
);
```

The MS SQL Server uses the IDENTITY keyword to perform an auto-increment feature.

In the example above, the starting value for IDENTITY is 1, and it will increment by 1 for each new record.

Tip: To specify that the "Personid" column should start at value 10 and increment by 5, change it to IDENTITY(10,5).

To insert a new record into the "Persons" table, we will NOT have to specify a value for the "Personid" column (a unique value will be added automatically):

```
INSERT INTO Persons (FirstName,LastName)  
VALUES ('Lars','Monsen');
```

The SQL statement above would insert a new record into the "Persons" table. The "Personid" column would be assigned a unique value. The "FirstName" column would be set to "Lars" and the "LastName" column would be set to "Monsen".

Bo Mạch Chính/
Mainboard Asrock...

1.439.000đ



Bo Mạch Chính/
Mainboard Asus Tuf...

2.090.000đ

~~2.550.000đ~~



Bo Mạch Chính/
Mainboard Asrock...

2.190.000đ

~~2.290.000đ~~



Máy Tính Để Bàn/ Pc
Asus Rog Huracan...

29.990.000đ



Syntax for Access

The following SQL statement defines the "Personid" column to be an auto-increment primary key field in the "Persons" table:

```
CREATE TABLE Persons (  
    Personid AUTOINCREMENT PRIMARY KEY,  
    LastName varchar(255) NOT NULL,  
    FirstName varchar(255),  
    Age int  
);
```

The MS Access uses the AUTOINCREMENT keyword to perform an auto-increment feature.

By default, the starting value for AUTOINCREMENT is 1, and it will increment by 1 for each new record.

Tip: To specify that the "Personid" column should start at value 10 and increment by 5, change the autoincrement to AUTOINCREMENT(10,5).

To insert a new record into the "Persons" table, we will NOT have to specify a value for the "Personid" column (a unique value will be added automatically):

```
INSERT INTO Persons (FirstName,LastName)  
VALUES ('Lars','Monsen');
```

The SQL statement above would insert a new record into the "Persons" table. The "Personid" column would be assigned a unique value. The "FirstName" column would be set to "Lars" and the "LastName" column would be set to "Monsen".

Syntax for Oracle

In Oracle the code is a little bit more tricky.

You will have to create an auto-increment field with the sequence object (this object generates a number sequence).

Use the following CREATE SEQUENCE syntax:

```
CREATE SEQUENCE seq_person  
MINVALUE 1  
START WITH 1  
INCREMENT BY 1  
CACHE 10;
```

The code above creates a sequence object called seq_person, that starts with 1 and will increment by 1. It will also cache up to 10 values for performance. The cache option specifies how many sequence values will be stored in memory for faster access.

To insert a new record into the "Persons" table, we will have to use the nextval function (this function retrieves the next value from seq_person sequence):

```
INSERT INTO Persons (Personid,FirstName,LastName)  
VALUES (seq_person.nextval, 'Lars', 'Monsen');
```

The SQL statement above would insert a new record into the "Persons" table. The "Personid" column would be assigned the next number from the seq_person sequence. The "FirstName" column would be set to "Lars" and the "LastName" column would be set to "Monsen".

[< Previous](#)[Next >](#)

Bo Mạch Chính/
Mainboard Asrock...



1.439.000đ



Màn Hình Lcd Dell
27" P2719H (Đen)

5.590.000đ

~~5.750.000đ~~



Bo Mạch Chính/
Mainboard Asrock...

2.190.000đ

~~2.290.000đ~~



Bo Mạch Chính/
Mainboard Asus
Tuf...

2.090.000đ

~~2.550.000đ~~



Máy Tính Để Bàn/
Pc Asus Rog
Huracan...

29.990.000đ



Màn Hình Lcd Dell
27" U2718Q (Đen)

12.950.000đ



Phong Vũ

COLOR PICKER



HOW TO

Tabs

Dropdowns

Accordions

Side Navigation

Top Navigation

Modal Boxes

Progress Bars
Parallax
Login Form
HTML Includes
Google Maps
Range Sliders
Tooltips
Slideshow
Filter List
Sort List

SHARE




CERTIFICATES

HTML
CSS
JavaScript
SQL
Python
PHP
jQuery
Bootstrap
XML

[Read More »](#)

How To Create a Calendar With CSS

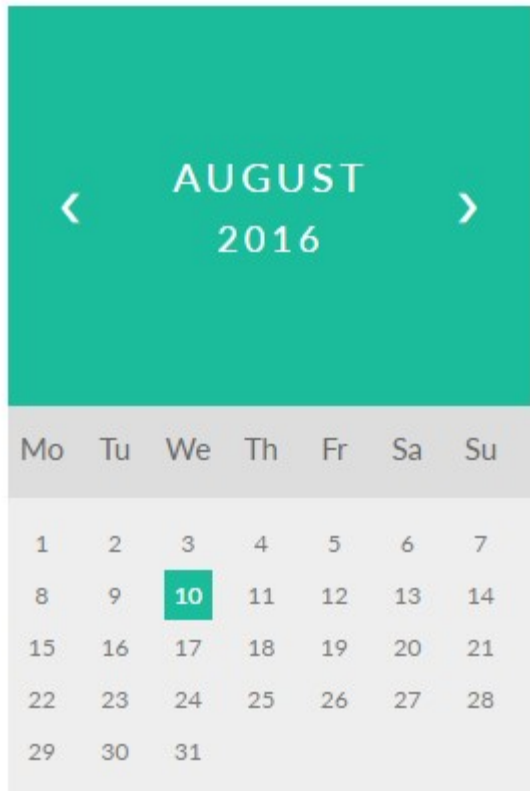

Bo Mạch Chính/
Mainboard Asrock...

1.439.000đ



Máy Tính Để Bàn/ Pc
Asus Rog Huracan...

29.990.000đ



Bo Mạch Chính
Mainboard As

2.190.000đ

~~2.290.000đ~~

Bo Mạch Chính
Mainboard As

2.090.000đ

~~2.550.000đ~~

W3.CSS Templates



[REPORT ERROR](#)

[PRINT PAGE](#)

[FORUM](#)

[ABOUT](#)

Top Tutorials

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [jQuery Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)

Top Examples

- [HTML Examples](#)
- [CSS Examples](#)
- [JavaScript Examples](#)
- [How To Examples](#)
- [SQL Examples](#)
- [Python Examples](#)
- [W3.CSS Examples](#)
- [Bootstrap Examples](#)
- [PHP Examples](#)
- [jQuery Examples](#)
- [Java Examples](#)
- [XML Examples](#)

Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)
- [SQL Reference](#)
- [Python Reference](#)
- [W3.CSS Reference](#)
- [Bootstrap Reference](#)
- [PHP Reference](#)
- [HTML Colors](#)
- [jQuery Reference](#)
- [Java Reference](#)
- [Angular Reference](#)

Web Certificates

- [HTML Certificate](#)
- [CSS Certificate](#)
- [JavaScript Certificate](#)
- [SQL Certificate](#)
- [Python Certificate](#)
- [jQuery Certificate](#)
- [PHP Certificate](#)
- [Bootstrap Certificate](#)
- [XML Certificate](#)

[Get Certified »](#)

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy.

Copyright 1999-2020 by Refsnes Data. All Rights Reserved.

Powered by W3.CSS.

