

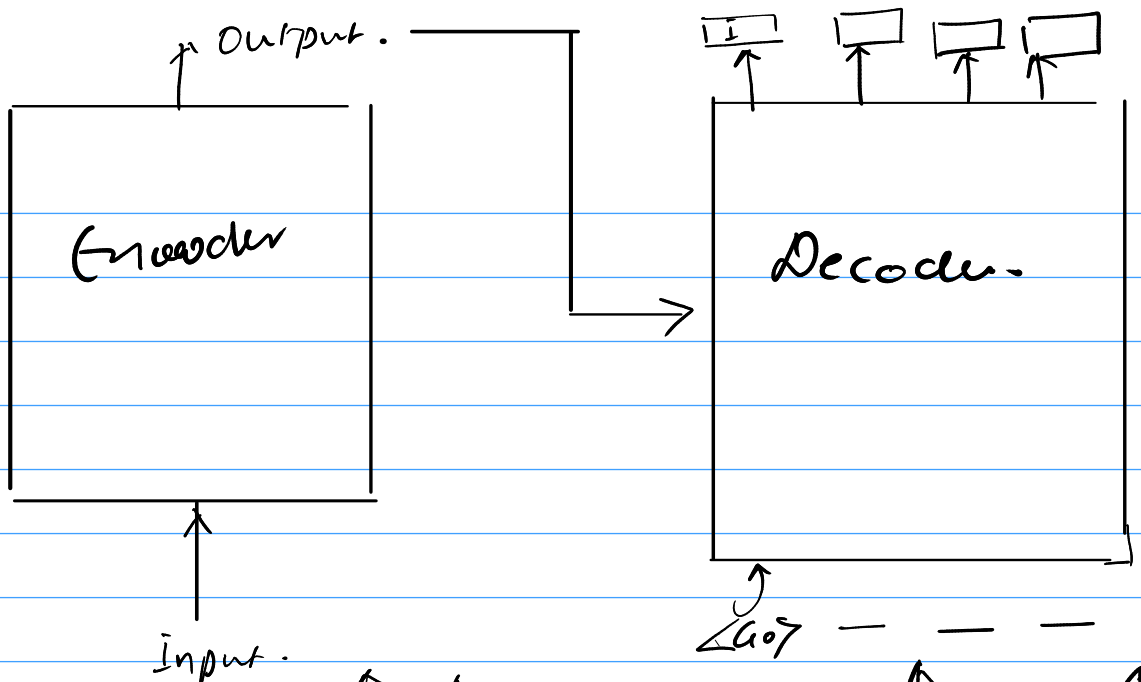


Encoder.

I am going here today
Let's go.
I want to go.

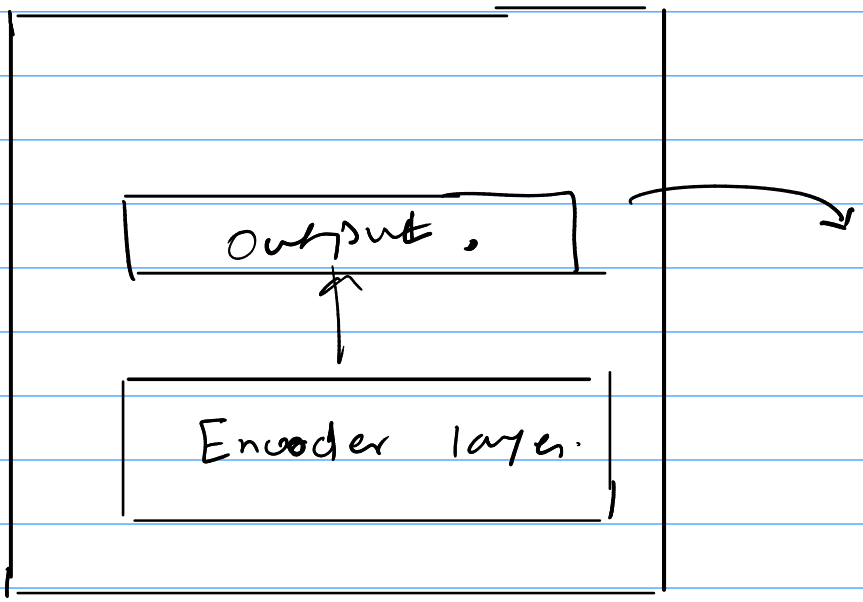

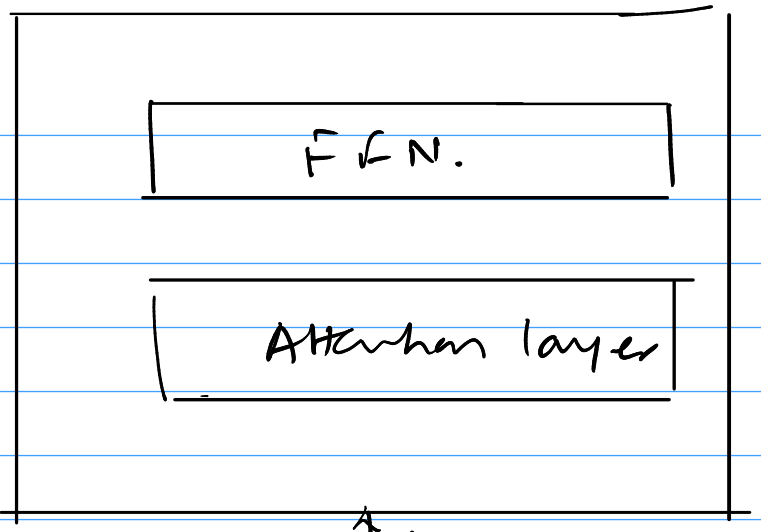

Vocab_Size( ) [— — — — — — — — — — 20]

input 1. → I am going home today.

dmodel.
hidden_size.

0 0 0 1 0 0 0

Embedding Matrix.

learnable.

Vocab_Size x dmodel.

T x V x D = T x D.

nn.Embedding( )

bias x

Embedy.

	0.1	0.2	0.3	0.12	...
I	—	—	—	—	—
Am	= —	—	—	—	—
going					
home.					
today					

Tx dmody
TxD

PE. $PE(\underset{Pos,2i}{\phi}) = \sin\left(\frac{Pos}{10000^{2i}/dmodel}\right)$

$Pos,2i+1$ $\cos\left(\frac{Pos}{10000^{2i}/dmodel}\right)$

$1 = \overset{(4)}{a}$ 0, 1.


CPT.

PE. learnable Parameter.( )

Parameter — Vocab Size x dmodel.

Before the input.

m

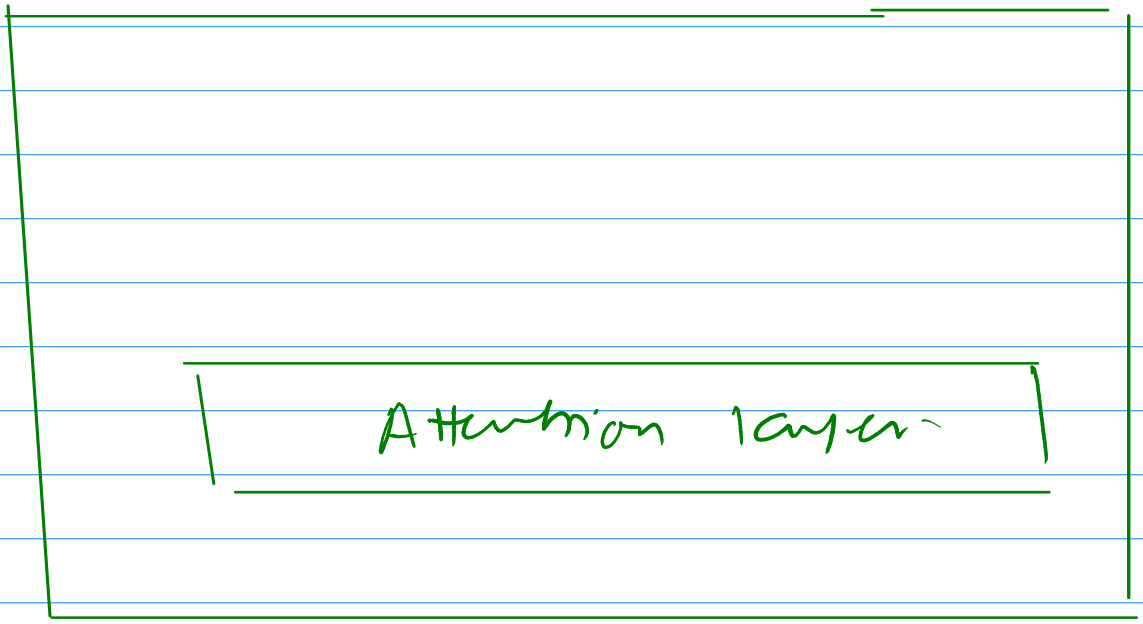

GATE PYQ.

X : 5 x 8.

Single head,

Q, K, V.

W_Q, W_K, W_V (dmodel x dmodel)

8 x 8.

$Q = X \cdot W_Q$ = 5 x 8 . 8 x 8 = 5 x 8

K, V ⟶ Same size. 5 x 8.

nn. Parameter. (bias x)

Q.
K.
V.

$$\text{Score} = \frac{Q \cdot K^T}{\sqrt{d_k}}$$

Attention matrix = Softmax(Score)

$5 \times 8 \cdot 8 \times 5 = 5 \times 5$
T D

I am going home today.

I
am
see
home
today.

5×8.

Output = AM. V. $5 \times 5 \cdot 5 \times 8 = 5 \times 8$

5×8.


Attention Layer

Style vector.

5×8

Parameters W_q, W_k, W_v.

$8 \times 8 \times 3$

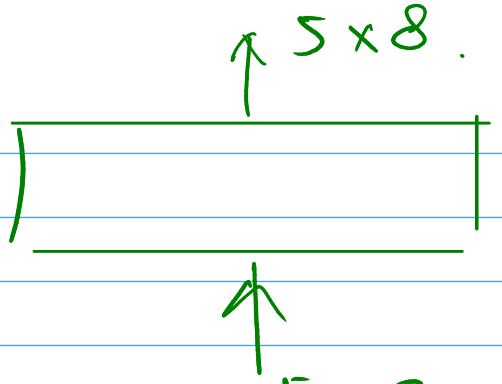


8x8

dmodel x dv.

$W_Q, W_K, W_V, W_0 =$ 4 x 8 x 8.

= 4 x d_m x d_m.

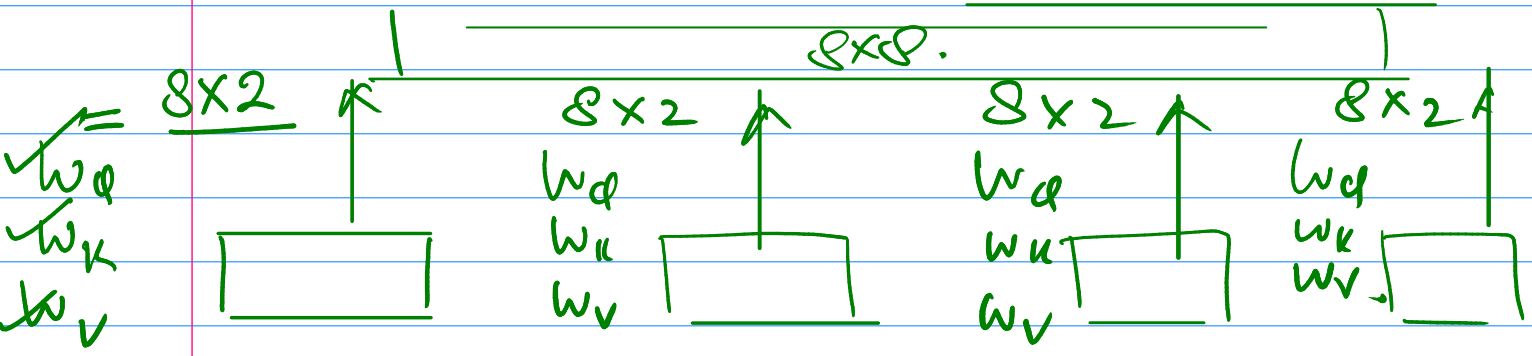

= dmodel x $\frac{\text{dmodel}}{\text{no. of heads}}$

5 x 8

no. of Pa = 3x8x2 + 3x8x2 + 3x8x2 + 3x8x2

= 3x8 (2 + 2 + 2 + 2)


= 3 x 8 x 8.

↓

$W_{0\,8\times8}$ = 4 x d_m x d_m


Embed. → Vocab x dmodel

Attn. → 4 x dm x dm.

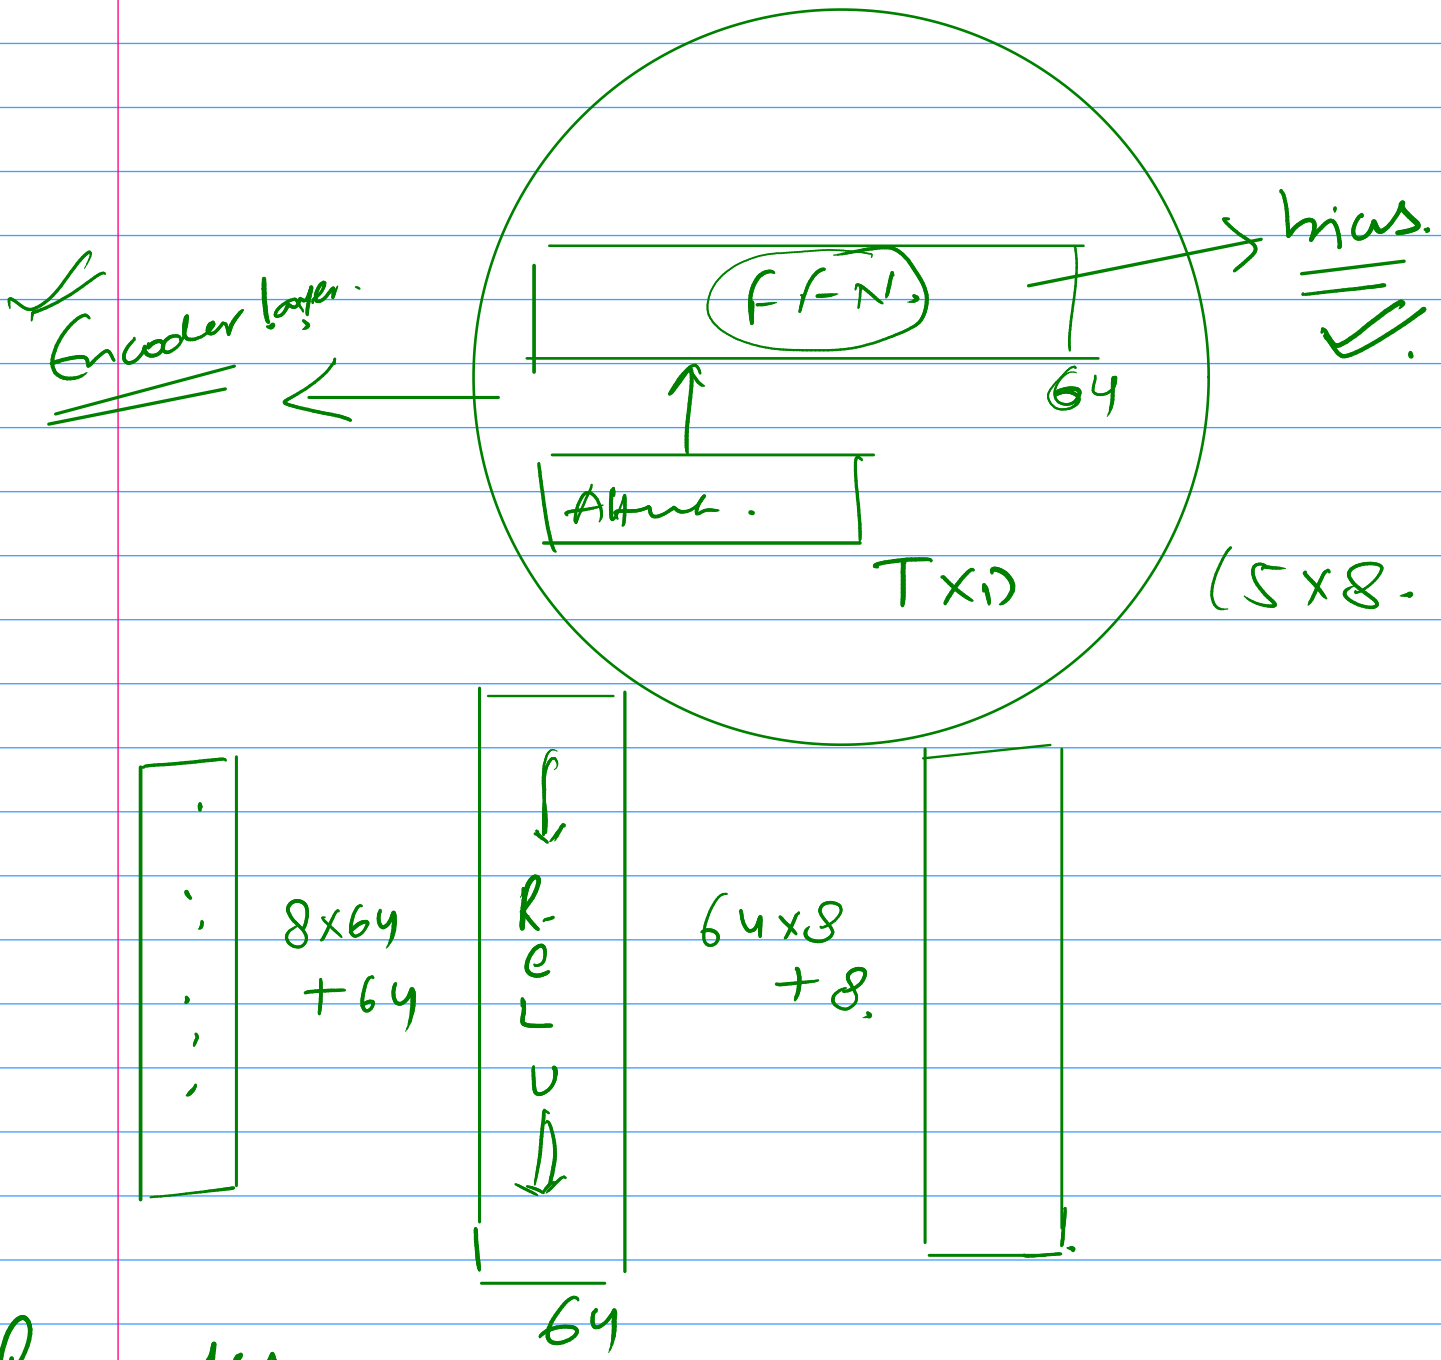

Parameters

1. Embedding layer. (Vocab x dm.)
2. Attention layer. (4 x dm x dm.)
3. FFN. (dmodel x FFN + FFN
FFN x dmodel + dmodel)

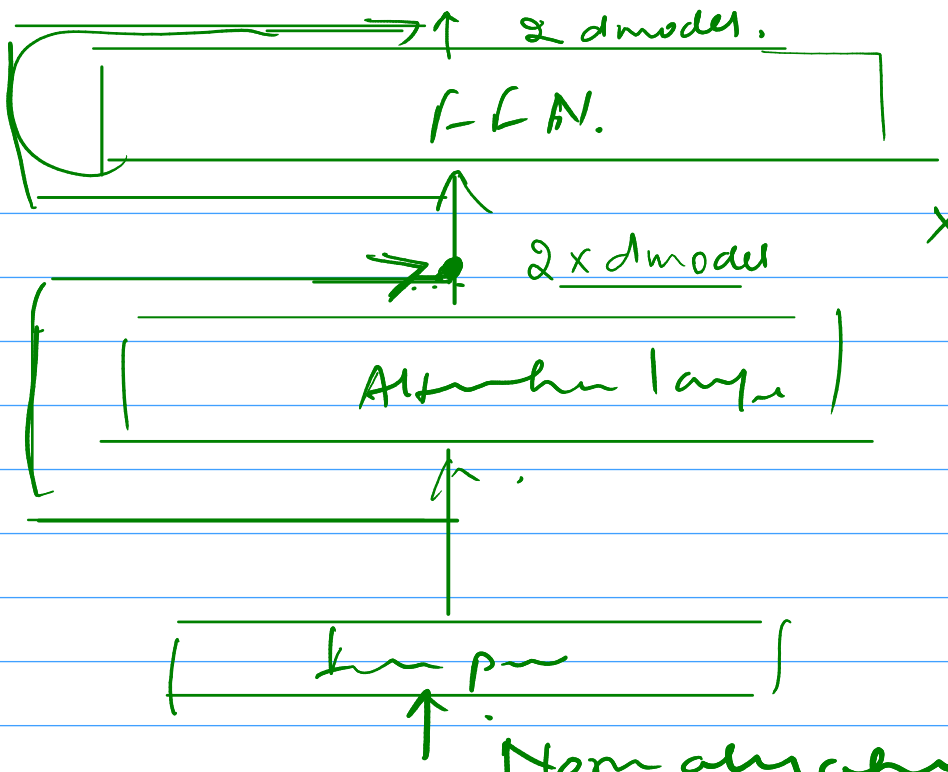

$\frac{X - \mu}{\sigma} = x'$

$= \gamma \cdot (x') + \beta$ $\quad \gamma, \beta \rightarrow$ dmodel

Encoder layer

$2 (2 \cdot d_{model})$

$= 4\ d_{model}$

layer-norm Parameters.

Encoder layer Parameter

Vocabsize

Pre Encoder

GPT.

output layer $\rightarrow$ Vocabsize x dmodel

5 x 8.

5 x 8. x 8 x 20

$\rightarrow$ 5 x 20

PAI

Parameters — embedding layer & output layer

— Vocab_Sz × d_model.

Attention layer — 4 × d_m × d_m.

(m.


FFN — d_m × FFN + FFN

FFN × d_m + d_m.

layer [layer_norm 'p' = 4 × d_model]

Ex

Decoder



Output layer

Encoder से.


FFr


MHCA


MHMA

decoder layer

$T_1 \times d_{model}$

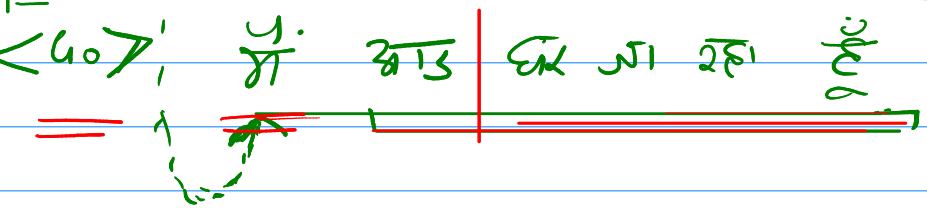






MHMA

W_Q 8×8

W_K 8×8

W_V 8×8

$W_0 \rightarrow 8 \times 8$.

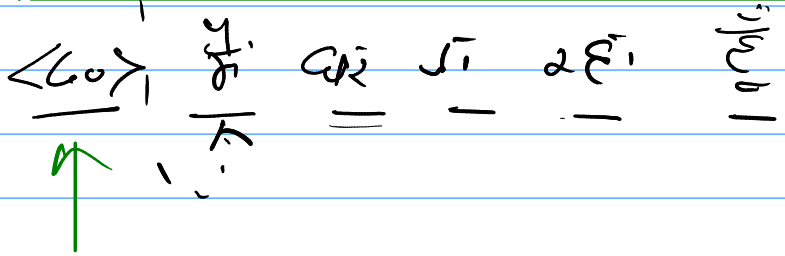


7×8.

$Q = 7 \times 8 \quad K = 7 \times 8 \quad V = 7 \times 8$

$Score = \frac{Q \cdot K^T}{\sqrt{d_K}}$ 7×7


Score =

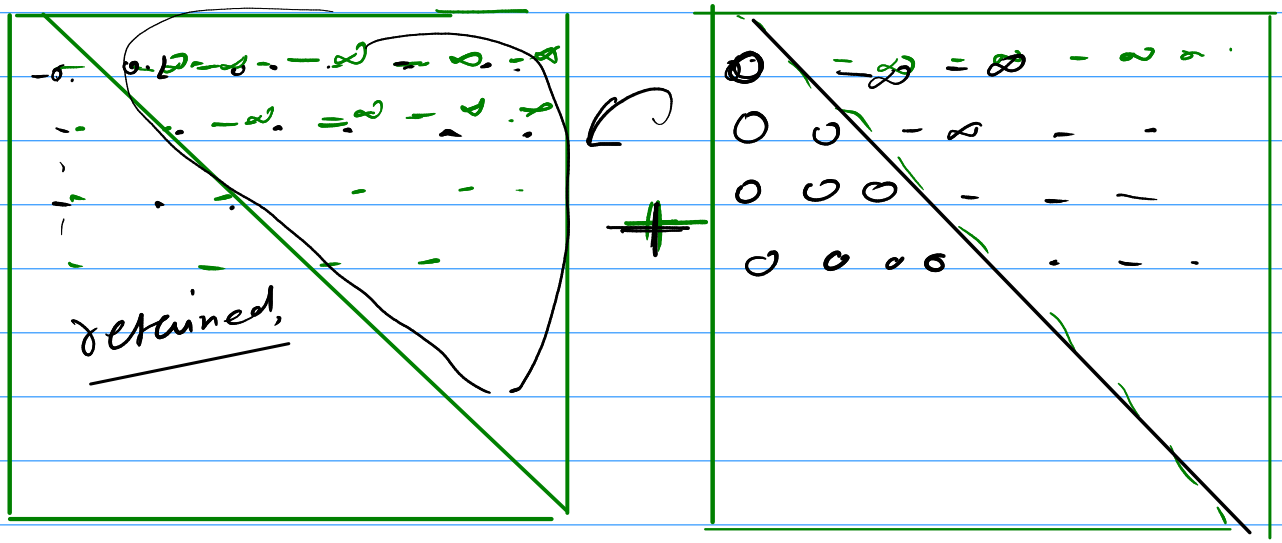

$e^{-\infty} = 0$


Attn mech. = Softmax.

Concept of Masking.

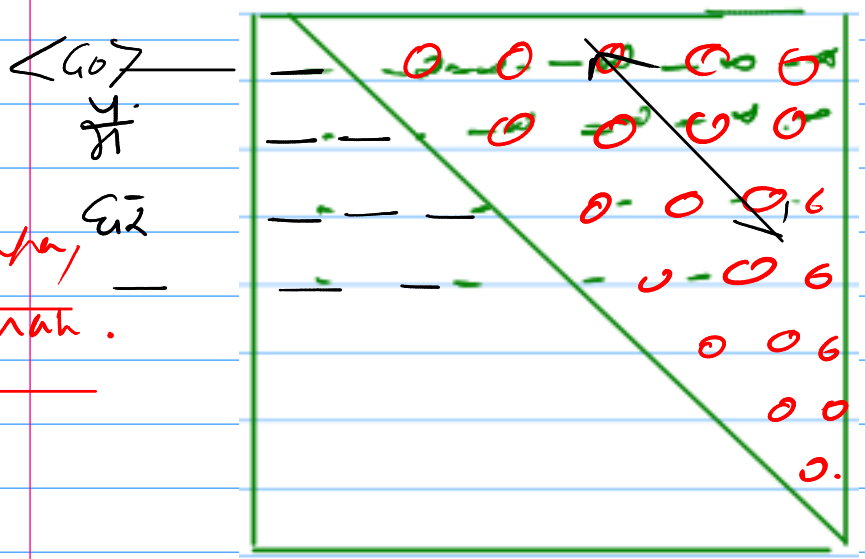

$S = Am.V \quad 7 \times 7 \times 7 \times 8 = 7 \times 8$

Parameters in MHMA → 4 x d_m x d_m. ✓

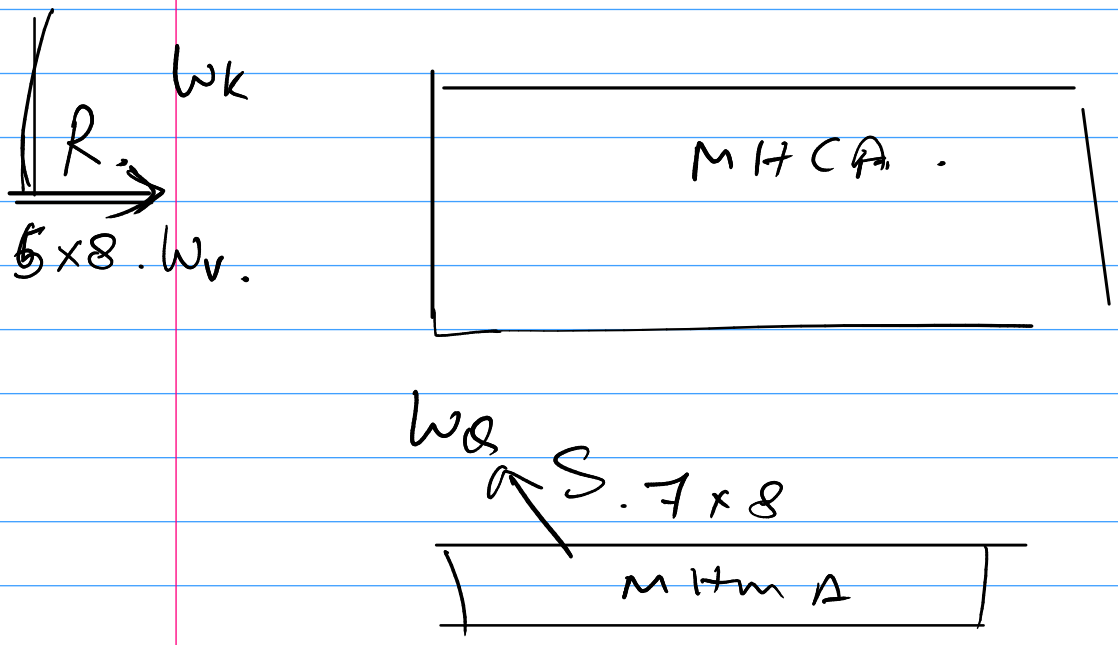

8x8

$Q = S.W_Q = 7\times8.\ 8\times8 \longrightarrow 7\times8.$

$K. = R.W_K = 5\times8.\ 8\times8 \longrightarrow 5\times8.$

$V = 5\times8.$ $V =$

Score $\frac{Q.K^T}{\sqrt{d_k}} = 7\times8\times8\times5 = 7\times5$


Attention mat = Softmax(Score) = 7x5.

Output $AM.V = 7\times5 \times 5\times8.$

$7\times5\ .\ 5\times8. = 7\times8.$

$W_O \rightarrow$ _____

Parameter. = 4 x d_m x d_{model}

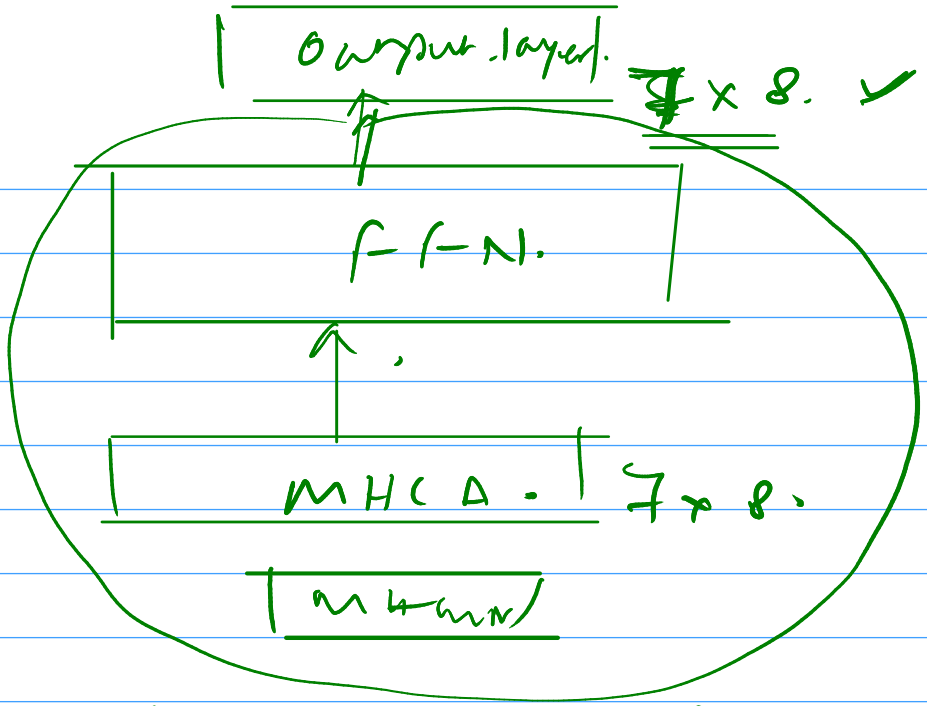


Vocab_Size.

Teacher enforcing

Softmax


dmodel x Vocab_Size.

Softmax.

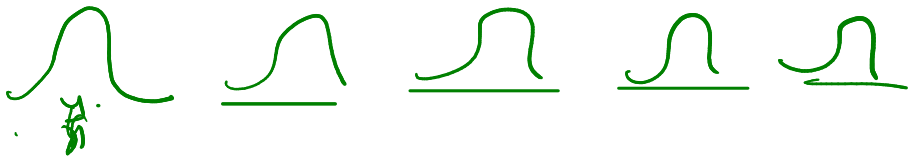

—max:

Inference mode

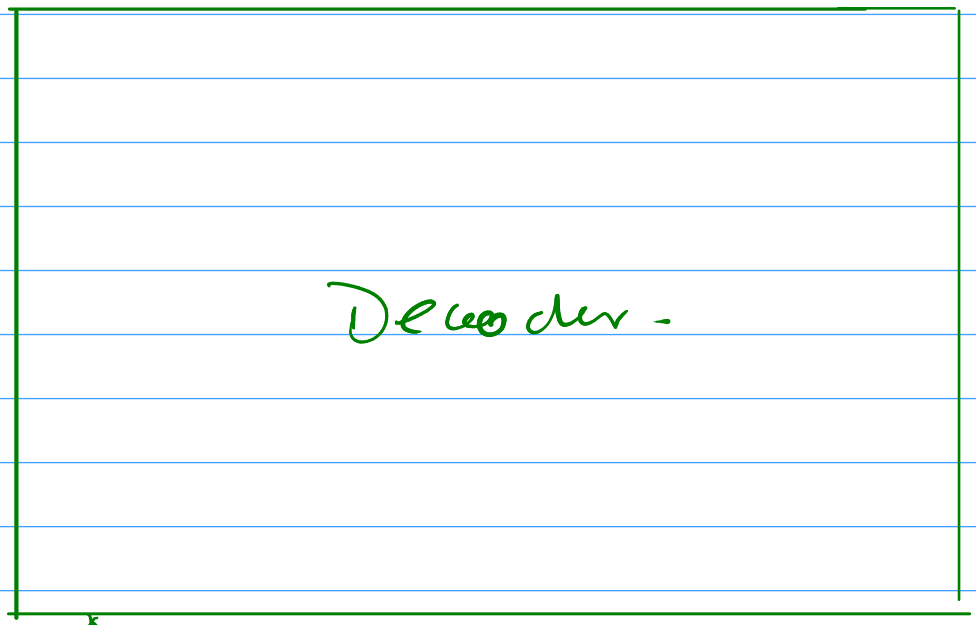

$= -\log(\hat{y})$

<Go> यी ८ट२ ज्ञी 2ह। ई

Vocab. Size

Embedding Matrix. → Vocab

Positional Encoding.] learnable parameter.

Parameters.

English Hindi.

V 30000 40000.

Decoder & (GPT)

Parameters

— Embedding layer.

→ Vocab_size * dmodel

P.E. → T x dmodel.

— Decoder layer

Encoder.

4 dmodel.

per layer.

6 x dmodel.

per layer.

1. MHMA.

4 x dm x dm.

2. MHCA

4 x dm x dm.

3. FFN dm x FFN + FFN

FFN * dm + dm.

— Output fn dm x V_size.

— Layer-norm

Sentiment Analysis

Classification problems

2

0 1

1 0 No

N.



RNN.


Pre training

Feature forcing

Autoregressive.


Fine tuning

labels.

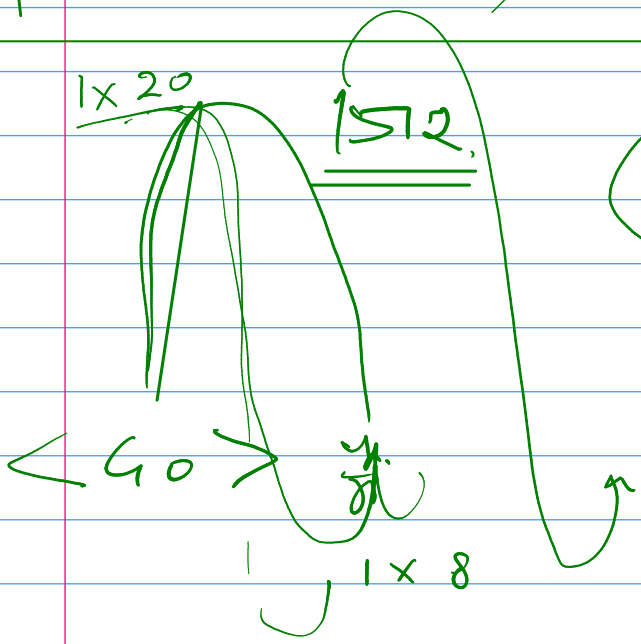




$W^T = W - \eta \nabla W$.

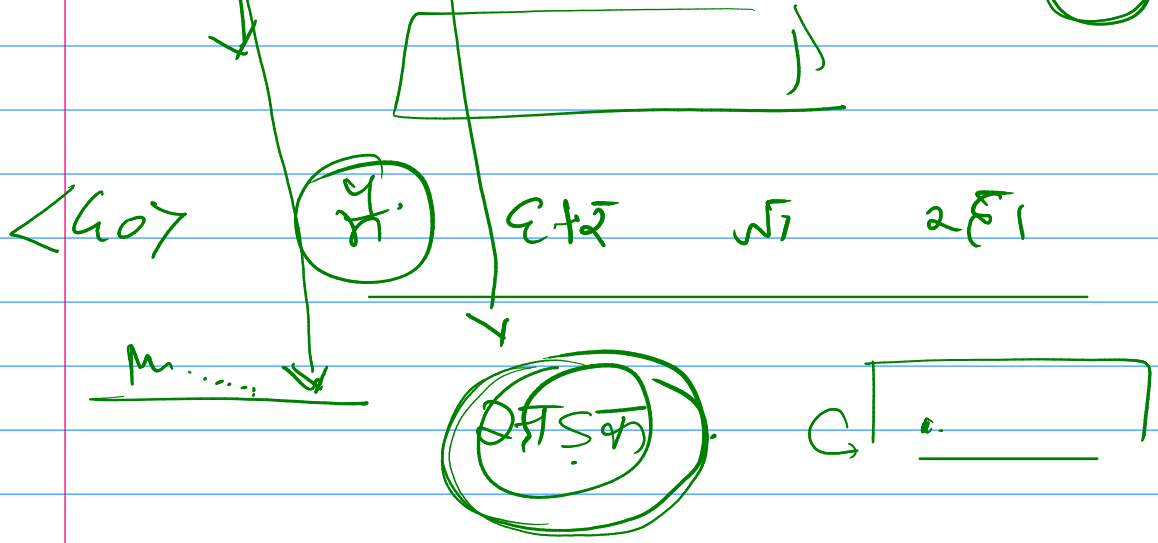

Posn	i = 0		i = 1		i = 2 .		3	3
0	0.1	0.2	0.1	0.3	0.4	0.2	0.3	0.4
1	am							8
2	going							
3	home							
4	today							

Semantic

I am going home today

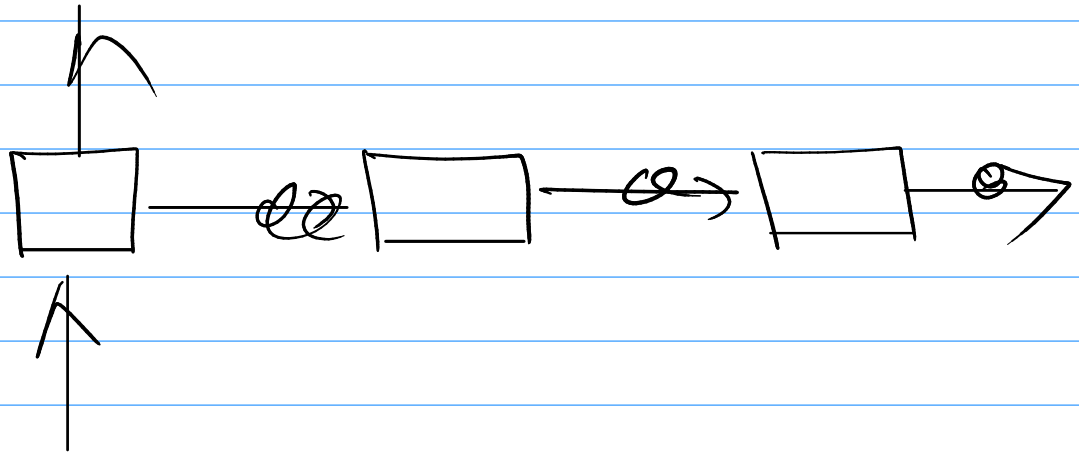

$PE_{(pos, 2i)} = \sin\left(\frac{pos}{10000^{2i/d_{model}}}\right)$

$PE_{(pos, 2i+1)} = \cos\left(\quad\right)$

Source vocabulary size, $|V_s|$: 1000
Target vocabulary size, $|V_t|$: 1500
The context length, T: 128
The embedding dimension, $d_{embed} = d_{model}$: 64
The projection dimensions, $d_q = d_k = d_v$: 16
The number of heads, n_h: 4
The hidden dimension of FFNN, d_{ff}: 256
Uses layer norm and residual connection

We pass the sample from the source language ``I enjoyed the movie Transformer" to the encoder and its translation ``Naan transformer padaththai rasithen" to the decoder. All the learnable parameters are randomly initialized. The model uses the teacher-forcing approach throughout the training process.

1) Assume the model has two layers ($N = 2$). Calculate the total number of parameters in the model (excluding the embedding layer and output layer). Moreover, no bias was added to the neuron in the FFNN layers.

230656

Encoder

Attention layer: $4 \times 64 \times 64$.
FFN. : 64×256
256×64
layer norm 4×64.

$\times 2$.

Decoder


MHMA + MHCA $\Rightarrow$ $8 \times 64 \times 64$.
ffn. $64 \times 256 + 256 \times 64$
layer_nw. 6×64

$\times 2$.

How many parameters does the output layer have? = Vocab_Sz $\times$ dmodel.

BERT. (Pure Encoder model, bidirectional).

GPT. (Parameters. MHCA. X ∵ there is no Encoder.)

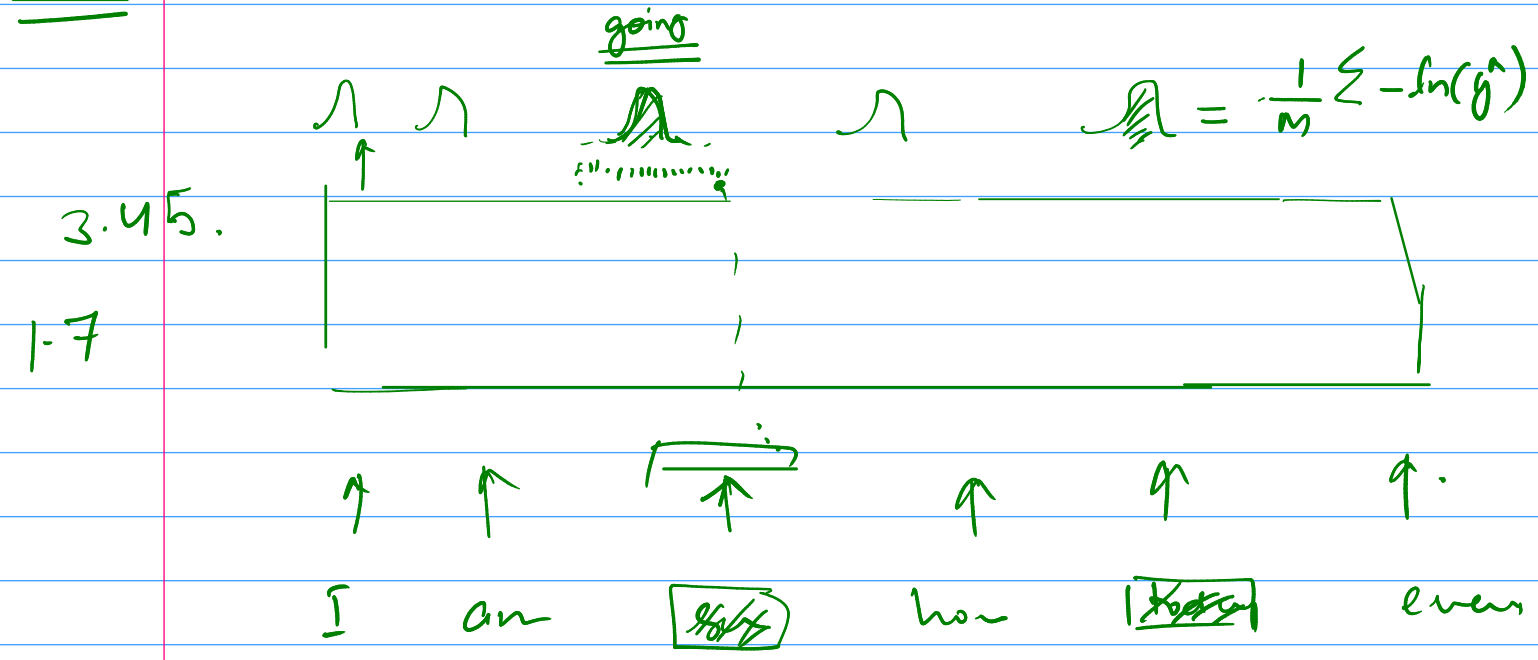

Decoding Strategies

LLMs

Deterministic.
- Exhaustive Search.
- Greedy Search.
- Beam Search.

Stochastic.
- Top k - Sampling.
- Top p - Sampling.

Consider a vocabulary $\mathcal{V}$,

$\mathcal{V}$ =([start], building, character, a, is, astronomy, science, experience, natural,[end]).

Assume that we have a pre-trained GPT model for text generation and the first input token to the model is always the special token [start]. The prediction probabilities outputted by the model are given below:

0.05	0.02	0.14	0.07	0.09	0.41	0.08	0.05	0.08	0.01
0.10	0.04	0.06	0.16	0.43	0.01	0.06	0.09	0.01	0.04
0.05	0.07	0.28	0.29	0.03	0.08	0.04	0.08	0.04	0.04
0.10	0.02	0.48	0.02	0.01	0.07	0.06	0.14	0.07	0.01
0.08	0.29	0.04	0.01	0.04	0.03	0.25	0.05	0.15	0.06
0.14	0.22	0.13	0.08	0.01	0.03	0.06	0.23	0.08	0.03

The zeroth row of the matrix is the output probability distribution by the model given the special [Start] token as input. Following the Greedy Search decoding strategy, the subsequent rows give the conditional probability distribution conditioned over the previous tokens. If you think the given information is insufficient for any sub-questions, then enter -1 as your answer

1) What is the probability of the predicted word equal to ``Astronomy" given the ``[Start]" token as the initial input $P(y_1 = Astronomy | y_0 = [Start]$?

0.41

2) What is the probability of the sequence ``Astronomy is a character building experience"?

$P(A|S) \cdot P(i|A,S) \cdot P(a|A,S,i) \cdot P(C|A,S,i,a) \cdot P(B|A,S,i,a,C) \cdot P(E|A,S,ia,B) \cdot P([End]|A,S,ia,B,E)$

0.41 0.14 0.09 0.64 0.4 -1


3) What is the probability of the sequence `` Astronomy is a natural science "?

-1. 0. Greedy. Exhaustive. Beam search.

4) Suppose we use Top$-k$ sampling, with $k = 3$, What is the probability of the predicted word equal to ``Astronomy" given the ``[Start]`` token as the initial input $P(y_1 = Astronomy | y_0 = [Start])$?


-1

Beam Search.

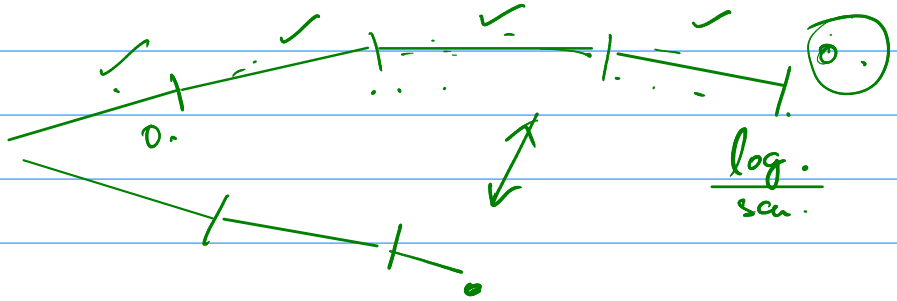

6) Suppose we use the pre-trained BERT model for a sentiment classification problem. Assume that we use the model for feature extraction. That is, the model gives the representation for the given input sentence and we use that as input to some traditional classification algorithms. Then choose which of the following statements is (are) True

- We can only take the representation of [CLS] token as an input to the classifier
- We can also use the representation of [SEP] token as an input to the classifier
- We can take representation of any word in the input sequence as an input to the classifier

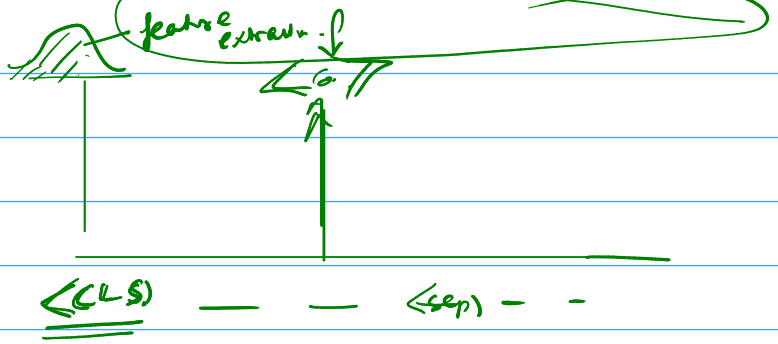

Consider a vocabulary $V = (A, T, C, G)$ and the corresponding embedding matrix $E = \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & -1 \\ 1 & 1 \end{bmatrix}$. For example, the $0-th$ row of E is the embedding for $0-th$ token of V and so on.

The following sequence $X = (G, C, C, T, A, G)$ is to be processed by the encoder layer of the transformer architecture by appropriately adding the positional information using the following encoding scheme

$$P(pos, 2i) = sin\left(\frac{pos}{10^{(2i/dmodel)}}\right)$$

$$P(pos, 2i+1) = cos\left(\frac{pos}{10^{(2i/dmodel)}}\right)$$

Assume the index for the position starts from zero. Add positional information to all the tokens in the sequence. Let the resultant sequence be denoted by $H = E(X) + P$, (H will be used in the subsequent questions, please write it down). Here, $E(X)$ denotes the embedding for each token in X

What is the sum of the elements in the embedding vector P_5?

Pos-	0	1	2	3	4	5
P	G	C	C	T	A	G
PE	0	0.84	0.91	0.14	-0.75	-0.95
	1	0.54	-0.41	-0.98	-0.65	0.28

$PE(G) = \sin(0) \quad \cos(0)$

$PE_1(C) = \sin\left(\frac{1}{10^{0/2}}\right) = \sin(1) \quad \cos(1)$

$PE_2(C) = \sin(2), \cos(2) = 0.91, -0.41$

$PE_3(T) = \sin(3), \cos(3) = 0.14, -0.98$

$PE_4(A) = \sin(4), \cos(4) = -0.75, -0.65$

$PE_5(G) = \sin(5), \cos(5) = -0.95, 0.28$

$\therefore P_5 = -0.95 \quad 0.28 \quad \therefore$ Sum $= -0.67$

H (row wise) $= E(X) + P =$

1.84	-0.46	h_0
1.91	-1.41	h_1
0.14	0.02	h_2
0.25	-0.65	h_3
0.05	1.28	h_4
		h_5

What is the sum of the elements in the $3-rd$ token, $h_3 \in H$

$h_3 = 0.14 \quad 0.02$

Sum = 0.16 ✓

The bottommost encoder layer of the transformer contains the following parameter matrices

$$W_Q = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}, \quad W_K = \begin{bmatrix} 1 & 0 \\ 1 & 0 \end{bmatrix} \quad W_V = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \quad W_O = \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix}$$

given that the embeddings are row vectors, compute the attention score to produce the new representation for the token (T) at the 3-rd position in the sequence X.

$Q = X \cdot W_Q$, $O = AM.V.$

$H =$ ✓

1	2
1.84	-0.46
1.91	-1.41
0.14	0.02
0.25	-0.65
0.05	1.28

What is the **un-normalized** attention weight given for the token (A) at the 4th position?

Note: unnormalized here implies the raw score before applying softmax. Avoid scaling the dot-product by $\sqrt{d_k}$

$Q = H \cdot W_Q =$

	1	-2
	1.84	0.46
	1.91	1.41
	0.14	-0.02
	0.25	0.65
	0.05	-1.28

(H)

$K = H \cdot W_K =$

3	0
1.38	0
0.5	0
0.16	0
-0.40	0
1.33	0

$\therefore$ Scores $= Q \cdot K^T =$

		1	-2
G		1	-2
C		1.84	0.46
C		1.91	1.41
T		0.14	-0.02
A		0.25	0.65
G		0.05	-1.28

$\cdot \begin{bmatrix} 3 & 1.38 & 0.5 & 0.16 & -0.40 & 1.33 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$

So for T, → [0.42 | G | C | C | T | A | G.]

G: 0.14 × 1.38

C: 0.07

C: 0.14 × 0.16

T: 0.14 × -0.40

A: 0.14 × 1.33

Unnormalized Score for T (A) → $0.14 \times (-0.4)$

$= -0.056$ ✓

The bottommost encoder layer of the transformer contains the following parameter matrices

$$W_Q = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}, \quad W_K = \begin{bmatrix} 1 & 0 \\ 1 & 0 \end{bmatrix} \quad W_V = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \quad W_O = \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix}$$

given that the embeddings are row vectors, compute the attention score to produce the new representation for the token (T) at the 3-rd position in the sequence X.

Which token in the sequence was given the highest score?

G C C T A G.

We got Score (T) = [0.42 0.19 0.07 .0224 -0.056 0.18]

∴ highest Score (0.42) for G.

Consider the following configuration for the Vannila transformer architecture with one encoder layer and one decoder layer.

- Source and target vocabulary size = 100
- maximum sequence length = 32 — dmodel,
- length of context window (T) for both encoder and decoder = 32 — T
- number of heads $n_h = 2$
- $dff = 4 * dmodel$
- $dq = dk = dv = \frac{dmodel}{n_h}$

I am go h.
↓ T×D.

PE → T x D.

Suppose the number of learnable parameters in the source input embedding layer is 1600 how many parameters are there in the positional embedding layer of the source language? Assume the positional embeddings are learnable.

Embedding layer Size = d_{model} × Vocab_Size. (1600)

∴ $d_{model} = \frac{1600}{100} = 16$

∴ Every token is represented by 16 variables.

Number of Parameters in PE = n × dmodel.


n → Sequence length.

∴ no. of Parameters in PE = 32 × 16 = 512

How many parameters are there in the multi-head attention layer of the encoder (exclude the parameters in the W_O matrix used for linear transformation)?

Means Parameters in W_Q, W_K & W_V.

Input = 32 × 16

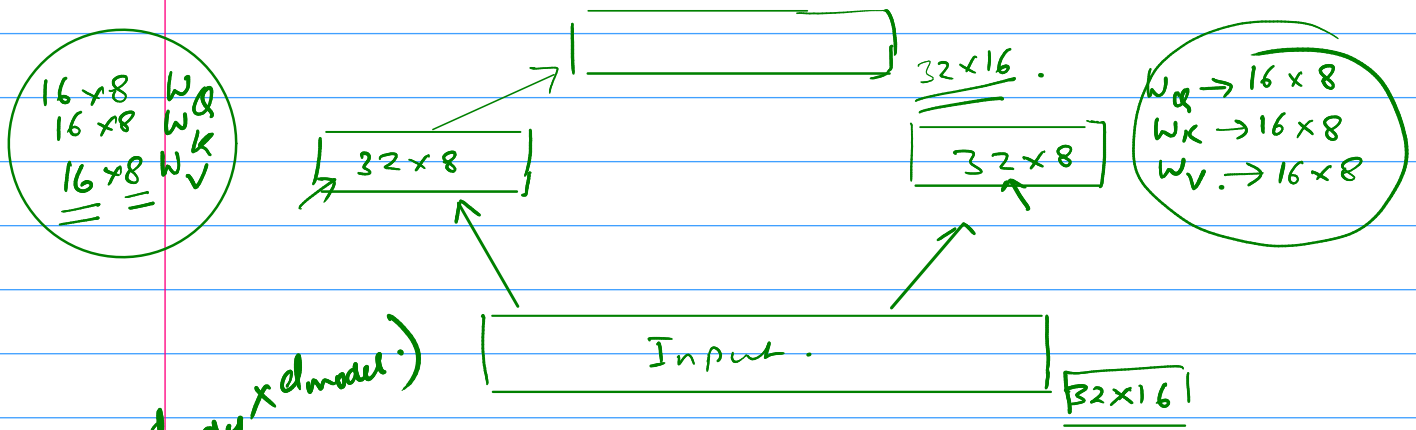

(3 × d_{model} × d_{model})

3 × 8 × 16.


(16 × 8 × 3) × 2 = 16 × 16 × 3

= 256 × 3

= 768

Let $R_E \in \mathbb{R}^{T_1 \times dmodel}$ be the representation from the topmost encoder layer of the encoder and $Z_D \in \mathbb{R}^{T_2 \times dmodel}$ be the output of Multi-head Masked Attention layer of one of the decoder layers. What will be the size of the attention matrix in the Multi-head Cross Attention layer of the same decoder layer? Assume $d_q = d_v = d_k = d$ if required.

Attention matrix = Softmax $\left(\frac{QK^T}{\sqrt{d_k}}\right)$

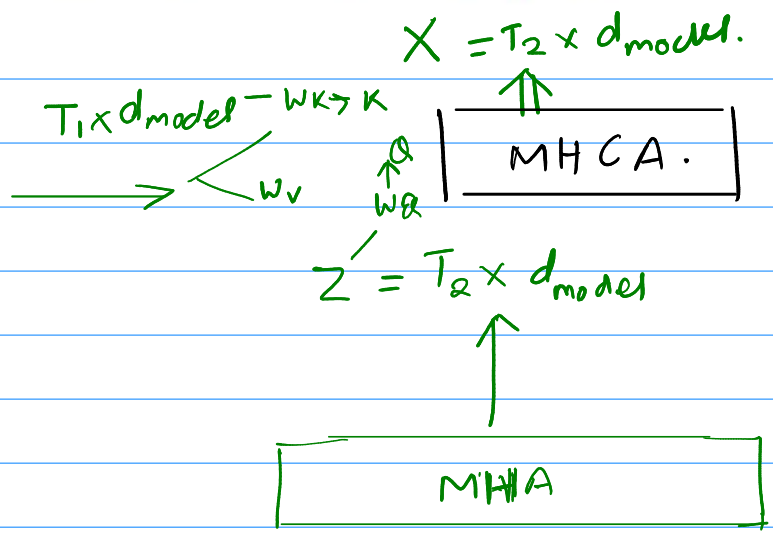

Size of W_K, W_V & W_K ?

Size of Attention matrix will be $T_2 \times T_1$

$T_1 \times d_{model} \times d \times q$. $T_1 \times d$. $\rightarrow K$.

R

Score $\Rightarrow$ $Q \cdot K^T$

$\uparrow$ $T_2 \times d$. $d \times T_1$

$\uparrow$ $T_2 \times T_1$

$T_2 \times d$.

$\uparrow$ $T_2 \times d_{model}$. $d \times d$ . . $\rightarrow Q$

MHMA .

W_Q , W_K , W_V $\rightarrow$ $d \times d$.

$W_Q \rightarrow d_{model} \times d_q$.

Then $Q \rightarrow Z_{T2 \times d_{model}} \cdot W_{Q\ d_{model} \times d_q} \rightarrow Q_{T_2 \times d}$

$K \rightarrow R_{T_1 \times d_{model}} \cdot W_{K\ d_{model} \times d_K} \rightarrow K_{T_1 \times d}$.

$V \rightarrow V_{T_1 \times d}$

$\therefore$ Score : $Q \cdot K^T \rightarrow T_2 \times T_1$ & Softmax (Score) → Attention Matrix


& $\therefore$ $X =$ Score $\cdot V^T \rightarrow T_2 \times T_1$

As per this, dimension of $W_Q, W_K \& W_V$ should be $d_{model} \times d$.

$\therefore$ dim. of attention matrix is $T_2 \times T_1$

Suppose we run the pre-trained GPT model in an autoregressive fashion for generating a text sequence. Then, the statement that " We do not need to add the positional embedding to the predicted tokens at every time step" is

False

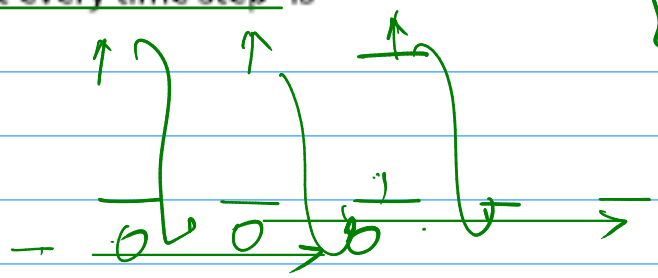

Suppose we have a dataset for machine translation tasks with thousands of samples. Suppose a team considers training the transformer model. The model could be trained in two approaches

A Autoregressive training

B Teacher forcing ✓

Teacher forcing allows to converge faster.

Choose the correct statements

Options :

6406532475231. ✗ Approach *A* helps the model to converge faster than approach *B* False

6406532475232. ✓ Approach *B* helps the model converge faster than approach *A* ✓

6406532475233. ✓ One can start the training with approach *B* first and then switch to approach *A* after some training steps ✓

6406532475234. ✗ Once the training starts with approach *B* and then switching to approach *A* after some training steps can not be done ∴ false.

A team trained a Language model using the GPT architecture using a large corpus of text. The model configurations are given below

- Vocabulary size = 30000
- $dmodel = 512$
- length of context window $T = 1024$
- $dff = 4 * dmodel$
- $dq = dk = dv = 64$

They trained the model for millions of steps and stopped the training after the loss had decreased significantly. Then, they used the model to generate the text by giving the special starting token [BOS] as an input to the model. Select the length of the text sequence that the model could generate.

Options :

6406532475235. ✔ 512

6406532475236. ✔ 1024

6406532475237. ✔ 1536

6406532475238. ✔ 2048

Can generate any no. of tokens. till <End> or some other Condition (max. no. of tokens)

Any no. ✓

✓ <End>.

✓ Context → 1000 / 2000

Choose the correct statements

Options :

6406532475245. ✔ All the parameters of the GPT model are randomly initialized during pre-training Yes

6406532475246. ✖ The model minimizes the CLM objective during fine-tuning to improve the performance

No, maximises.

6406532475247. ✖ All parameters of the GPT model are randomly initialized during fine-tuning

No. (

6406532475248. ✔ In general, fine-tuning requires a dataset with labels ✓ yes.

Consider a GPT model used for Causal language modelling. We feed the input sentence "This is a cool idea" to the model by appending special staring [BOS] and ending [EOS] tokens (that is, "[BOS] This is a cool idea [EOS]"). Assume the context length of the model is 7. The attention matrix computed in one of the attention layers is given below

	BOS	This	is	a	cool	idea	<End>
0	1	0	0	0	0	0	0
1	0.5	0.5	0	0	0	0	0
2	0.3	0.2	0.5	0	0	0	0
3	0.1	0.1	0.8	0	0	0	0
4	0	0.15	0	0.6	0.25	0	0
5	0.25	0.35	0	0.2	0.1	0.1	0
6	0.1	0.1	0.1	0.1	0.1	0.4	0.1

Table 1: Attention score

decoder

✓

7×7

The attention score matrix given in Table 1 is appropriate for the causal language modelling task ✓ yes ∵ it is "masking" the info from future tokens.

Options :

6406532474526. ✔ True

6406532474527. ✖ False

6406532474528. ✖ Insufficient information

Assume the time step starts from $t = 0$ and ends at $t = 6$. Suppose the model is at time step $t = 4$, what is the attention value assigned for the word "is"?

at t=4

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0

At t=4, attention value for 'is' is 0.

Key Concept: GPT's Autoregressive Generation

GPT models generate text in an **autoregressive** manner, which means they predict the next token one at a time, conditioned on the previously generated tokens. This process continues until a predefined stopping condition (like reaching a maximum sequence length or a special token) is met.

Context Window $T = 1024$:

- The context window size $T = 1024$ defines the maximum number of tokens that the model can handle **at once** during training or inference.
- When generating sequences longer than 1024 tokens, the model uses a **sliding window** technique, where newly predicted tokens are fed back into the model, and the oldest tokens are dropped from the context.

Which of the following decoding strategies is (are) appropriate for machine translation tasks? Assume we have infinite compute and the values for $k \geq 3, p > 0.35$ where required.

Options :

6406532475249. ✖ Top-k sampling

6406532475250. ✔ Beam search with the beam size $K = 2$


6406532475251. ✖ Top-p sampling

6406532475252. ✔ Exhaustive search

6406532475253. ✖ None of these

Machine Translation does not require "Uncertainty" so it has to follow "deterministic strategy" So either. Exhaustive / Greedy / Beam Search.

1024 Context Sw.

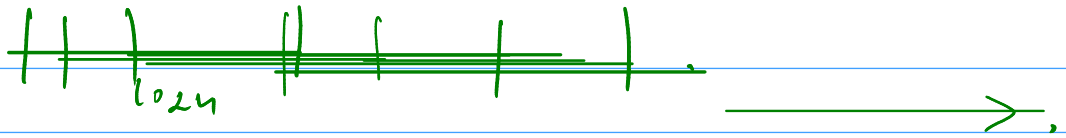

Question Label: Multiple Choice Question


The statement that "the Next Sentence Prediction (NSP) task requires the BERT model to run autoregressively given the first sentence(or segment)" is

Options :

6406532475254. ✗ TRUE

6406532475255. ✓ FALSE


"BERT" model works on "bidirectional" context and does not have "auto regression".

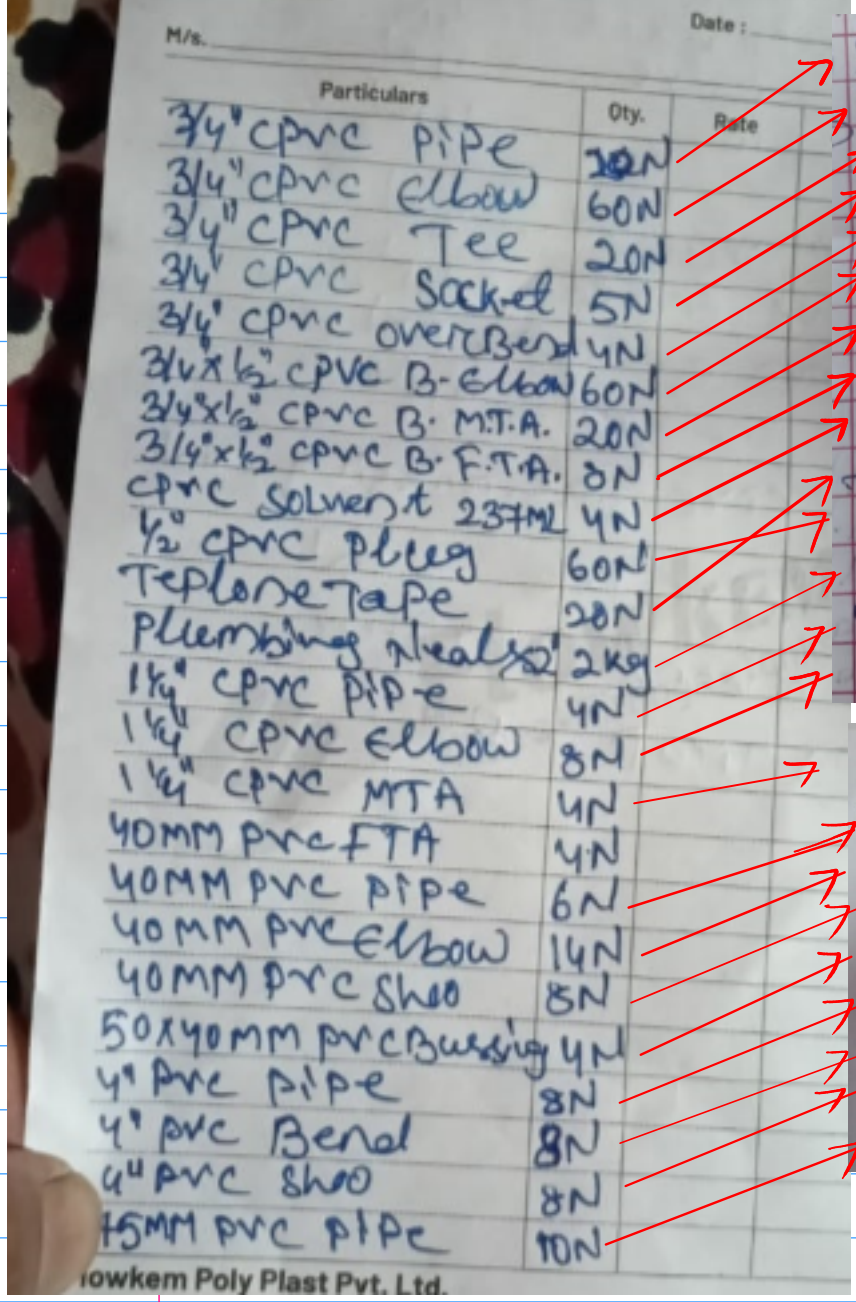


M/s. Date :

Particulars	Qty.	Rate
3/4" cPVC pipe	10N	
3/4" cPVC Elbow	60N	
3/4" cPVC Tee	20N	
3/4" cPVC Socket	5N	
3/4" cPVC overBend	4N	
3/4"x1/2" cPVC B. Elbow	60N	
3/4"x1/2" cPVC B. M.T.A.	20N	
3/4"x1/2" cPVC B. F.T.A.	8N	
cPVC Solvent 237ML	4N	
1/2" cPVC Plug	60N	
Teplone Tape	20N	
Plumbing Heal 50	2kg	
1 1/4" cPVC Pipe	4N	
1 1/4" cPVC Elbow	8N	
1 1/4" cPVC MTA	4N	
40MM PVC FTA	4N	
40MM PVC Pipe	6N	
40MM PVC Elbow	14N	
40MM PVC Shoe	8N	
50x40MM PVC Bushing	4N	
4" PVC Pipe	8N	
4" PVC Bend	8N	
4" PVC Shoe	8N	
75MM PVC Pipe	10N	

owkem Poly Plast Pvt. Ltd.

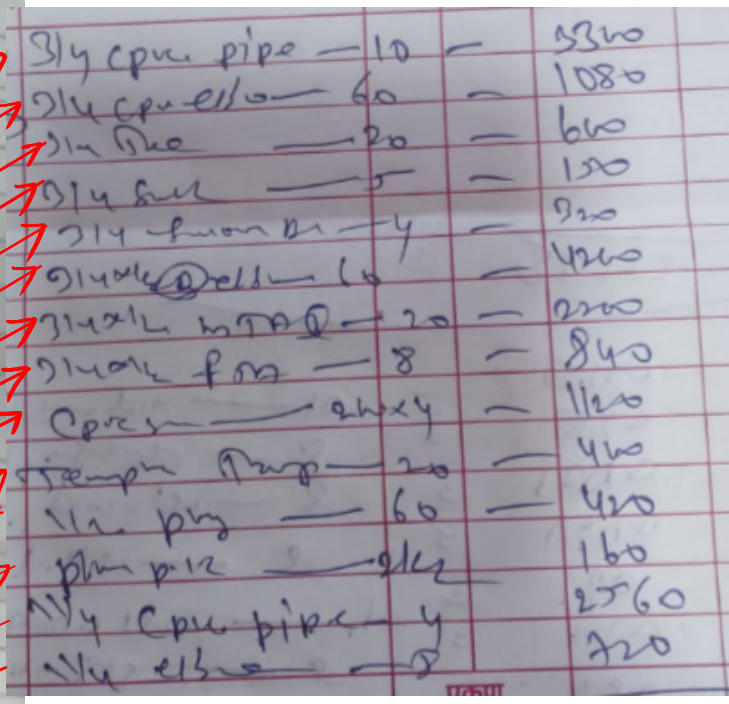

3/4 cpvc pipe — 10 — 3360
3/4 cpvc ello — 60 — 1080
3/4 Tee — 20 — 660
3/4 Soc — 5 — 150
3/4 Fmon Br — 4 — 320
3/4x1/2 Bell — 6 — 4260
3/4x1/2 MTA — 20 — 2300
3/4x1/2 FTA — 8 — 840
Cpvc — 237x4 — 1120
Temflon Tape — 20 — 460
1/2 plug — 60 — 420
plum p.12 — 2kg — 160
1 1/4 Cpvc pipe — 4 — 2560
1 1/4 Elbo — 8 — 720

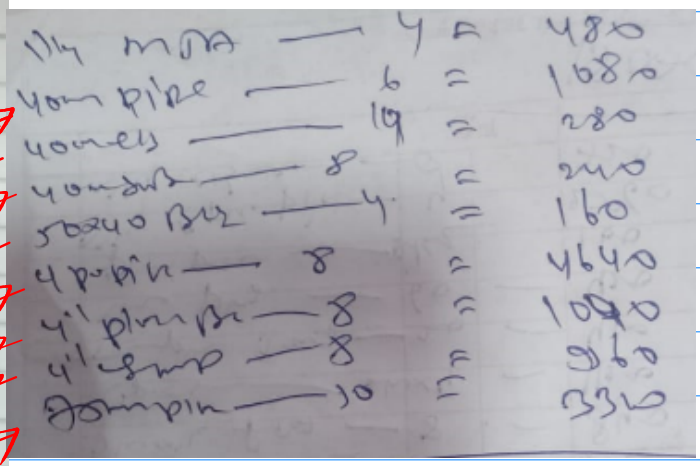

1 1/4 MTA — 4 = 480
40mm pipe — 6 = 1080
40mm Elb — 14 = 280
40mm Shoe — 8 = 240
50x40 Bush — 4 = 160
4" pipe — 8 = 4640
4" plum Br — 8 = 1040
4" Shoe — 8 = 960
75mm pipe — 10 = 3360