



Chapter II

HTML

College of Information and Communication Technology

Can Tho University

Dr. Trieu Thanh Ngoan



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
5. HTML Color
6. HTML `<!DOCTYPE>`



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
5. HTML Color
6. HTML `<!DOCTYPE>`

1. OVERVIEW

- HTML(Hyper Text Markup Language) is a hypertext markup language.
- Invented by Tim Berners-Lee and standardized by the W3C (World Wide Web Consortium) in 1994.
- Tags are used to format text and are displayed by web browsers.
- An HTML file is a text file containing markup tags, with the extension htm or html.
- HTML pages can be created using any plain text editor (Notepad, Notepad++, Editplus, Turbo Pascal, etc.).
- Browsers usually do not report HTML syntax errors. If the syntax is incorrect, the displayed result will not be as expected.

◆ HTML5

- HTML5 is the current standard version of HTML
- HTML5 is designed to deliver everything to web users without the need for plugins (effects, sounds, images, etc.).
- Multi-platform: PC, tablet, smartphone, smart TV, etc.
- Write web applications that can run offline.
- HTML5 is still under development.
- Many HTML5 elements are already supported by popular browsers (IE, Firefox, Chrome).

New elements: http://w3schools.com/html/html5_new_elements.asp

HTML5 Game Development: <https://www.udacity.com/course/cs255>

◆ HTML5

HTML5 is a collaboration between the World Wide Web Consortium (W3C) and the Web Hypertext Application Technology Working Group (WHATWG).

Some principles of HTML5 development:

- New features based on HTML, CSS, DOM, and JavaScript
- Many features are developed to replace some scripting
- Device independence
- Easier error handling than previous HTML versions
- Community visibility of development progress

◆ HTML5 Document

Minimum structure of an HTML5 page

```
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Title of the document</title>
</head>

<body>
Content of the document.....
</body>

</html>
```



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
5. HTML Color
6. HTML `<!DOCTYPE>`

◆ 2. STRUCTURE AND SYNTAX

HTML tags:

- HTML tags are keywords enclosed in angle brackets, such as `<html>`
- Common HTML tags are defined in pairs, such as `<b>` and `</b>`
- The first tag is called the start tag/opening tag, and the second is called the end tag/closing tag
- Some tags do not have a closing tag, such as: `<br />`, `<img />`, `<input />`,...
- Tag names are not case-sensitive
- List of tags: <http://www.w3schools.com/tags/default.asp>

◆ HTML Elements

- An HTML page is made up of HTML elements
- An HTML element is everything from the start tag to the end tag

Example: *<p>This is a paragraph</p>*

- The content of an HTML element is everything between the start tag and the end tag
- Elements can be **nested** (element contains elements)

◆ HTML Attributes

- Most HTML tags have attributes
- Attributes provide additional information about HTML elements
- Attributes are placed within the opening tag and always appear in *name/value* such as: *name*= "*value*"
- *Value* should be enclosed in double quotes "*value*" or single quote '*value*'
- Convention: use lowercase for attributes

Example:

```

```

◆ Inline Elements & Block Elements

- Block elements are HTML elements that occupy the entire possible width and cannot be on the same line as any other elements.

Example: `<h1>`, `<p>`, `<div>`, `<hr>`

- Inline elements are HTML elements that only occupy the necessary width and can be on the same line as each other.

Example: `<span>`, `<a>`

HTML PAGE

Index.html

```
<html>

  <head>

    <title> Page Title </title>

  </head>

  <body>

    <h1>This is a Heading</h1>

    <p>This is a paragraph.</p>

  </body>

</html>
```



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
5. HTML Color
6. HTML `<!DOCTYPE>`

3. HTML ELEMENTS

Basic tags:

`<html>` : Define a Web page

`<head>` : The header of the web page

`<body>` : The body of the Web page

`<h1> ... <h6>` : headings from 1 to 6

`<p>` : a paragraph

`<br>` : Line break

`<hr>` : a horizontal line

`<!-- -->` : comment

Attributes : `id`, `tabindex`, `class`, `style`, `title`, `name`


Example

```
<html>
<head>
  <title> Example 1 </title>
</head>
<body>
  <h1> Heading 1</h1>
  <h2 align="left"> Heading 2</h2>
  <h3 align="right"> Heading 3</h3>
  <h4> Heading 4</h4>
  <h5 align="center">Heading 5</h5>
  <h6>Heading 6</h6>

  <hr>

  <p>First paragraph</p>
  <p>Second paragraph</p>
  <p>A para<br>graph
    having line break</p>

  <!-- A comment -->
</body>
</html>
```

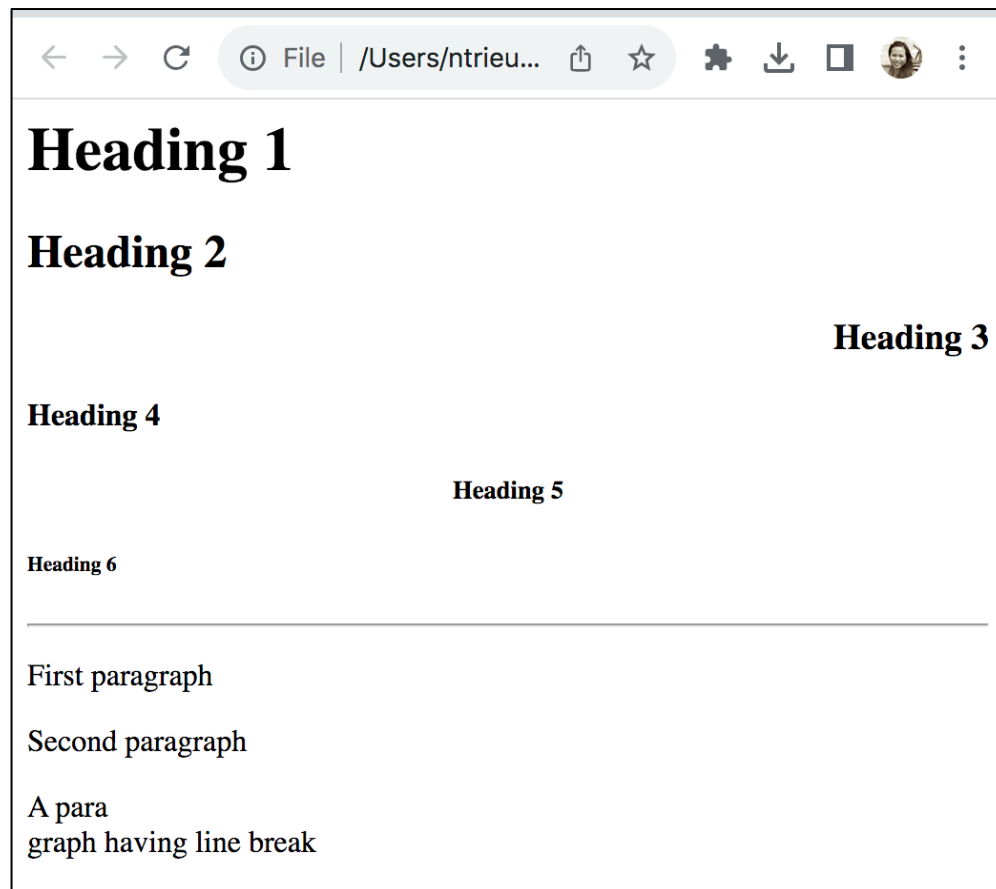

◆ HTML Text Formatting

`<b>` : bold text

`<u>` : underline

`<i>` : italic

`<strong>` : strong important

`<em>` : emphasis

`<mark>` : marked text

`<small>` : smaller text

`<sup>` : super script

`<sub>` : sub script

- `<code>`: computer code
- `<kbd>`: keyboard
- `<samp>`: sample
- `<var>` : variable
- `<pre>` : Preformatted Text
- `<s>`, `<del>` : Strikethrough
- `<ins>`: Inserted Text

◆ HTML Entities

- Special characters in HTML are replaced by **Character Entity**, which can be in the form of Entity name or Entity number
- Browsers may not support all entity names, but they support entity numbers very well.
- A commonly used Character Entity is ** **;
- Browsers always discard spaces if more than one space character is used consecutively => use character entity (** **;) instead

HTML Entities (tt)

Result	Description	Entity Name	Entity Number
"	quotation mark	"	"
'	apostrophe	'	'
<	less than	<	<
>	greater than	>	>
&	ampersand	&	&
	non-breaking space	 	
¢	cent	¢	¢
£	pound	£	£
¥	yen	¥	¥
€	euro	€	€
§	section	§	§
©	copyright	©	©
®	registered trademark	®	®
™	trademark	™	™

Image

Add images to the website in formats such as *.gif or *.jpg

```

```

Other attributes of `<img>` tag

- **Width** = number pixels or number %
- **Height** = number pixels or number %
- **Alt**="provides an alternate text for an image"

Image size:

- Using **width/height**= number pixels or number %
- **Using** **style**="width:Xpx/%;height:Ypx/%;"

◆ Background Image

A background image on an HTML element:

`style="background-image: url('<URL>');"`

Avoid from repeating:

`background-repeat: no-repeat;`

```
<style>
body {
  background-image: url('img_girl.jpg');
}
</style>
```

HTML `<picture>`

Allows to display different pictures for different devices or screen sizes

Example:

https://www.w3schools.com/tags/tryit.asp?filename=tryhtml5_picture

Image

Image formats supported by popular browsers

Abbreviation	File Format	File Extension
APNG	Animated Portable Network Graphics	.apng
GIF	Graphics Interchange Format	.gif
ICO	Microsoft Icon	.ico, .cur
JPEG	Joint Photographic Expert Group image	.jpg, .jpeg, .jfif, .pjpeg, .jpp
PNG	Portable Network Graphics	.png
SVG	Scalable Vector Graphics	.svg

◆ Example

`<map>` and `<area>`: defines an image map with clickable areas

```
<p>
Click vào 1 trong những hành tinh để
nhìn được rõ hơn:
</p>




<map name="planetmap">

<area shape="rect" coords="0,0,82,126"
href="mattroi.htm">

<area shape="circle" coords="90,58,3"
href="saothuy.htm">

<area shape="circle" coords="124,58,8"
href="saokim.htm">


</map>
```

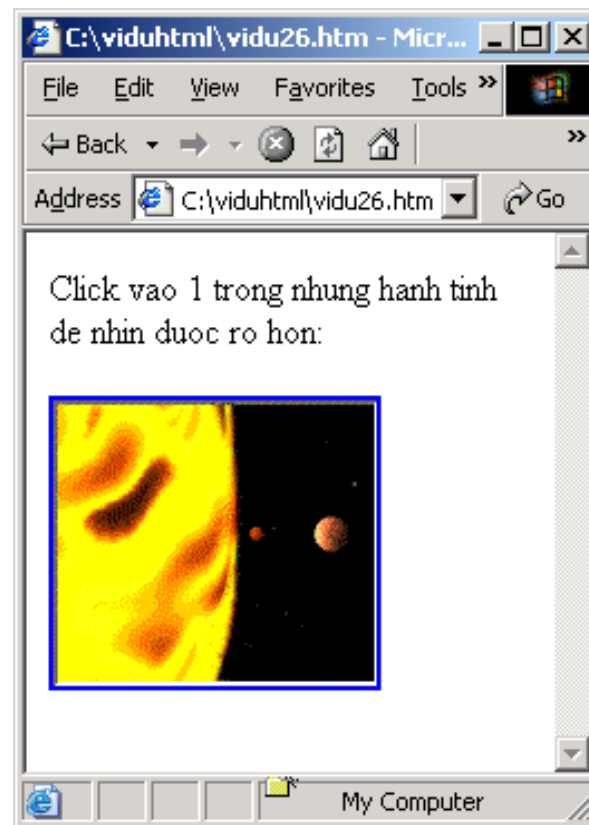

◆ Link

External link:

`<a href="URL"> Link Text </a>`

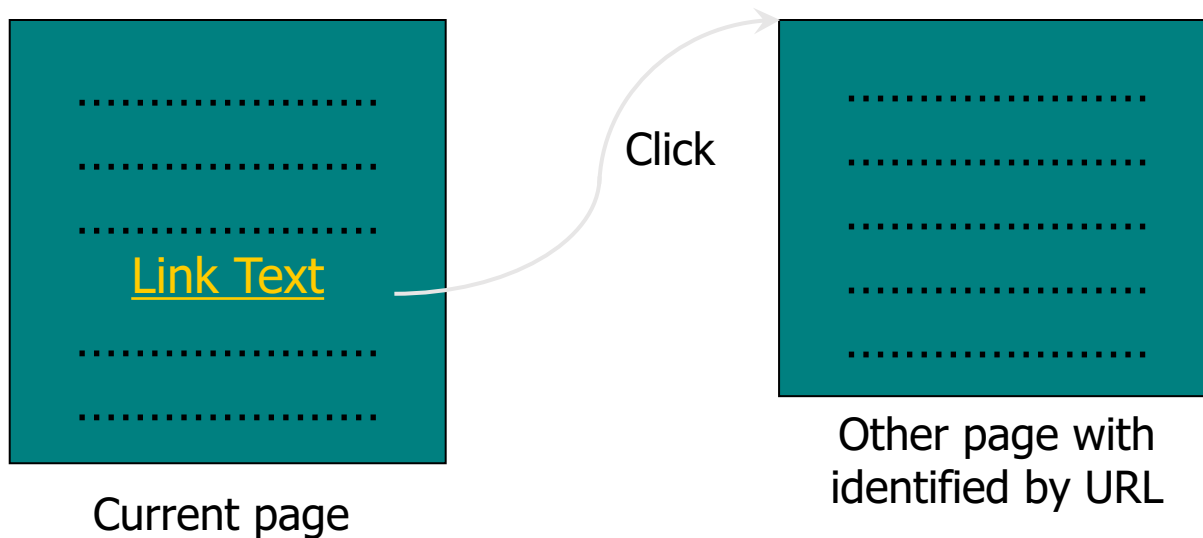

Example

External link:

```
<!DOCTYPE html>
<html>
<body>

<h2>External link</h2>

<a href="externallink.html"> This text</a> will is a self-link.

<br />

<a href="https://www.w3schools.com/"
target="_blank">This text</a> will link to external page.

<p>If target="_blank", the link will open in a new browser
window or tab.</p>


</body>
</html>
```

◆ Link

Internal Link (bookmarks):

- `<a id="name">Starting point </a>`
- `<h2 id="C4">Chapter 4</h2>`

`<a href="#name"> Link text Text </a>`

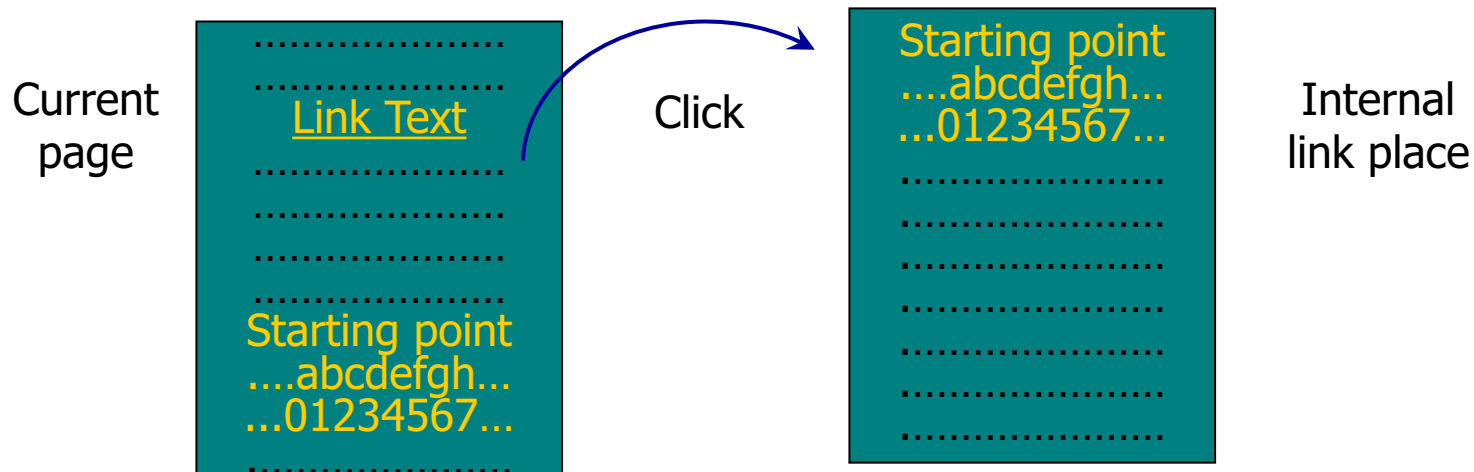


◆ Link

External + internal links:

`<a id="name">Starting point </a>`

`<a href="URL#name"> link Text </a>`

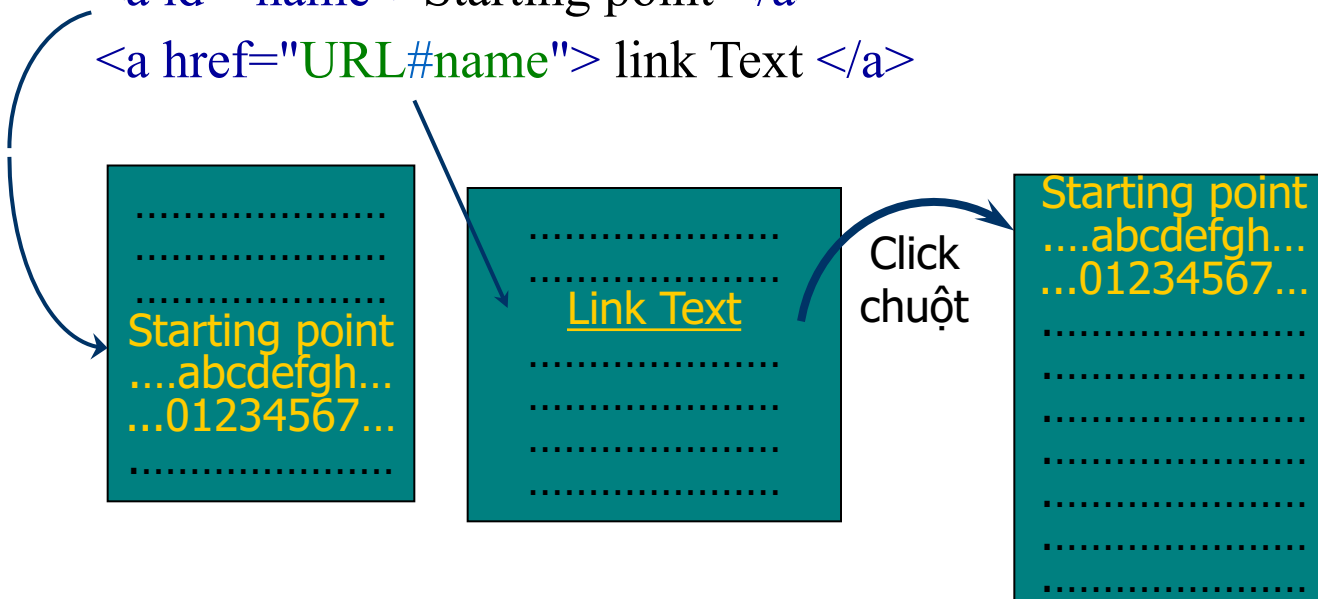

◆ Link

To Mail Client :

```
<a href="mailto: xyz@abc.com"> Text </a>
```

From an image

```
<a href="Url1">  </a>
```

◆ List

Types:

- Ordered List : `<ol>`
- Unordered List: `<ul>`
- Definition Lists: `<dl>`

List includes multiple elements:

- Each element in the list is marked by a tag `<li>`
- Or in `<dl>` definition lists is: `<dt>` and `<dd>`

Nested lists can be defined.

Ordered List

`<h4>Ordered List (numbers)</h4>`

`<ol>`

`<li>Apple</li>`

`<li>Banana</li>`

`<li>Lemon</li>`

`</ol>`

`<h4>Ordered List (Upper case letters)</h4>`

`<ol type="A">`

`<li>Apple</li>`

`<li>Banana</li>`

`<li>Lemon</li>`

`</ol>`

`<h4>Ordered List (Lower case letters)</h4>`

`<ol type="a">`

`<li>Apple</li>`

`<li>Banana</li>`

`<li>Lemon</li>`

`</ol>`

`<h4>Ordered List (Roman numbers)</h4>`

`<ol type="I">`

`<li>Apple</li>`

`<li>Banana</li>`

`<li>Lemon</li>`

`</ol>`

Ordered list
with
different
markers

Ordered List (numbers)

1. Apple
2. Banana
3. Lemon

Ordered List (Upper case letters)

- A. Apple
- B. Banana
- C. Lemon

Ordered List (Lower case letters)

- a. Apple
- b. Banana
- c. Lemon

Ordered List (Roman numbers)

- I. Apple
- II. Banana
- III. Lemon

◆ Unordered List

```
<h4>Unordered List (disc)</h4>
```

```
<ul type="disc">
```

```
<li>Apple</li>
```

```
<li>Banana</li>
```

```
<li>Lemon</li>
```

```
</ul>
```

```
<h4>Unordered List (circle)</h4>
```

```
<ul type="circle">
```

```
<li>Apple</li>
```

```
<li>Banana</li>
```

```
<li>Lemon</li>
```

```
</ul>
```

```
<h4>Unordered List (square)</h4>
```

```
<ul type="square">
```

```
<li>Apple</li>
```

```
<li>Banana</li>
```

```
<li>Lemon</li>
```

```
</ul>
```

Unordered
list with
different
markers

Unordered List (disc)

- Apple
- Banana
- Lemon

Unordered List (circle)

- Apple
- Banana
- Lemon

Unordered List (square)

- Apple
- Banana
- Lemon

◆ Definition List and Nested List

```
<h4>Definition List</h4>
<dl>
  <dt>Cafe</dt>
  <dd>Black ot drink</dd>
  <dt>Milk</dt>
  <dd>White cold drink</dd>
</dl>
```

```
<h4>Nested List</h4>
<ul>
  <li>Cafe</li>
  <li>Tea
    <ul>
      <li>Black tea</li>
      <li>Green tea</li>
    </ul>
  </li>
  <li>Milk</li>
</ul>
```

Definition List

Cafe
Black ot drink
Milk
White cold drink

Nested List

- Cafe
- Tea
 - Black tea
 - Green tea
- Milk

◆ Table

A table is defined by the tag `<table>`

- Divided into multiple rows `<tr>`
- Each row is divided into multiple data cells `<td>`

Contain:

- Text, images, lines(`<hr>`)
- List
- Form
- Sub-table, ...

Table

Example:

```
<table border="1" cellspacing="0" cellpadding="10"
bordercolor="black">
  <tr>
    <td>Emil</td>
    <td>Tobias</td>
    <td>Linus</td>
  </tr>
  <tr>
    <td>16</td>
    <td>14</td>
    <td>10</td>
  </tr>
</table>
```

Emil	Tobias	Linus
16	14	10

Table

Example:

```
<table border="1" cellspacing="0" cellpadding="10"
bordercolor="black">
  <tr>
    <th>Person 1</th>
    <th>Person 2</th>
    <th>Person 3</th>
  </tr>
  <tr>
    <td>Emil</td>
    <td>Tobias</td>
    <td>Linus</td>
  </tr>
  <tr>
    <td>16</td>
    <td>14</td>
    <td>10</td>
  </tr>
</table>
```

Person 1	Person 2	Person 3
Emil	Tobias	Linus
16	14	10

◆ Table

Formatting tables with style

Example

```
table, th, td {  
    border: 1px solid black;  
}
```

Table size: width, height

```
<table style="width:100%">
```

Table

Table with different number of rows and columns:

```
<h2>Cell that spans two columns</h2>
<table style="width:50%" border="1">
  <tr>
    <th colspan="2">Name</th>
    <th>Age</th>
  </tr>
  <tr>
    <td>Jill</td>
    <td>Smith</td>
    <td>43</td>
  </tr>
</table>
```

```
<h2>Cell that spans two rows</h2>
<table style="width:30%" border="1">
  <tr>
    <th>Name</th>
    <td>Jill</td>
  </tr>
  <tr>
    <th rowspan="2">Phone</th>
    <td>555-1234</td>
  </tr>
  <tr>
    <td>555-8745</td>
  </tr>
</table>
```

Cell that spans two columns

Name		Age
Jill	Smith	43

Cell that spans two rows

Name	Jill
Phone	555-1234
	555-8745

Table

Table content:

```
<table border="1">
  <tr>
    <td>
      <p>A paragraph</p>
    </td>
    <td> A table:
      <table border="1">
        <tr>
          <td>AB</td>
          <td>CD</td>
        </tr>
        <tr>
          <td>EF</td>
          <td>GH</td>
        </tr>
      </table>
    </td>
  </tr>
  <tr>
    <td> A list
      <ul>
        <li>Tao</li>
        <li>Chuai</li>
        <li>Xoi</li>
      </ul>
    </td>
    <td></td>
  </tr>
</table>
```

A paragraph	A table: <table><tr><td>AB</td><td>CD</td></tr><tr><td>EF</td><td>GH</td></tr></table>	AB	CD	EF	GH
AB	CD				
EF	GH				
A list • Tao • Chuoi • Xoai					

◆ Other Table Tags

Tag	Description
<u><th></u>	Defines a header cell in a table
<u><caption></u>	Defines a table caption
<u><colgroup></u>	Specifies a group of one or more columns in a table for formatting
<u><col></u>	Specifies column properties for each column within a <colgroup> element
<u><thead></u>	Groups the header content in a table
<u><tbody></u>	Groups the body content in a table
<u><tfoot></u>	Groups the footer content in a table

◆ Form

Forms are used to pass data to a server.

Form elements: text fields, textarea fields, drop-down menus, radio buttons, checkboxes, etc.

Using tags: `<form> .... </form>`

Example : `<form name="Fname" action="Form-Action"
method="GET|POST"> ...</form>`

More HTML Forms: https://www.w3schools.com/html/html_forms.asp

◆ Form Elements

1. `<input>`: Different types of input data depend on the type attribute
2. `<label>`: a label for several form elements

TextField

```
<form>
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="John"><br>
</form>
```

First name:

John

Radio Button

```
<form>
  <input type="radio" id="html" name="fav_language" value="HTML">
  <label for="html">HTML</label><br>
  <input type="radio" id="css" name="fav_language" value="CSS">
  <label for="css">CSS</label><br>
  <input type="radio" id="javascript" name="fav_language" value="JavaScript">
  <label for="javascript">JavaScript</label>
</form>
```

- ☐ HTML
- ☐ CSS
- ☐ JavaScript

◆ Form Elements

Check box

```
<form action="/action_page.php">
  <input type="checkbox" id="vehicle1" name="vehicle1" value="Bike">
  <label for="vehicle1"> I have a bike</label><br>
  <input type="checkbox" id="vehicle2" name="vehicle2" value="Car">
  <label for="vehicle2"> I have a car</label><br>
  <input type="submit" value="Submit">
</form>
```

☐ I have a bike
☐ I have a car

Submit

```
<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="John"><br><br>
  <input type="submit" value="Submit">
</form>
```

First name:

John

◆ Form Elements

3. `<select>`: defines a drop-down list
4. `<textarea>`: defines a multi-line input field

Drop-down List

```
<label for="cars">Choose a car:</label>
<select id="cars" name="cars">
  <option value="volvo">Volvo</option>
  <option value="saab">Saab</option>
  <option value="fiat">Fiat</option>
  <option value="audi">Audi</option>
</select>
```

Choose a car:

Text Area

```
<textarea name="message" rows="10" cols="30">
The cat was playing in the garden.
</textarea>
```


The cat was playing in the garden.

◆ Form Elements

5. `<button>`: defines a clickable button
6. `<fieldset>`: used to group related data in a form
7. `<legend>`: defines a caption for the `<fieldset>` element


Button

```
<button type="button" onclick="alert('Hello World!')">Click Me!</button>
```



Field Set and Legend

```
<form action="/action_page.php">
  <fieldset>
    <legend>Personalia:</legend>
    <label for="fname">First name:</label><br>
    <input type="text" id="fname" name="fname" value="John"><br>
    <label for="lname">Last name:</label><br>
    <input type="text" id="lname" name="lname" value="Doe"><br><br>
    <input type="submit" value="Submit">
  </fieldset>
</form>
```

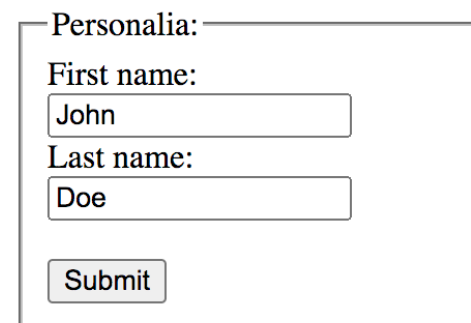


Form Elements

8. `<datalist>`: specifies a list of pre-defined options for an `<input>` element.

Data list

```
<form action="/action_page.php">
  <input list="browsers">
  <datalist id="browsers">
    <option value="Edge">
    <option value="Firefox">
    <option value="Chrome">
    <option value="Opera">
    <option value="Safari">
  </datalist>
</form>
```

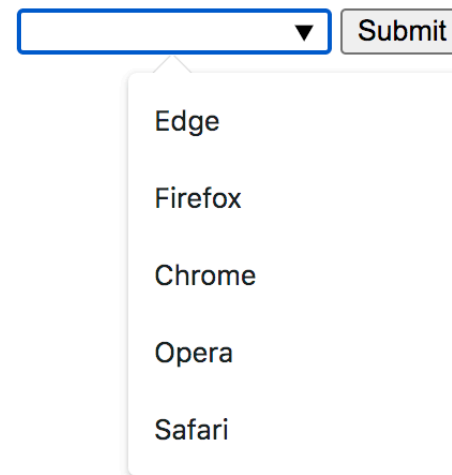

A web form consisting of a text input field with a dropdown arrow on the right, a 'Submit' button, and a dropdown menu that is currently open, displaying a list of browser names: Edge, Firefox, Chrome, Opera, and Safari.

◆ Form Attributes

1. **action**: defines the action to be performed when the form is submitted
2. **target**: specifies where to display the response
3. **method**: specifies the HTTP method to be used
4. **autocomplete**: specifies whether a form should have autocomplete on or off
5. **novalidate**: specifies that the form-data should not be validated when submitted

◆ Other Attributes of <input>

1. **value**: specifies an initial value for an input field
2. **readonly**: specifies that an input field is read-only
3. **disabled**: specifies that an input field should be disabled
4. **multiple**: specifies that the user is allowed to enter more than one value
5. **pattern**: specifies a regular expression that the input field's value is checked against
6. **required**: specifies that an input field must be filled out
7. **autofocus**: specifies that an input field should automatically get focus

◆ Other Attributes of <input>

1. **form**: specifies the form the <input> element belongs to

2. **formaction**, **formenctype**, **formmethod**, **formtarget**

Override the action, enctype, method, target of <form>.

Use for <input> with type as submit or image

3. **formnovalidate**

Override the novalidate attribute of <form>.

Use for <input> with type as submit

More information:

https://www.w3schools.com/html/html_form_attributes_form.asp

◆ Inline frame (iframe)

Used to display the content of one webpage inside another webpage

Syntax:

```
<iframe src= "URL "></iframe>
```

Attributes:

height, width

title

◆ Example

```
<html>
<body>

<iframe src="demo_iframe.htm" name=
"iframe_a"></iframe>
<p><a href=
"http://www.w3schools.com" target=
"iframe_a">W3Schools.com</a></p>

<p><b>Note:</b> Because the target
of the link matches the name of the
iframe, the link will open in the
iframe.</p>
</body>
</html>
```

**This page is
displayed in an
iframe**

[W3Schools.com](http://www.w3schools.com)

Note: Because the target of the link matches the name of the iframe, the link will open in the iframe.

◆ Head Element

Tags `<head>` & `</head>` contain information about *the title, links, scripts, meta information, style sheets, etc.*

Tags that can be inside the head tag include: `<title>`, `<base>`, `<link/>`, `<meta/>`, `<style>`, `<script>`, `<noscript>`

- `<base>`: specifies the base URL and/or target for all relative URLs in a page
- `<link>`: defines the relationship between the current document and an external resource.
- `<style>`: define style information for a single HTML page
- `<script>`: used to defined client-side script (JavaScript, VBScript, ...)

◆ Meta Element

`<meta/>`: inside `<head>` tag, providing metadata of the page

Metadata is not displayed on the page.

Attributes:

Content: content of metadata

Name: Defines names for the information in the *content* attribute. Example: keywords, description, author, revised, generator,...

http-equiv: Provides an HTTP header (response message) for the values of the *content* attribute. This can be used to refresh the page or create cookies.

◆ Meta Element

Keywords, page descriptions: used by search engines.

```
<meta name="keywords" content="HTML, meta tags, metadata"/>
```

```
<meta name="description" content="Learn about Meta Tags."/>
```

- Last updated document time:

```
<meta name="revised" content="Tutorialspoint, 6/12/2006"/>
```

- Refresh the page:

```
<meta http-equiv="refresh" content="10" />
```

- Redirect:

```
<meta http-equiv="refresh" content="10;  
url=http://www.tutorialspoint.com" />
```



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
5. HTML Color
6. HTML `<!DOCTYPE>`

◆ 4. HTML Character Sets

To display an HTML page correctly, a web browser must know which character set to use

By default: UTF-8 (commonly used character encoding scheme on websites today, suitable for displaying Vietnamese characters)

The character set is specified in the <meta> tag

Example:

HTML 4.01:

```
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
```

HTML5:

```
<meta charset="UTF-8">
```



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
- 5. HTML Color**
6. HTML `<!DOCTYPE>`

◆ 5. HTML Color

- Different colors are made up of 3 primary colors: red, green, and blue.
- Colors in HTML are created based on the ratio of the 3 primary colors, determined by a set of three hexadecimal digits.
- The lowest value for each color is 00 (0) and the highest is FF (255).
- Colors are determined by 3 pairs of hexadecimal numbers, starting with the character: '#' => there are over 16 million different colors.

Color	Color HEX	Color RGB
	#000000	rgb(0,0,0)
	#FF0000	rgb(255,0,0)
	#00FF00	rgb(0,255,0)
	#0000FF	rgb(0,0,255)
	#FFFF00	rgb(255,255,0)
	#00FFFF	rgb(0,255,255)
	#FF00FF	rgb(255,0,255)
	#C0C0C0	rgb(192,192,192)
	#FFFFFF	rgb(255,255,255)

◆ HTML Color Names

Color values can be replaced with their corresponding color names.

There are 140 color names defined in HTML and CSS.

17 standard colors: aqua, black, blue, fuchsia, gray, grey, green, lime, maroon, navy, olive, purple, red, silver, teal, white, and yellow.

Color Name	HEX	Color
<u>AliceBlue</u>	<u>#F0F8FF</u>	
<u>AntiqueWhite</u>	<u>#FAEBD7</u>	
<u>Aqua</u>	<u>#00FFFF</u>	
<u>Aquamarine</u>	<u>#7FFFD4</u>	
<u>Azure</u>	<u>#F0FFFF</u>	
<u>Beige</u>	<u>#F5F5DC</u>	
<u>Bisque</u>	<u>#FFE4C4</u>	
<u>Black</u>	<u>#000000</u>	
<u>BlanchedAlmond</u>	<u>#FFEBCD</u>	
<u>Blue</u>	<u>#0000FF</u>	



CONTENT

1. Overview
2. Structure and Syntax
3. HTML Elements
4. HTML Character Sets
5. HTML Color
6. HTML `<!DOCTYPE>`

◆ 7. HTML <!DOCTYPE>

DOCTYPE should be declared first in an HTML document, before the <html> tag

<!DOCTYPE> is not an HTML tag; it is used to inform the browser of the HTML version being used

HTML5:

<!DOCTYPE html>


More info: https://www.w3schools.com/tags/ref_html_dtd.asp



Questions?

Exercise 1

Create the following webpage and view it in a browser:

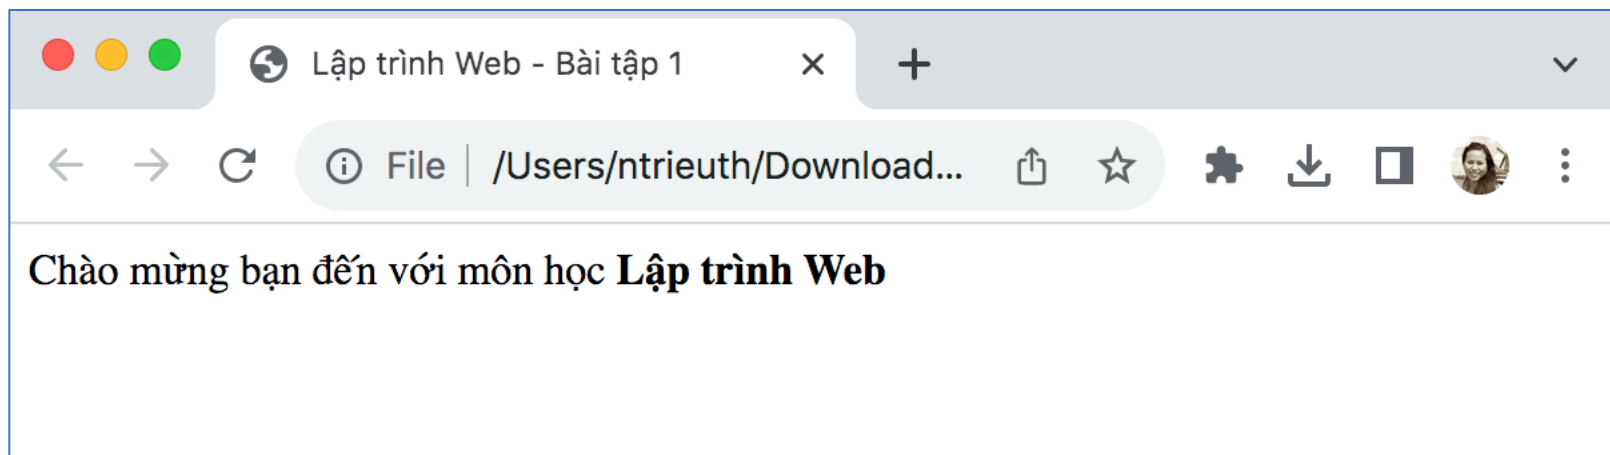


◆ Exercise 2

- Type and run the examples in the lectures
- Slides: 16, 30, 31, 32, 37, 38, 41, 42, 43, 44, 45

Exercise 3

Create the following webpage and view it in a browser:

Nguyễn Văn A's Homepage



Nguyễn Văn A (01234567B)

Sinh viên

Trường CNTT-TT

Đại học Cần Thơ

3/2 Street, Ninh Kiều, Cần Thơ

Thông tin liên hệ:

- Email: nva@sinhvien.ctu.edu.vn
- Phone: (84) 0710 3831 301

Các liên kết

- [Kết quả học tập](#)
- [Curriculum Vitae](#)

Last updated: 10/2025