

Overview


Scenario

Name: Character

Description: Security through Induced Boredom is a personal favourite approach of mine. Not as exciting as something like The Fray, but I love making it as tedious as possible to see my secrets, so you can only get one character at a time!

Solving

- Run `nc 154.57.164.83 31292` to connect docker.
- After establishing the connection, the screen displays a prompt asking for a flag index and returns the character at that position.

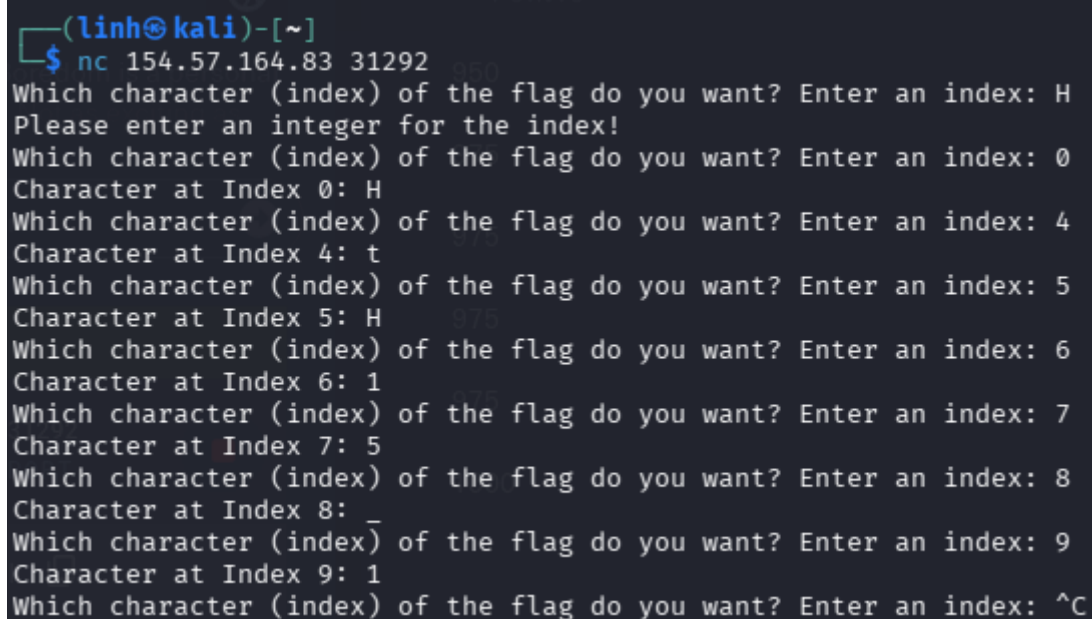

```
(linh@kali)-[~]
$ nc 154.57.164.83 31292
Which character (index) of the flag do you want? Enter an index: H
Please enter an integer for the index!
Which character (index) of the flag do you want? Enter an index: 0
Character at Index 0: H
Which character (index) of the flag do you want? Enter an index: 4
Character at Index 4: t
Which character (index) of the flag do you want? Enter an index: 5
Character at Index 5: H
Which character (index) of the flag do you want? Enter an index: 6
Character at Index 6: 1
Which character (index) of the flag do you want? Enter an index: 7
Character at Index 7: 5
Which character (index) of the flag do you want? Enter an index: 8
Character at Index 8: _
Which character (index) of the flag do you want? Enter an index: 9
Character at Index 9: 1
Which character (index) of the flag do you want? Enter an index: ^C
```

- Given that the Hack The Box flag format is `HTB{...}`, the flag will end with a `}` character.
- Write a script to automatically connect to the server and input increments of the index until the closing brace is found, then stop and print the flag.

```
GNU nano 8.7.1 script.py
import socket
import re

def get_flag():
    host = '154.57.164.83'
    port = 31292
    flag = ""
    index = 0

    try:
        s = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
        s.connect((host, port))
        s.recv(1024)

        while True:
            s.sendall(f"{index}\n".encode('utf-8'))
            response = s.recv(4096).decode('utf-8')
            match = re.search(r"Character at Index \d+: (.)", response)
            if match:
                char = match.group(1)
                flag += char
                if char == '}':
                    break
            index += 1
    except Exception as e:
        print(f"Error: {e}")
    finally:
        s.close()
        print(f"\nFlag: {flag}")

if __name__ == "__main__":
    get_flag()
```

```
(linh@kali)~/Documents/NT334/Character
$ python script.py
```

```
Flag: HTB{tH15_1s_4_r3aLly_l0nG_fL4g_i_h0p3_f0r_y0Ur_s4k3_tH4t_y0U_sCr1pTEd_tH1s_oR_els3_iT_t0oK_qU1t3_l0ng!!}
```

CTF Try Out



Overview

Solves



Scenario Pwned

 22 Apr, 2026 16:32

SCENARIO NAME

Character

Security through Induced Boredom is a personal favourite approach of mine. Not as exciting as

Submit flag & press enter



Spawn Docker



Spawned for all team members

950
POINTS

very easy
DIFFICULTY