


Positive Strand Read Counts

Use to help determine `--minInd`, `--setMinDepthInd`, `--setMaxDepth`


Note: axes log10 scaled

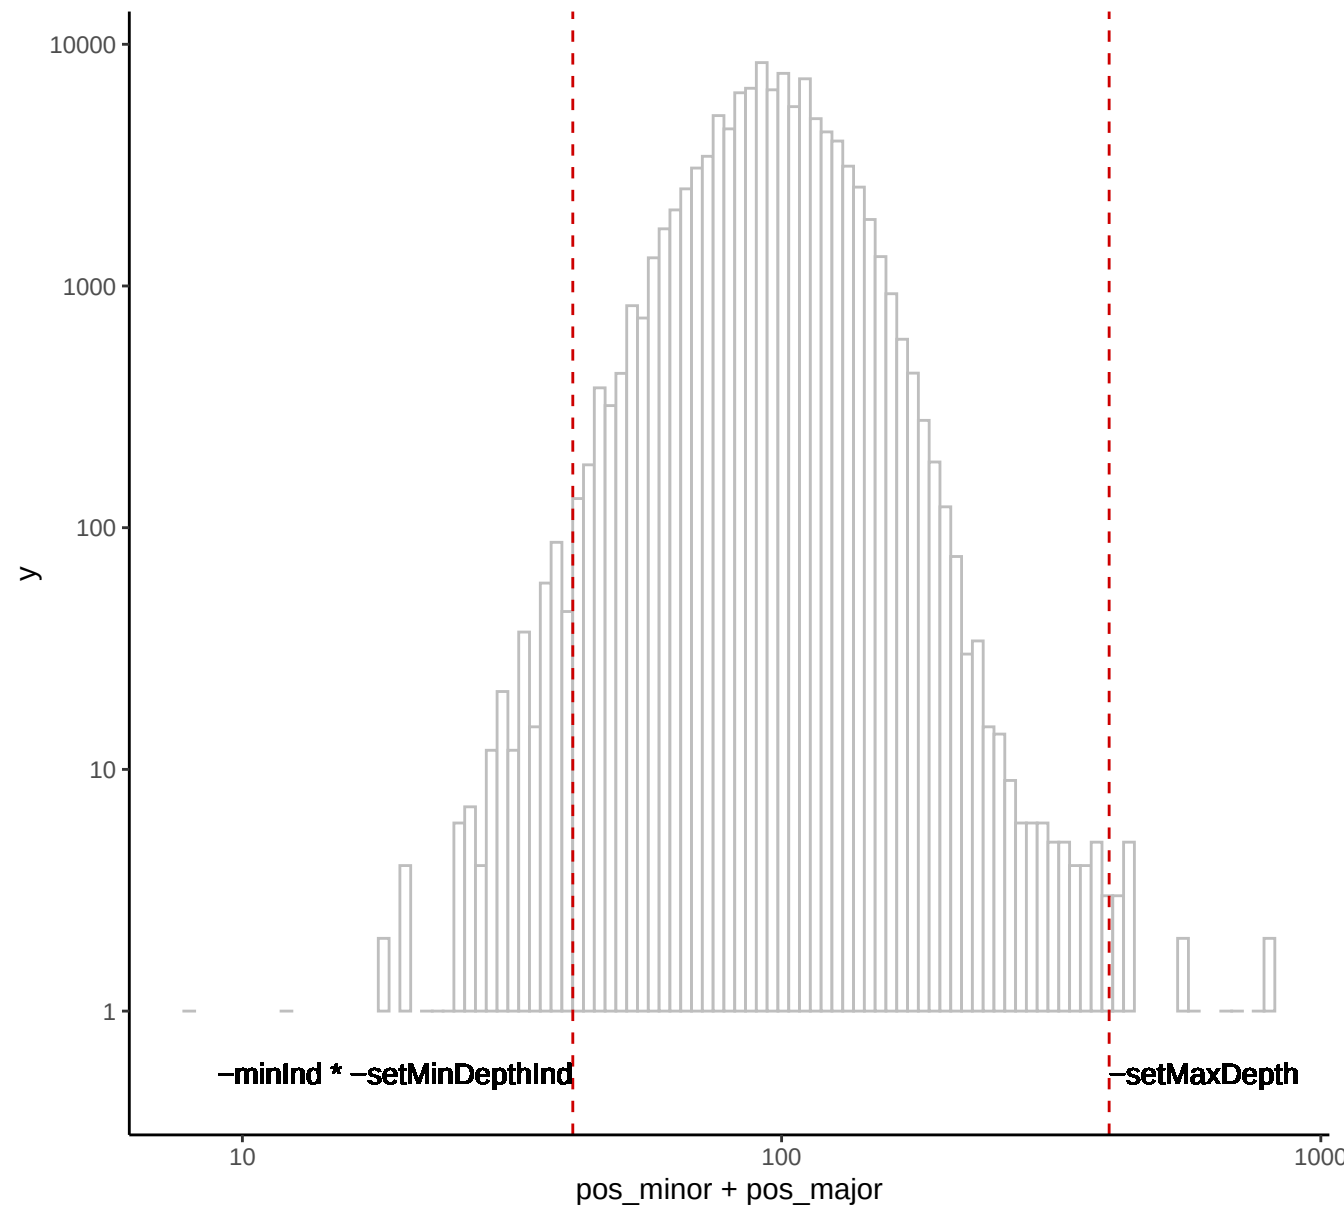

Negative Strand Read Counts

Use to help determine `-minInd`, `-setMinDepthInd`, `-setMaxDepth`

Note: only x axis log10 scaled

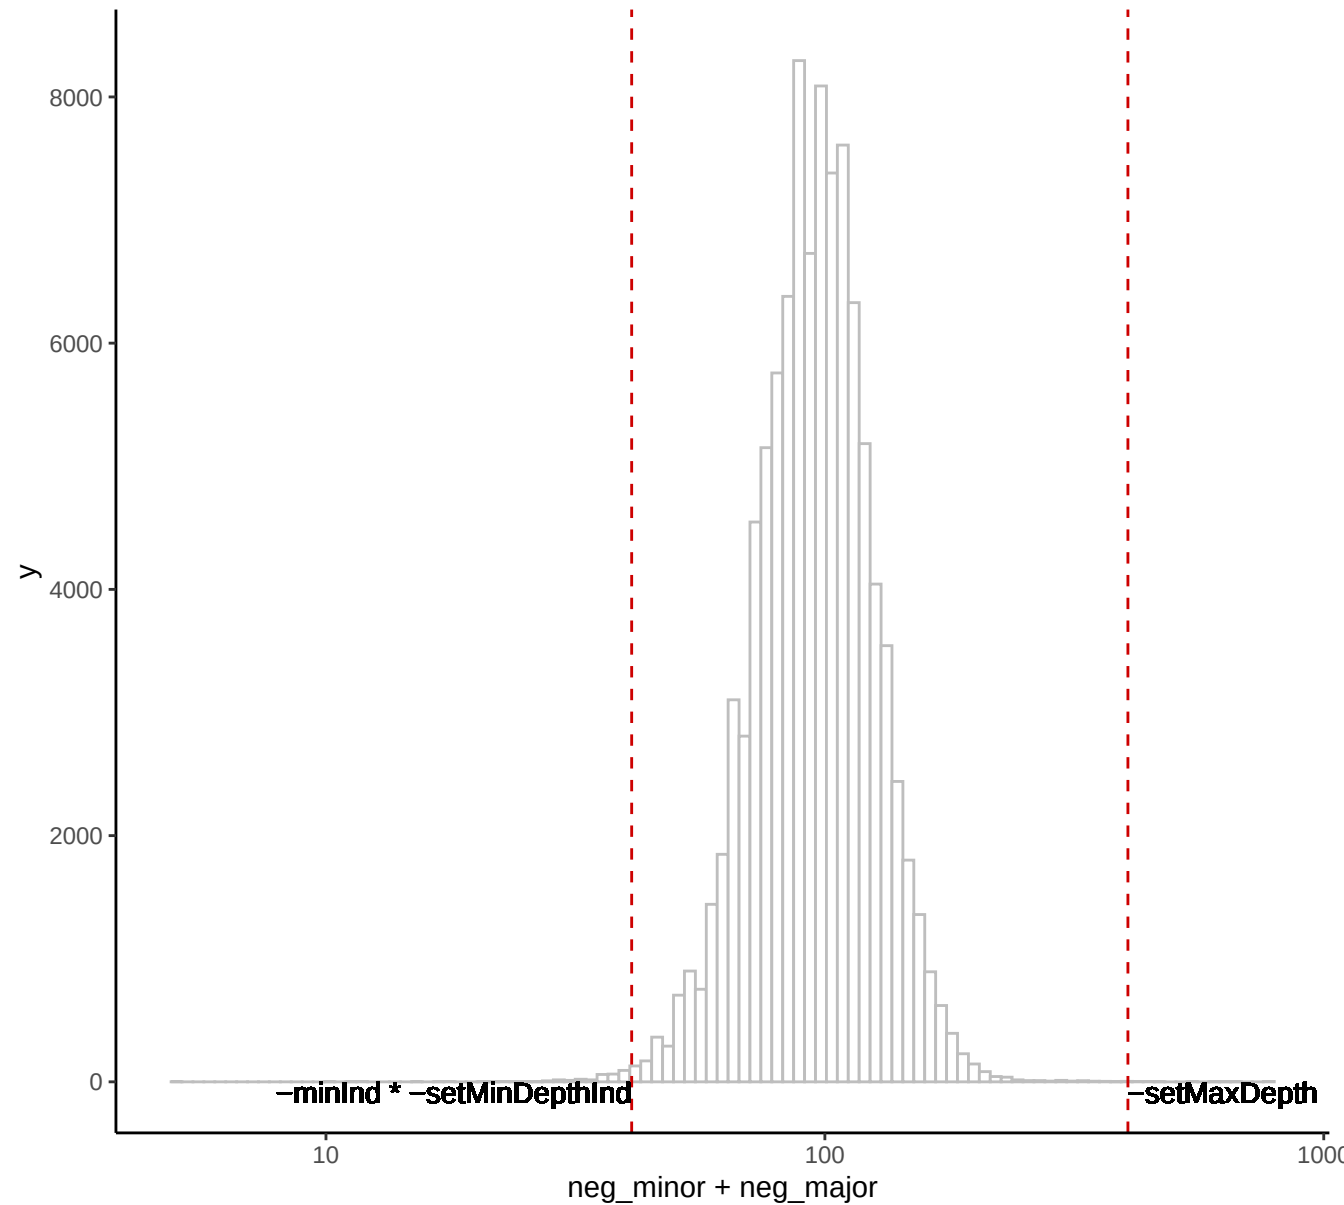


Positive Strand Minor AF

Use to set `-minMaf`

Threshold displayed = 1 Minor Allele in numInd diploids

Peak is indicative of resolution based on combination of sample size and number of reads per site

If peak is at Threshold, there is little to no missing data across all sites and the meanDP > 2 reads

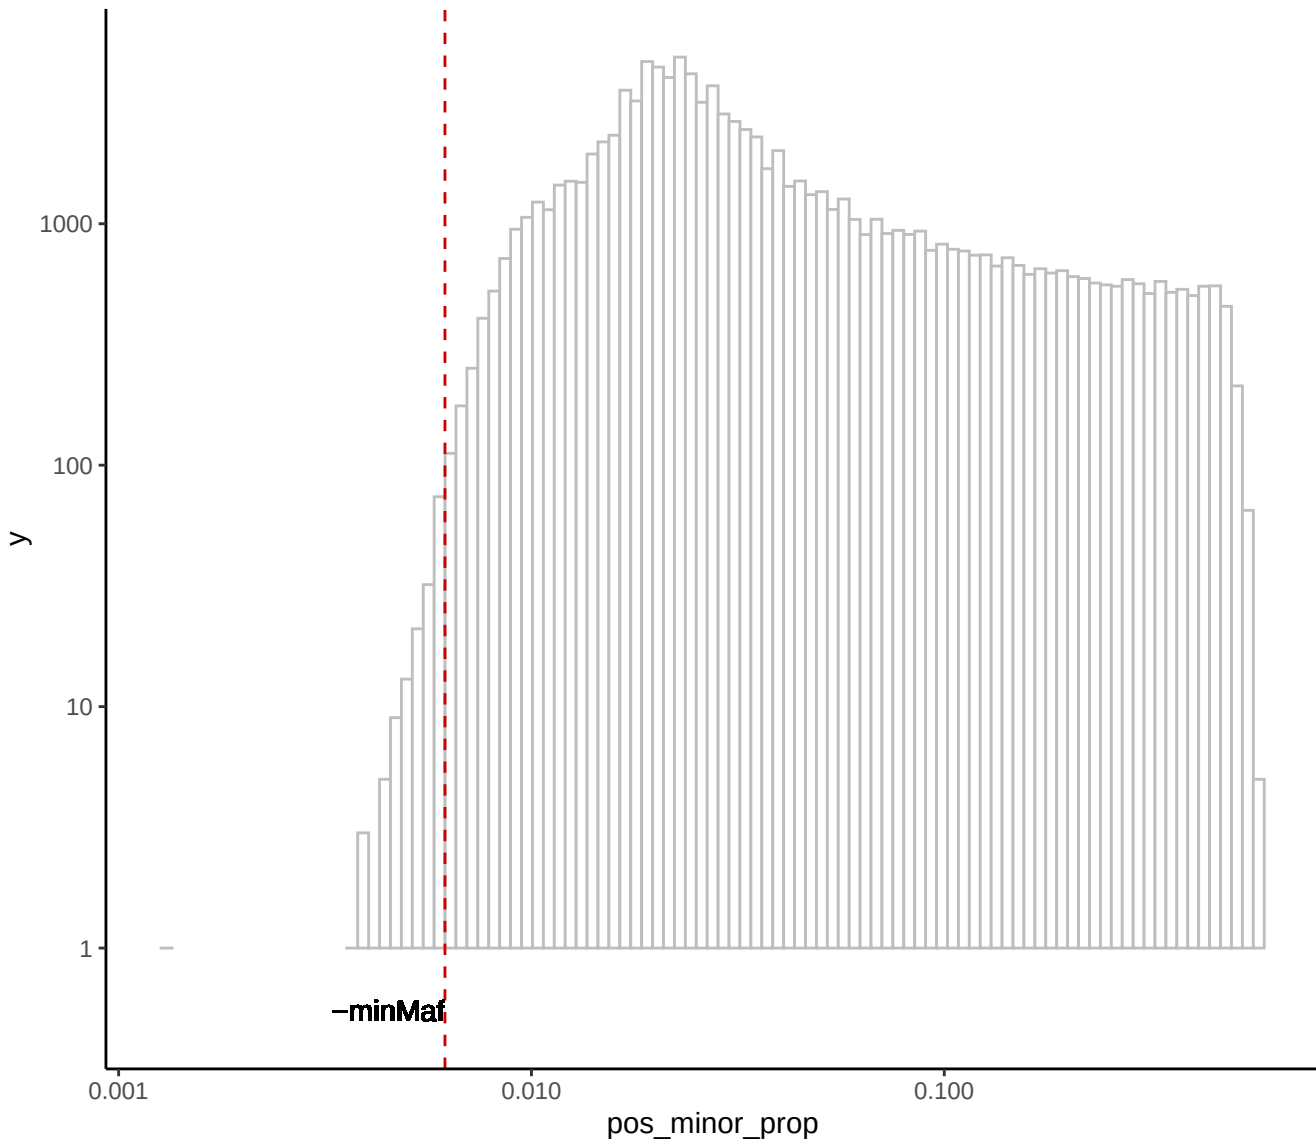

Negative Strand Read Counts

Use to help determine `-minInd`, `-setMinDepthInd`, `-setMaxDepth`

Note: only x axis log10 scaled

