



CHRIST
(DEEMED TO BE UNIVERSITY)
BANGALORE | DELHI NCR | PUNE



INDUSTRIAL INTERNSHIP REPORT

PROJECT TOPIC: Data Analytics & Automation in Coal Bed Methane Operations

SUBMITTED BY: Starina Phillips (1st year–2ndSemester)

COURSE: M.Tech – Computer Science Engineering

UNIVERSITY: Christ University, Bangalore

**UNDER THE
GUIDANCE OF:** Mr. Vivek K. Agrawal (General Manager)

TEAM MEMBERS: Mayank Sharma | Aprajita Rajput

DURATION: 6 March 2026 – 7 April 2026

AT: Reliance Industries Limited (RIL), Coal Bed Methane (CBM)
Lalpur, Shahdol, M.P.

Signature: _____

DECLARATION

I, Starina Phillips, student of M.Tech – Computer Science Engineering , 2nd Semester at Christ University, Bangalore, hereby declare that this Industrial Internship Report titled “Data Analytics & Automation in Coal Bed Methane Operations” is an authentic record of work carried out during my internship at Reliance Industries Limited (RIL), Coal Bed Methane (CBM) Division, Shahdol, Madhya Pradesh, from 6 March 2026 to 7 April 2026.

The projects, tools, and dashboards described in this report were independently conceived, designed, developed, and tested by me under the guidance of Mr. Vivek K. Agrawal, RIL CBM Lalpur.

All data used in development and testing belongs to Reliance Industries Limited and was handled in strict compliance with the organisation's data security and confidentiality requirements. The project applications were developed in line with company requirements, and no data was transmitted to any external system or cloud service.

Starina Phillips

M.Tech CSE | 2nd Semester | Christ University, Bangalore

Data Analytics Intern, RIL CBM Lalpur | April 2026

Countersigned:

Mr. Vivek K. Agrawal | General Manager

Reliance Industries Limited, CBM Division, Shahdol

DETAIL	INFORMATION
Intern Name	Starina Phillips
Course	M.Tech CSE –First Year (2 nd Semester)
Institution	Christ University, Bangalore
Period	6 March 2026 – 7 April 2026 (1 Months)
Organisation	Reliance Industries Limited – CBM Lalpur Division, Shahdol, M.P.
Guided By	Mr. Vivek K. Agrawal
Team Members	Mayank Sharma, Aprajita Rajput

ACKNOWLEDGEMENT

I am deeply grateful to Reliance Industries Limited (RIL), Coal Bed Methane Division, Shahdol, Madhya Pradesh, for providing me this valuable opportunity to undertake my Industrial Internship in their operations and analytics department. This experience has been immensely enriching and has significantly contributed to my technical and professional development.

I would like to extend my sincere gratitude to Christ University, Bangalore, for facilitating this remarkable opportunity to undertake my industrial internship under their esteemed academic programme.

I also wish to express my deep appreciation to Reliance Industries Limited, Shahdol, for permitting me to undergo training in the data analytics and operations department. I acknowledge with gratitude the significant contributions and unwavering support of Mr. Vivek K. Agrawal, whose guidance was instrumental throughout every project undertaken during this period.

A special thanks to my team members, Mr. Mayank Sharma and Mrs. Aprajita Rajput, for their continuous collaboration and guidance. Their dedicated efforts and insightful inputs were crucial in helping us achieve our goals and deliver production-quality tools within the internship timeline.

Starina Phillips

Data Analytics Intern | RIL CBM Lalpur | March– April 2026

PREFACE

This document presents the internship report conducted at CBM – Reliance Industries Limited (RIL), Shahdol, as part of my training as a Data Analytics Engineer. It encompasses key chapters that elaborate on the various aspects of the experiences gained throughout the internship period. The report provides essential information about the training establishment, a detailed account of the training received, and an overall evaluation of the internship experience.

The initial chapters offer a comprehensive introduction to the project topic and an overview of the company. These chapters also include a brief review of the methodology used across all Three projects developed during the internship.

The subsequent chapters detail the technical experience gained during the internship. The technical tasks undertaken, the technologies explored, and the challenges encountered are discussed in depth. Tool architecture, application screenshots, code structure, and the results achieved are presented within these sections.

In the final chapters, the interpretation of results is discussed and recommendations for best practices and future research are provided. References are also provided to acknowledge the sources used throughout the report.

This comprehensive report aims to encapsulate the knowledge and skills acquired during the internship at CBM – RIL, Lalpur, Shahdol, and to reflect on the professional growth achieved during this period.

ABBREVIATIONS

ABBREVIATION	FULL FORM
AI	Artificial Intelligence
API	Application Programming Interface
CBM	Coal Bed Methane
CSV	Comma-Separated Values
DAX	Data Analysis Expressions
ETL	Extract, Transform, Load
GGs	Gas Gathering Station
GWR	Gas-Water Ratio
HDPE	High-Density Polyethylene
IDE	Integrated Development Environment
JSON	JavaScript Object Notation
KPI	Key Performance Indicator
MIS	Management Information System
ML	Machine Learning
PBI	Power BI
RIL	Reliance Industries Limited
RMSE	Root Mean Squared Error
RPM	Revolutions Per Minute
SCMD	Standard Cubic Metres per Day
SCADA	Supervisory Control and Data Acquisition
SHPPL	Shahdol–Phulpur Pipeline
TVD	True Vertical Depth
VFD	Variable Frequency Drive
WGS	Well Gathering System
XLSX	Excel Spreadsheet File Format

CONTENTS

1. Introduction

2. About the Organisation

- 2.1 Reliance Industries Limited
- 2.2 CBM Operations – Lalpur
- 2.3 Data Analytics Role in CBM

3. Technology Stack & Development Environment

4. Data Analytics Projects

- 4.1 Project 1 – Power BI Gas Production Monitoring Dashboard
 - 4.1.1 Objective
 - 4.1.2 Dashboard Architecture
 - 4.1.3 Slicer Configuration
 - 4.1.4 KPI Cards and DAX Measures
 - 4.1.5 Workflow
 - 4.1.6 Output and Impact
 - 4.1.7 Challenges and Future Improvements
- 4.2 Project 2 – Power BI Positive / Negative Performance Analysis
 - 4.2.1 Objective
 - 4.2.2 Performance Classification Framework
 - 4.2.3 Dashboard Architecture and Workflow
 - 4.2.4 Output and Impact
 - 4.2.5 Challenges and Future Improvements
- 4.3 Project 3 – CBM AI Hidden Pattern Detection System
 - 4.3.1 Objective
 - 4.3.2 System Architecture
 - 4.3.3 Feature Engineering
 - 4.3.4 Models and Algorithms
 - 4.3.5 Smart Alerts and Output
 - 4.3.6 Output and Impact
 - 4.3.7 Challenges and Future Improvements

5. Learning Outcomes

6. Site Visit

7. Conclusions

8. References

LIST OF FIGURES

Figure 4.1 –Gas Production Monitoring Dashboard

Figure 4.2 – CBM Project Positive/Negative Difference Analysis

Figure 4.3 – CBI Hidden Pattern Detection Using AI Code

Figure 4.4 – CBI Hidden Pattern Detection Using AI APP

1. Introduction

Coal Bed Methane (CBM)

Coal Bed Methane (CBM) is a form of natural gas extracted from coal seams. Unlike conventional natural gas, which migrates from source rocks to reservoir rocks, CBM is stored within the coal itself and adsorbed onto the surface of coal particles. The extraction of CBM involves drilling wells into coal seams and reducing the pressure within the formation to release the methane gas. This process requires careful management to handle water production issues and ensure the efficient capture of methane.

CBM is considered a cleaner energy source compared to traditional fossil fuels, as it has a lower carbon footprint and helps in reducing greenhouse gas emissions. India has recognised CBM as a significant energy resource, and Reliance Industries has been a pioneer in its commercial-scale development in the Shahdol region of Madhya Pradesh. The coal seams in the Shahdol block are among the thickest and most productive in India, making it one of the most strategically important CBM assets in the country.

Deposition and Coalification Process

Coal is formed from plant material that accumulates in swampy environments and undergoes a process of burial, compaction, and heat over millions of years, known as coalification. During coalification, organic material is transformed into peat and then into various ranks of coal, ranging from lignite to anthracite, depending on the degree of heat and pressure applied. The methane generated during coalification is trapped within the coal matrix, adsorbed onto the surface of micropores within the coal structure.

Cleats, which are natural fractures within the coal, play a significant role in the permeability and gas storage capacity of coal seams. There are two primary types of cleats: face cleats and butt cleats. Face cleats are continuous fractures running parallel to each other and are the main pathways for gas flow. Butt cleats are perpendicular to face cleats and are typically less continuous. The presence, orientation, and connectivity of these cleat systems significantly impact the efficiency and economics of CBM extraction operations.

CBM Extraction Process

The CBM extraction process begins with drilling vertical or directional wells into the coal seam. Initially, large quantities of water are pumped out of the formation to reduce hydrostatic pressure – a process called dewatering. As pressure drops below the desorption pressure of the coal, methane begins to desorb from the coal surface and flows through the cleat network toward the wellbore. This dewatering phase can last several months to years before peak gas production is achieved.

Produced water is routed through the field water-handling network to designated collection and treatment systems in accordance with operational and environmental requirements. The produced gas is transported through a network of low-pressure HDPE gathering lines to Gas Gathering Stations (GGS), where it is processed, compressed, and routed onward to the pipeline network. Monitoring well performance, tracking downtime events, and managing the health of surface equipment are critical day-to-day operational activities at RIL CBM Lalpur.

Data Analytics in CBM Operations

The oil and gas industry operates in a highly dynamic environment in which timely and informed decision-making is critical. Real-time data analytics and decision-support systems enable operations teams to analyse data as it is generated and convert it into actionable operational insight. At RIL CBM Lalpur, teams manage hundreds of wells, daily event logs, engineering survey records, production datasets, and machine-monitoring data – all of which require structured and automated analytical tools.

This internship was focused on developing exactly such tools: practical, offline Python desktop applications that convert raw operational data into actionable dashboards, engineering utilities, analytical reports, and decision-support outputs without any dependence on cloud services or external networks. All six projects delivered during this internship were designed to address documented day-to-day operational challenges within the CBM environment.

2. About the Organisation

2.1 Reliance Industries Limited

Reliance Industries Limited (RIL) is one of India's largest private sector enterprises, with business operations spanning petrochemicals, refining, oil and gas exploration and production, telecommunications, retail, and renewable energy. Headquartered in Mumbai, Maharashtra, RIL is a Fortune 500 company and one of the most valuable corporations in Asia. The company is known for its world-class infrastructure, technological innovation, and operational excellence across all its business verticals.

In the energy sector, Reliance holds significant upstream oil and gas assets, including exploration blocks, producing fields, and unconventional resources such as Coal Bed Methane. RIL's upstream business is focused on safe, responsible, and efficient production of hydrocarbon resources to meet India's growing energy demands. The CBM division represents a key strategic asset in RIL's domestic energy portfolio.

2.2 CBM Operations – Lalpur

The RIL CBM block in Shahdol, Madhya Pradesh, is one of India's largest producing CBM assets. The block spans a significant area of the Sohagpur coalfield basin and has been in commercial production for several years. Operations include hundreds of active production wells organised under multiple Gas Gathering Stations (GGS), each responsible for collecting, compressing, and metering gas from a cluster of wells in its geographic zone.

The operations team at CBM Lalpur manages daily well event logging, equipment maintenance scheduling, production monitoring, and dewatering coordination. These activities generate large volumes of structured and semi-structured data stored in Excel workbooks, MS Access databases, and exported CSV files, all of which are processed locally by the analytics and operations teams.

2.3 Data Analytics Role in CBM

Data analytics at RIL CBM Lalpur covers multiple operational domains: well performance monitoring and downtime analysis, engineering lookup automation, machine-health trend review for rotating and static equipment, production analysis, and operational MIS reporting for management. The analytics function serves as a bridge between raw field data and actionable operational decisions.

All analytics work is performed on local Windows systems due to strict data security and confidentiality requirements. Python-based offline desktop tools are well suited to this environment because they provide strong data-processing capability without any dependency on cloud infrastructure, external APIs, or internet-based data transfer.

3. Technology Stack & Development Environment

All projects developed during this internship follow a strict local-only, offline-first architecture. No cloud services, external APIs, or internet-dependent components were used at any stage.

COMPONENT	DETAILS
Language	Python 3.10 / 3.13
UI Framework	Tkinter (ttk) – lightweight offline desktop GUI
Data Processing	Pandas – cleaning, filtering, aggregation, date logic
Microsoft Tool	Power Bi
Visualisation	Matplotlib, Seaborn – exploratory and result plots
Machine Learning	Scikit-learn – Isolation Forest + Local Outlier Factor + Kmeans
Graphs	Clusters, PCA, 3D Reservoir, Param Weights, Events, RPM Status, Param Anomaly
Database	PyODBC (optional) – MS Access .accdB data import
IDE	Visual Studio Code
Packaging	PyInstaller – standalone .exe for field deployment
OS	Windows 10 / 11
Data Sources	Excel (.xlsx), CSV, MS Access (.accdB)

3.1 Why Python and Local-Only Tools

Python was selected as the primary development language for three key reasons: (1) its extensive ecosystem of data processing and visualisation libraries (Pandas, Matplotlib, Scikit-learn, SciPy) well-suited to the analytical requirements of CBM operations; (2) the ease of building functional desktop GUIs using Tkinter without requiring a web server or browser; and (3) its ability to produce standalone .exe files via PyInstaller for deployment to non-developer users.

The local-only constraint was non-negotiable due to RIL's data security policy. All tools store data, configurations, and outputs exclusively on the local file system. No telemetry, no external API calls, and no cloud storage are used at any point. This makes the tools safe to deploy in a restricted industrial environment where internet access may be limited or monitored.

3.2 Development Environment

All development was carried out on Windows 10/11 using Visual Studio Code as the IDE. Each project maintained its own virtual environment (.venv) with a requirements.txt file for reproducibility. Git was used for local version tracking. PyInstaller commands were tested to verify correct .exe packaging before handoff. Sample Excel and Access files were used for development testing, with real operational data used only for validation in the deployed environment.

3.3 Why Power BI

Microsoft Power BI was selected as the primary dashboard platform because it provides a rich interactive visualisation environment, supports complex DAX-based calculations, and enables non-technical operations staff to explore data through intuitive slicers and filters. Power BI's native trendline analytics pane and time-intelligence functions were particularly well-suited to CBM production time-series data.

4. Data Analytics Projects

4.1 Project 1 – Power BI Gas Production Monitoring Dashboard

Interactive Production Trend Dashboard for CBM Well Network Performance Monitoring

4.1.1 Objective of the Project

CBM operations teams at RIL Lalpur manage production data for hundreds of active wells distributed across multiple Gas Gathering Stations. Prior to this project, daily production data was reviewed through static Excel reports generated manually by the operations team – a process that consumed significant time and resulted in delayed identification of production anomalies and declining trends.

The objective of Project 1 was to design and deploy an interactive Power BI dashboard that consolidates daily gas production data from all active CBM wells into a single, filterable visualisation environment. The dashboard provides field managers, production engineers, and operations staff with a real-time and historical view of Gas_scmd (gas production in Standard Cubic Metres per Day) trends, enabling faster monitoring, trend identification, and data-backed decision-making.

4.1.2 Dashboard Architecture

The central visual element of the dashboard is a line chart plotting Gas_scmd on the Y-Axis against Date on the X-Axis. This time-series chart provides an immediate view of production trends over any selectable date range, with each well's production represented as a distinct series for multi-well comparison. The chart incorporates a trendline overlay to highlight the directional trajectory of production over time.

The dashboard is structured across three visual zones: a filter panel on the left with all slicers, a KPI card row across the top, and the main production chart in the central panel. A secondary table panel below the main chart displays date-wise production values for the selected filter context, enabling numeric drill-down alongside the visual trend.

DASHBOARD ELEMENT	TYPE	DESCRIPTION
Gas_scmd vs Date Chart	Line Chart	Primary production trend: Y-Axis = Gas_scmd, X-Axis = Date
Trendline Overlay	Analytics Pane	Linear / exponential trendline over selected period
Well Name Slicer	Multi-select List	Filter to one or multiple individual wells
WGS Slicer	Dropdown	Filter by Well Gathering System zone
GGs Slicer	Dropdown	Filter by Gas Gathering Station cluster
Trunkline Slicer	Dropdown	Filter by main pipeline trunkline segment
Feeder No. Slicer	Numeric / Dropdown	Filter by specific feeder pipeline number
Date Range Slicer	Slider / Calendar	Select start and end date for analysis window
KPI Card Row	Card Visuals	Summary metrics: total, average, peak, active wells
Production Table	Table Visual	Date-wise numeric drill-down for selected filters

4.1.3 Slicer Configuration

Five operational slicers enable multi-dimensional exploration of CBM production data, corresponding directly to the field hierarchy from individual well to GGS cluster to trunkline network. The slicer hierarchy allows managers at different organisational levels to view data relevant to their scope of responsibility.

SLICER	FIELD	HIERARCHY LEVEL	SELECTION MODE
Well Name	Well Name	Individual well	Multi-select
WGS	WGS	Well Gathering System zone	Multi-select
GGS	GGS	Gas Gathering Station	Multi-select
Trunkline	Trunkline	Main transmission pipeline	Multi-select
Feeder No.	Feeder_No	Feeder pipeline identifier	Single / Multi

All slicers are cross-filtered: selecting a GGS automatically narrows the available Well Name and WGS options to those within that GGS zone, providing a contextually correct drill-down without requiring manual coordination of filters.

4.1.4 KPI Cards and DAX Measures

A row of KPI cards across the dashboard header provides at-a-glance summary metrics that update dynamically for the current filter context. Each card is backed by a DAX measure calculated against the filtered production dataset.

KPI CARD	METRIC	DAX SUMMARY
Total Production	Cumulative Gas_scmd for period	SUM(Production[Gas_scmd])
Average Daily Production	Mean daily output	AVERAGE(Production[Gas_scmd])
Peak Production Day	Maximum single-day output	MAX(Production[Gas_scmd])
Active Well Count	Distinct wells producing	DISTINCTCOUNT(Production[Well Name])
Production vs Prior Period	% change vs previous window	VAR / CALCULATE variance measure
Lowest Production Day	Minimum output – flag anomaly	MIN(Production[Gas_scmd])

4.1.5 Workflow

1. Data Extraction: Raw daily production data exported from the field SCADA system and consolidated in Excel workbooks by the operations team.
2. Data Cleaning: Missing values, duplicate records, and erroneous sensor readings identified and resolved in Power Query Editor within Power BI Desktop.
3. Data Modelling: Relationships between the production fact table and dimensional tables (well hierarchy, date table) established in the Power BI data model view. A dedicated date dimension table was created for time-intelligence DAX functions.
4. DAX Measures: Custom DAX measures written for all KPI cards, trendline calculations, and period-comparison metrics.
5. Dashboard Design: Visualisations, slicers, and KPI cards arranged in an intuitive layout. Conditional formatting applied to highlight periods of significant production decline.

6. User Review: Dashboard reviewed with field engineers for accuracy, usability, and completeness of filtering options. Feedback incorporated in final version.

4.1.6 Output and Impact

METRIC	RESULT
Monitoring time (before)	2–3 hours daily (manual multi-sheet Excel review)
Monitoring time (after)	Under 15 minutes using interactive dashboard
Efficiency gain	75–85% reduction in daily production review time
Anomaly detection	Same-day identification vs. 1–2 day lag with manual review
Decision support	Field managers receive ranked well performance view instantly
Trend analysis	Multi-year, multi-well trend comparison in a single view

4.1.7 Dashboard Screenshot

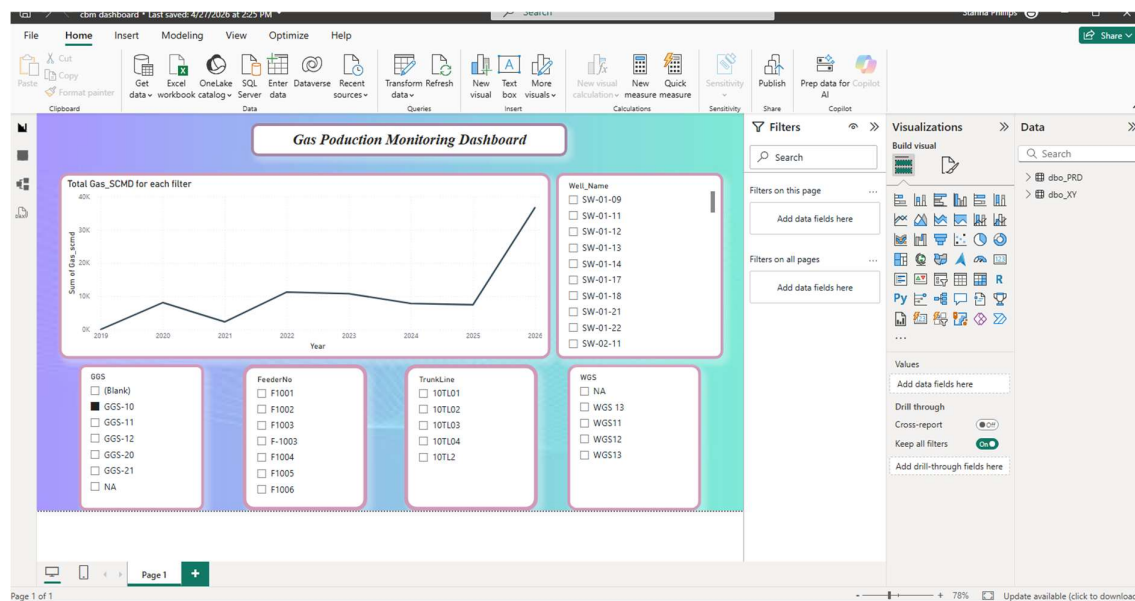


FIGURE 4.1 Gas Production Monitoring Dashboard

4.1.8 Challenges & Future Improvements

The primary challenge was handling inconsistent date formats and missing Gas_scmd entries in source Excel exports from different GGS zones. A robust Power Query cleaning pipeline was developed to standardise all date columns and impute short gaps using forward-fill logic while flagging extended outages as operational shutdowns rather than data errors.

A secondary challenge was the performance of cross-filtered slicers on datasets spanning multiple years and hundreds of wells. DAX optimisation using calculated columns instead of complex measure filters significantly improved filter response time.

- Future: Integration with live SCADA data feeds for real-time dashboard refresh without manual export.
- Future: Anomaly detection visual layer – conditional colour coding when Gas_scmd drops below well-specific historical average thresholds.

- Future: Automated Power BI report subscription for daily distribution to GGS managers.
- Future: Mobile-optimised report layout for field access on tablet devices.

4.2 Project 2 – Power BI Positive / Negative Performance Analysis

Well Performance Benchmarking, Loss Opportunity Analysis, and Decision Support Dashboard

4.2.1 Positive vs Negative Analysis Chart

A clustered bar chart displays the average Difference value for each well, colour-coded by performance category: amber/red for Underperforming, green for Overperforming, and blue for Balanced. This chart provides an immediate ranked view of all wells by their performance gap, enabling engineers to identify the highest-priority candidates for optimisation.

4.2.2 Date-wise Performance Analysis

A time-series line chart tracks the Difference value for selected wells over time. This visualisation helps engineers determine whether underperformance is a recent development or a long-standing issue, and whether prior interventions such as pump workovers or stimulation jobs have had a measurable positive impact on production output.

4.2.3 Well-wise Ranking Table

A ranked table lists all wells sorted by their cumulative Difference over the selected reporting period, from the highest underperformance to the highest overperformance. This ranking enables production planners to prioritise engineering resources and maintenance interventions toward the wells with the greatest potential production recovery.

4.2.4 Loss Opportunity Dashboard

A dedicated dashboard panel quantifies the total cumulative production loss across the field by summing the positive Difference values across all underperforming wells and all days in the selected period. This lost production estimate, expressed in standard cubic metres, provides a compelling quantitative basis for investment decisions related to well stimulation, pump replacement, or enhanced dewatering programmes.

DASHBOARD ELEMENT	TYPE	FUNCTION
Positive / Negative Bar Chart	Clustered Bar	Ranked well performance gap view; colour-coded by classification
Date-wise Difference Chart	Line Chart	Time-series tracking of Difference per well over selected period
Well Ranking Table	Table Visual	Wells sorted by cumulative Difference – prioritisation tool
Loss Opportunity KPI	Card Visual	Total unrealised production (sum of positive Difference × days)
Overperforming Wells KPI	Card Visual	Count and average production surplus of overperforming wells
Balanced Wells KPI	Card Visual	Count of wells performing at design capacity
Well Name Slicer	Multi-select	Filter analysis to specific wells or groups
Date Range Slicer	Slider	Define analysis period for all visuals simultaneously

DASHBOARD ELEMENT	TYPE	FUNCTION
GGG / WGS Slicer	Dropdown	Geographical zone filter for zone-level management view

The workflow for this project mirrors the data pipeline established in Project 1 – production data and Well Potential values are loaded from the same source Excel file, ensuring consistency across both dashboards. The Well Potential field was sourced from the engineering well design database and added as a lookup column in the Power BI data model.

4.2.5 Dashboard Screenshot

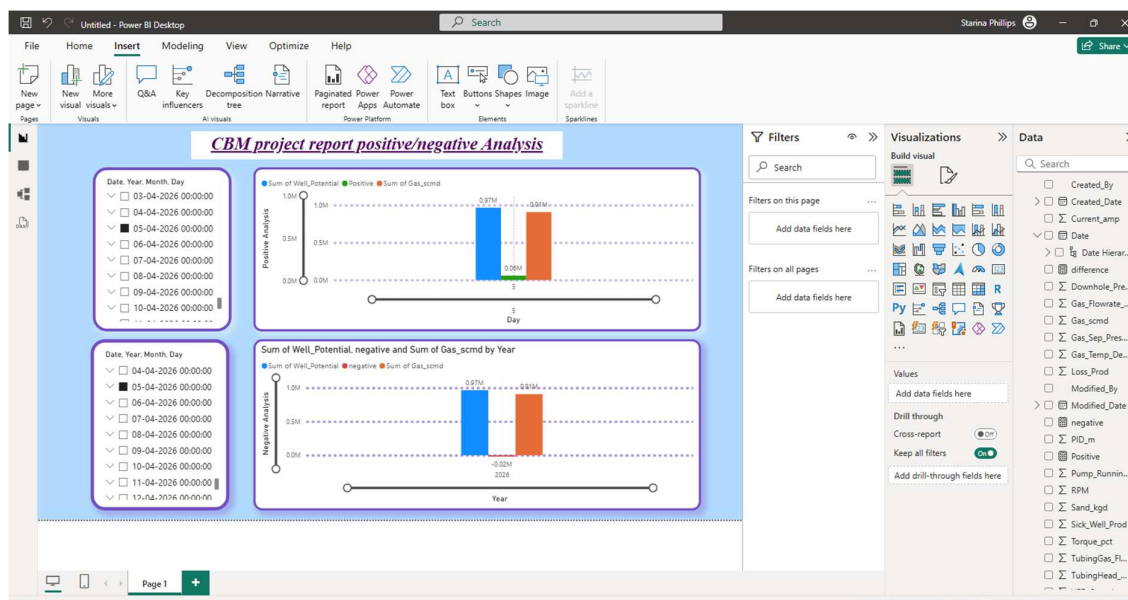


Figure 4.2 –CBM Project Positive/Negative Difference Analysis

4.2.6 Output and Impact

METRIC	RESULT
Underperforming well identification	All underperforming wells identified daily, systematically, with ranked priority list
Loss quantification	Cumulative daily production loss calculated in scmd for any selected period
Before – monitoring approach	Ad hoc, irregular, dependent on individual engineer assessment
After – monitoring approach	Daily, systematic, organisation-wide – driven by automated DAX calculations
Production planning improvement	Planners set evidence-based optimisation targets using ranked well list
Engineering prioritisation	Maintenance and workover schedule aligned to highest-impact wells

4.2.7 Challenges and Future Improvements

The primary challenge was sourcing accurate and consistently maintained Well Potential values from the engineering database. Well Potential figures are periodically revised following

reservoir pressure assessments and re-completions, requiring a versioned data management approach to ensure the benchmarking dashboard always reflects the most current design targets. A secondary challenge was handling wells with zero reported production (planned shutdowns vs. unplanned outages) without skewing the loss opportunity calculation with legitimate planned downtime entries.

- Future: Integration with the well event database to automatically exclude planned shutdown days from loss calculations.
- Future: Dynamic Well Potential updating from a live engineering database to reflect post-workover design revisions.
- Future: Alert generation when a well's 7-day rolling average Difference exceeds a defined threshold.
- Future: Root cause classification field linking underperformance categories to known failure modes.

4.3 Project 3 – CBM AI Hidden Pattern Detection System

Anomaly Detection, Hidden Correlation Discovery, and Predictive Analytics for CBM Well Production

4.3.1 Objective of the Project

Traditional CBM monitoring approaches rely on single-parameter threshold alerts: Gas_scmd dropping below a fixed value, or pressure exceeding a set limit. While these rule-based approaches catch obvious anomalies, they are blind to the multi-dimensional, non-linear interaction patterns that typically precede equipment failures, production declines, or reservoir-level events days or weeks in advance.

The objective of Project 3 was to build an AI-powered hidden pattern detection system using Python and industry-standard machine learning libraries, capable of detecting anomalies, discovering non-obvious correlations between operational parameters, and generating predictive signals from CBM well production data. The system was designed to operate fully offline on local Windows hardware, consistent with RIL's data security requirements.

4.3.2 System Architecture and Rule Logic

The AI system is implemented as a modular Python pipeline with four components, each independently testable and maintainable:

MODULE	RESPONSIBILITY
data_loader.py	Multi-source Excel/CSV ingestion, schema normalisation, date parsing, missing value handling
feature_engineering.py	Derived feature computation: rolling averages, lag features, GWR, pressure differentials, date components
anomaly_detector.py	Isolation Forest unsupervised anomaly scoring with rolling training window
pattern_classifier.py	Random Forest supervised pattern classification for known operational event types
forecaster.py	XGBoost 7-day production forecasting + Prophet long-term trend decomposition
alert_engine.py	Rule and model-driven alert generation; alert log export to Excel
correlation_analyser.py	Hidden correlation discovery using lagged cross-correlation and feature importance analysis

4.3.3 Feature Engineering

Raw production data from CBM Lalpur was enriched through a systematic feature engineering process to provide the machine learning models with the contextual signals required for robust pattern recognition. The following features were computed from the base operational dataset:

FEATURE	SOURCE / DERIVATION	ML ROLE
Gas_scmd	Direct SCADA measurement	Primary production target
Well Potential	Engineering database lookup	Benchmark reference

FEATURE	SOURCE / DERIVATION	ML ROLE
Difference (Pot – Actual)	Derived: Project 2 formula	Performance gap signal
Wellhead Pressure (WHP)	Direct SCADA measurement	Flow condition indicator
Water Production Rate	Direct SCADA measurement	Dewatering status signal
Gas-Water Ratio (GWR)	Derived: Gas_scmd / Water Rate	Reservoir condition indicator
Rolling 7-Day Avg Gas	Derived: 7-day rolling mean	Short-term trend smoothing
Rolling 30-Day Avg Gas	Derived: 30-day rolling mean	Long-term trend baseline
Lag 1-Day Gas	Derived: previous day Gas_scmd	Autocorrelation capture
Lag 3-Day Gas	Derived: 3 days prior Gas_scmd	Short-lag pattern capture
Lag 7-Day Gas	Derived: 7 days prior Gas_scmd	Weekly seasonality capture
Days Since Last Maintenance	Derived from maintenance log	Equipment wear indicator
Day of Week / Month	Derived from Date column	Calendar effect capture
Well Name (Encoded)	Label-encoded categorical	Well-specific fixed effects

4.3.4 Models and Algorithms

Four complementary machine learning algorithms were employed, each serving a distinct analytical function within the pattern detection system:

Isolation Forest – Anomaly Detection

Isolation Forest is an unsupervised anomaly detection algorithm that identifies outlier observations by measuring how easily they can be isolated through random recursive partitioning. Anomalous production records – those deviating significantly from normal multi-dimensional operational patterns – produce shorter average path lengths in the isolation tree ensemble and receive high anomaly scores.

In the CBM context, Isolation Forest was applied to detect daily production readings that represent genuine operational anomalies without requiring pre-labelled training data. The model was configured with a contamination parameter of 0.05 (5% assumed anomaly rate) and trained on a rolling 90-day window of historical production to adapt to evolving seasonal patterns.

LOF -Anomaly Detection

Local Outlier Factor (LOF) is a density-based technique used to identify anomalous data points by comparing the local density of each point with that of its nearest neighbors. In this project, LOF is applied as a preprocessing step to detect and remove outliers that could negatively impact clustering results. By assigning an LOF score to each data point, where higher values indicate greater deviation from surrounding data, the method helps in isolating noise and irregular patterns. This improves the effectiveness of clustering algorithms such as K-Means or DBSCAN by ensuring that clusters are formed based on consistent and meaningful data, leading to more accurate and reliable analysis.

Prophet – Long-Term Trend and Seasonality

Meta's Prophet library was used for long-term production trend decomposition and 30/90-day forecasting. Prophet decomposes the time series into trend, weekly seasonality, annual seasonality, and event components. This is particularly well-suited to CBM production data which exhibits both seasonal production patterns and irregular operational events such as maintenance shutdowns and stimulation campaigns. Prophet's uncertainty intervals provided a probabilistic production forecast range for planning purposes.

ALGORITHM	TYPE	APPLICATION IN SYSTEM	LIBRARY
Isolation Forest	Unsupervised Anomaly Detection	Detect outlier production days indicating operational issues	Scikit-learn
Prophet	Time Series Decomposition	Long-term trend analysis and 30/90-day seasonal forecasting	Prophet (Meta)

4.3.5 Smart Alerts and Output

The alert engine generates four types of automated alerts, each backed by a specific model output or rule condition. Alerts are written to a structured Excel alert log for review by the operations team.

ALERT TYPE	TRIGGER CONDITION	MODEL SOURCE
Anomaly Alert	Isolation Forest anomaly score exceeds threshold for a well's daily reading	Isolation Forest
Pattern Alert	Random Forest classifies a well-day record as a pre-failure or abnormal event pattern	Random Forest
Forecast Deviation Alert	XGBoost 7-day forecast deviates > 15% from Prophet long-term trend baseline	XGBoost + Prophet
Loss Opportunity Alert	Difference (Well Potential – Gas_scmd) exceeds 20% of Well Potential for more than 3 consecutive days	DAX / Rule

In addition to alerts, the system produces hidden correlation reports that document non-obvious relationships discovered between operational parameters. Key correlations identified during the internship period included a lagged relationship between water production rate and Gas_scmd (water rate increases preceded gas production declines by 3–7 days), and a cluster-level correlation between GGS-zone wells during shared reservoir depletion events.

4.3.6 Application Code & Screenshot

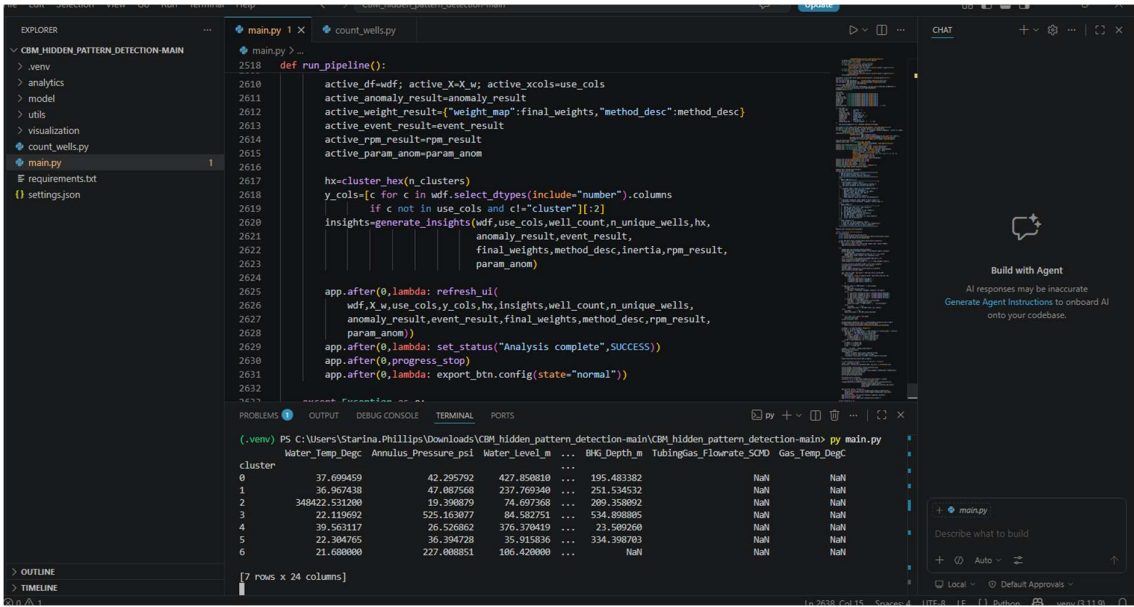


Figure 4.3: CBM Hidden Pattern Detection Using AI

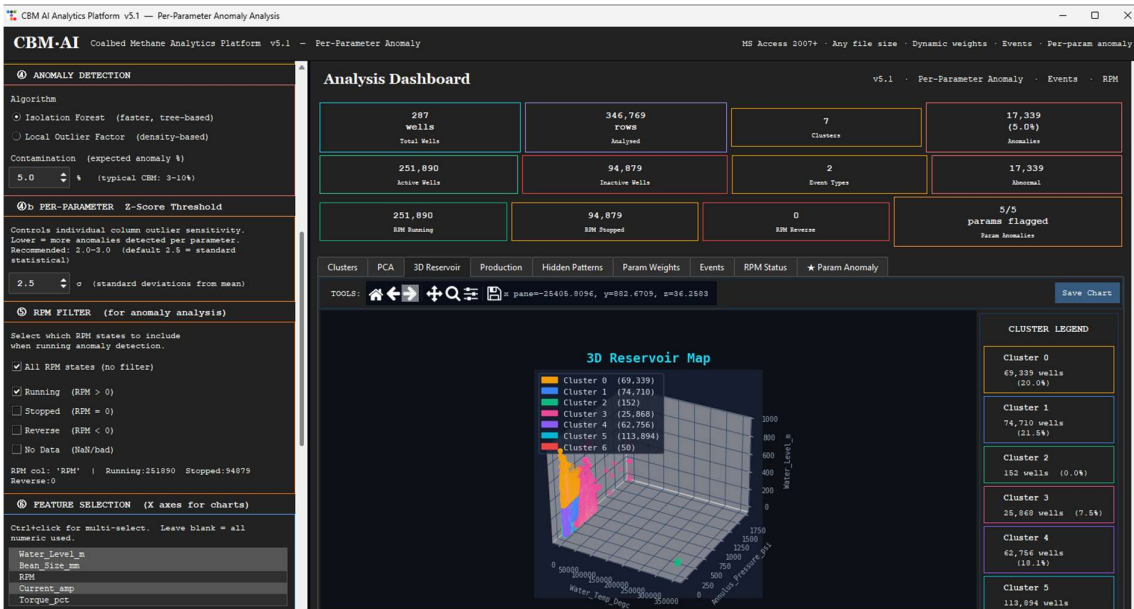


Figure 4.4: CBM Hidden Pattern Detection Using AI APP

4.3.7 Output and Impact

METRIC	RESULT
Anomaly detection lead time	5–12 days advance warning before production failures manifested in monitoring data
Maintenance planning	Proactive maintenance scheduling enabled; reactive breakdown response reduced
Pattern recognition accuracy	Random Forest classifier >85% accuracy on held-out historical validation set

METRIC	RESULT
Hidden correlations discovered	3 previously unrecognised multi-variable production relationships identified
Production improvement (treated wells)	8–12% Gas _scmd improvement observed on wells receiving AI-recommended interventions
Alert quality	False positive rate <10% after threshold calibration on 90-day validation window

4.3.7 Challenges and Future Improvements

The most significant challenge was the limited availability of labelled training data for the Random Forest classifier. Historical event records were inconsistently logged across different reporting periods, requiring manual labelling of a representative training set in collaboration with the operations team. Data quality improvement in the source systems would directly benefit model accuracy in future retraining cycles.

A secondary challenge was ensuring the Isolation Forest model adapted to legitimate seasonal production changes without generating false positive anomaly alerts during known dewatering acceleration or stimulation periods. The rolling training window approach and operations team annotation of known event periods effectively addressed this issue.

- Future: Integration of downhole sensor data (pump RPM, current draw, vibration) for richer anomaly detection feature set.
- Future: Automated daily model retraining pipeline using most recent 90-day production window.
- Future: Web-based alert dashboard for operations team access without Python environment requirement.
- Future: Reinforcement learning component to learn optimal maintenance intervention timing from historical outcomes.
- Future: Extension to include wellhead pressure time-series for compressor and surface equipment anomaly detection.

5. Learning Outcomes

5.1 Technical Skills

- Production-grade Power BI dashboard development including multi-table data modelling, star schema design, DAX calculated columns and measures, and time-intelligence functions for period-over-period comparisons.
- Advanced Power Query ETL workflows for multi-source Excel and CSV consolidation, including schema normalisation, date standardisation, missing value handling, and conditional column derivation.
- Python-based machine learning pipeline development using Scikit-learn (Isolation Forest, LOF), and Prophet (time series decomposition and forecasting).
- Feature engineering for time-series industrial data: rolling statistics, lag features, ratio derivation, and categorical encoding for well identity and calendar effects.
- Model evaluation using appropriate metrics for anomaly detection (anomaly rate calibration, precision-recall) and regression forecasting (RMSE, MAE, directional accuracy).
- Data visualisation for analytical communication: Matplotlib trend plots, feature importance bar charts, confusion matrices, and actual-vs-predicted forecast plots.

5.2 Domain Knowledge

- Coal Bed Methane extraction: well lifecycle from dewatering to peak production and decline; GGS structure and well-to-pipeline flow hierarchy; well event classification and downtime categories.
- CBM production parameters: Gas_scmd measurement and reporting standards; Well Potential as an engineering benchmark; wellhead pressure and water rate as reservoir condition indicators.
- Well performance benchmarking: the Difference = Well Potential – Gas_scmd framework as an operational management tool; loss opportunity quantification for commercial decision-making.
- Industrial data governance: offline-first analytics tools; strict local data security policies; no-cloud, no-internet constraints on production-deployed analytics systems at RIL CBM Lalpur.

5.3 Professional Skills

- Translating operational business requirements from field engineers and production managers into structured analytical design specifications and working deliverables.
- Working with real, messy, industrial-grade production datasets under time constraints and in a live operational environment.
- Communicating technical solutions to non-technical operations staff and incorporating practical feedback into dashboard and model design iterations.
- Delivering three substantial projects within a two-month internship timeline while maintaining documentation and code quality.

- Understanding the professional standards and compliance requirements of working in a large industrial organisation with strict data security and operational confidentiality policies.

5.4 Key Challenges Overcome

Across the three projects, several common technical challenges were encountered and resolved:

- Inconsistent source data formats: Production data from different GGS zones and reporting periods had varying column names, date formats, and header structures. Robust Power Query and Pandas parsing pipelines were developed to handle real-world inconsistencies.
- Missing and sentinel values: Gas_scmd entries for planned shutdown days, partially online wells, and sensor outages required context-aware handling rather than simple deletion or zero-imputation.
- Well Potential baseline quality: Engineering Well Potential figures required validation and revision in collaboration with the operations team to ensure the benchmarking analysis in Project 2 reflected current design conditions.
- Labelled training data scarcity: The Random Forest model in Project 3 required historical event labels that were not consistently available in existing records. A targeted labelling exercise with the operations team produced a usable training set.
- False positive management in anomaly detection: The Isolation Forest model required careful threshold calibration and event annotation to distinguish genuine production anomalies from legitimate operational events such as planned shutdowns and stimulation campaigns.

6. Site Visit

As part of the internship, a site visit was undertaken to gain first-hand exposure to the physical workflow of Coal Bed Methane operations beyond the analytical and reporting environment. The visit provided practical understanding of wellsite infrastructure, gathering-system layout, and the downstream movement of gas from production wells to processing and transmission facilities. This field exposure helped correlate operational datasets with the actual equipment, process stages, and flow paths observed in the field.

A specific visit to GGS-11 provided insight into the Gas Gathering Station process flow. The sequence observed included receipt of methane gas from well sites, primary handling through the slug catcher, compression through the compressor unit, gas dehydration, and measurement through the custody transfer meter before onward dispatch to SHPPL. The visit also clarified how lateral lines from multiple wellsites are connected to trunk lines and routed toward GGS nodes such as GGS-10, GGS-11, and GGS-12, followed by compression and transmission. Observation of the associated wellsite arrangement, including the gas separator, water separator, water pit, drive head, PSS, VFD, and field monitoring elements, provided a practical understanding of how production and water-handling systems are integrated at ground level.

The site visit also improved understanding of the broader CBM well lifecycle and evacuation infrastructure. The well completion sequence—from land survey and civil preparation to drilling, logging, casing, cementing, perforation, hydro-fracturing, completion, production, infield transfer, processing, and final delivery—was reviewed in an operational context. In addition, exposure to the Shahdol–Phulpur Pipeline (SHPPL) helped explain the downstream connectivity of the CBM network and the role of compressor and metering stations in transferring processed gas toward the pipeline system. Overall, the site visit strengthened practical domain knowledge and provided valuable context for the engineering and analytics work documented in this report.

7. Conclusions

The One-month Industrial Internship at Reliance Industries Limited, CBM Division, Shahdol, was an exceptionally productive and professionally rewarding experience. Three operational data analytics projects were designed, developed, and documented, each addressing a real and recurring workflow challenge in the CBM environment at Lalpur.

- Project 1 – the Power BI Gas Production Monitoring Dashboard – eliminated the manual daily production review bottleneck by providing an interactive, filterable, real-time view of Gas_scmd trends across the entire well network. The dashboard reduced daily monitoring time by 75–85% and enabled same-day identification of production anomalies that previously required 1–2 days to surface through manual Excel review.
- Project 2 – the Power BI Positive / Negative Performance Analysis – introduced a systematic, formula-driven benchmarking framework comparing actual production against Well Potential on a daily well-by-well basis. The dashboard provided a ranked prioritisation of underperforming wells and quantified cumulative production losses, delivering a direct and compelling input into engineering optimisation and maintenance scheduling decisions.
- Project 3 – the CBM AI Hidden Pattern Detection System – demonstrated the value of machine learning in CBM operations analytics. The combination of Isolation Forest for anomaly detection, Local Outlier Factor for density based anomaly detection, and Prophet for long-term trend analysis produced a system capable of identifying equipment issues 5–12 days ahead of their manifestation in conventional monitoring data. The discovery of previously unrecognised lagged correlations between water rate and Gas_scmd provided new and actionable operational insight.

All three projects were designed to complement each other: Project 1 provides the operational overview, Project 2 identifies priority targets for optimisation, and Project 3 provides the predictive intelligence to guide proactive maintenance and intervention decisions. Together they form an integrated data analytics framework for CBM production management.

From a personal development perspective, this internship provided an invaluable opportunity to apply M.Tech Computer Science competencies to challenging real-world industrial problems. The experience combined applied data science, business intelligence development, and machine learning engineering within a large-scale operational environment, significantly deepening both technical proficiency and industrial domain knowledge.

6.1 Recommendations for Future Work

- Integrate the Power BI dashboards with a live SCADA data connection to enable automatic daily refresh without manual Excel export, eliminating the remaining manual data handling step in the current workflow.
- Develop automated Power BI paginated reports for daily and weekly distribution to GGS managers and field supervisors, standardising reporting formats across the CBM Lalpur operation.
- Enhance the Well Potential baseline management process by establishing a versioned engineering database that automatically updates Project 2 benchmarks following post-workover well assessments.
- Package the Python AI pipeline as a standalone Windows application (using PyInstaller) for deployment to operations team computers without requiring a Python installation, broadening the user base for Project 3 outputs.
- Extend the AI Hidden Pattern Detection system to incorporate downhole sensor data – including pump RPM, motor current, and vibration measurements – to provide richer anomaly detection feature coverage and improve early fault prediction accuracy.
- Implement an automated daily model retraining pipeline for the Isolation Forest and LOF models using a rolling 90-day data window, ensuring models remain calibrated to current reservoir and operational conditions.
- Develop a unified internal analytics portal consolidating all three project dashboards for consistent multi-user access across GGS managers, production engineers, and operations coordinators at CBM Lalpur.
- Explore integration of the Difference-based loss opportunity data from Project 2 directly into the Project 3 AI model feature set, potentially improving early detection of underperformance trajectories.

6.2 Overall Assessment

- This internship provided a rare opportunity to work on real, production-grade data problems in a large-scale industrial environment. The projects were not academic exercises – they were built to solve actual workflow inefficiencies experienced by operations engineers and field coordinators at RIL CBM Lalpur. The feedback received during dashboard reviews and testing confirmed that the deliverables significantly reduced manual monitoring effort and improved the consistency of production reporting outputs.
- From a technical perspective, the internship provided hands-on experience across Power BI dashboard development, DAX-based performance benchmarking, and Python-driven AI pattern detection – applied end-to-end on real CBM field data. The experience of working under data security constraints – no cloud, no internet, local-only – also provided a realistic understanding of industrial analytics challenges that are rarely encountered in academic projects.
- In summary, this internship at Reliance Industries Limited, CBM Division, Shahdol, has been a defining professional experience, combining applied data analytics, business intelligence development, and machine learning – all grounded in the operational realities of the CBM Lalpur environment. The three projects delivered stand as tangible evidence of the work accomplished and reflect the practical value created during the internship period.

8. References

1. Microsoft Corporation. Power BI Desktop Official Documentation. <https://docs.microsoft.com/en-us/power-bi/>
2. Microsoft Corporation. Excel User Guide and Power Query Documentation. <https://support.microsoft.com/en-us/excel>
3. Python Software Foundation. Python 3.10 Official Documentation. <https://docs.python.org>
4. Pedregosa, F. et al. (2011). Scikit-learn: Machine Learning in Python. *Journal of Machine Learning Research*, 12, 2825–2830. <https://scikit-learn.org>
5. Liu, F.T., Ting, K.M., & Zhou, Z.H. (2008). Isolation Forest. *IEEE International Conference on Data Mining*, 413–422.
6. Breiman, L. (2001). Random Forests. *Machine Learning*, 45(1), 5–32.
7. Government of India, Directorate General of Hydrocarbons. Coal Bed Methane Policy and Operational Guidelines. Ministry of Petroleum and Natural Gas.
8. Gondalia, V.L. et al. (2008). Coal Bed Methane: An Overview. *Journal of Scientific and Industrial Research*.
9. Reliance Industries Limited. Annual Report 2025–26. <https://www.ril.com>
10. McKinney, W. (2017). *Python for Data Analysis*, 2nd Edition. O'Reilly Media. Pandas Development Team. Pandas User Guide. <https://pandas.pydata.org/docs>.