


Disaggregated intelligence

Enterprise reasoning with
koa-action, Agent Graph
and AgentScript.

Reliability and cost start with
how you allocate the work.

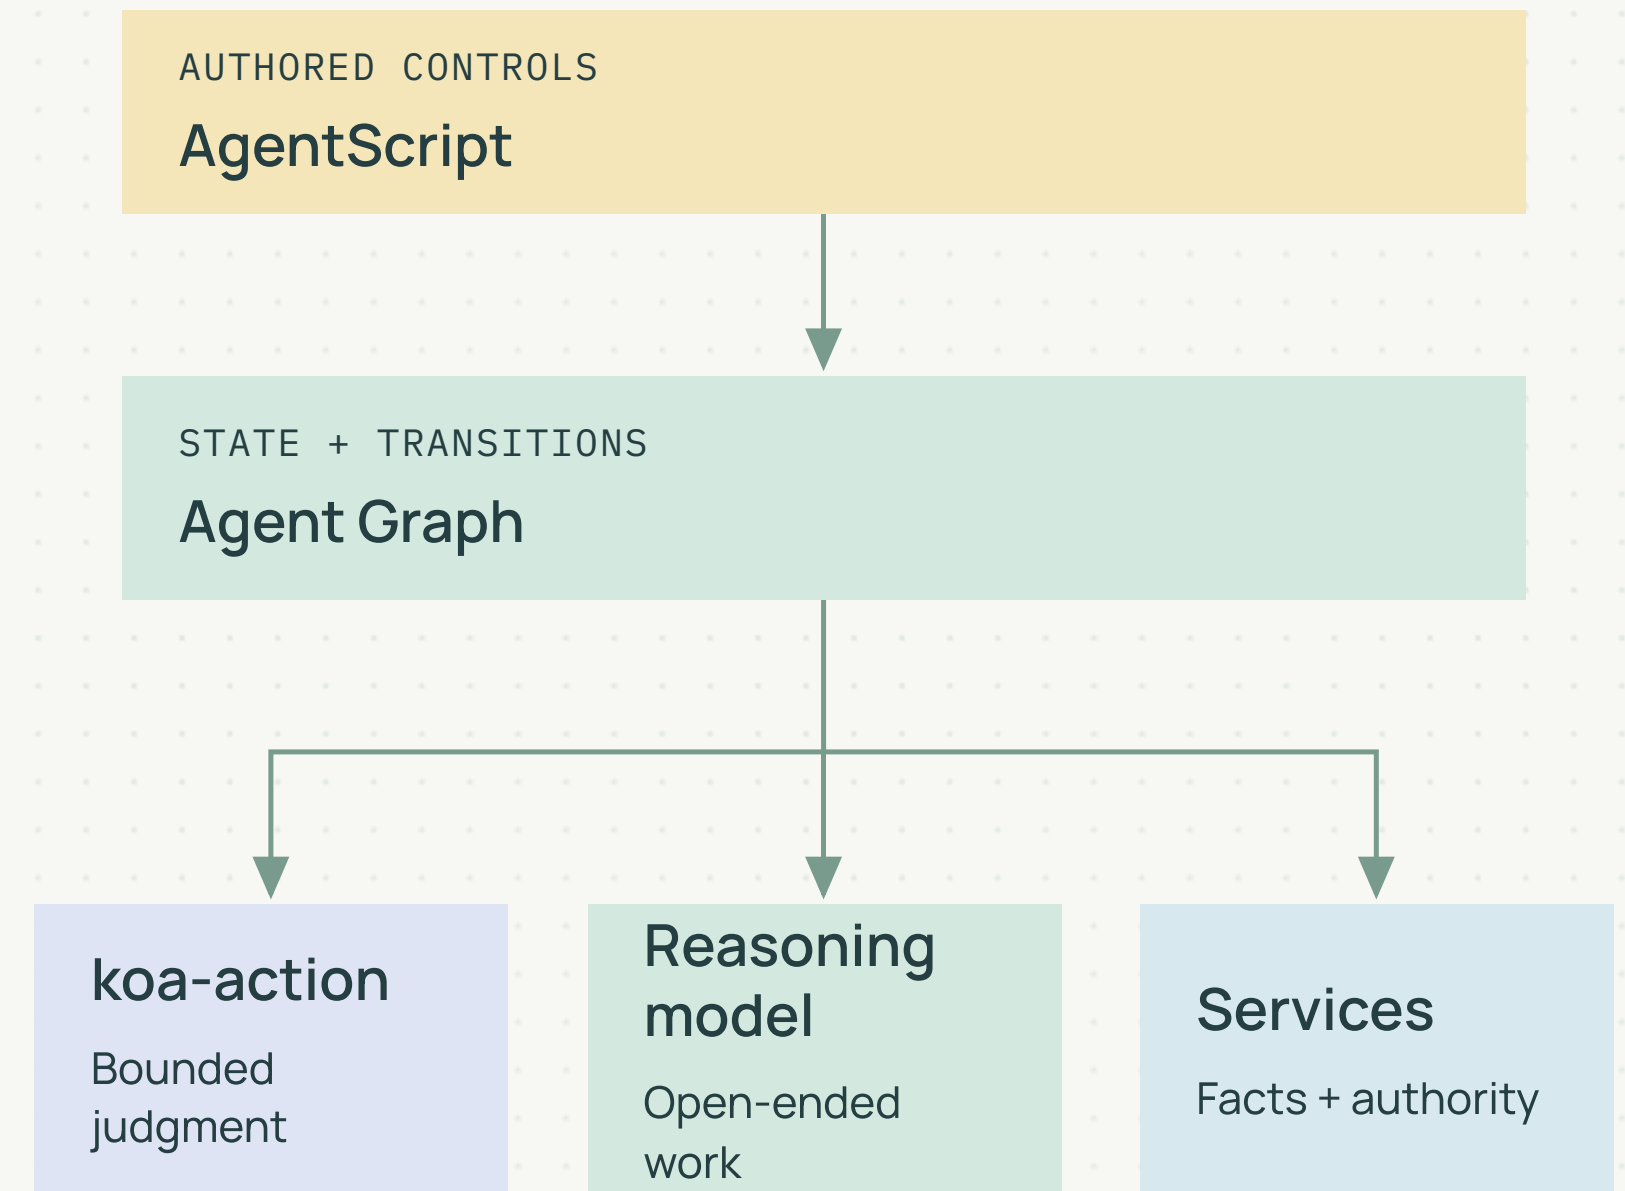

Four benefits. One service to measure.

CORRECT OUTCOMES



Reliability

Test decisions and enforce required checks.

CONTROLLED VARIATION



Predictability

Bound outputs, paths, and recovery behavior.

LESS TOTAL WORK



Lower cost

Avoid expensive work that the case does not need.

SHORTER CRITICAL PATH



Faster inference

Use short decision steps on frequent routes.

One customer, two obligations

“Why was I charged twice,
and why is my service
down?”


One message creates two obligations.

The case ledger

Invoice	Requested	Pending
Outage	Requested	Pending

What must survive
every transition?

Give each responsibility an owner

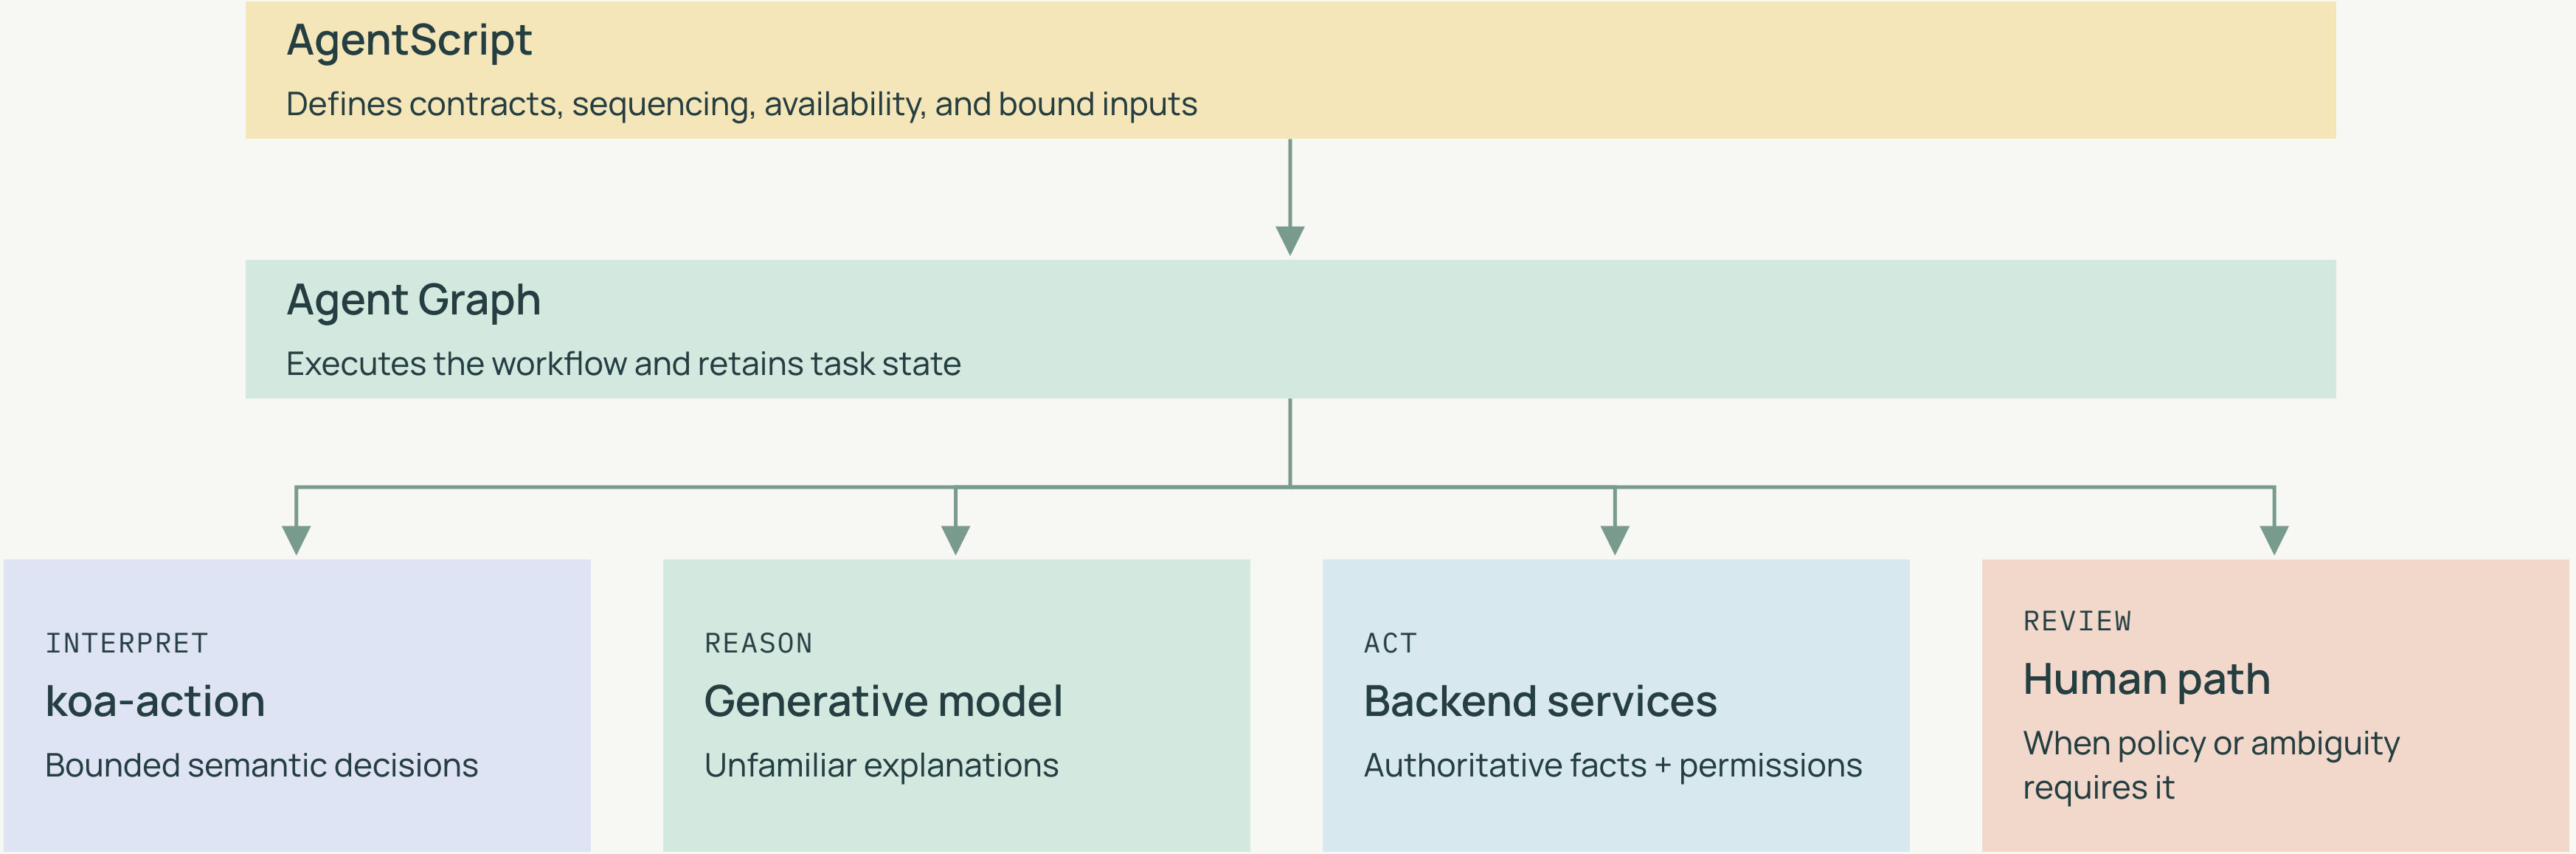

Process knowledge becomes topology

A PROCESS BURIED IN INSTRUCTIONS

Before explaining an invoice, check account access. Keep other requests pending. Retrieve the invoice first. Do not infer the balance.

Definitions and evidence still belong in node context.

Verify caller + account access



Retrieve authorized invoice facts



Explain the charge using those facts

A runtime sits beneath the harness

Harness

The agent loop, context strategy, tools, and operating policy.

Example in LangChain's stack: Deep Agents.

Runtime

State transitions and the execution of the configured workflow.

Agent Graph is analogous at this layer to LangGraph.

Configuration

The authored rules and bindings that shape behavior.

AgentScript configures Salesforce's runtime.

Start with a decision contract

QUESTION

Which service route
is supported now?

Read the conversation so far
and the relevant service context.

Version the question and category definitions.

Allowed answers

- billing
- technical
- account_access
- mixed
- unclear

UNUSABLE OR AMBIGUOUS RESULT

Clarify within a budget,
then use an explicit handoff.

Four bounded decisions, four contracts

01 Classification Which route? Select a category.	02 Noul Cancellation requested? Assess a yes/no proposition.	03 Scoring How urgent? Use an anchored rubric.	04 Endpointing Has the turn ended? Judge the available prefix.
---	--	--	--

Probability and intensity answer different questions

NOUL · TYPESAFE SEMANTICS

Was cancellation requested?

A probability-valued
yes/no judgment.

An uncertain answer does not mean
“a medium amount of cancellation.”

SCORE · ILLUSTRATIVE RUBRIC

How urgent is the issue?

Can wait

Work disrupted

Critical service blocked

Endpointing is a decision in time



Cut too early

The customer is interrupted.


Wait too long

The response is delayed.


Keep the boundary

Future audio supplies labels only.


Split work along information dependencies

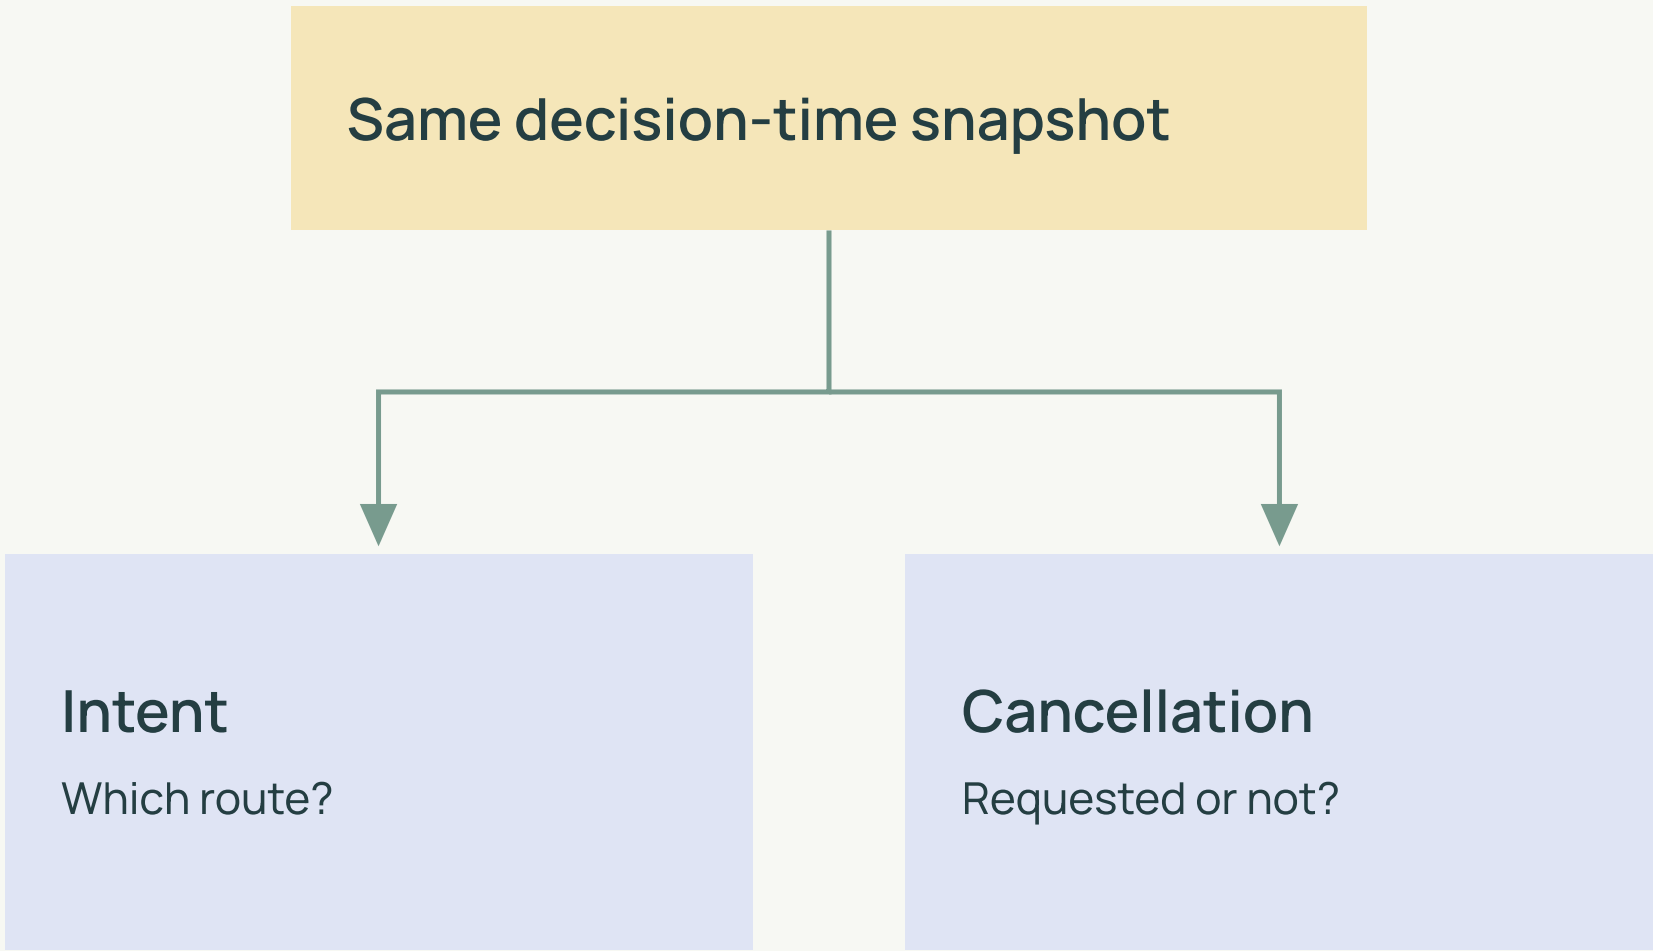


Independent execution can still produce correlated errors.

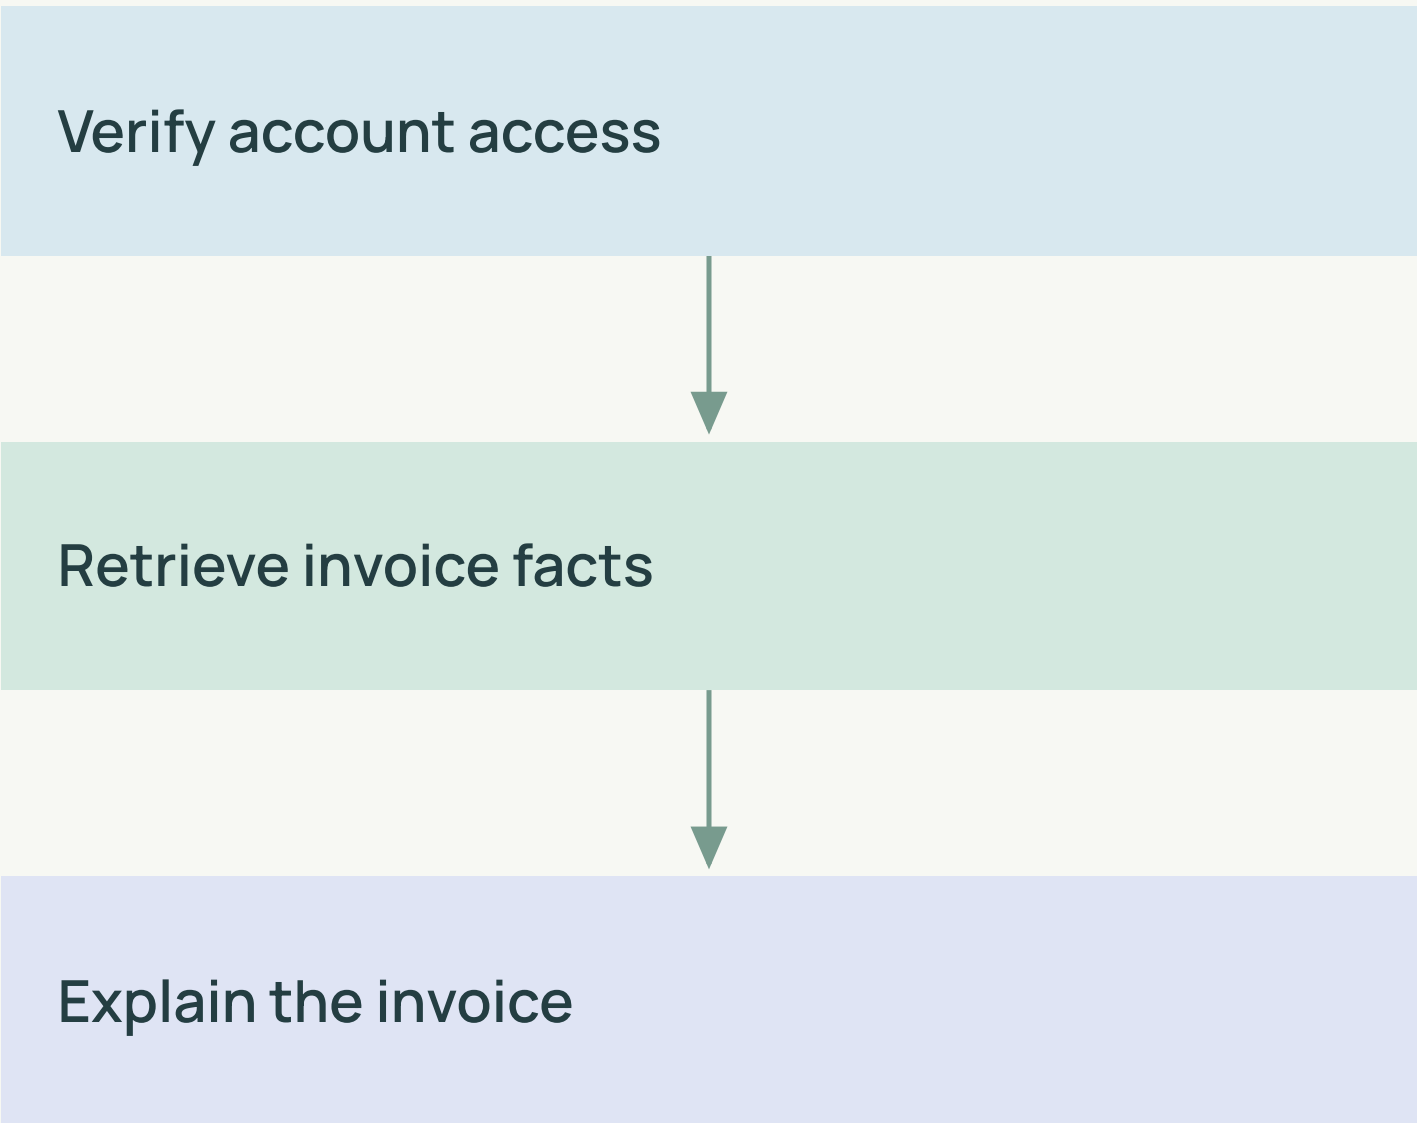

Each node sees a different view of the case

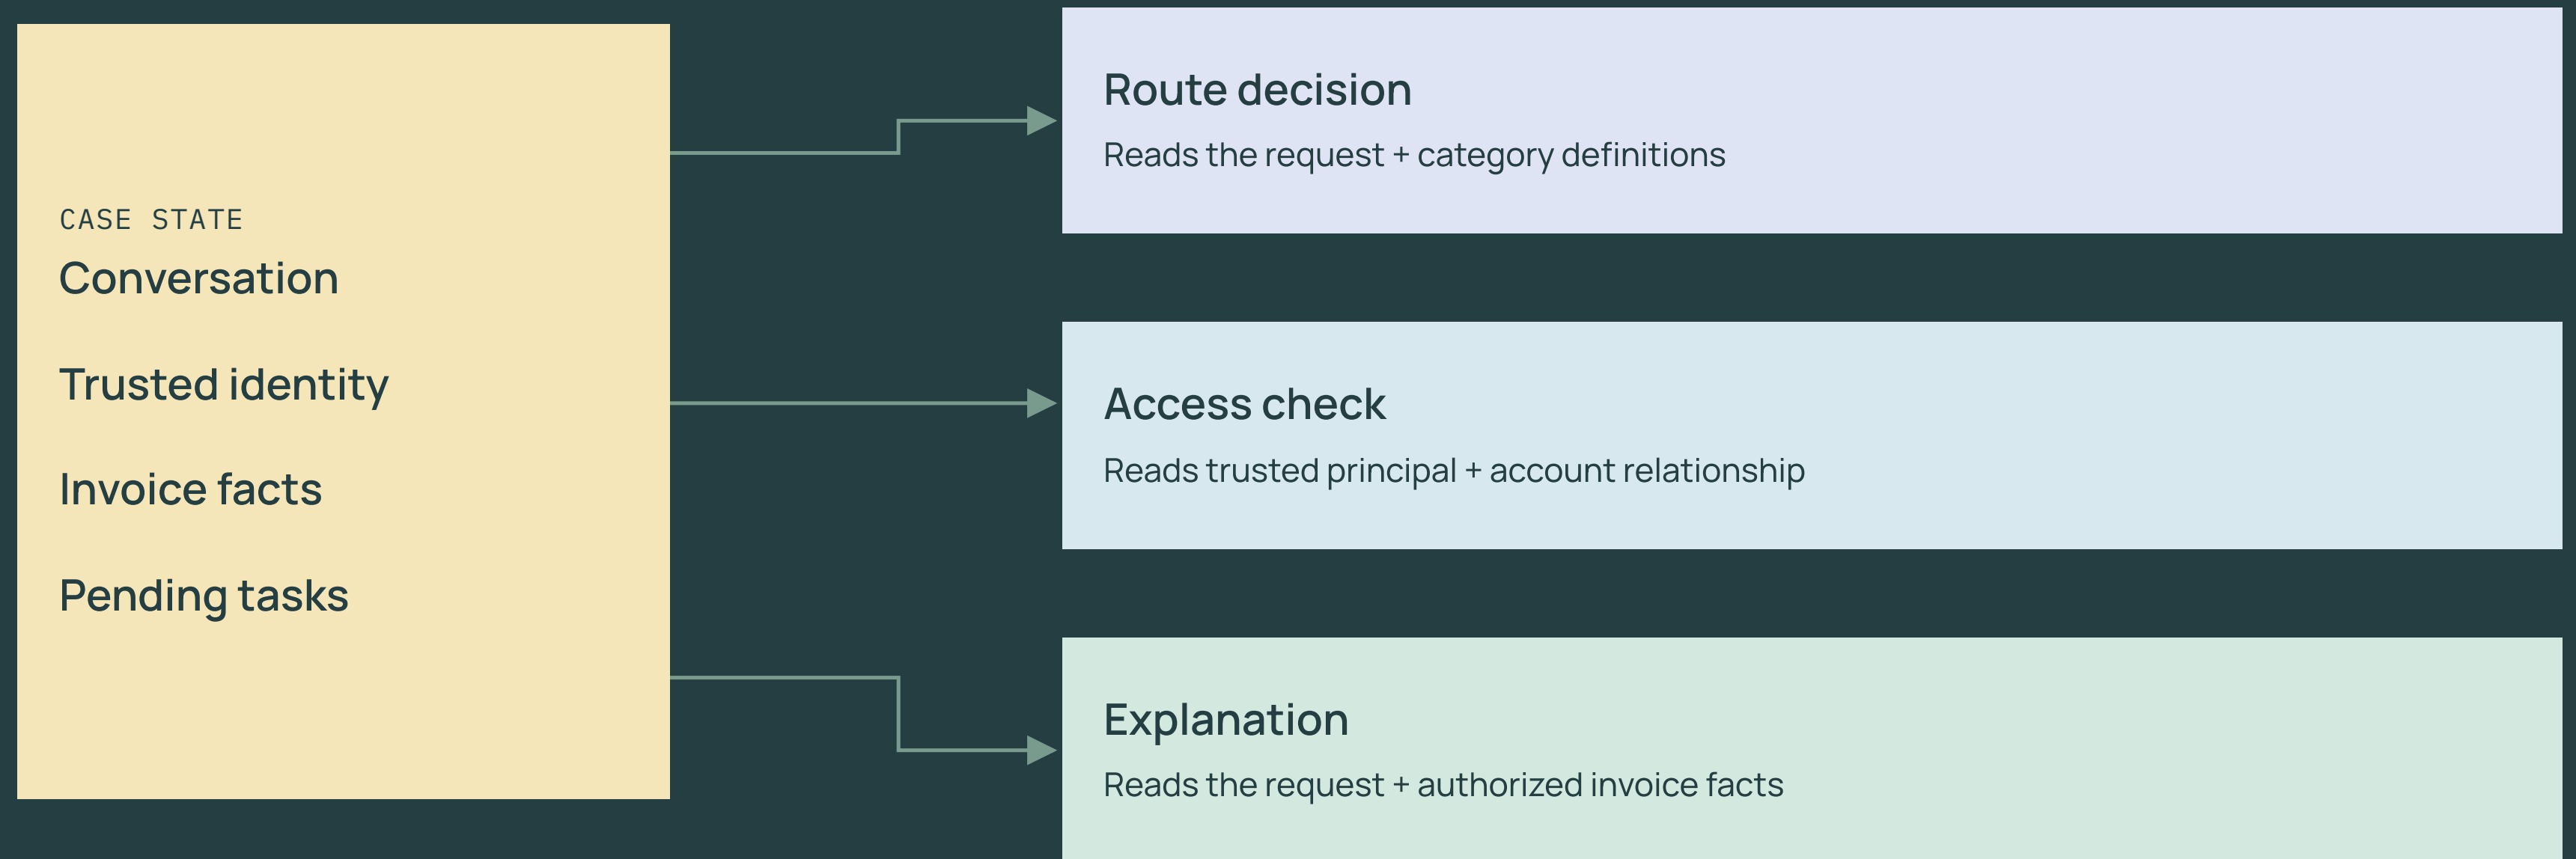

State preserves work across a branch

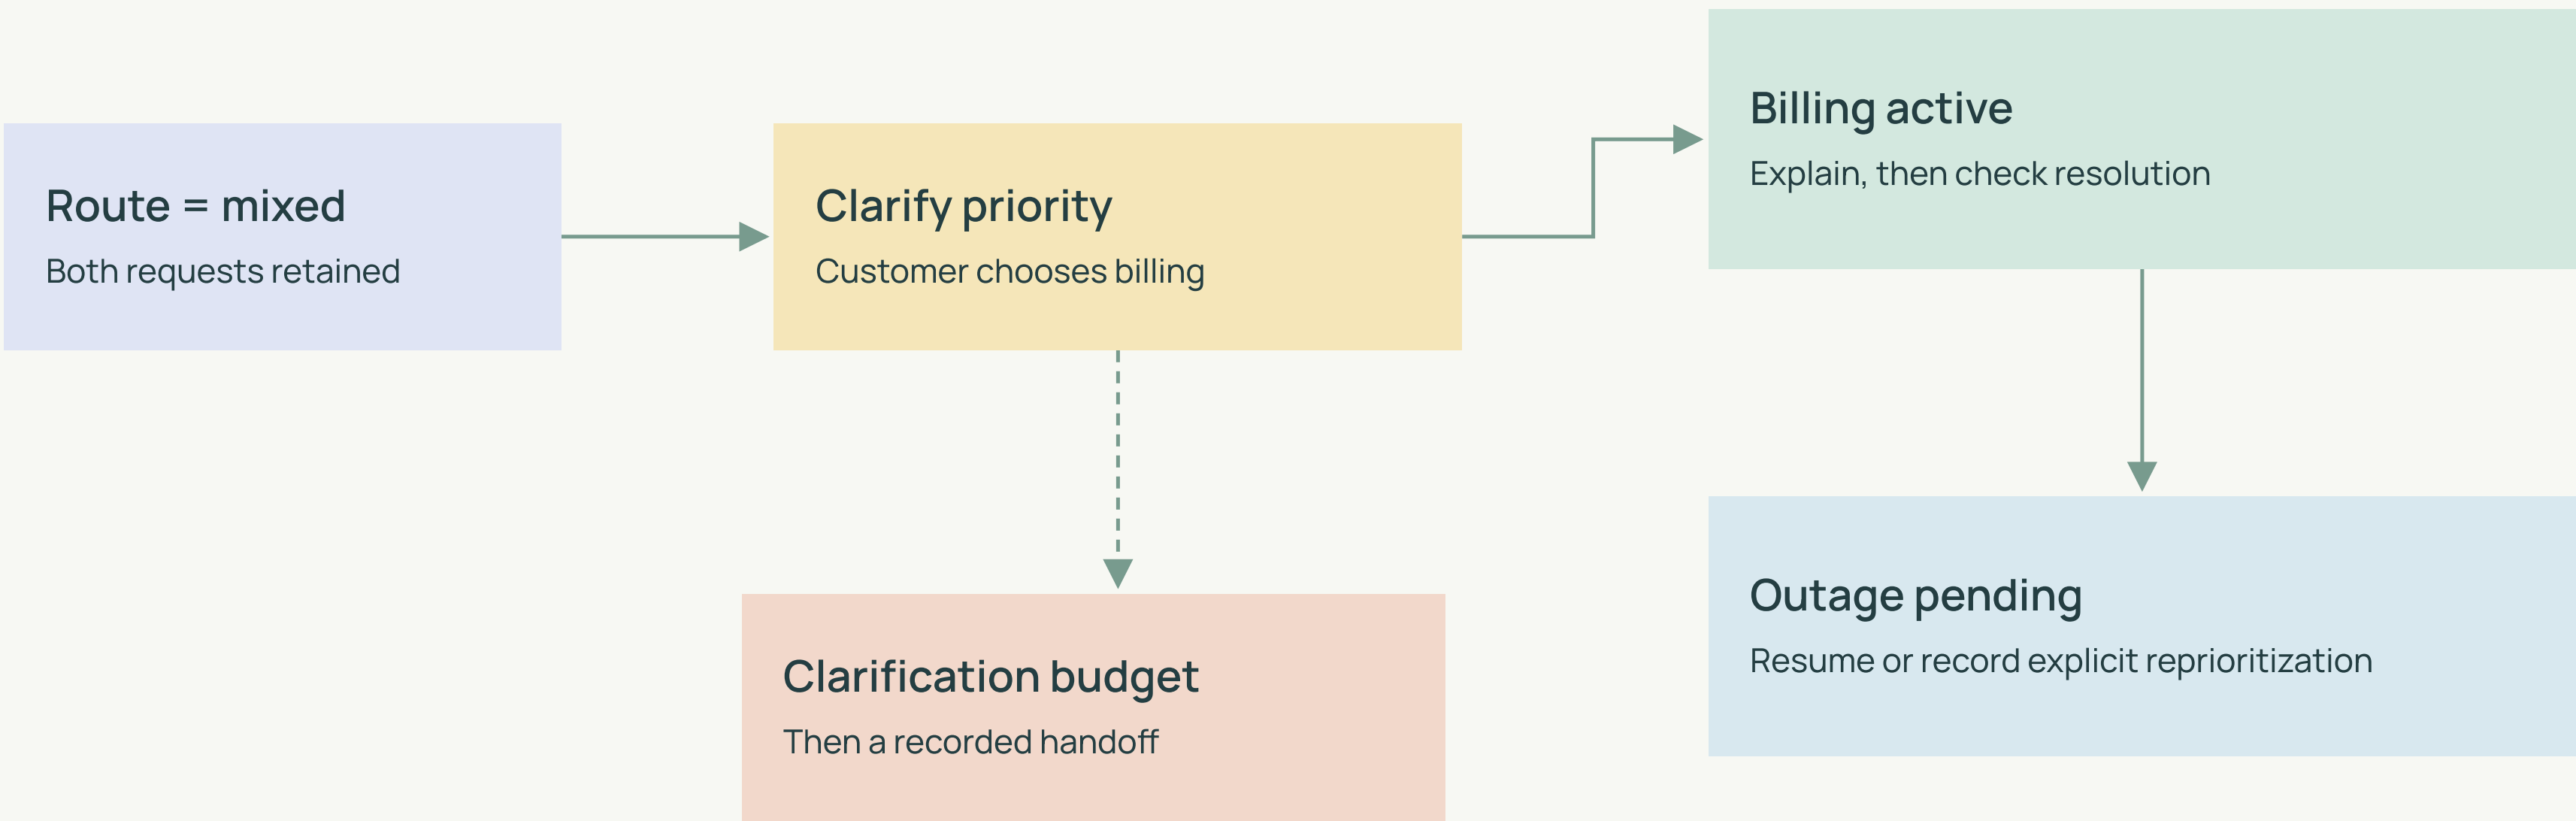

Guided determinism gives uncertainty a place

Neural interpretation inside an authored process.

AgentScript defines where model choice is available.
Agent Graph executes the configured transitions.

Interpretation

Fallible semantic judgment.

Procedure

Required steps and state changes.

Authority

Enforced by trusted services.

Availability and required execution differ

THE SERVICE BOUNDARY

A model signal
cannot grant
account access.

The backend rechecks
the caller and policy
before a write.

REQUIRED WORK

`run` / procedure

Use explicit procedure logic for checks that must execute.

PERMITTED CHOICES

`available when`


Filter which actions the model may select. Availability does not force selection.

CONTROLLED ARGUMENTS

`with` / bound input

Bind consequential inputs from trusted state.

Follow one complete service trace

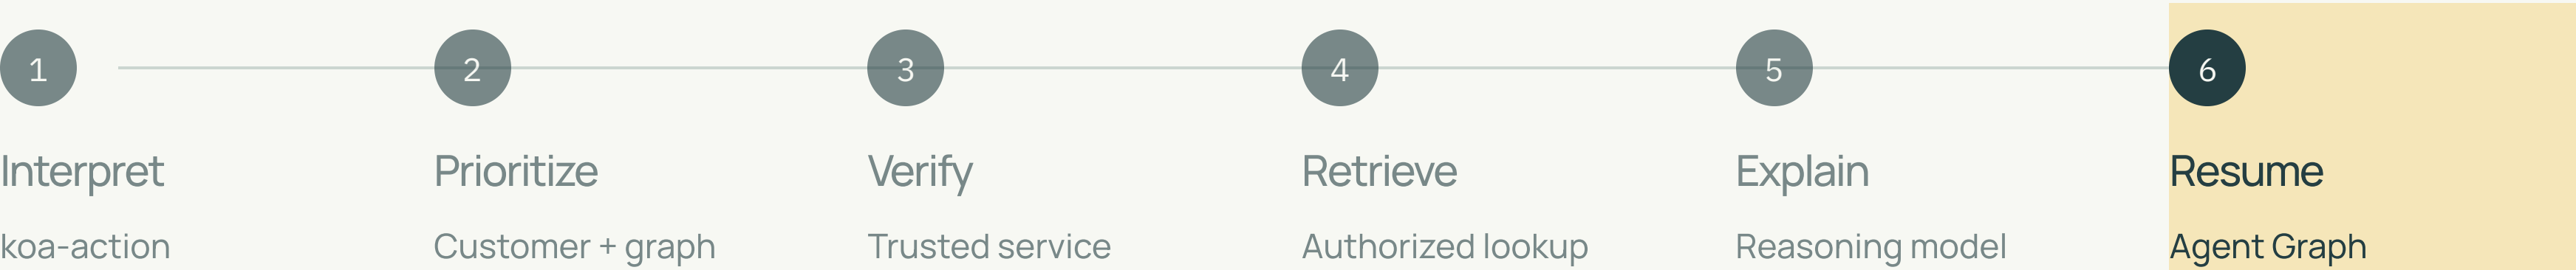

INVOICE

Resolved

The workflow resumes the outage task.

OUTAGE

Active

Retained throughout the billing path.

Event 6 of 6

Failure routes are part of the program

CONTRACT FAILURE

Invalid output

Validate the result before branching. Use a defined fallback.

DEPENDENCY FAILURE

Timeout

Bound retries and retain every pending obligation.

AUTHORITY BOUNDARY

Unauthorized write

The service rejects the action under current policy.


SIDE EFFECT

Repeated write

Use transaction safeguards; record the actual result.

Confidence needs evidence in your domain

A concentrated distribution

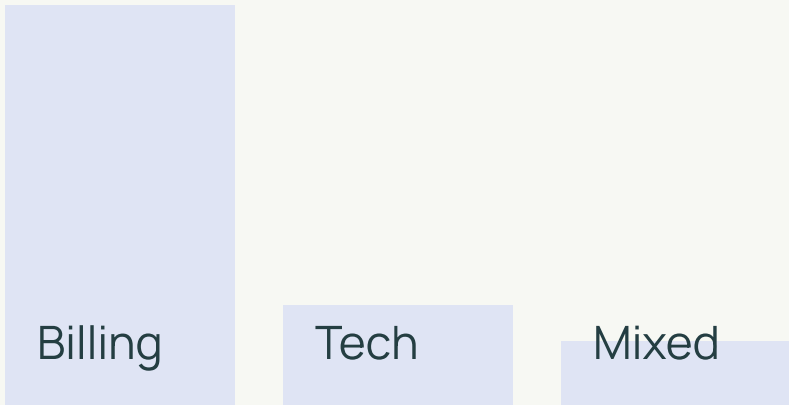

Illustrative output shape.
The highest option can still be wrong.

VALIDATE LOCALLY


Compare signals
with adjudicated labels.

Choose gates on development data.
Report error alongside coverage.

Identity, permissions, and policy
remain separate checks.

A stricter gate moves work somewhere


Twelve labeled examples

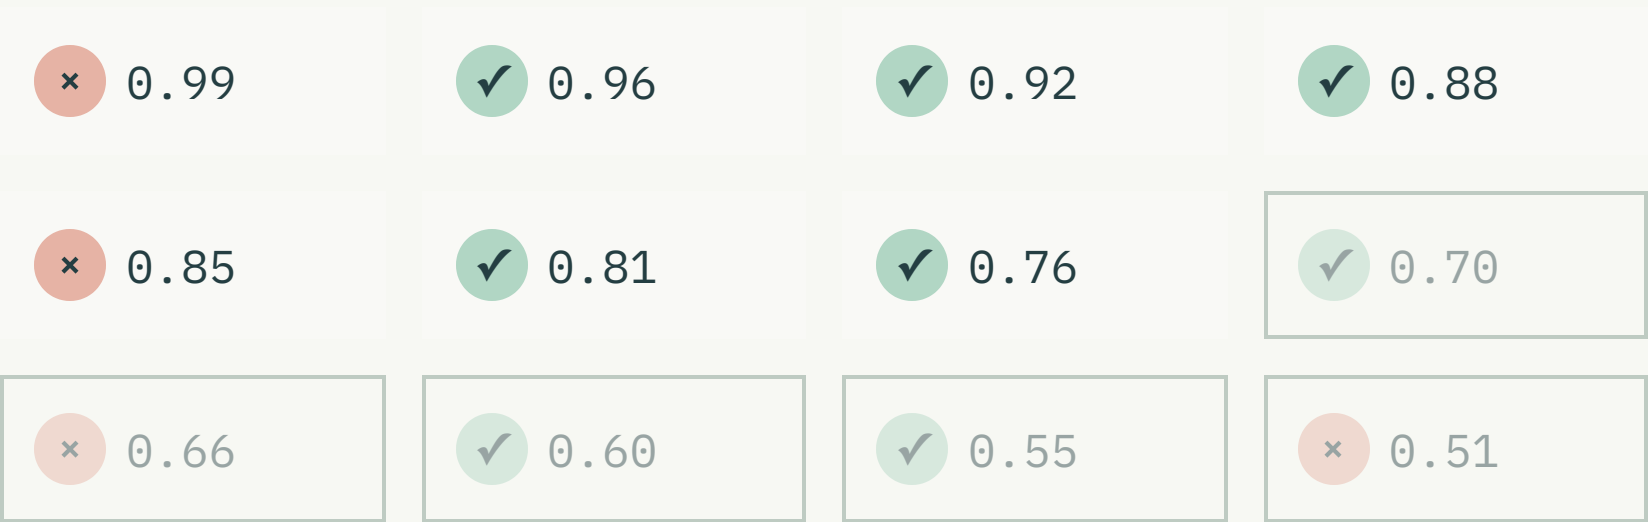

✓ correct route · × wrong route
Faded examples go to review.

SYNTHETIC SAMPLE / UNCALIBRATED SIGNAL

Automatic-route threshold: 0.75

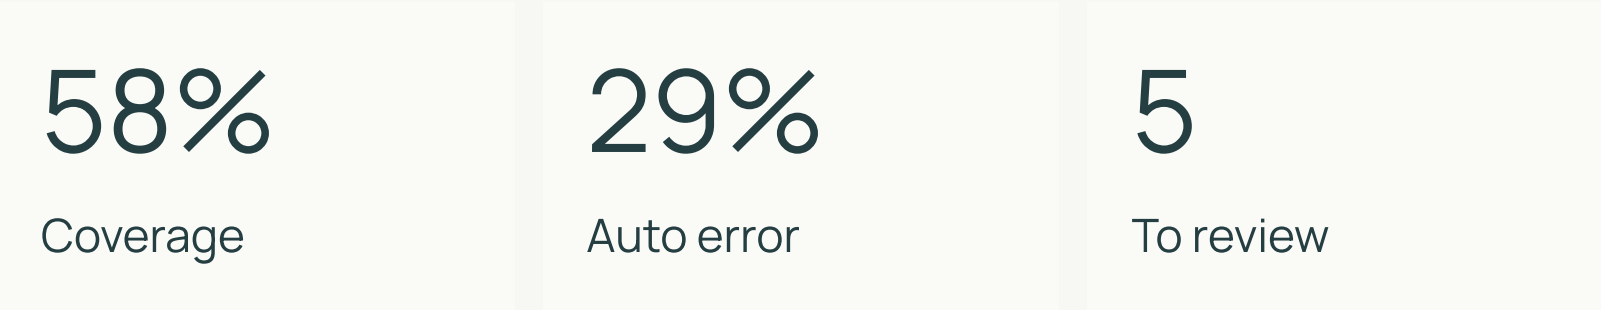

Inspect the high-scoring mistake.
A stricter gate need not remove it.

Avoided work must exceed added work

NORMALIZED DECISION-PATH MODEL

Baseline = G

Candidate = D + O + pG


G = 1.00 generative-stage unit

D = 0.03 decision cost


O = 0.04 orchestration overhead

Fraction still using G: 20%

Baseline



Candidate

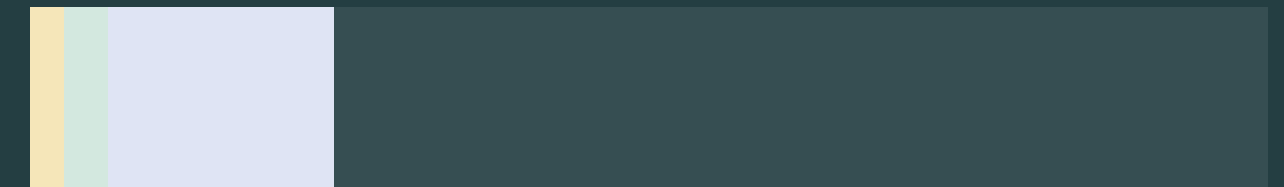


73% lower

0.27 normalized units

Break-even: $D + O < (1 - p)G$


Excludes changed service and human costs.

Fast inference helps the path that uses it

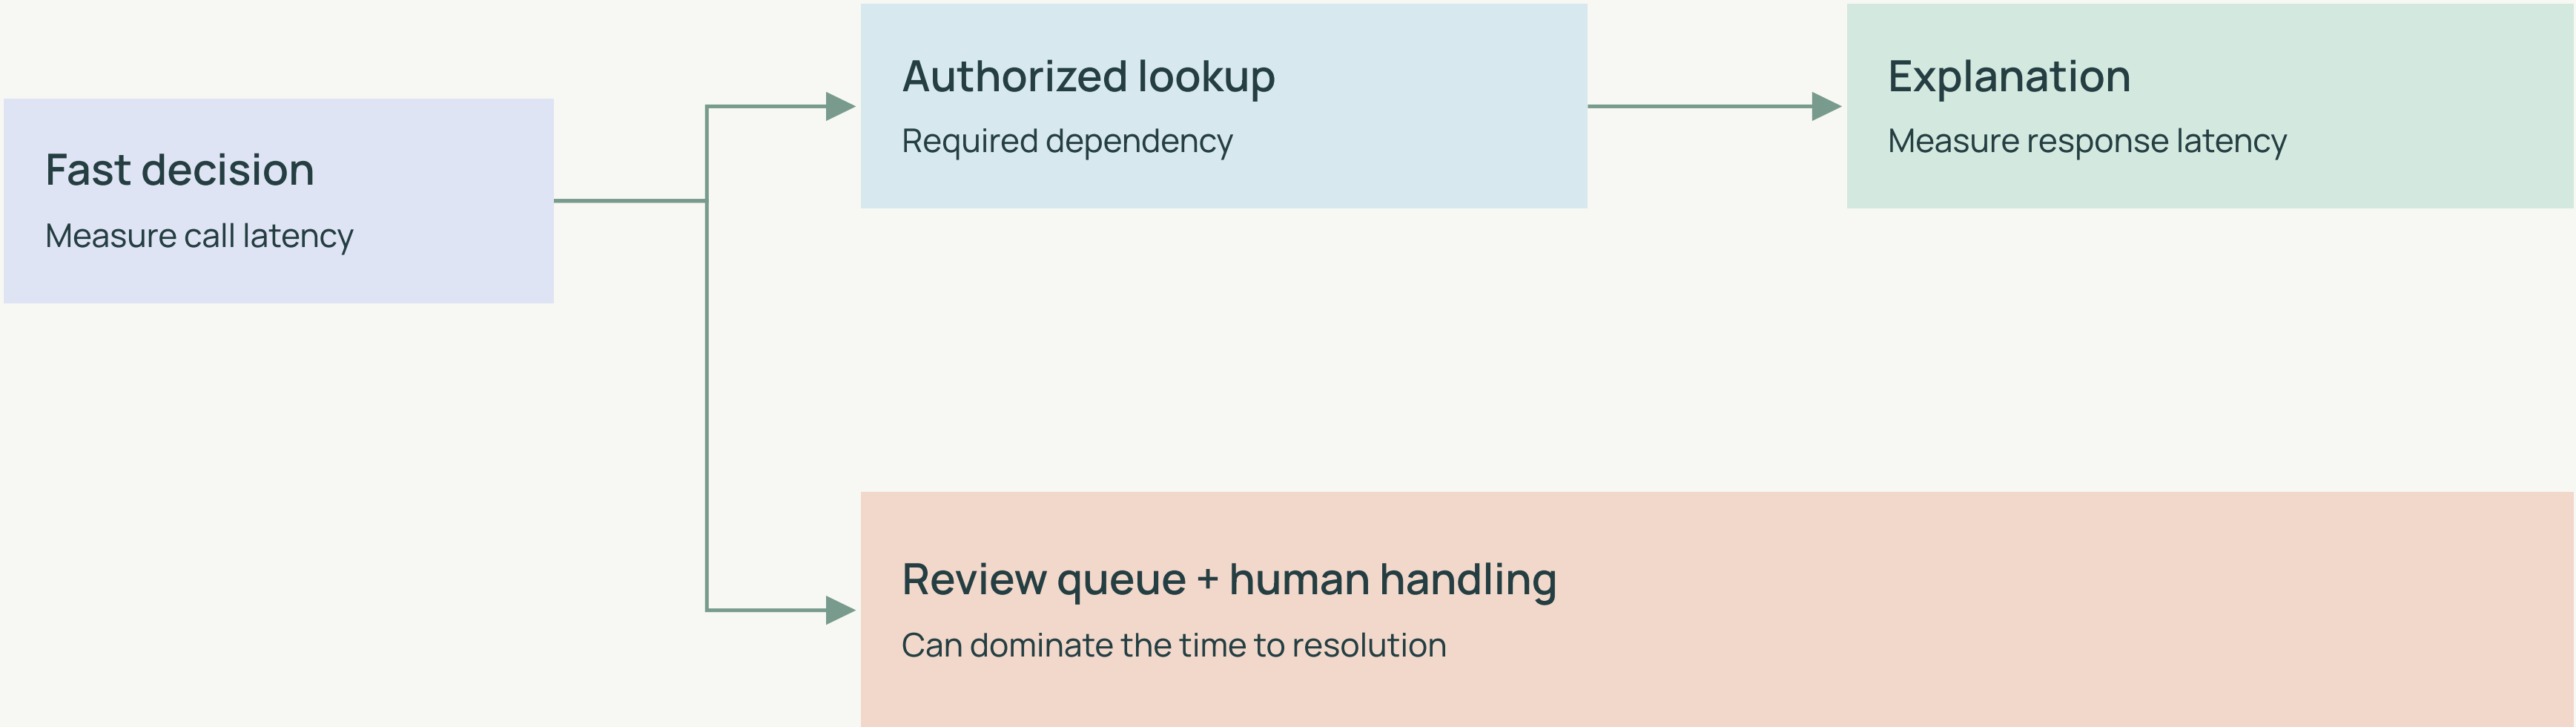

Track decision time, response time, and time to completed service separately.

Find the missing boundary

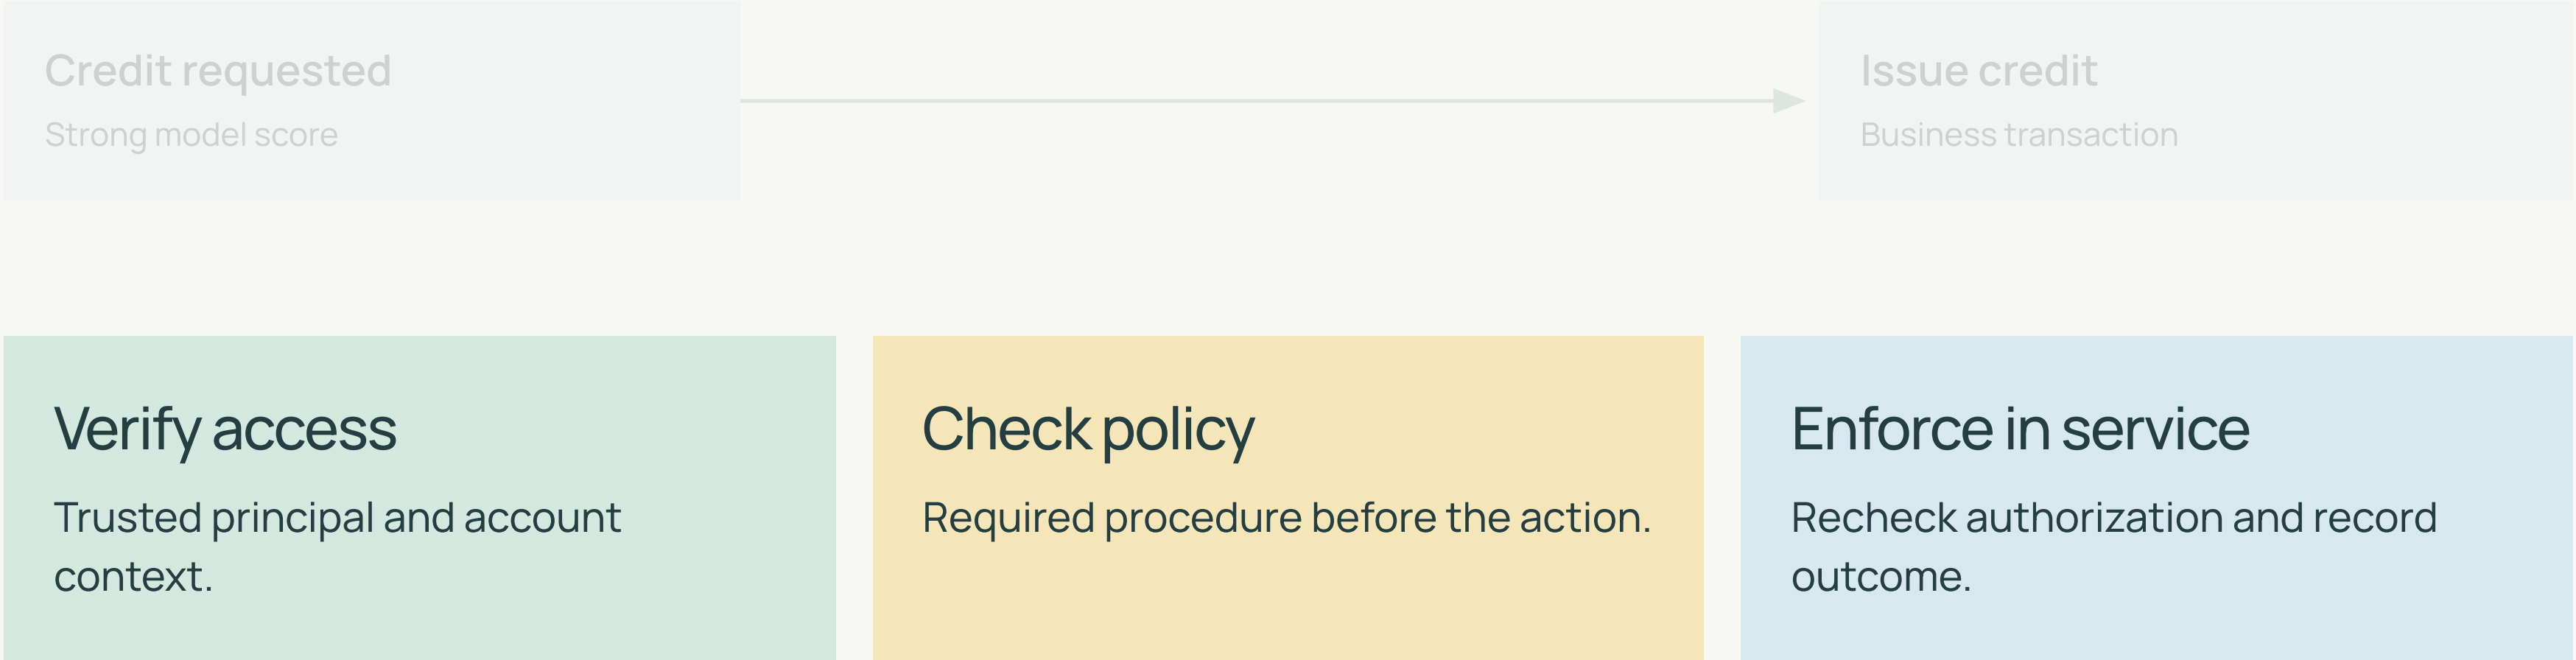

Begin the dataset at the decision boundary

At decision time

INPUT SNAPSHOT

Conversation prefix
Trusted facts available then
Current policy version

REFERENCE LABEL

Next route supported by that evidence.


After the decision

LATER TURNS AND OUTCOMES

Useful for separate outcome labels.
Excluded from the earlier input.

Preserve order,
relationships,
and provenance.

Build a pipeline that protects the test

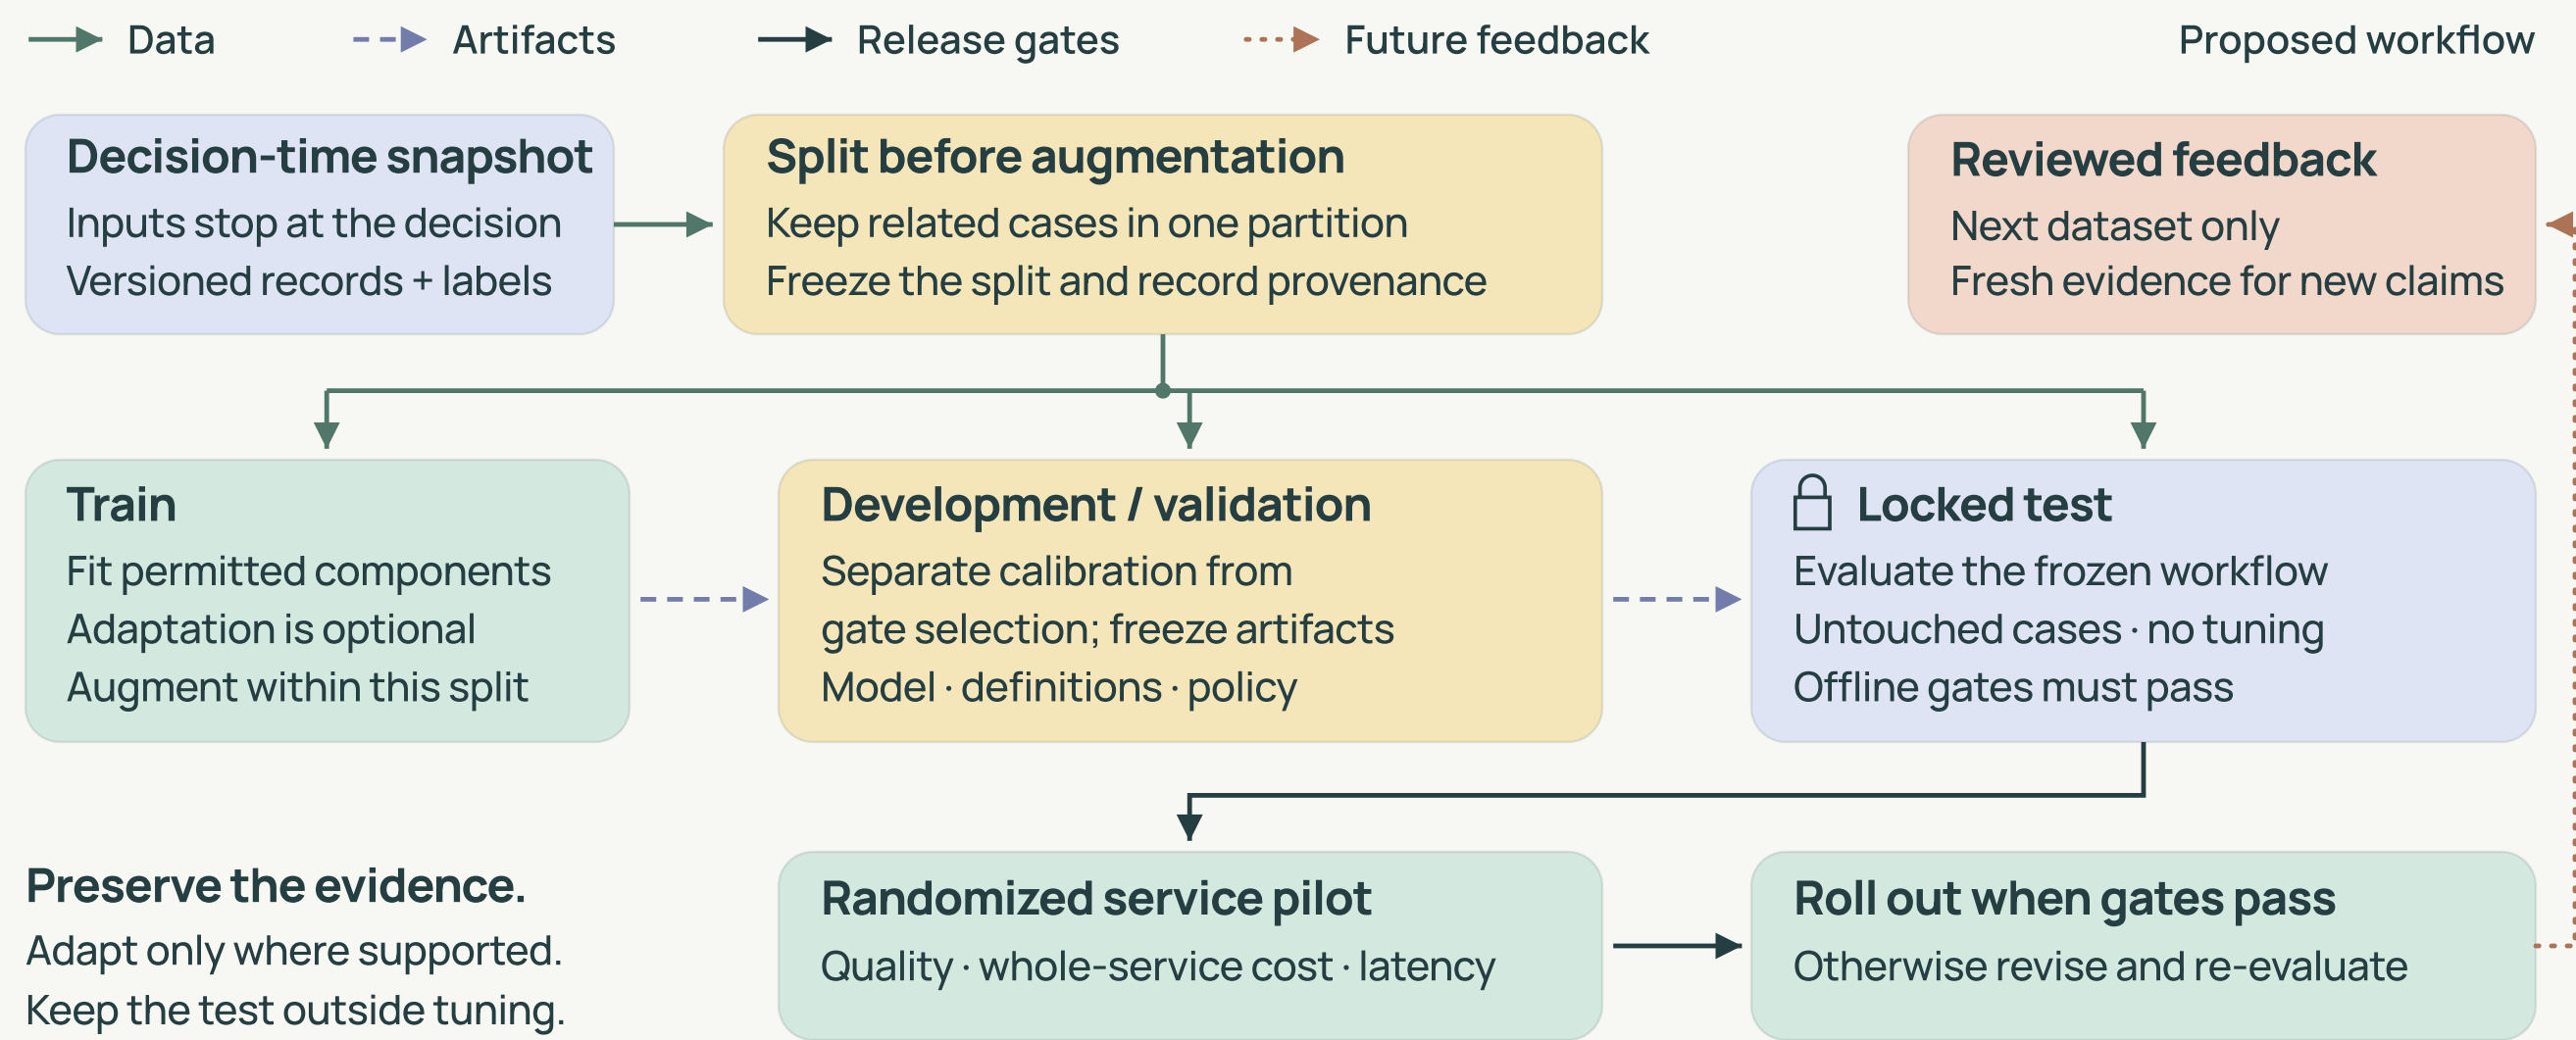

Group before augmentation.

Test a frozen candidate.

Pilot before wider rollout.

Choose the split that matches the claim

UNSEEN ACCOUNTS

Keep account families intact.



Related cases and variants stay in one partition.

FUTURE TRAFFIC

Reserve a later-time cohort.



Declare boundary exclusions and duplicate handling.

Predeclare what would earn a rollout

MUST PASS

Quality

Upper uncertainty bound
on failure-rate increase

◀ **allowed margin**

MUST PASS

Cost

Lower uncertainty bound
on saving per incoming
case

▶ **required gain**

MUST PASS

Consequences

Separate limits for harmful
actions, assessed on fixed
cohorts.

MUST PASS

Latency

Required response and
resolution constraints,
including unfinished
cases.

Evaluate the decision, then the service

PAIRED OFFLINE COMPARISON

Evaluate the decision.

Same held-out snapshots.
Same route question.
Fixed permissions and tools.

Each model's gate is selected
on development data.


CONTROLLED SERVICE PILOT

Evaluate the complete case.

Randomized case/account assignment.
Consistent treatment and horizon.
Costs, queues, and unresolved work.

Pilot evidence must precede
wider rollout.

Diagnose the boundary that failed

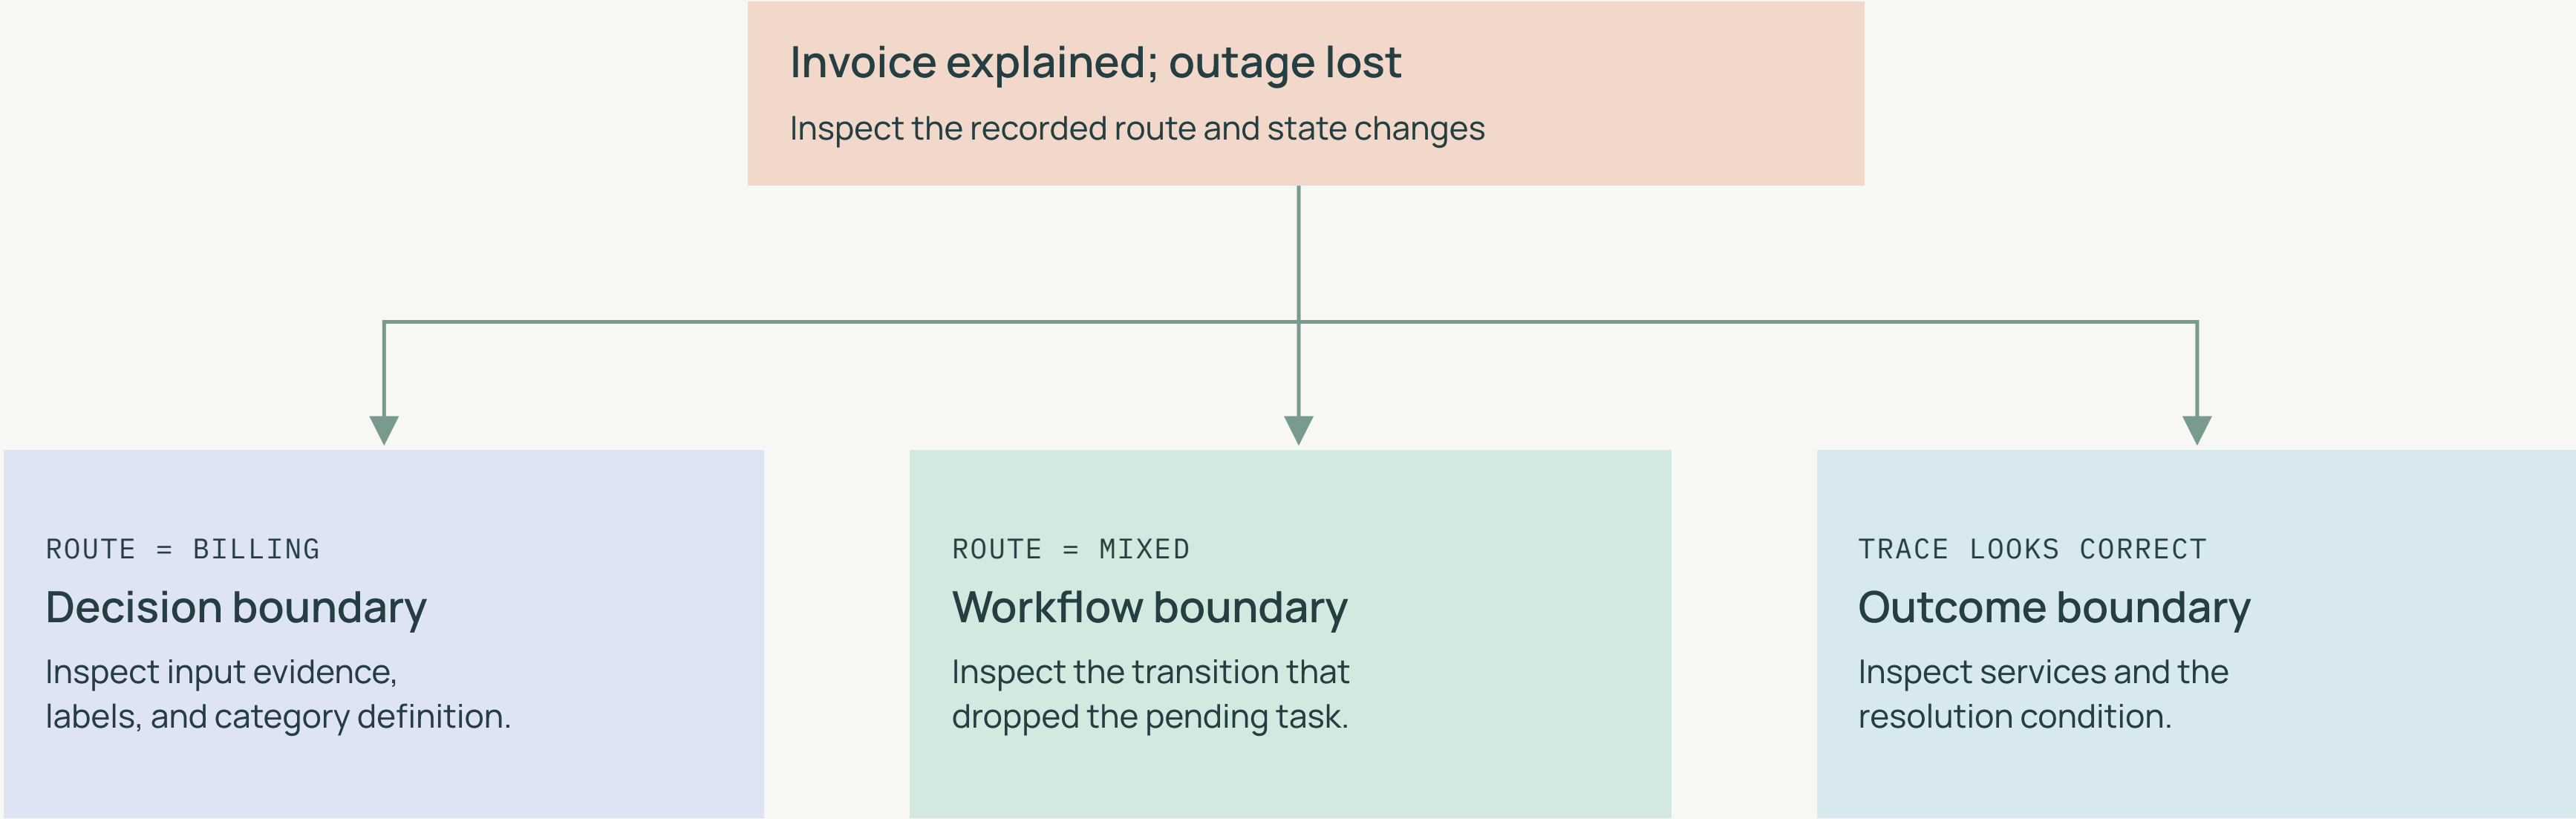

Start with one decision that changes the path

Give each decision a purpose. Give the workflow a contract.

Complete both customer requests
within the reliability and cost limits.

- 01 Choose a bounded decision.
- 02 Define its evidence and outputs.
- 03 Encode sequence and state in the graph.
- 04 Keep authority in trusted services.
- 05 Earn expansion with measured outcomes.

Read the evidence behind the architecture

Salesforce control

[Agent Graph / guided determinism ↗](#)

[Reliable enterprise agents ↗](#)

[AgentScript control plane ↗](#)

[AgentScript specification ↗](#)

Agent architecture

[Jev + LangGraph ↗](#)

[A harness with Jev ↗](#)

[Jev in LangSmith Evals ↗](#)

[Jev-as-a-Judge ↗](#)

[Runtime, framework, harness ↗](#)

Decision patterns

[Composable AI ↗](#)

[TypeSafe quickstart ↗](#)

[Confidence routing ↗](#)

[Intent routing ↗](#)

[Structured decision criteria ↗](#)

[Building with System One ↗](#)