


Disaggregated intelligence


Enterprise reasoning with
`koa-action`, Agent Graph
and AgentScript.

Fast, focused judgment by default.
Frontier reasoning for the exceptions.

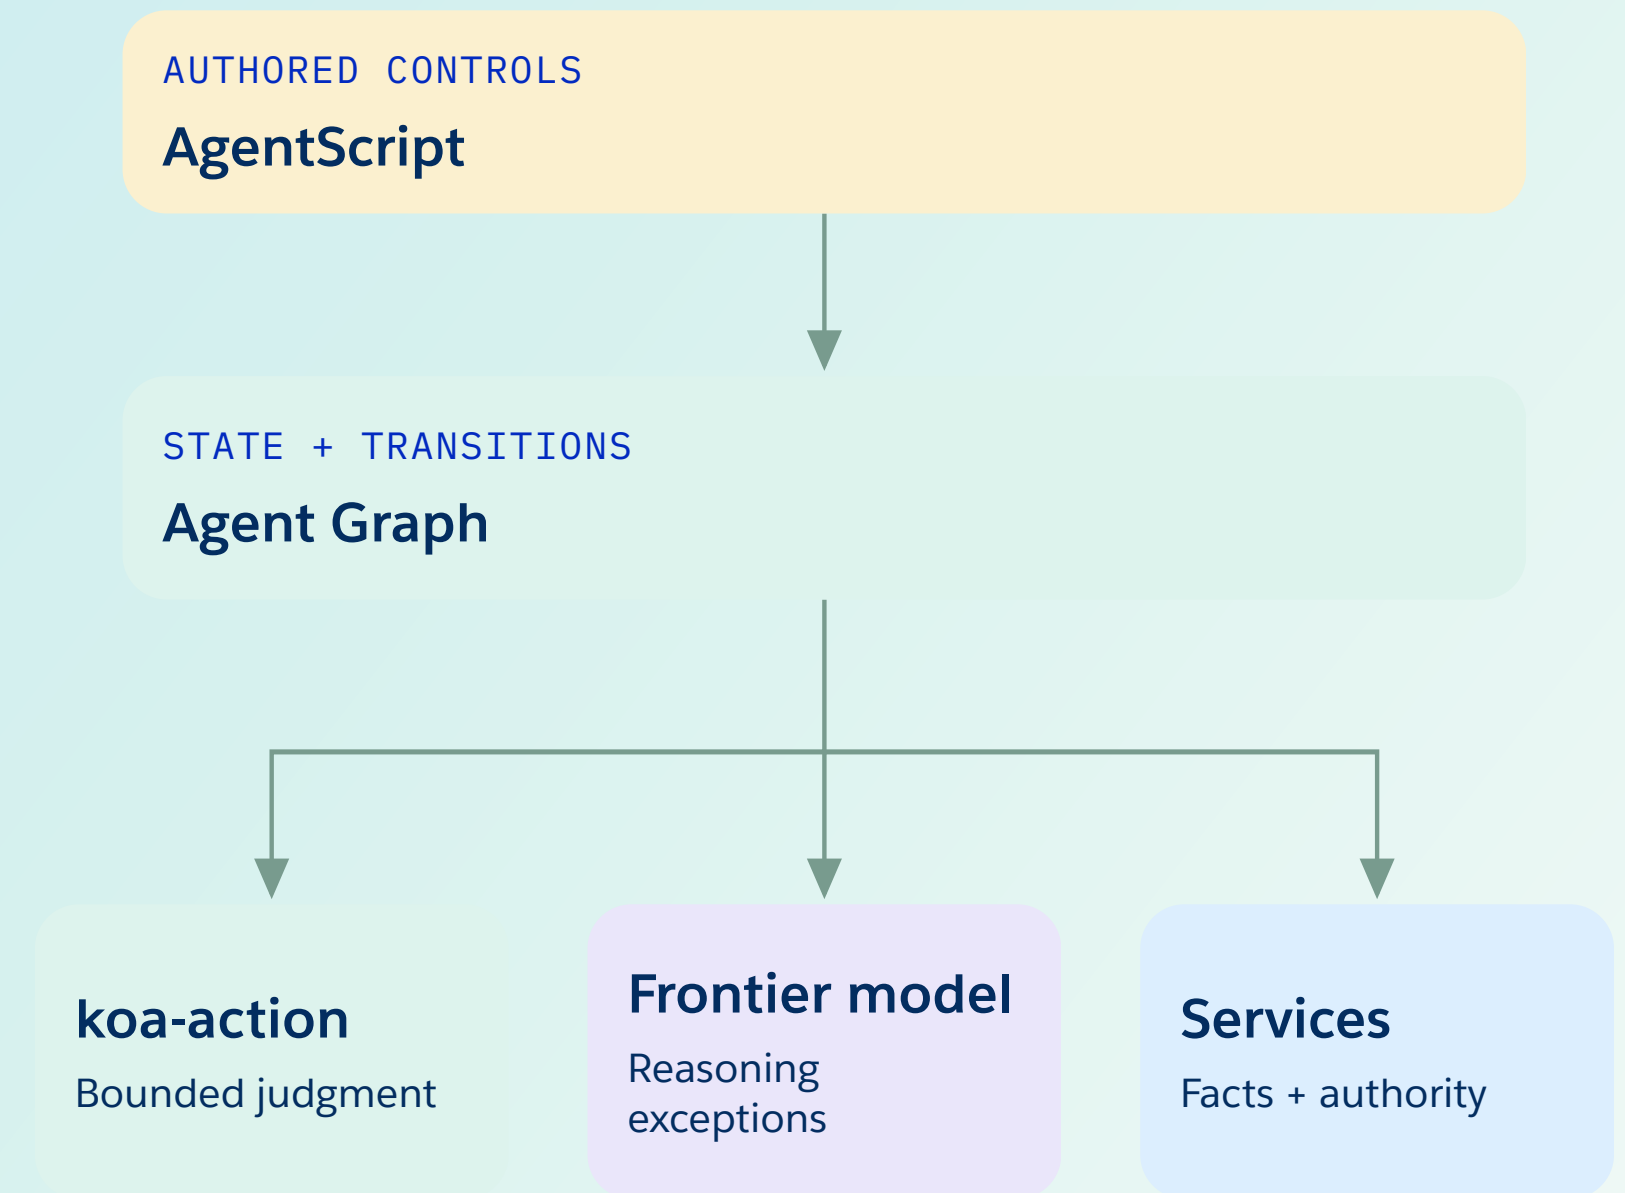

Four benefits. One service to measure.


CORRECT OUTCOMES



Reliability

Test decisions and enforce required checks.


CONTROLLED VARIATION



Predictability

Bound outputs, paths, and recovery behavior.

LESS TOTAL WORK



Lower cost

Avoid expensive work that the case does not need.

SHORTER CRITICAL PATH



Faster inference

Use short decision steps on frequent routes.

One customer, two obligations

“Exchange these headphones and return the spare cable.”


The cable is a separately purchased item.

The case ledger

Exchange	Requested	Pending
Cable return	Requested	Pending

What must survive every transition?

Give each responsibility an owner

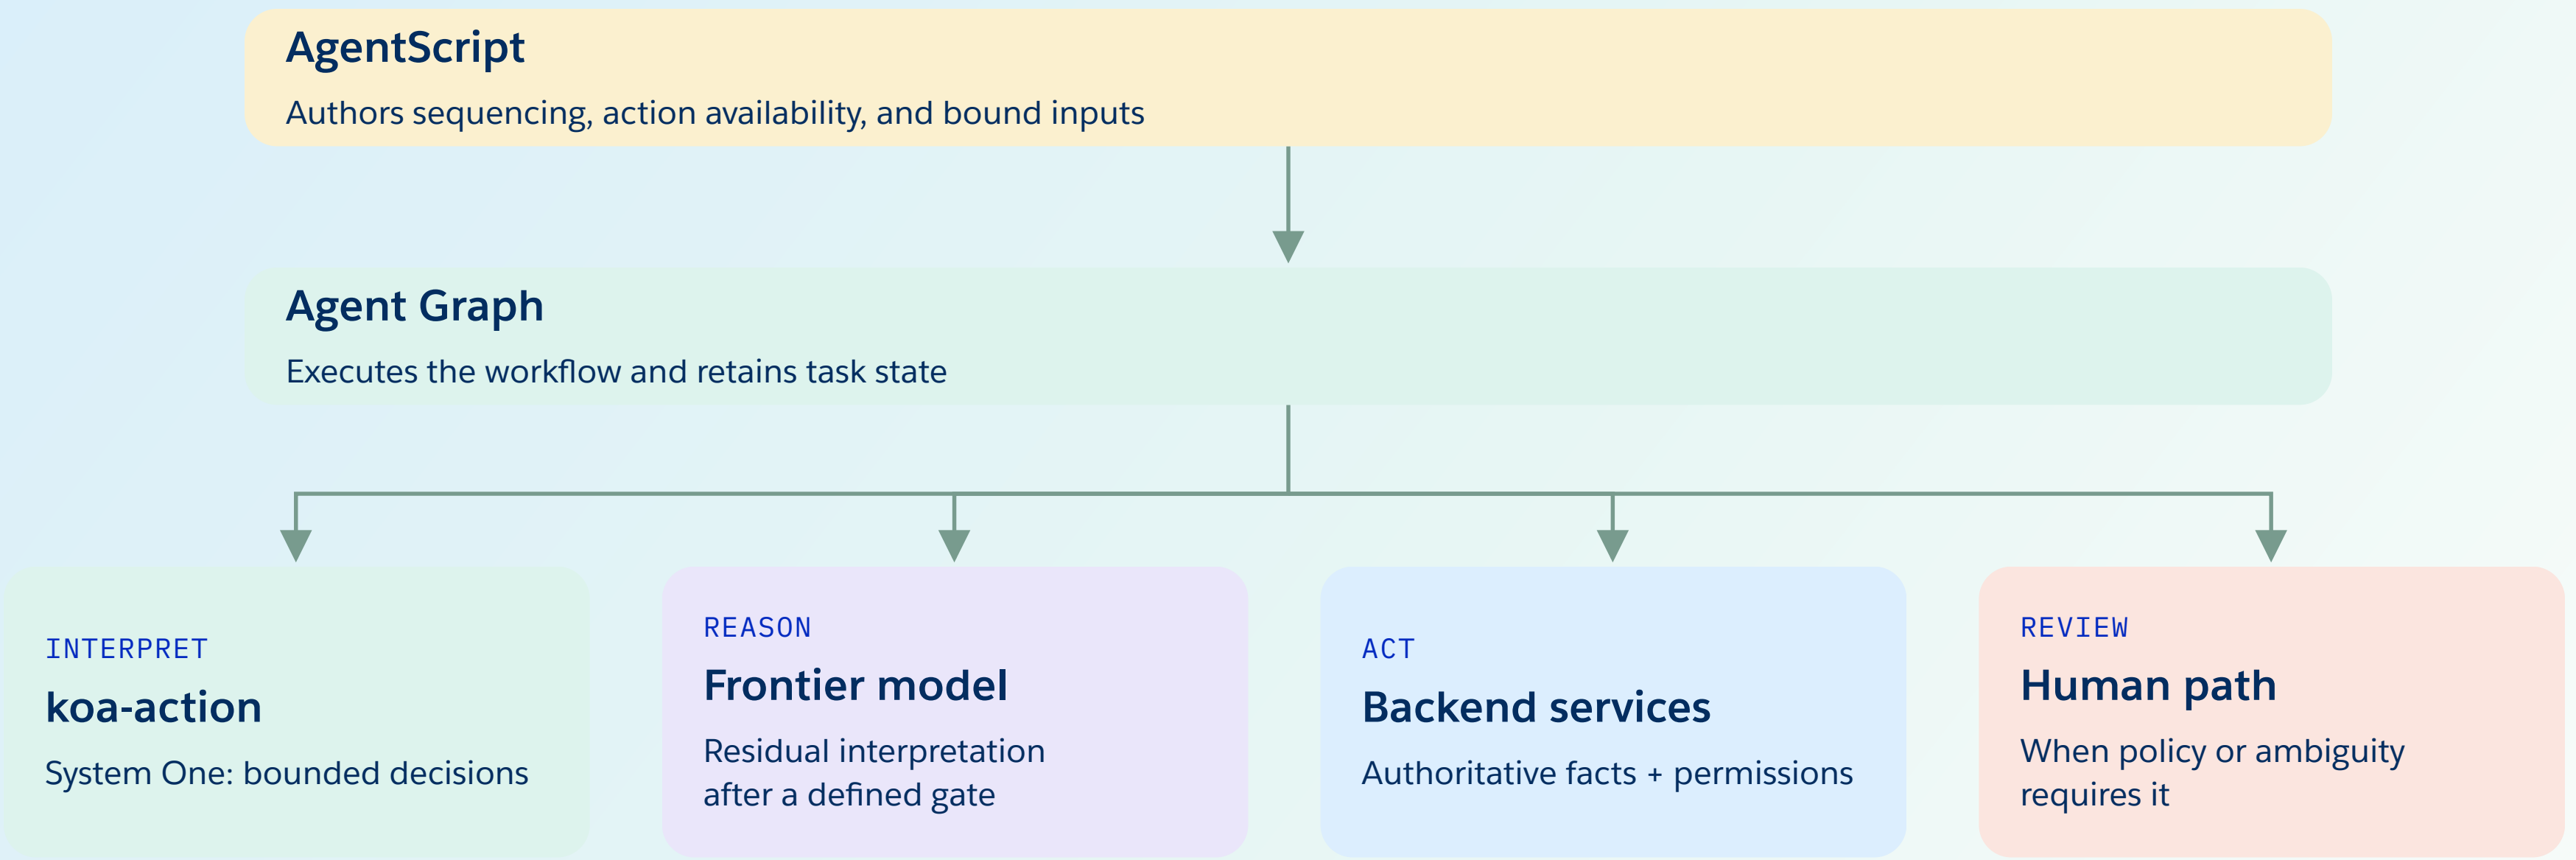


Process knowledge becomes topology


A PROCESS BURIED IN INSTRUCTIONS

Before an exchange, verify identity and match the purchase. Check exchange rules and stock. Preserve the cable return.


Definitions and evidence still belong in node context.

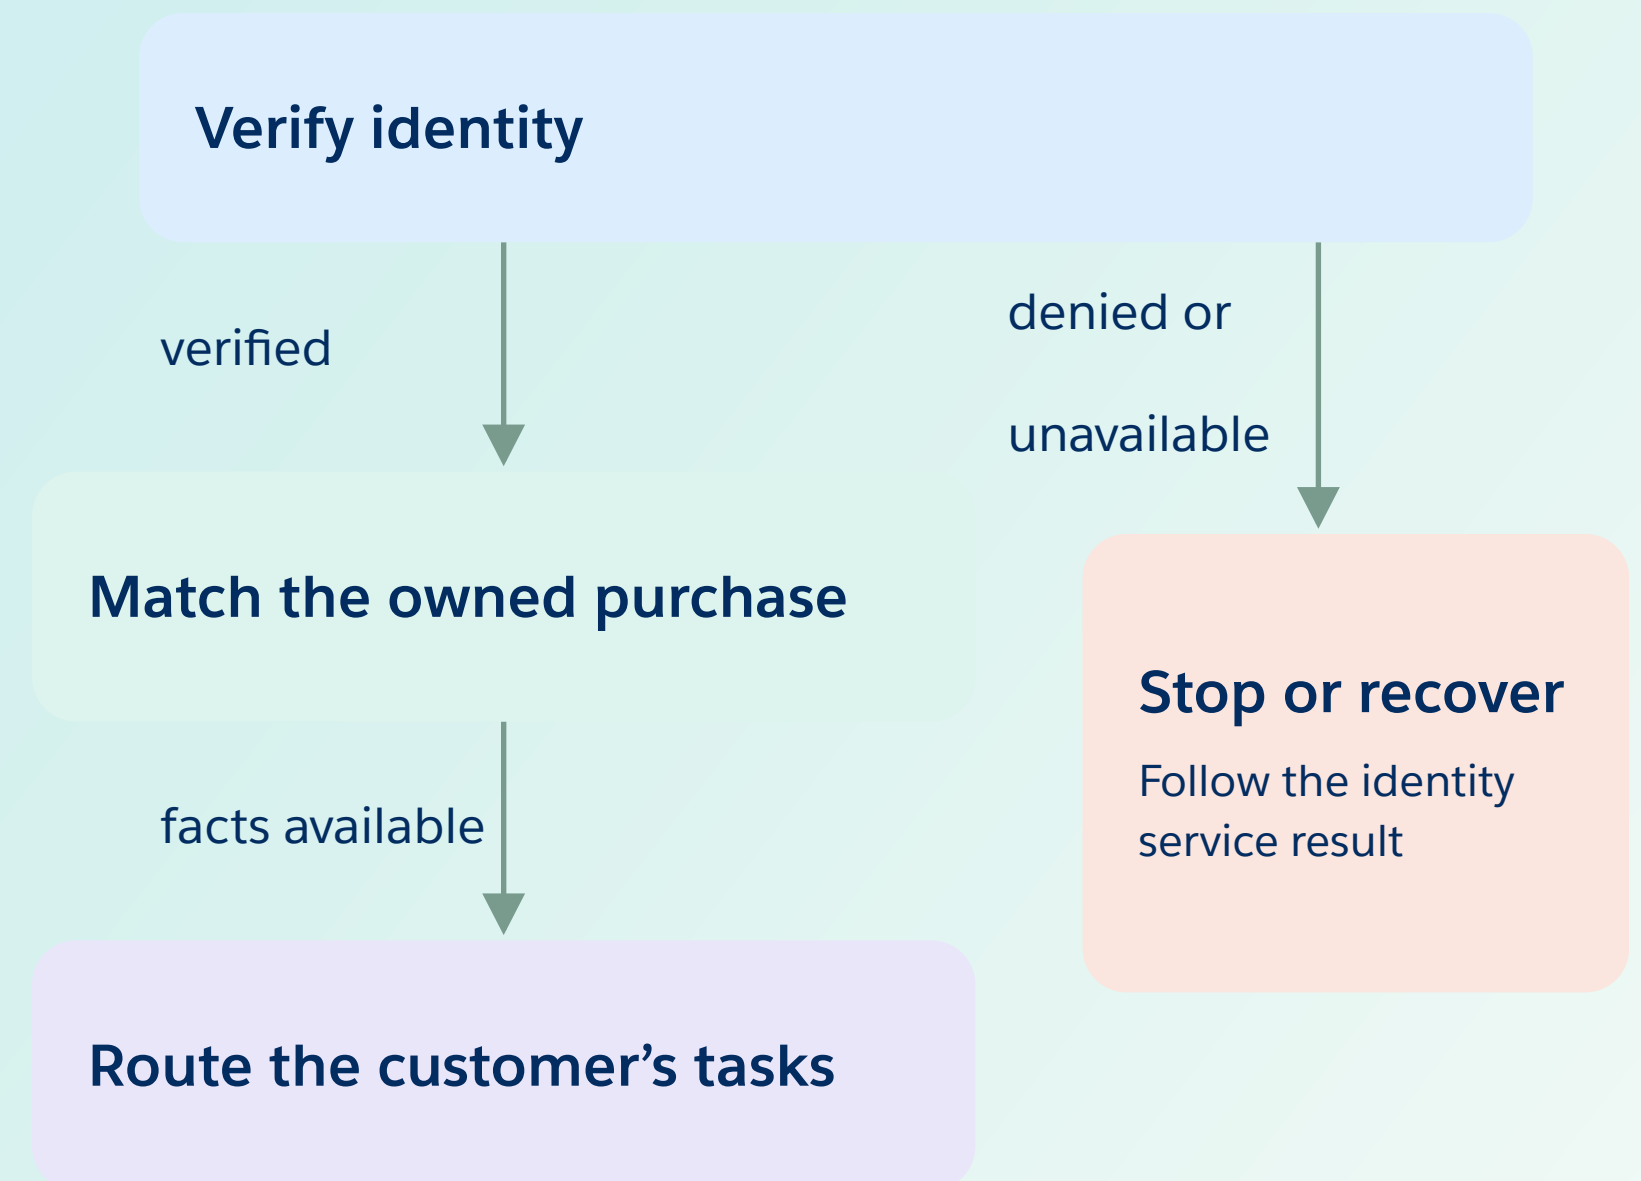


Start with identity and an owned purchase

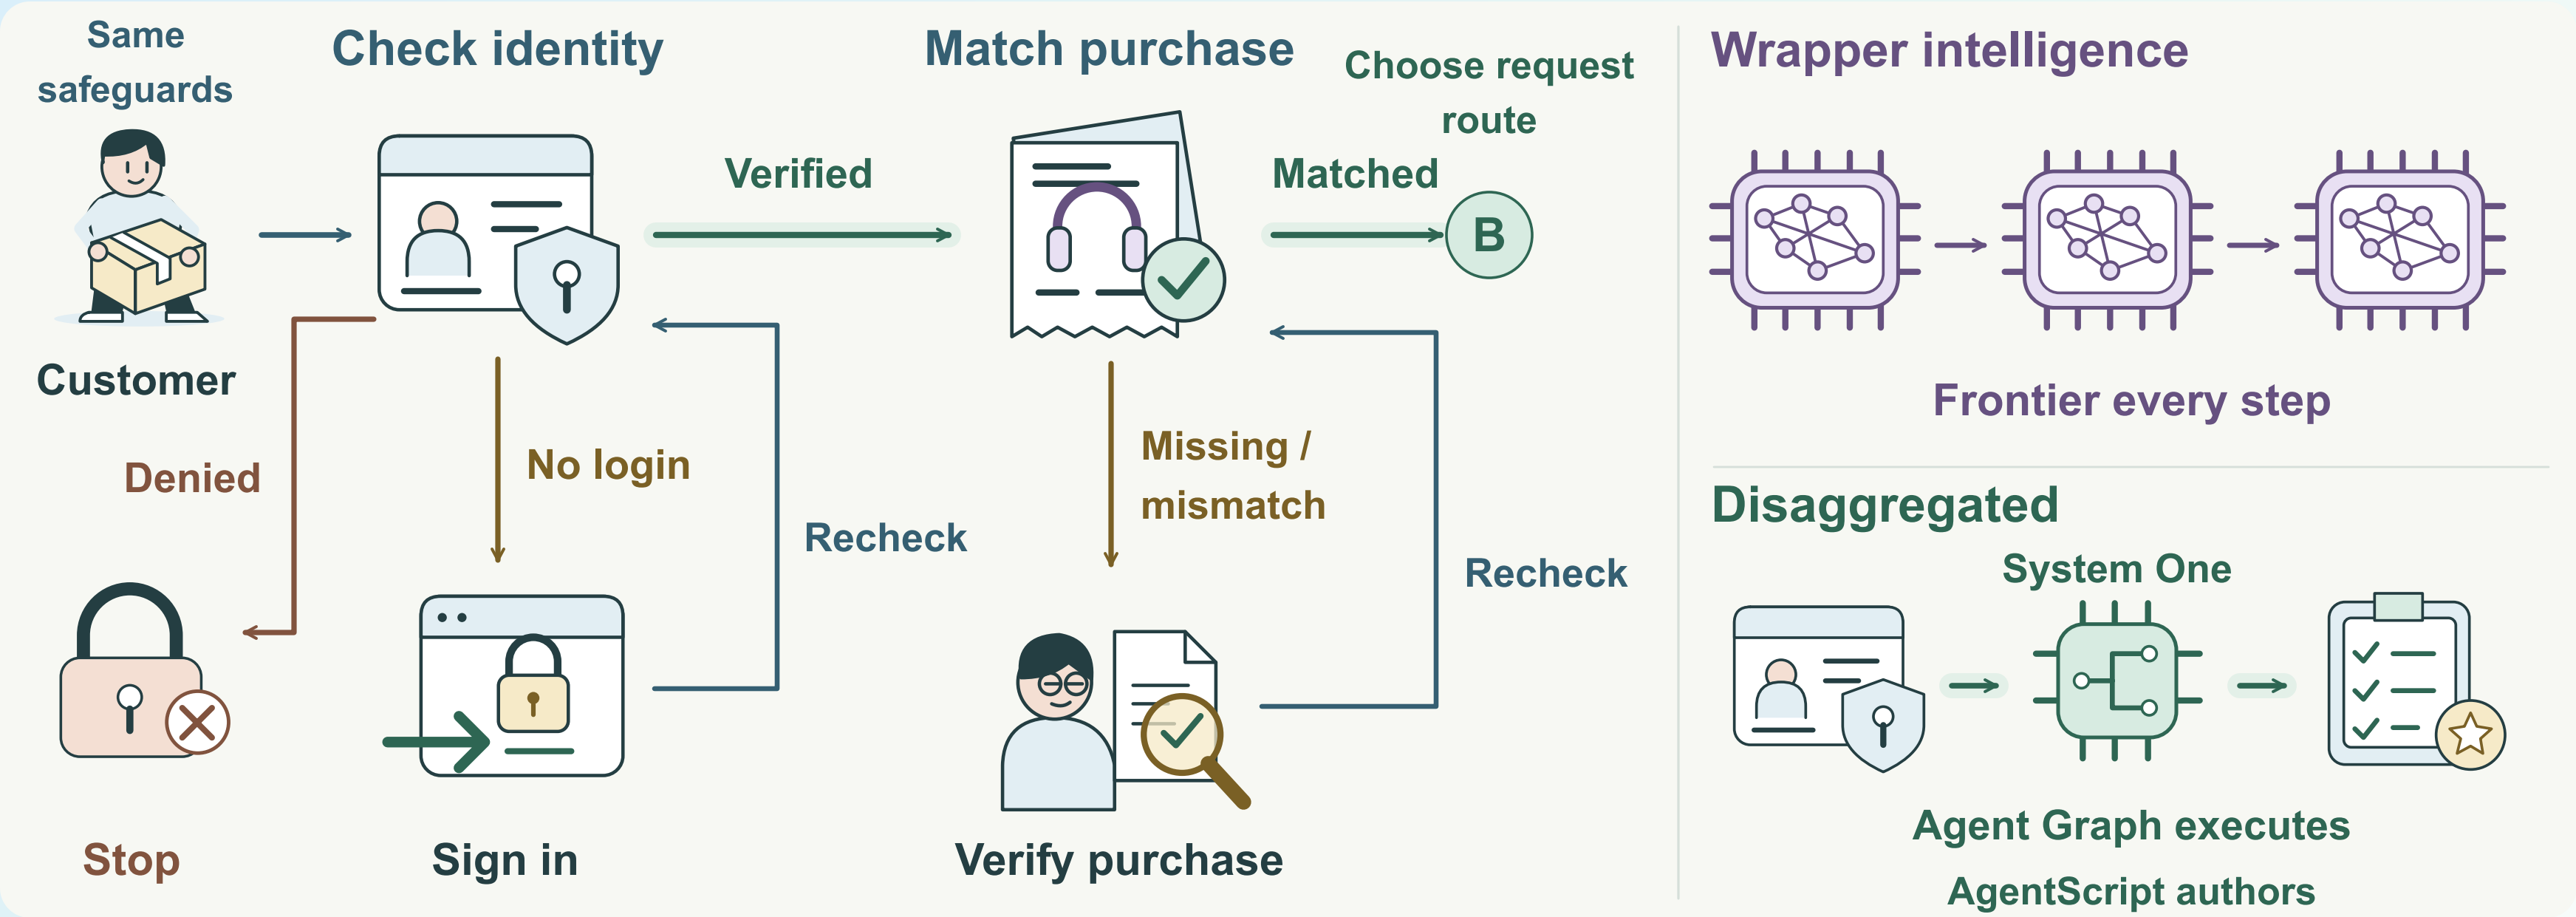


Give familiar requests a direct service route

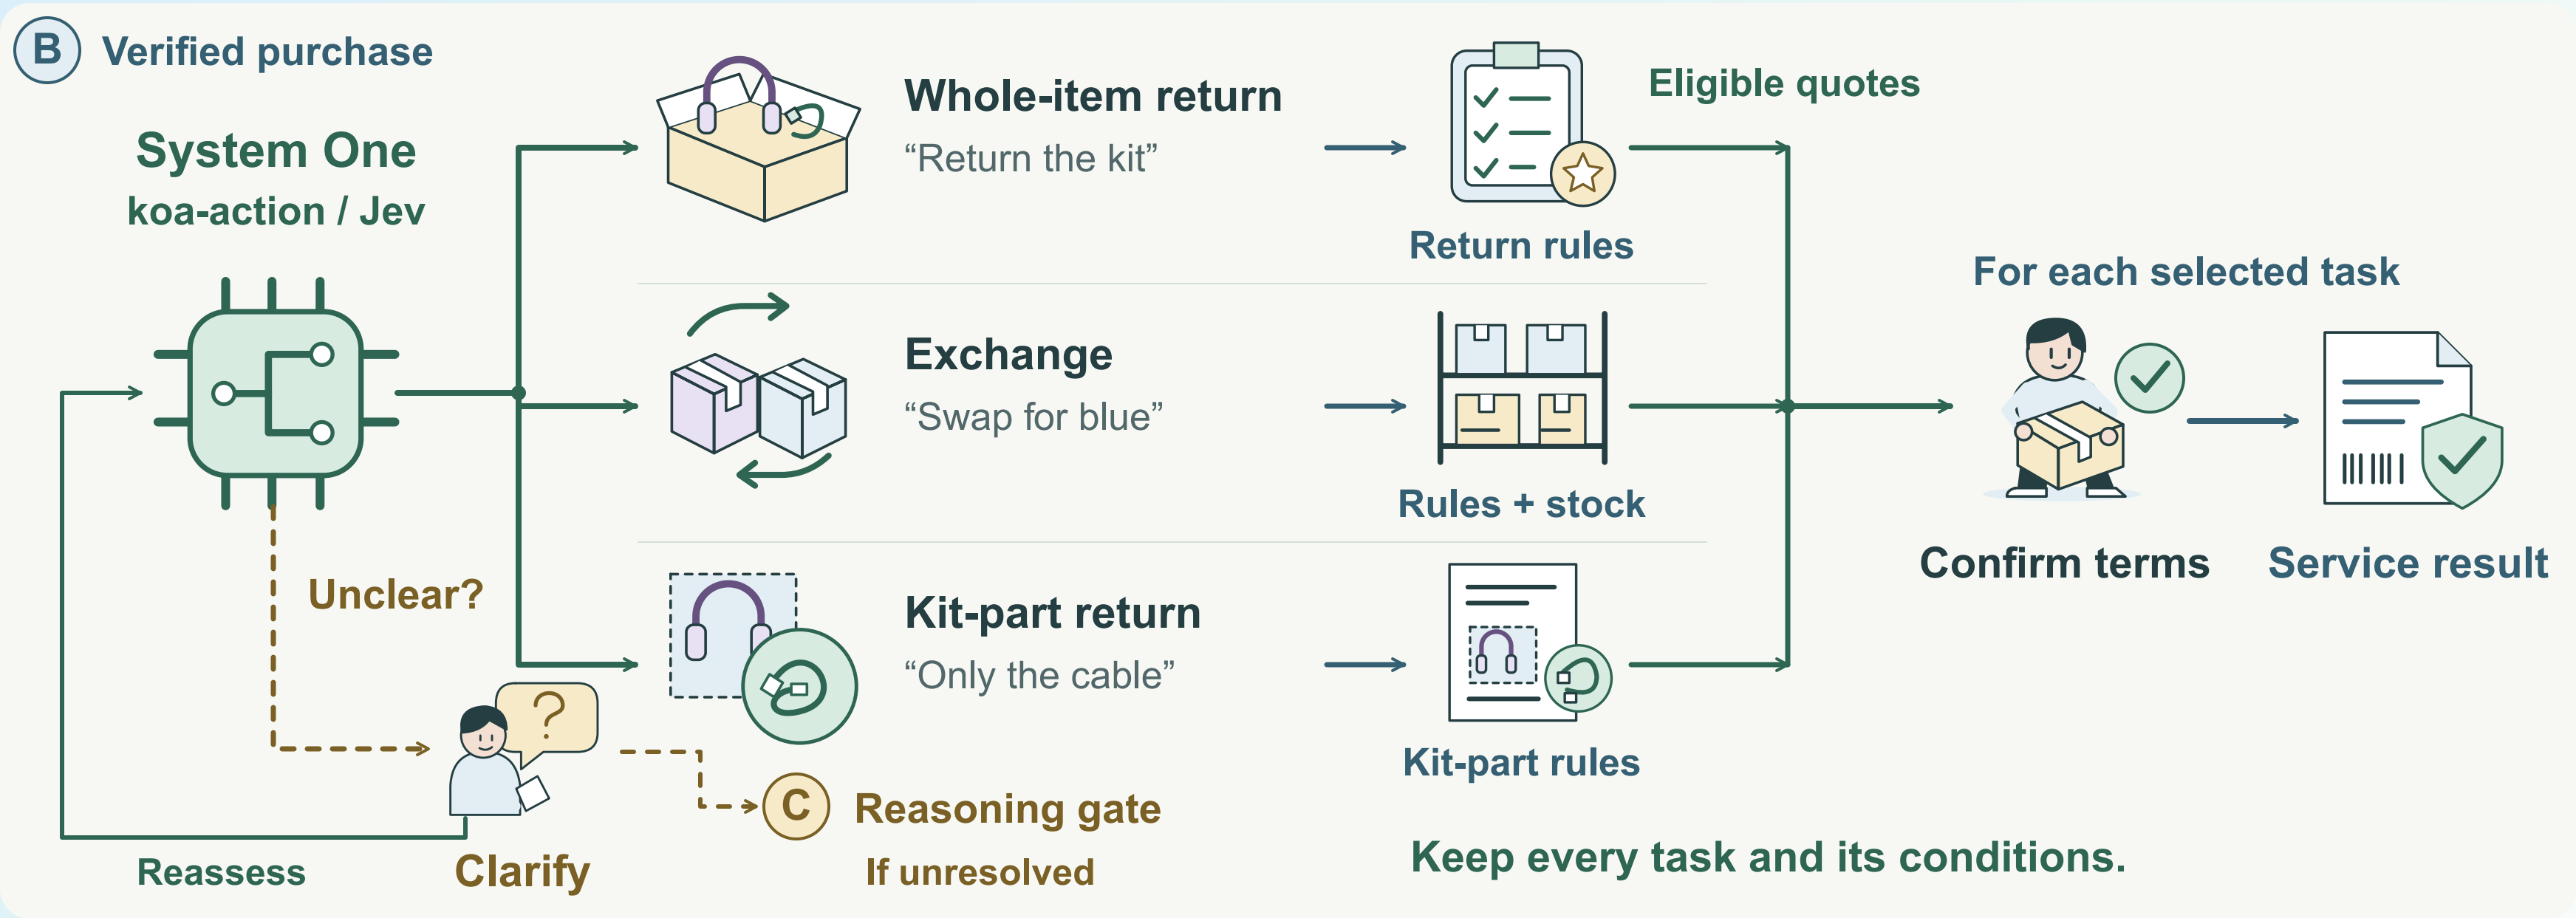

Reserve frontier reasoning for unresolved meaning

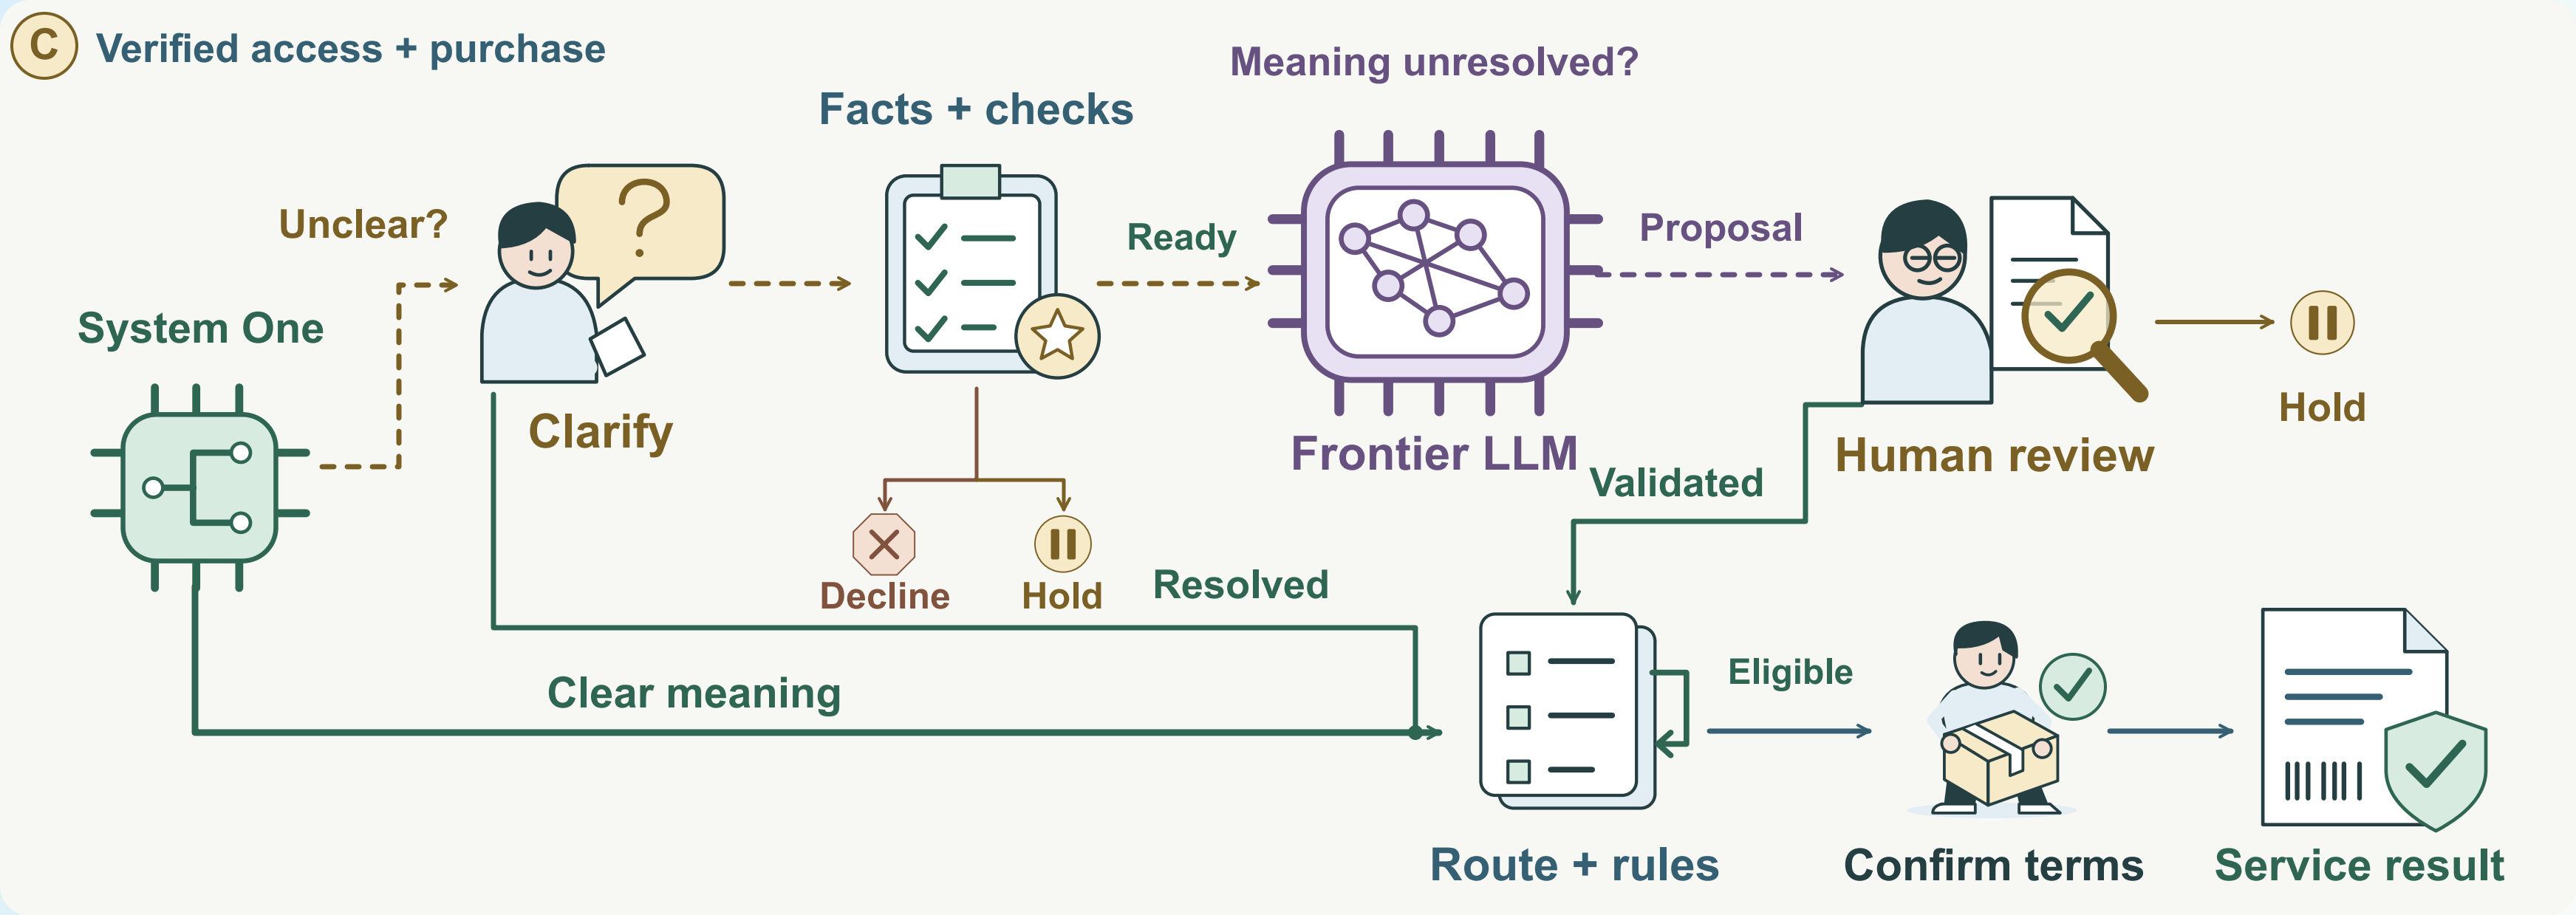

Whole-item returns follow their own policy

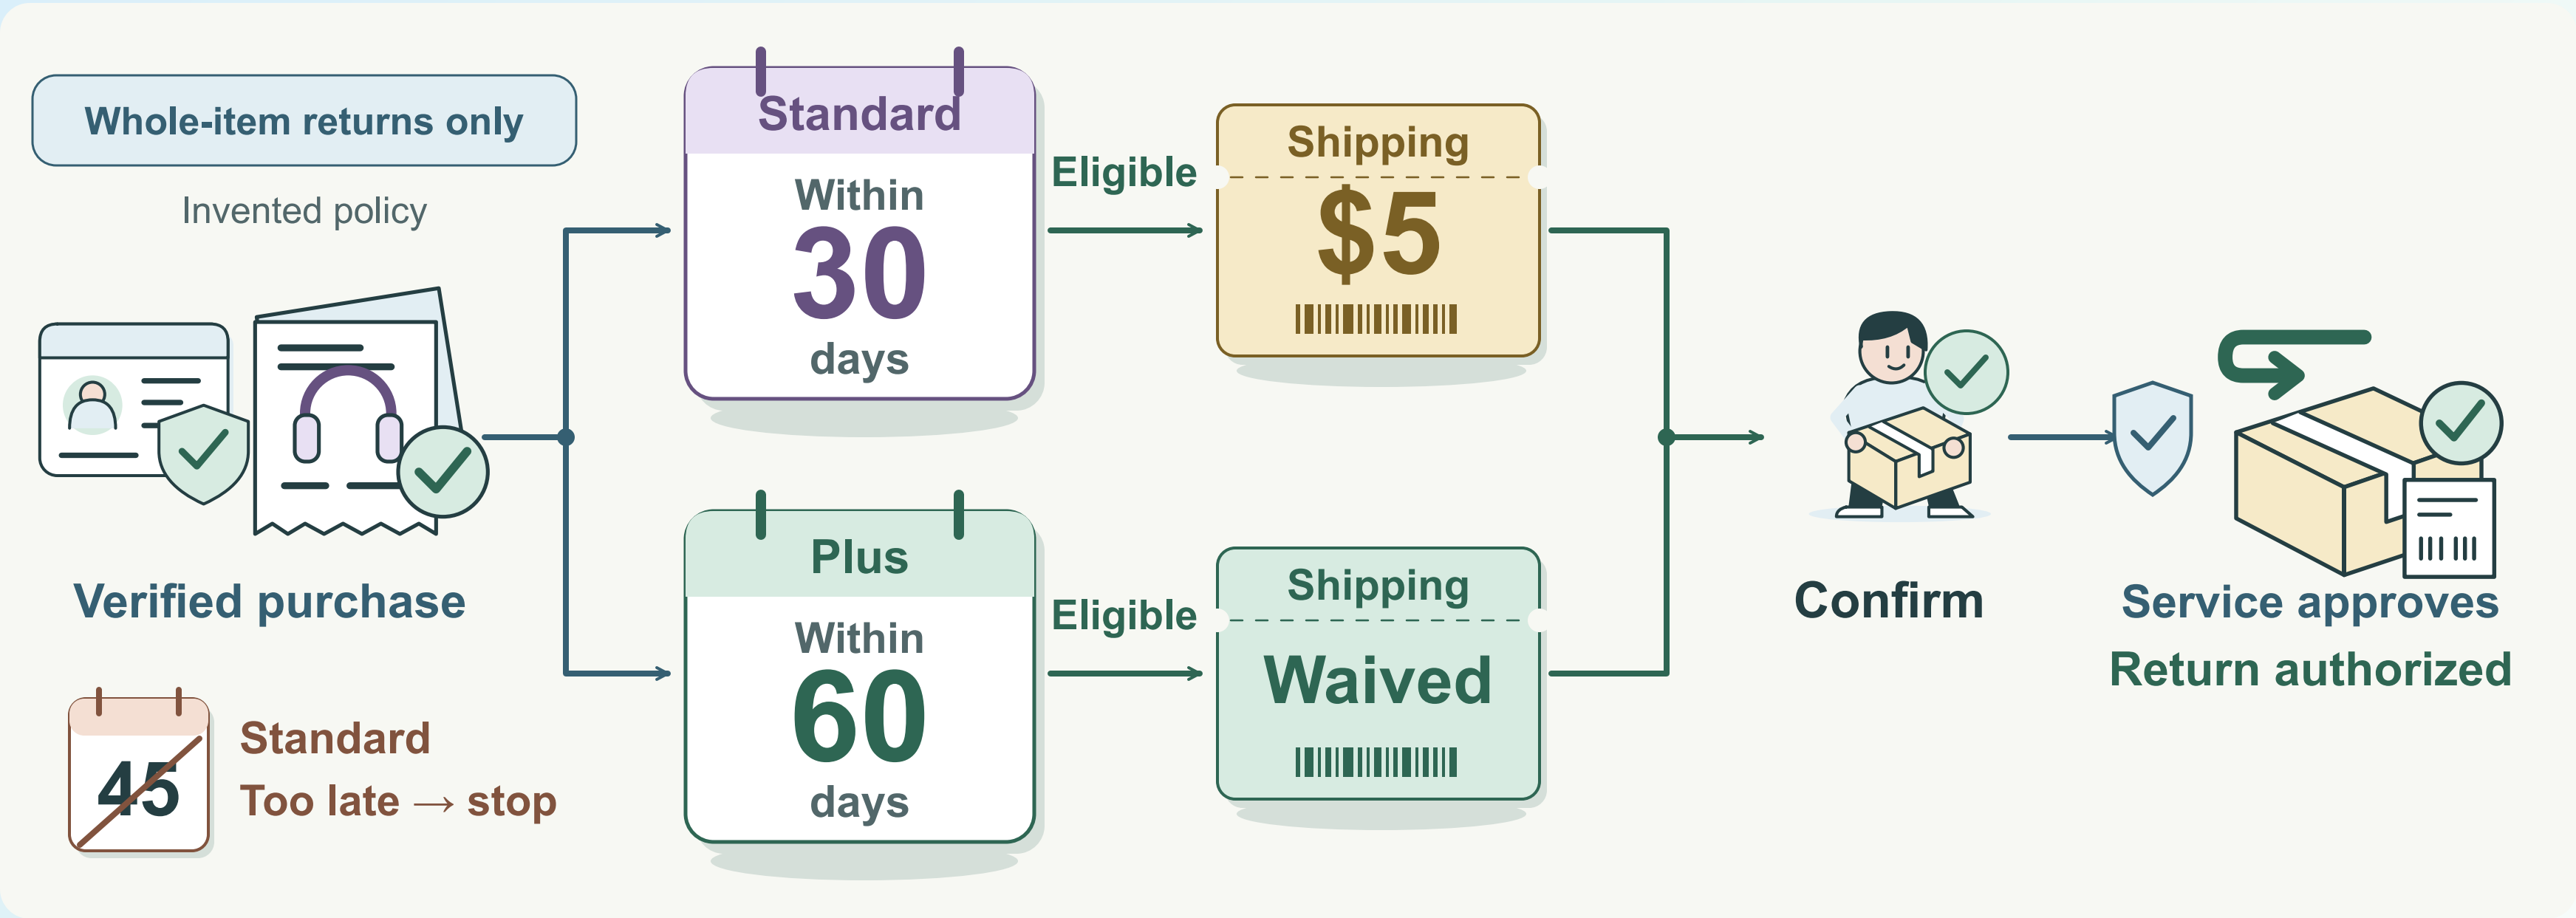

A runtime sits beneath the harness

Harness

The agent loop, context strategy, tools, and operating policy.

Example in LangChain's stack: Deep Agents.

Runtime

State transitions and the execution of the configured workflow.

Agent Graph is analogous at this layer to LangGraph.

Configuration

The authored rules and bindings that shape behavior.

AgentScript configures Salesforce's runtime.

Separate the remedy, the unit and the uncertainty

BOUNDED SEMANTIC QUESTION

What work is the customer requesting?

Conversation prefix
+ verified candidate items.

CONCEPTUAL LABELS · BOUNDARY EXAMPLES

“Swap for blue.”	exchange
“Only the kit cable.”	component
“Return this one.”	clarify unit

Keep three fields distinct

- Remedy
- Unit
- Interpretation

Clear + supported
Graph selects the applicable handler.

Meaning unclear
Ask one useful clarification.

Unsupported combinations use a configured specialist.
Invalid output follows bounded recovery.

Four bounded decisions, four contracts

01

Classification

Which route?

Select a category.

02

Noul

Return requested?

Assess a yes/no proposition.

03

Scoring

How urgent is this case?

Use an anchored rubric.

04

Endpointing

Has the turn ended?

Judge the available prefix.

Probability and intensity answer different questions

NOUL · TYPESAFE SEMANTICS

Was a return requested?

A probability-valued
yes/no judgment.

An uncertain answer does not mean
“a medium amount of returning.”

SCORE · ILLUSTRATIVE RUBRIC


How urgent is the case?

Can wait

Use disrupted

Essential use blocked

Endpointing is a decision in time

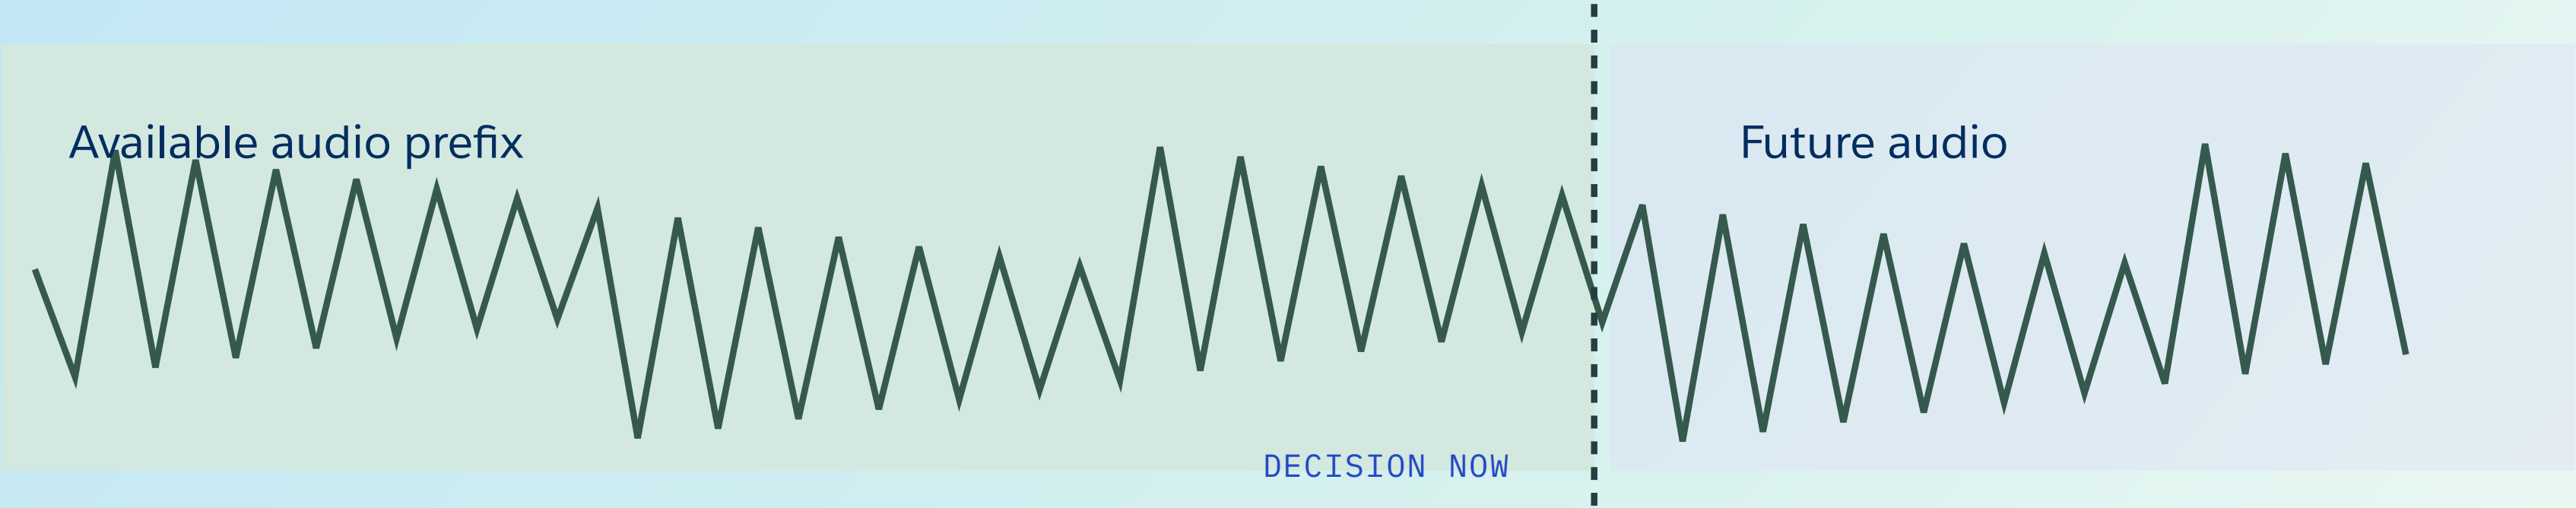

Cut too early

The customer is interrupted.


Wait too long

The response is delayed.

Keep the boundary


Future audio may label the prefix.
It cannot enter the input.

Split work along information dependencies

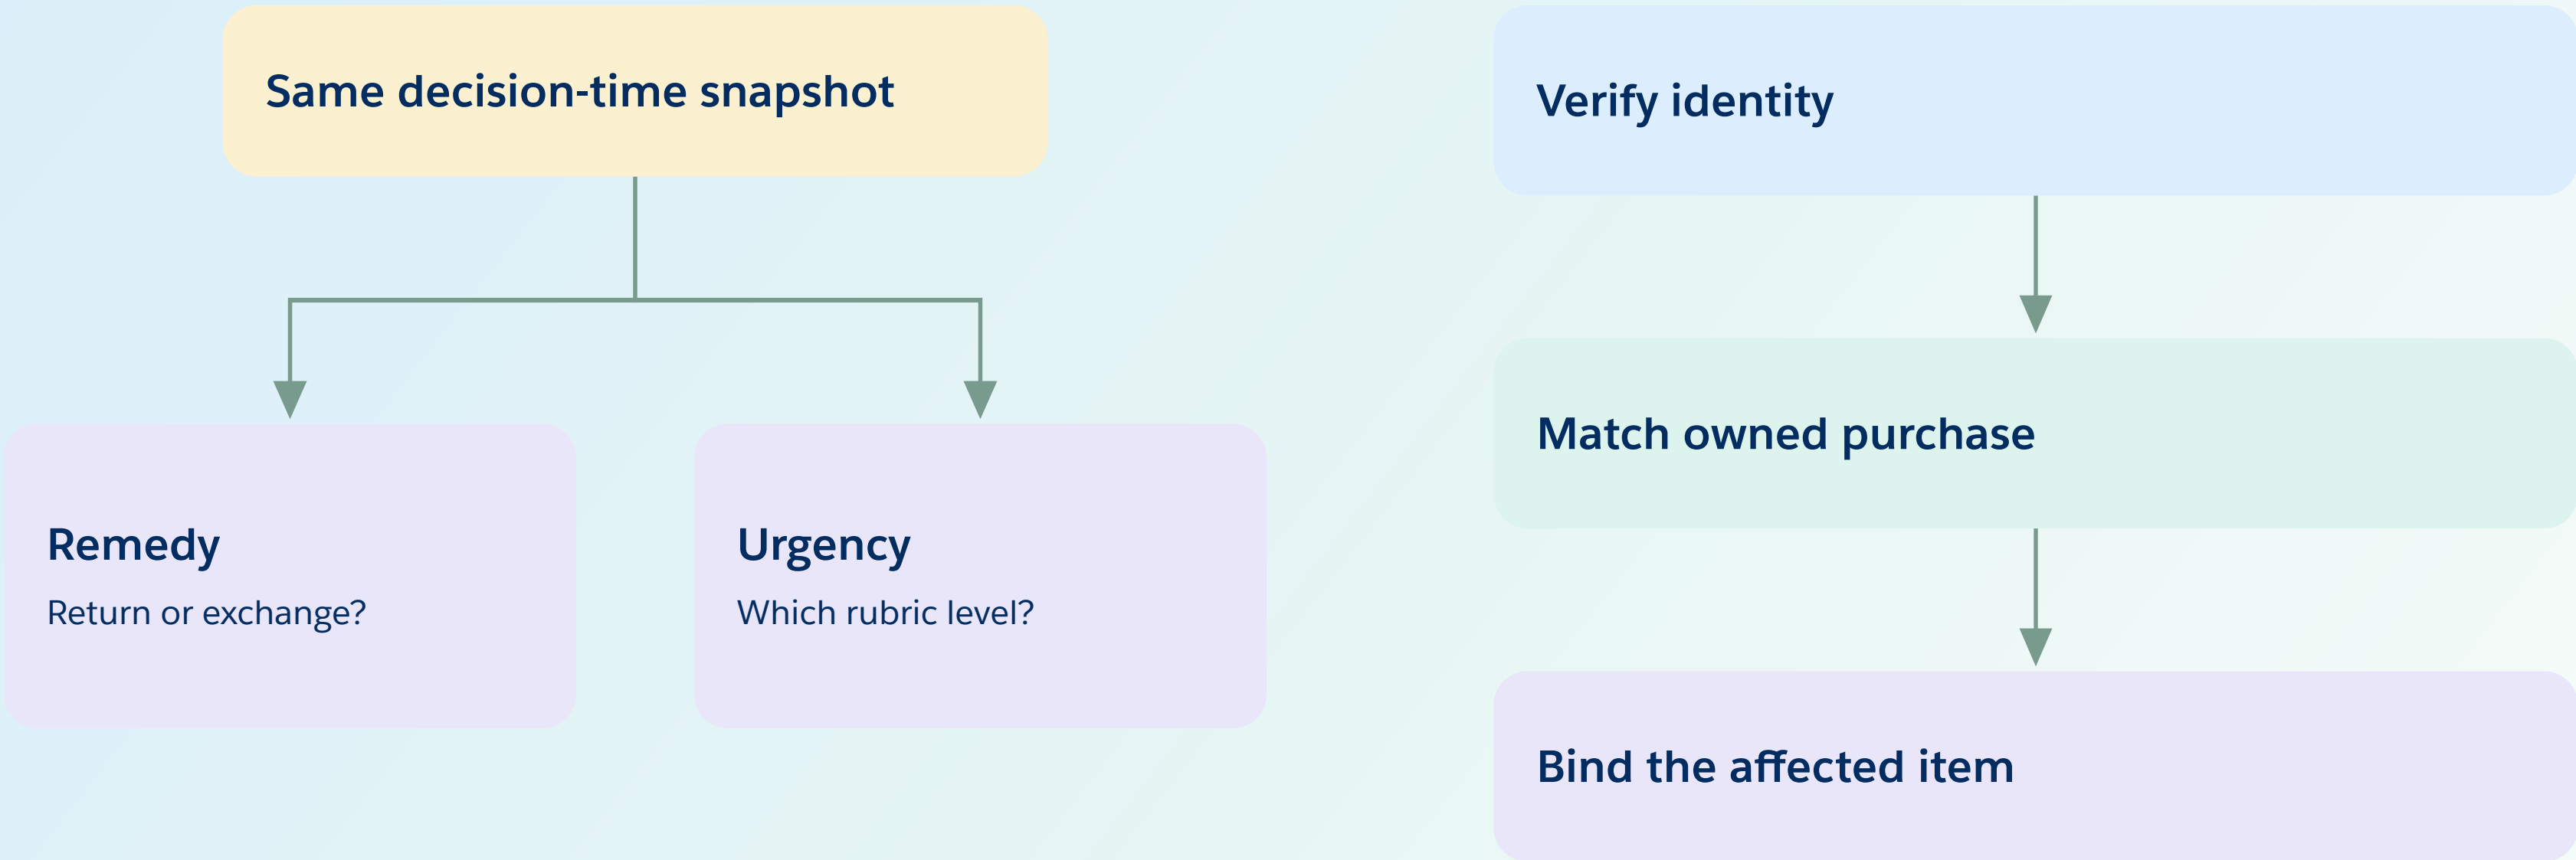

Independent execution can still produce correlated errors.


Each node sees a different view of the case

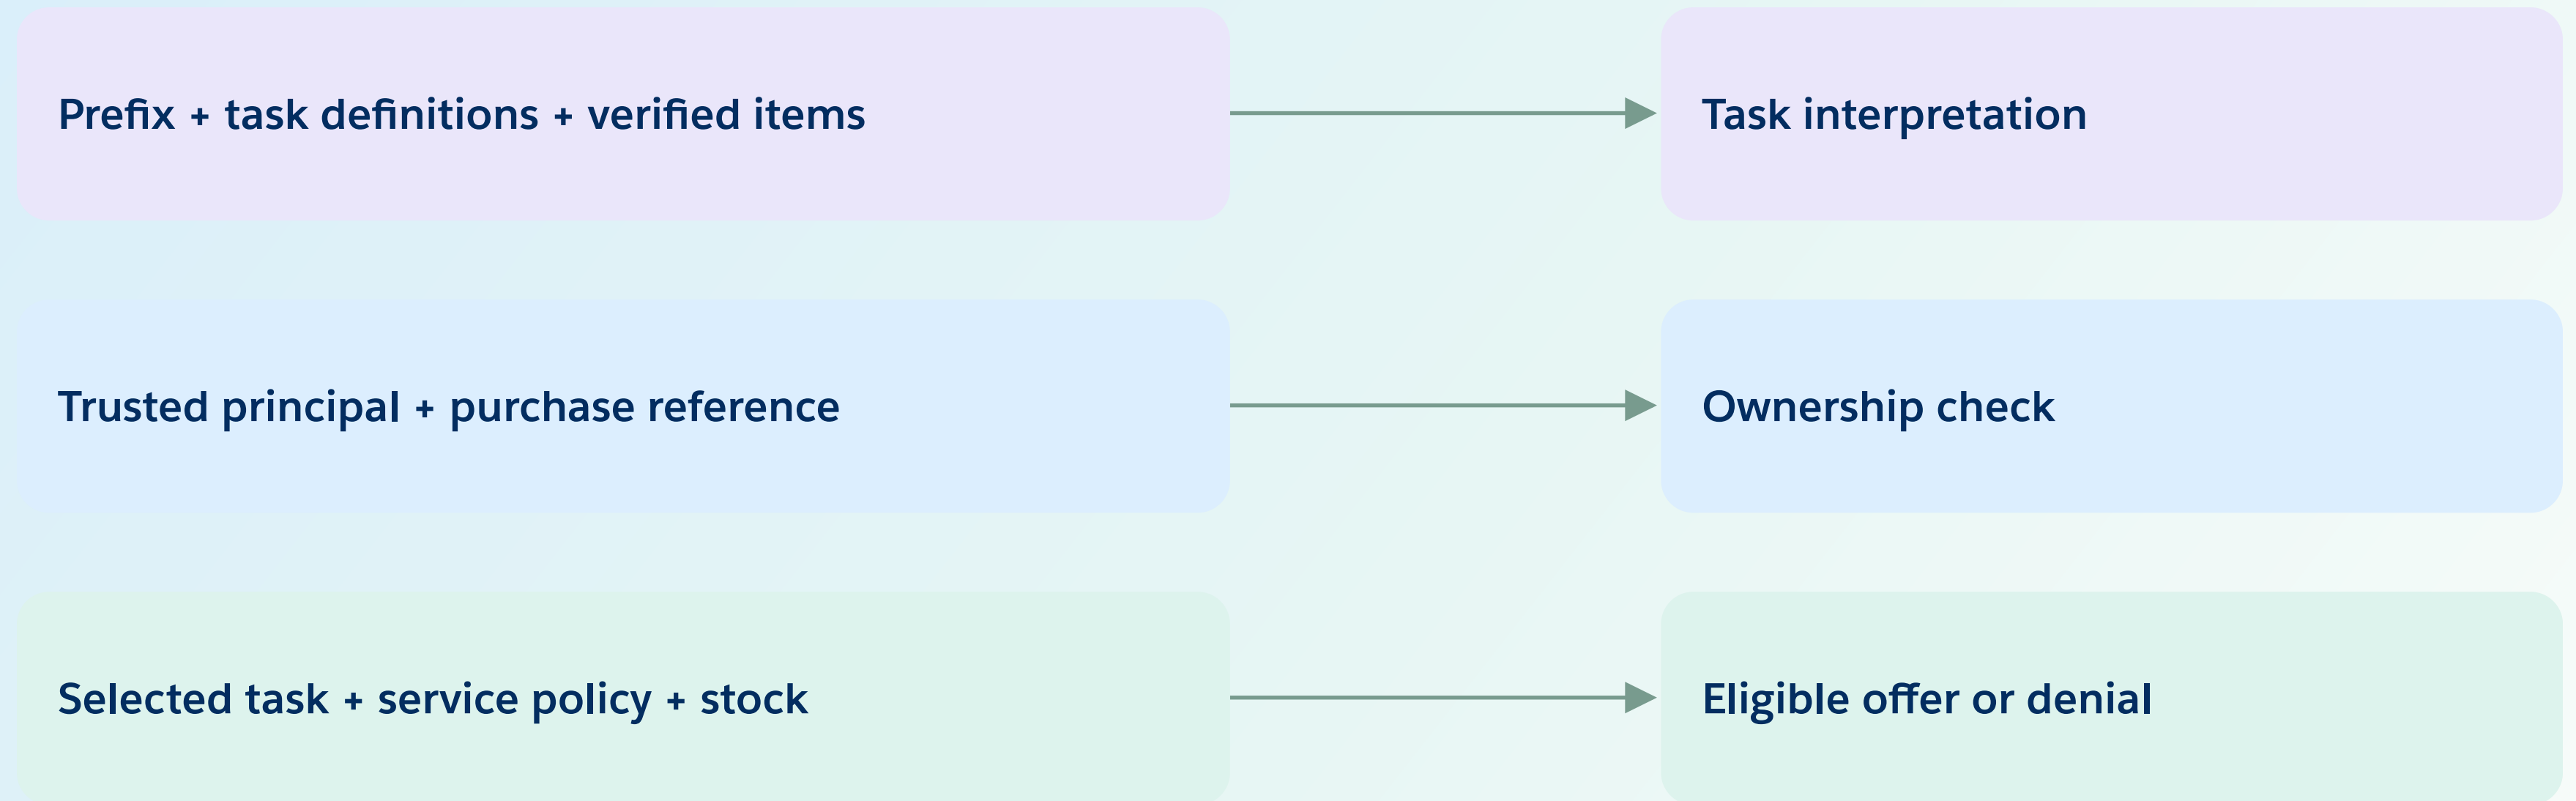

A node receives its declared input view; task state remains in the graph.

04 / STEP 3

State preserves work across a branch

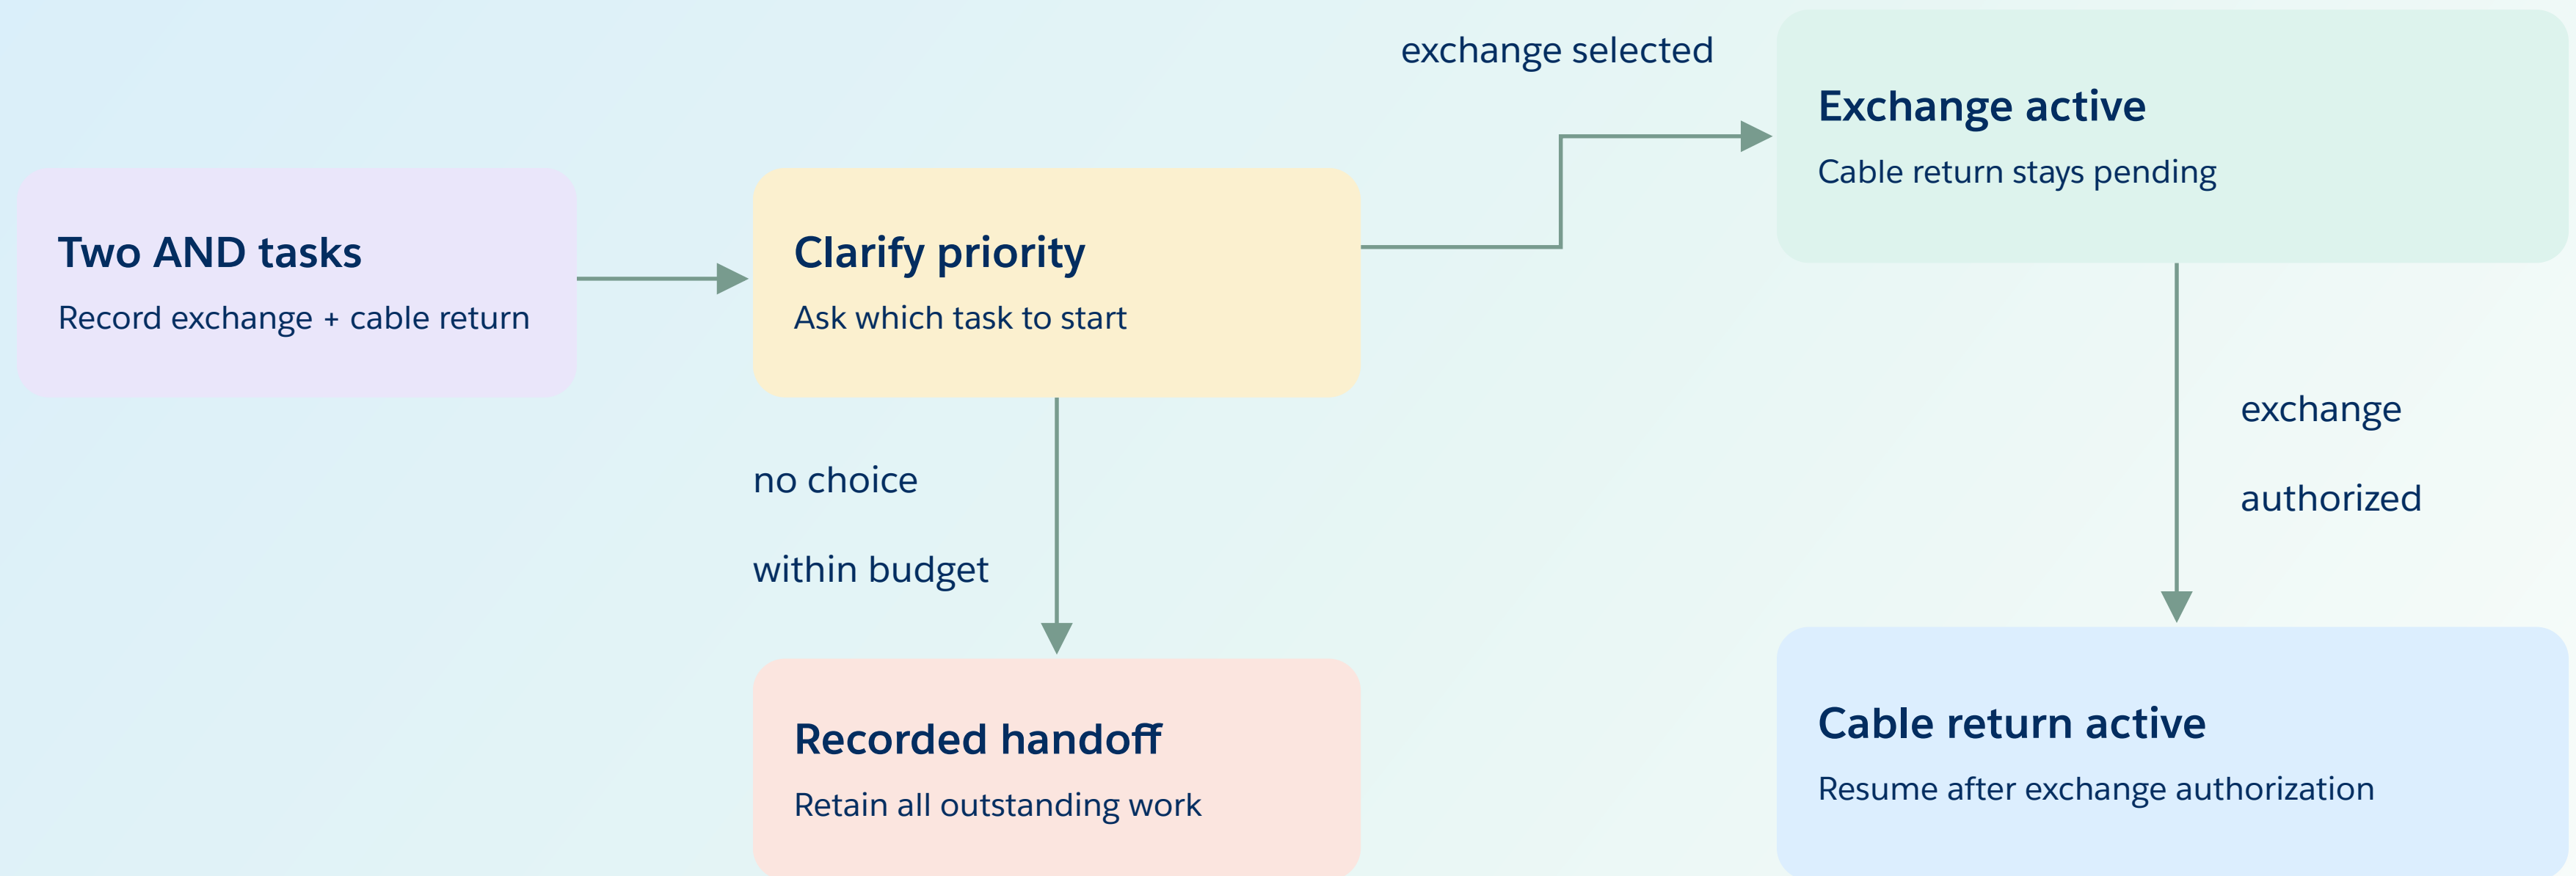

Guided determinism gives uncertainty a place

Neural interpretation
inside an authored process.

AgentScript defines where model choice is available.
Agent Graph executes the configured transitions.

Interpretation

Fallible semantic judgment.

Procedure

Required steps and state changes.

Authority

Enforced by trusted services.

Availability and required execution differ

DESIGN PSEUDOCODE

Control around the model choice.

```
identity = verifySession()
if identity != verified: return
recovery
purchase = requireOwnedOrder(identity)
tasks = interpretAndValidate(purchase)
run selectedHandler(tasks)
```

Backend services also enforce access.
This is an authoring sketch, not runnable syntax.

REQUIRED WORK

run / procedure

Use explicit procedure logic for checks that must execute.

PERMITTED CHOICES

available when


Filter which actions the model may select. Availability does not force selection.

CONTROLLED ARGUMENTS

with / bound input

Bind consequential inputs from trusted state.

Authorize the exchange, then resume the cable return

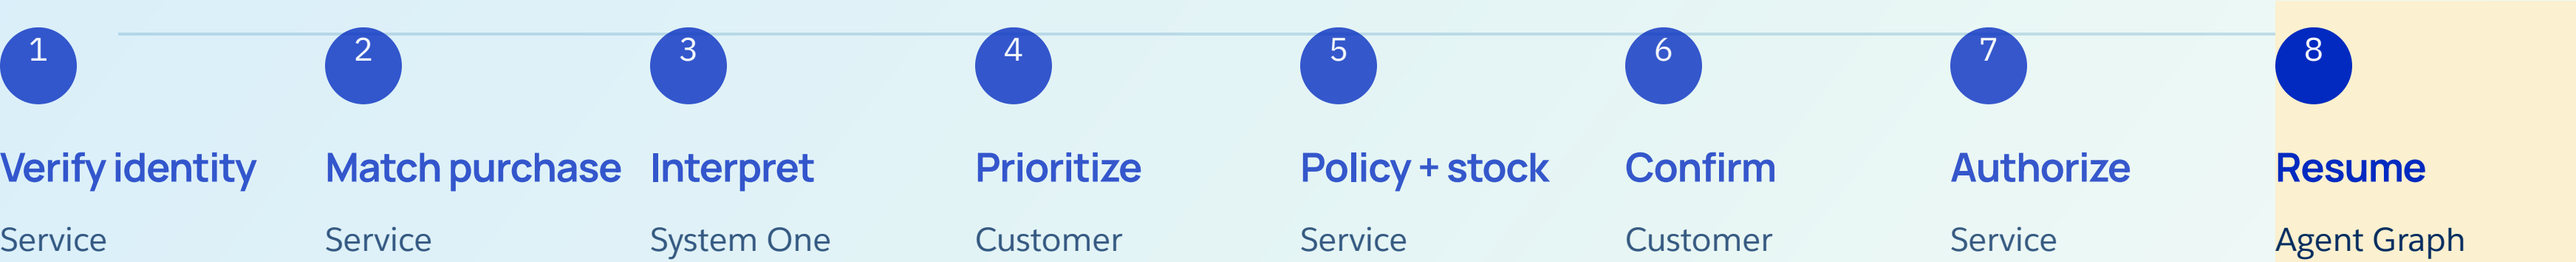

Agent Graph resumes the cable return. Its policy, confirmation, and authorization are unfinished.

EXCHANGE

Authorized

Confirmation precedes a recheck and the service-issued exchange ID.

CABLE RETURN

Active

A separately purchased item. Still unfinished when this trace ends.

Event 8 of 8

Failure routes are part of the program

CONTRACT FAILURE

Invalid output

Validate the result before branching. Use a defined fallback.

DEPENDENCY FAILURE

Timeout

Bound retries and retain every pending obligation.

AUTHORITY BOUNDARY

Unauthorized write

The service rejects the action under current policy.


SIDE EFFECT

Repeated write

Use transaction safeguards; record the actual result.

Confidence needs evidence in your domain

A concentrated distribution

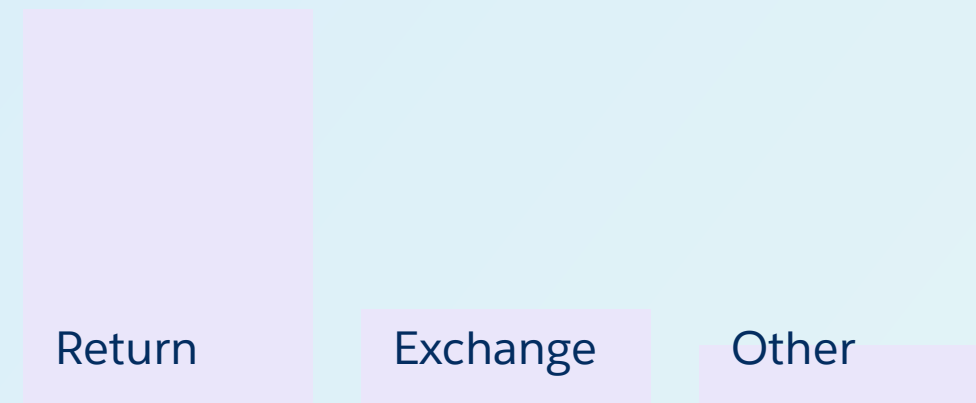

Illustrative output shape.
The highest option can still be wrong.

VALIDATE LOCALLY


Compare signals with adjudicated labels.

Choose gates on development data.
Report error alongside coverage.

Identity, permissions, and policy
remain separate checks.

A stricter gate moves work somewhere


Twelve constructed examples

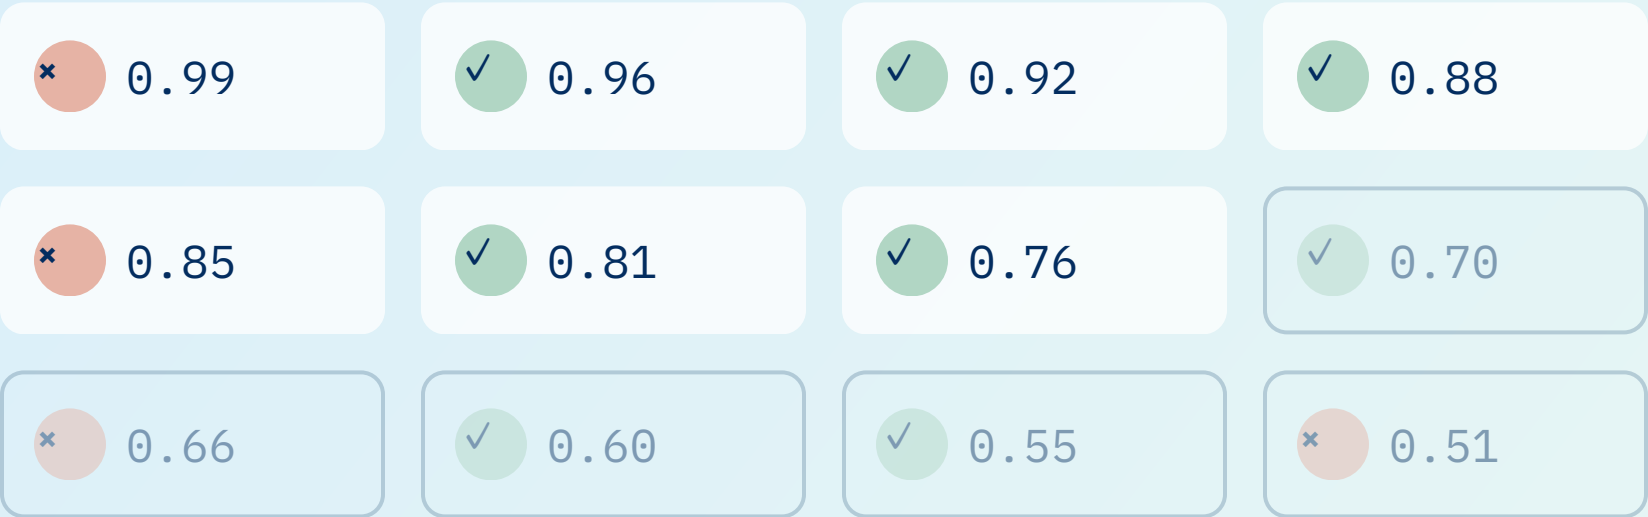

✓ correct route · × wrong route
Faded examples go to review.

SYNTHETIC SAMPLE / UNCALIBRATED SIGNAL

Automatic-route threshold: 0.75

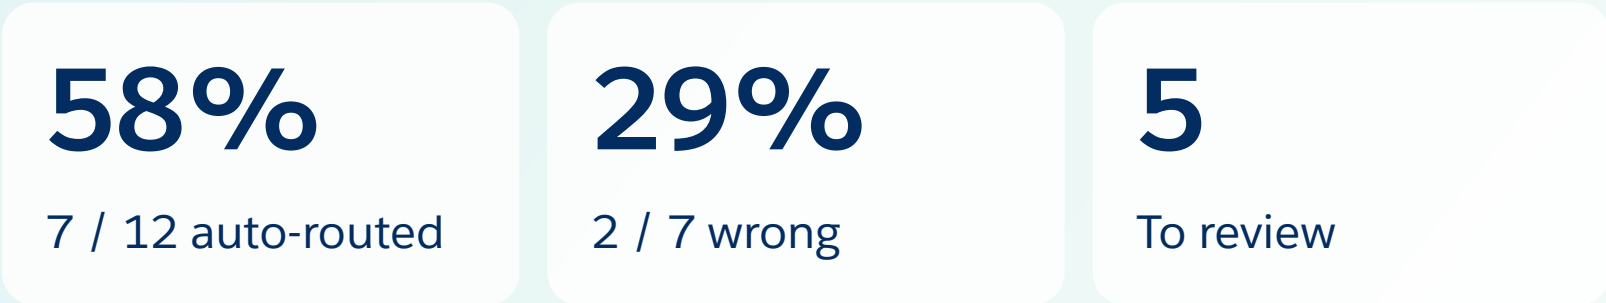

A high-scoring mistake can survive the gate.
Review consumes capacity and can add delay.

Savings depend on avoiding expensive work

ROUTING STEP ONLY · INVENTED UNIT COSTS


Baseline = G

Candidate = D + O + pG

G = 1.00 expensive routing call
D = 0.03 specialized decision
O = 0.04 added orchestration

Routes still using G: 20%

HYPOTHETICAL ROUTING-STAGE ARITHMETIC

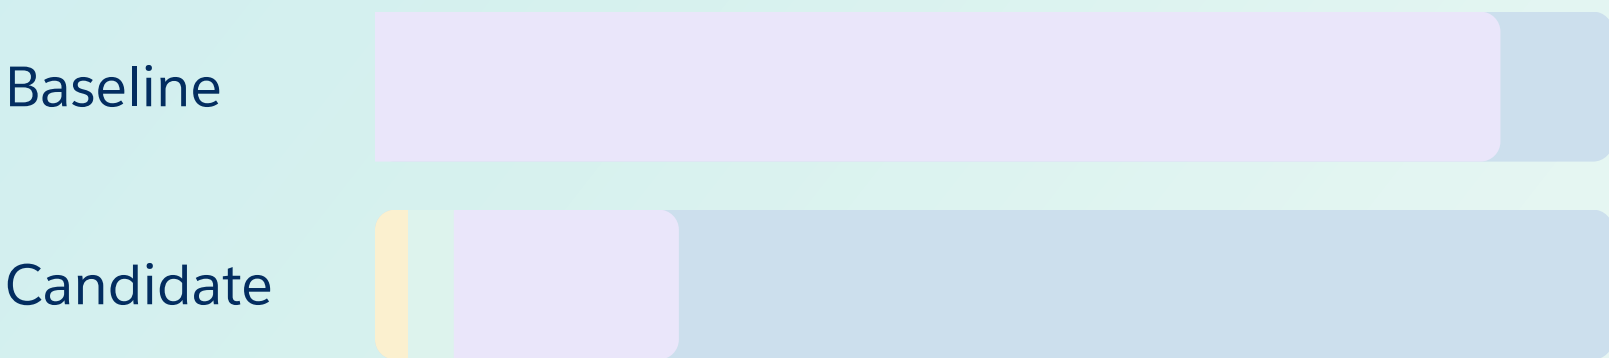


73% lower

0.27 normalized units

Break-even: $D + O = (1 - p)G$
Later messages and service work excluded.


Fast inference helps the path that uses it

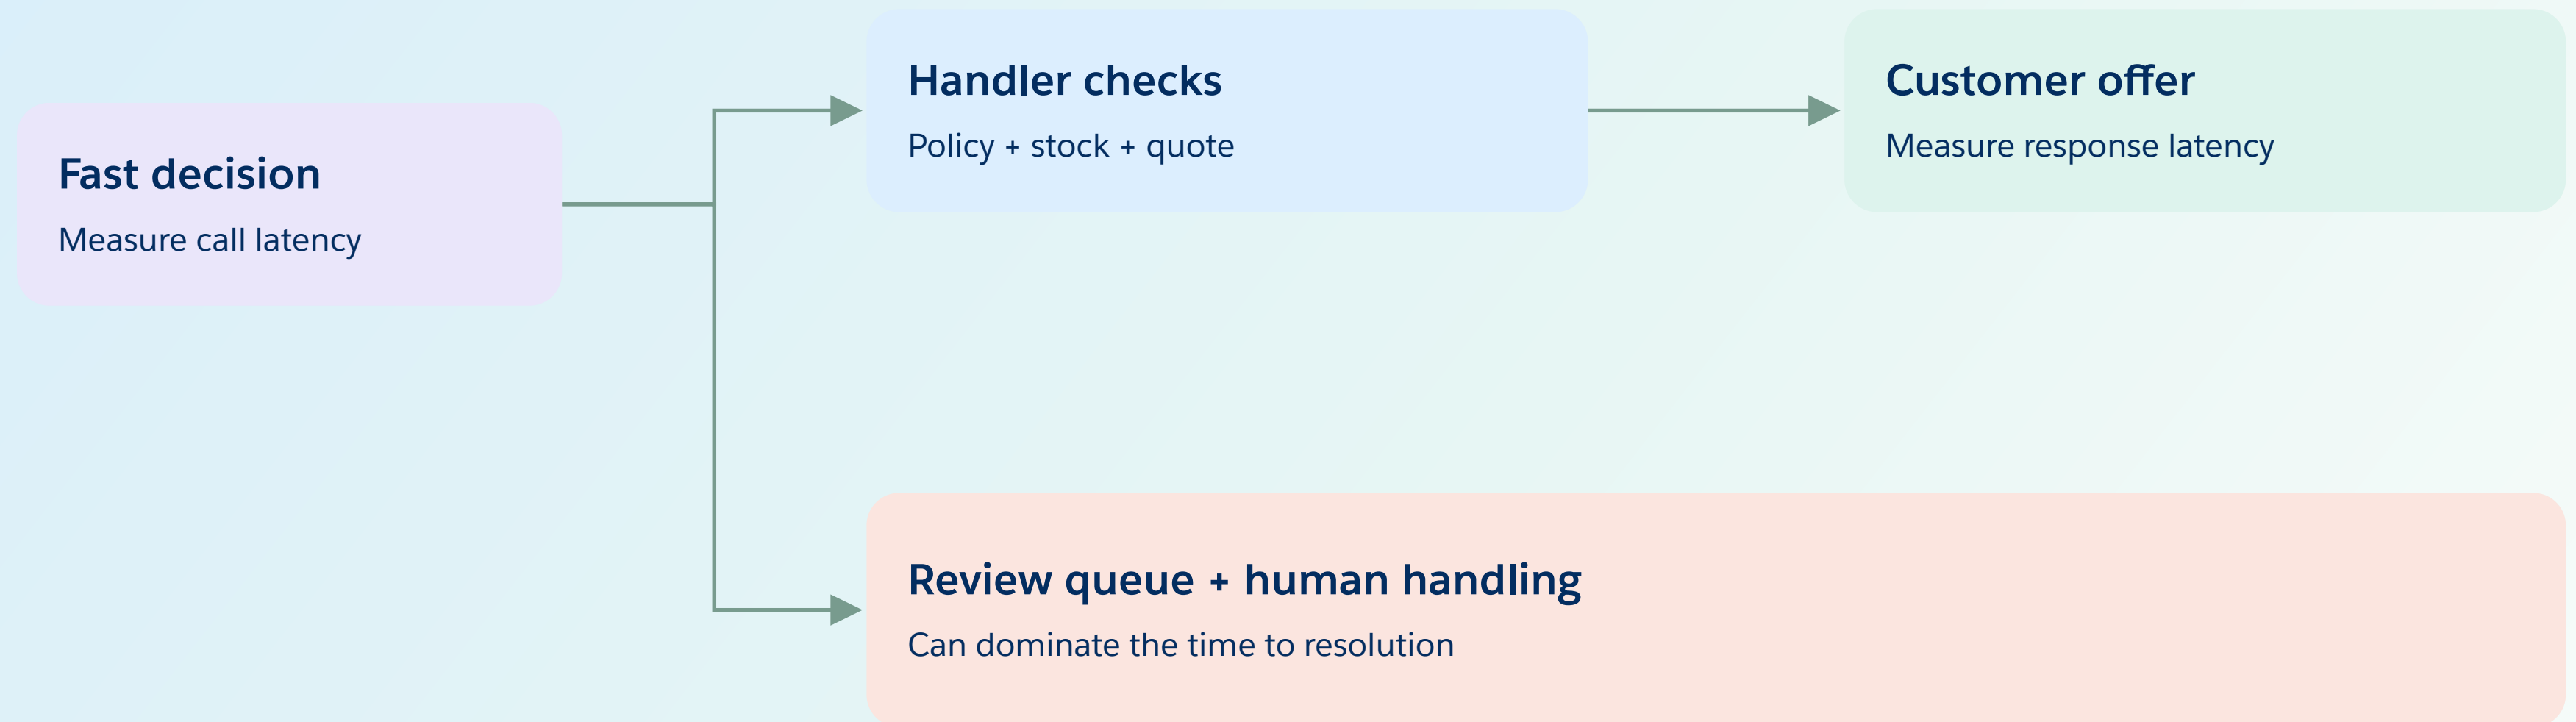

Track decision time, response time, and time to completed service separately.

07 / EXERCISE

Find the missing boundary

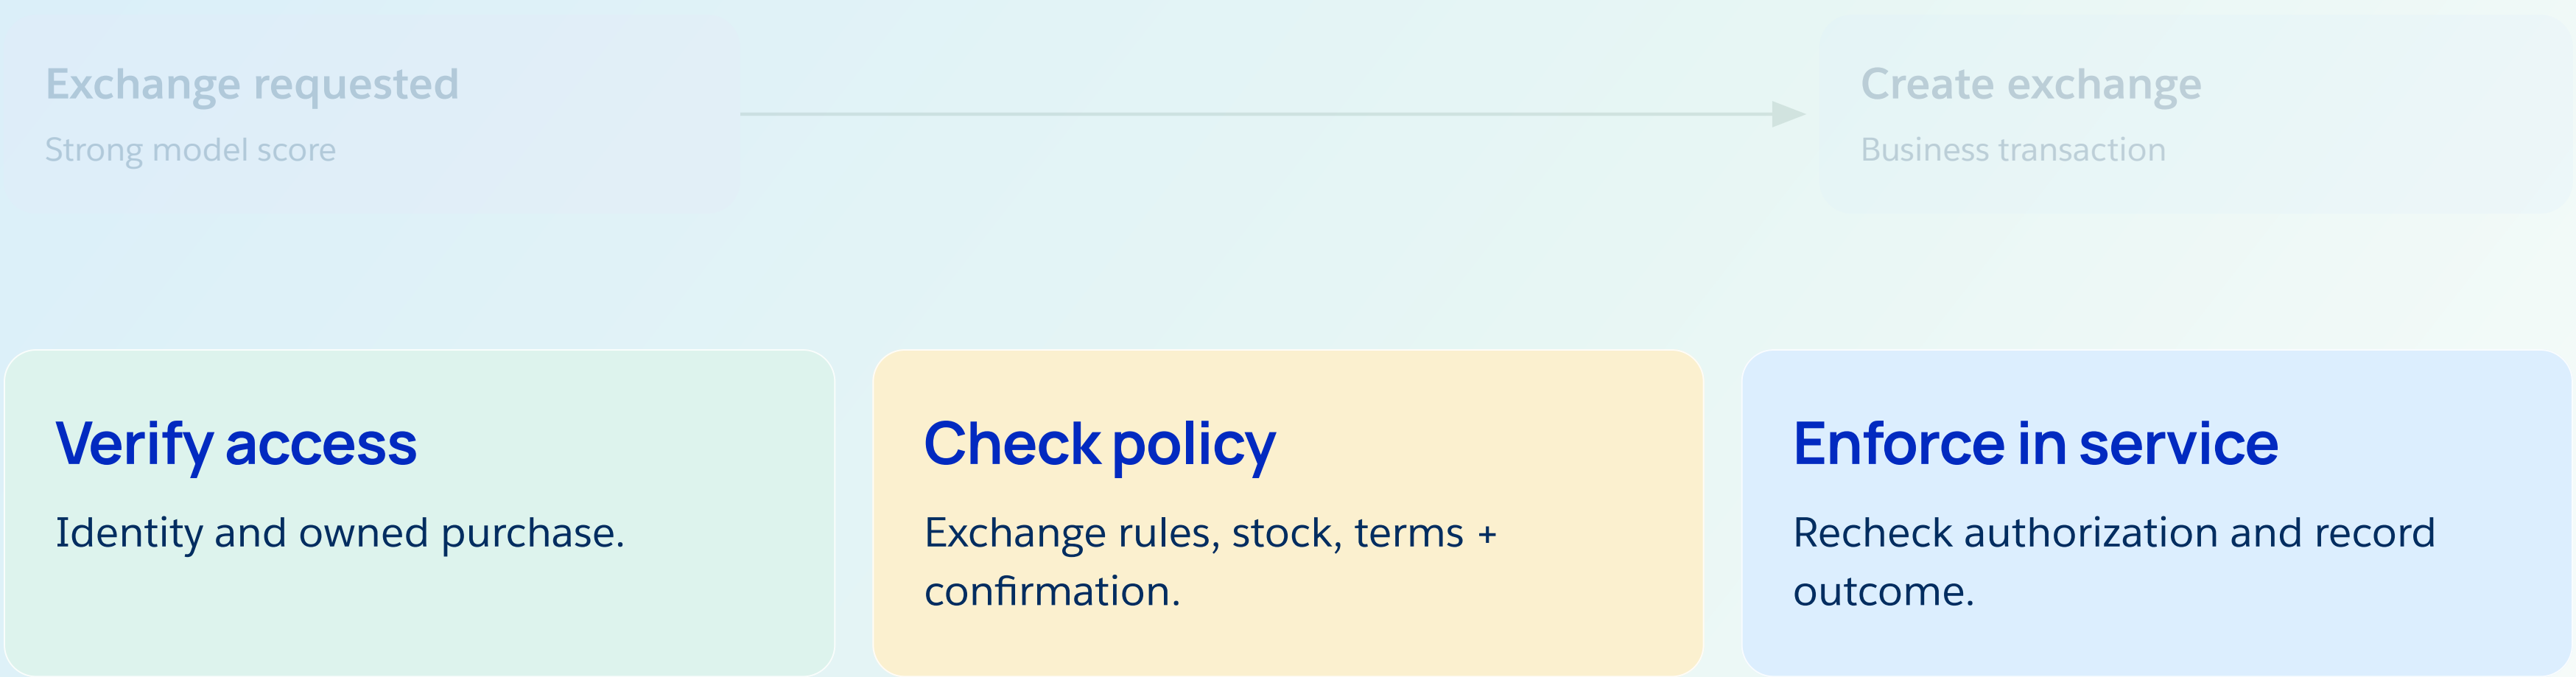

08 / STEP 6

Begin the dataset at the decision boundary

At decision time

INPUT SNAPSHOT

Conversation prefix
Trusted facts available then
Current policy version

REFERENCE LABEL

Remedy, unit and task relationships
supported by that evidence.


After the decision

LATER TURNS AND OUTCOMES

Useful for separate outcome labels.
Excluded from the earlier input.


Preserve order,
relationships,
and provenance.

Split examples before developing the decision

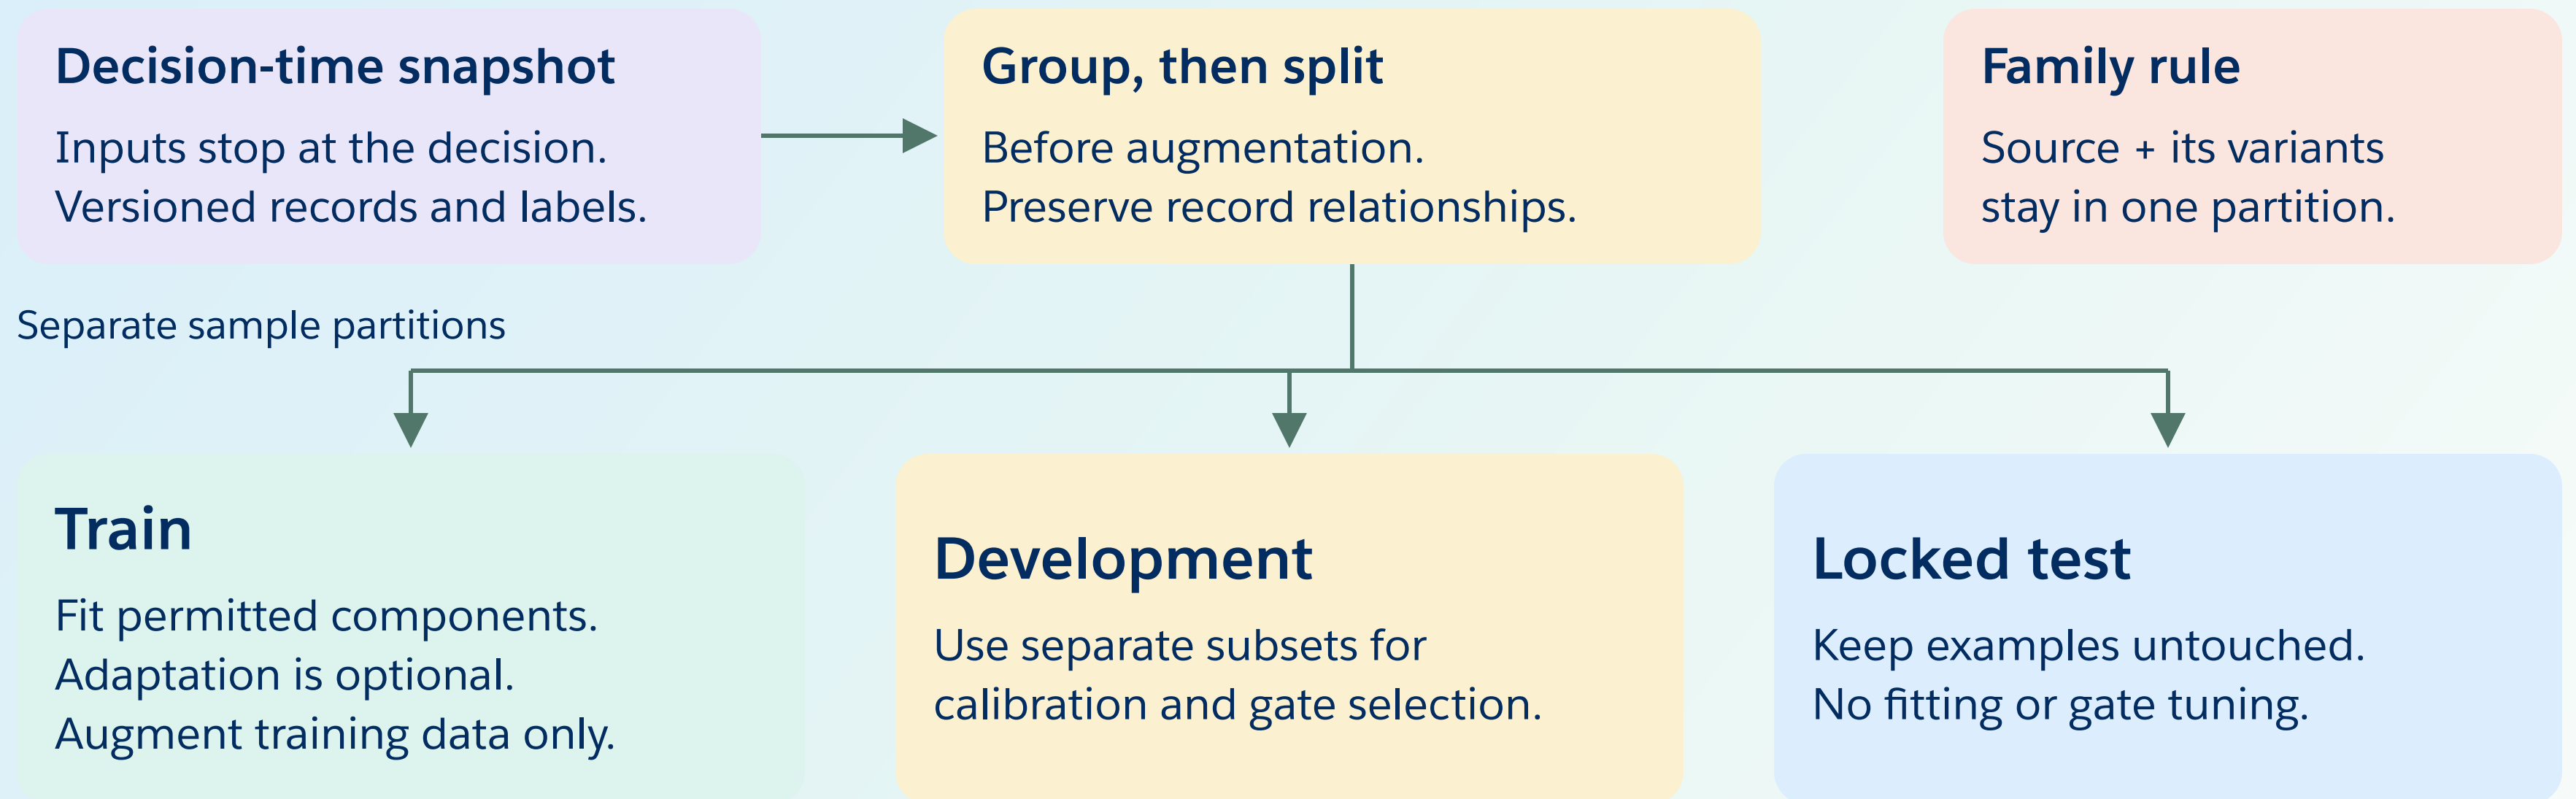

Route labels use decision-time evidence; later outcomes belong to separate targets.

Freeze the workflow before earning release

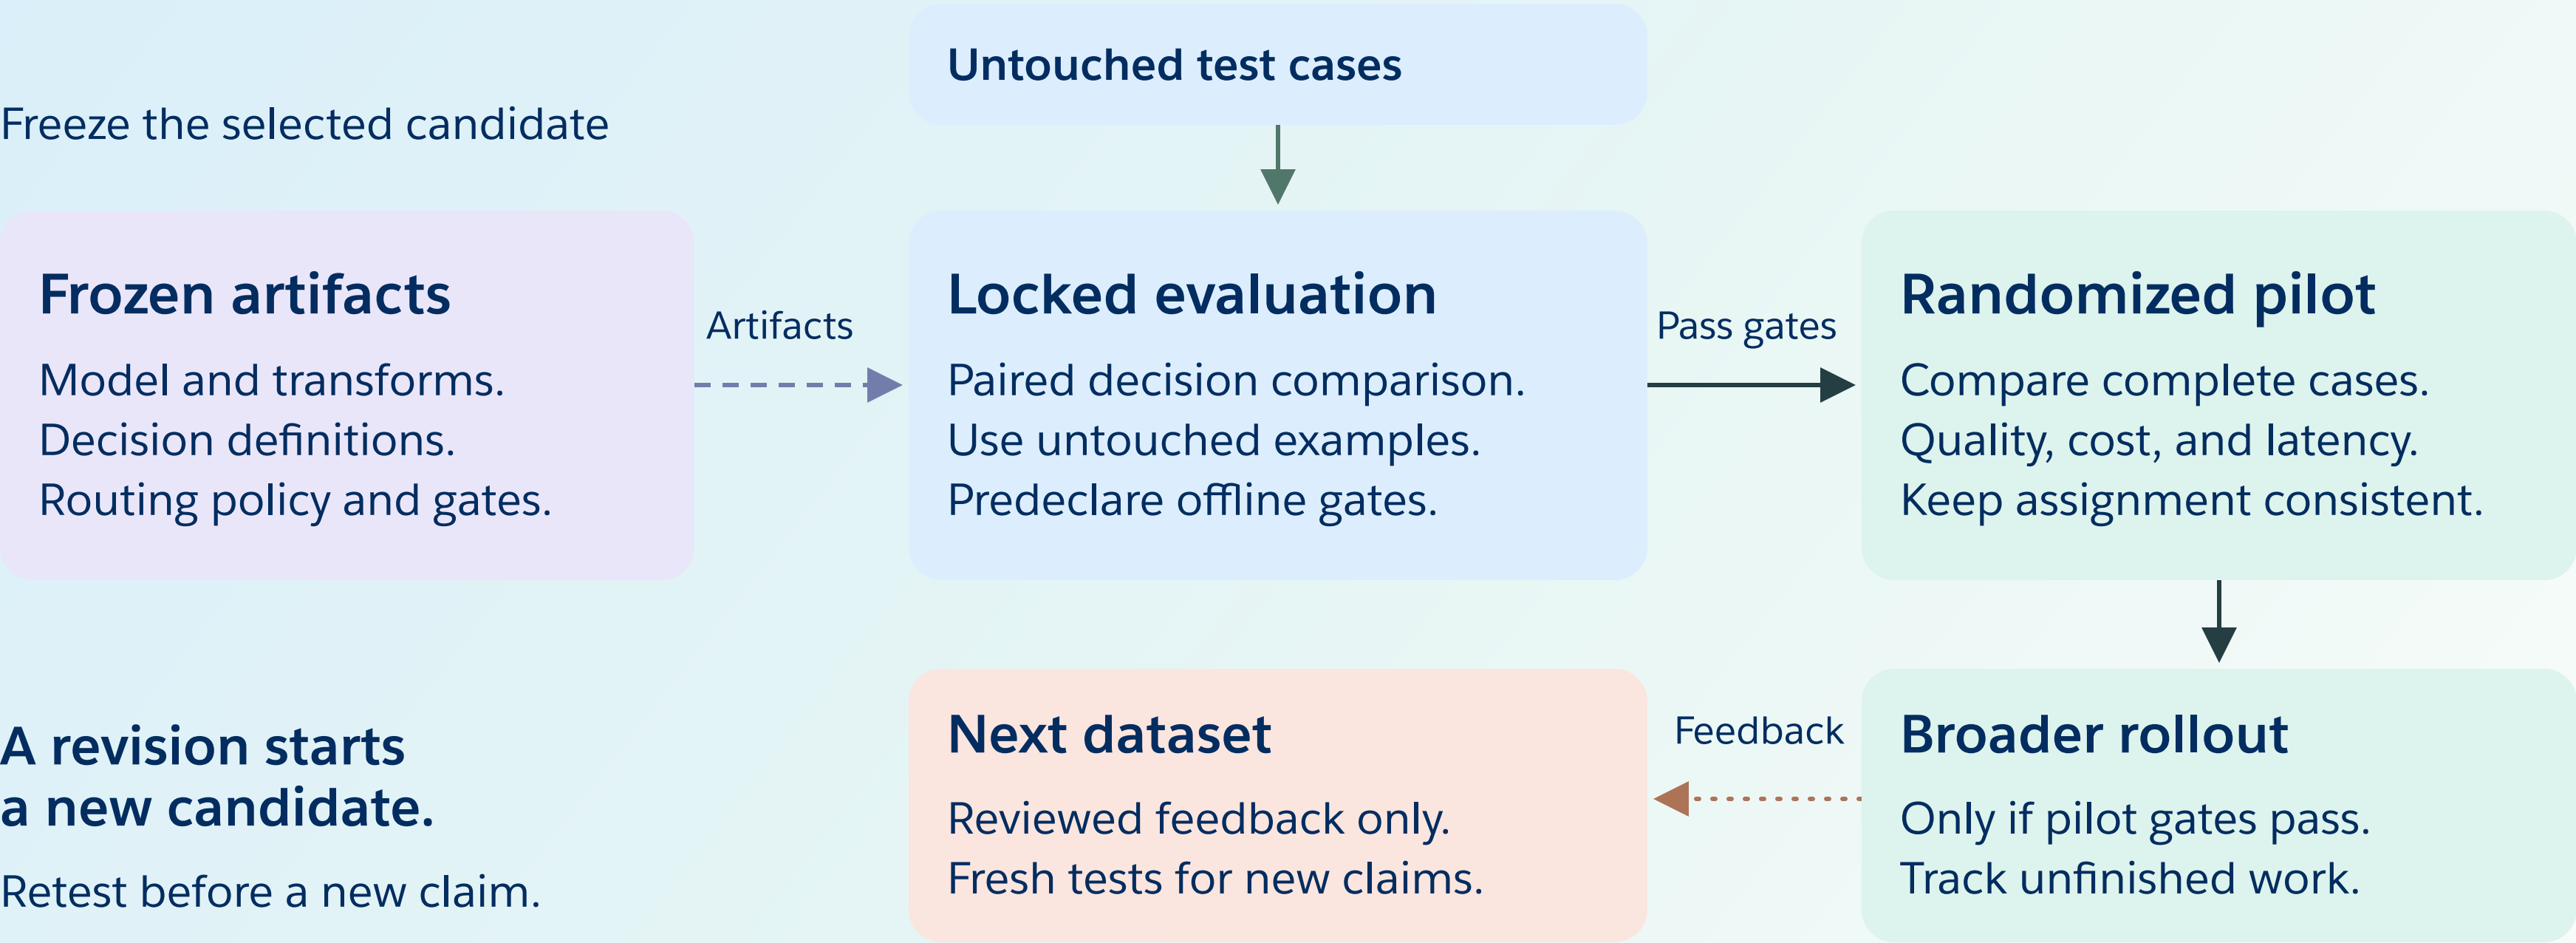

Choose the split that matches the claim

UNSEEN ACCOUNTS

Keep account families intact.

A A A

B B

C C C

Related cases and variants
stay in one partition.

FUTURE TRAFFIC

Reserve a later-time cohort.

Earlier cases | Later test


Declare boundary exclusions
and duplicate handling.

Lower cost must come with acceptable quality

Schematic decision rule · no measured results

Quality: upper end must stay below the limit


Uncertainty range

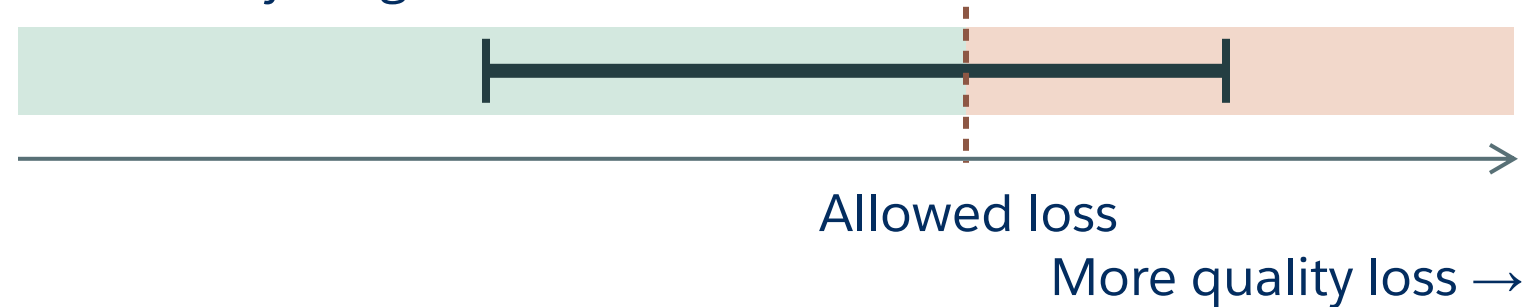

This range crosses the margin.
Quality remains uncertain.

Cost: lower end must exceed the target

Uncertainty range

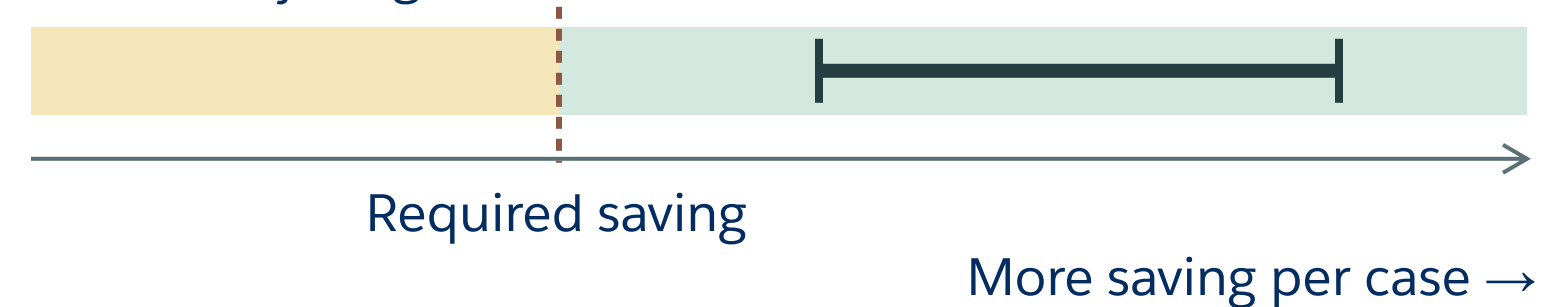

This range clears the required gain.
Cost passes; rollout still waits.

Count the whole case: exchange authorized + cable return active
= incomplete at the deadline.

Harm limits must also pass.
Assess all cases and the same relevant cohort.

Latency limits must also pass.
Include unfinished cases and resolution time.

09 / TWO EXPERIMENTS

Evaluate the decision, then the service

PAIRED OFFLINE COMPARISON

Evaluate the decision.

Same held-out snapshots.
Same route question.
Fixed permissions and tools.

Each model's gate is selected
on development data.


CONTROLLED SERVICE PILOT

Evaluate the complete case.

Randomized case/account assignment.
Consistent treatment and horizon.
Costs, queues, and unresolved work.

Pilot evidence must precede
wider rollout.

Diagnose the boundary that failed

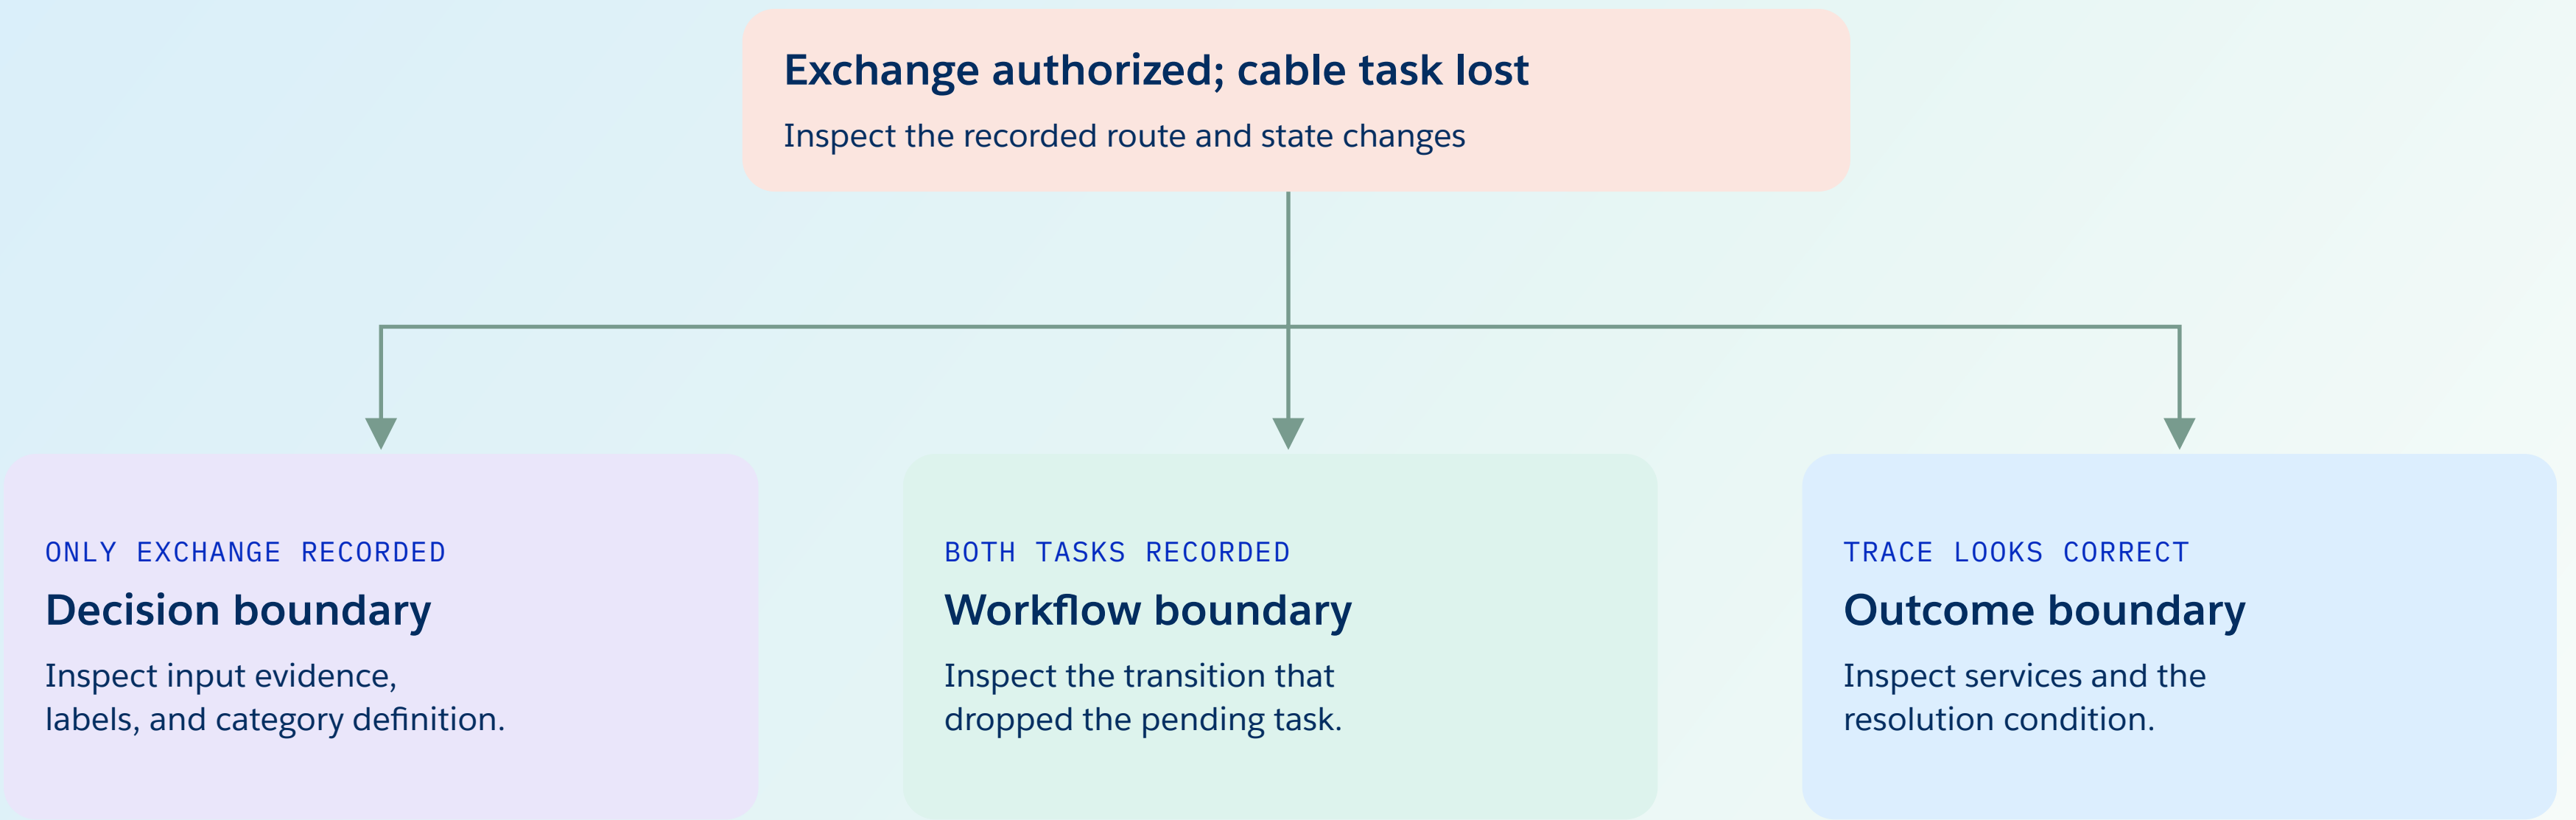

Start with one decision that changes the path

**Specialize judgment.
Author the controls.
Keep every task
accounted for.**

Agentforce coordinates the work
within quality, cost and latency limits.

01 Write one bounded route question.

02 Label remedies, units and relationships.

03 Declare the node's input view.

04 Draw the guarded failure route.

05 Define complete-case acceptance.

Read the evidence behind the architecture

Salesforce control

[Agent Graph / guided determinism ↗](#)

[Reliable enterprise agents ↗](#)

[AgentScript control plane ↗](#)

[AgentScript specification ↗](#)

[All sources and claim boundaries ↗](#)

[Tutorial handout and notes ↗](#)

Agent architecture

[Jev + LangGraph ↗](#)

[A harness with Jev ↗](#)

[Jev in LangSmith Evals ↗](#)

[Jev-as-a-Judge ↗](#)

[Runtime, framework, harness ↗](#)

Decision patterns

[Composable AI ↗](#)

[TypeSafe quickstart ↗](#)

[Confidence routing ↗](#)

[Intent routing ↗](#)

[Structured decision criteria ↗](#)

[Building with System One ↗](#)

[Aftercare walkthrough + evaluation ↗](#)

[Full training pipeline ↗](#)


Reuse the visual vocabulary in another workflow




Identity gate




Sign in

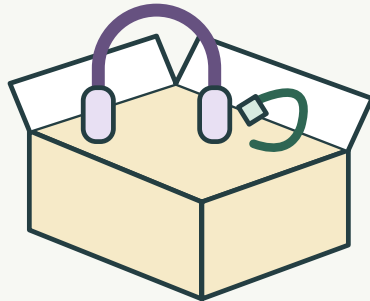


Whole kit

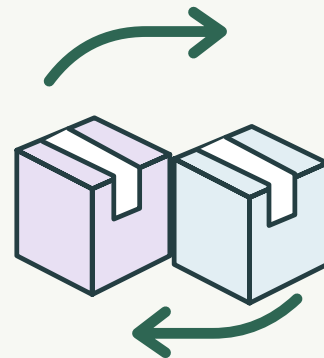


Exchange




Kit part




Inventory



System One

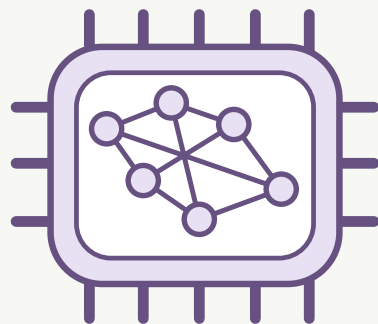

Frontier LLM

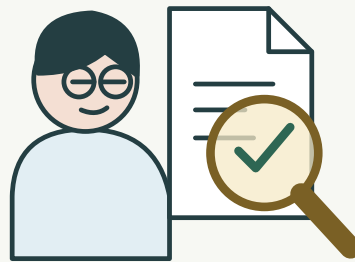

Human review



Customer



Service result



Hold