Cluster histograms and stacked composition


clustering_flowsom_20261102_161553_81b341d095e

> Counts describe the saved clustering cohort, not absolute cell abundance in tissue. Filtering clusters keeps the original denominator: unselected clusters are combined as Other.

Clusters (none selected = all) Marker Histogram Histogram view Histogram page Stack bars by Composition Composition filter Filter value


Marker intensity within clusters

All clustered events, shared bin boundaries per marker, no clipping. Composition filters do not modify these histograms. Up to 12 clusters per page.

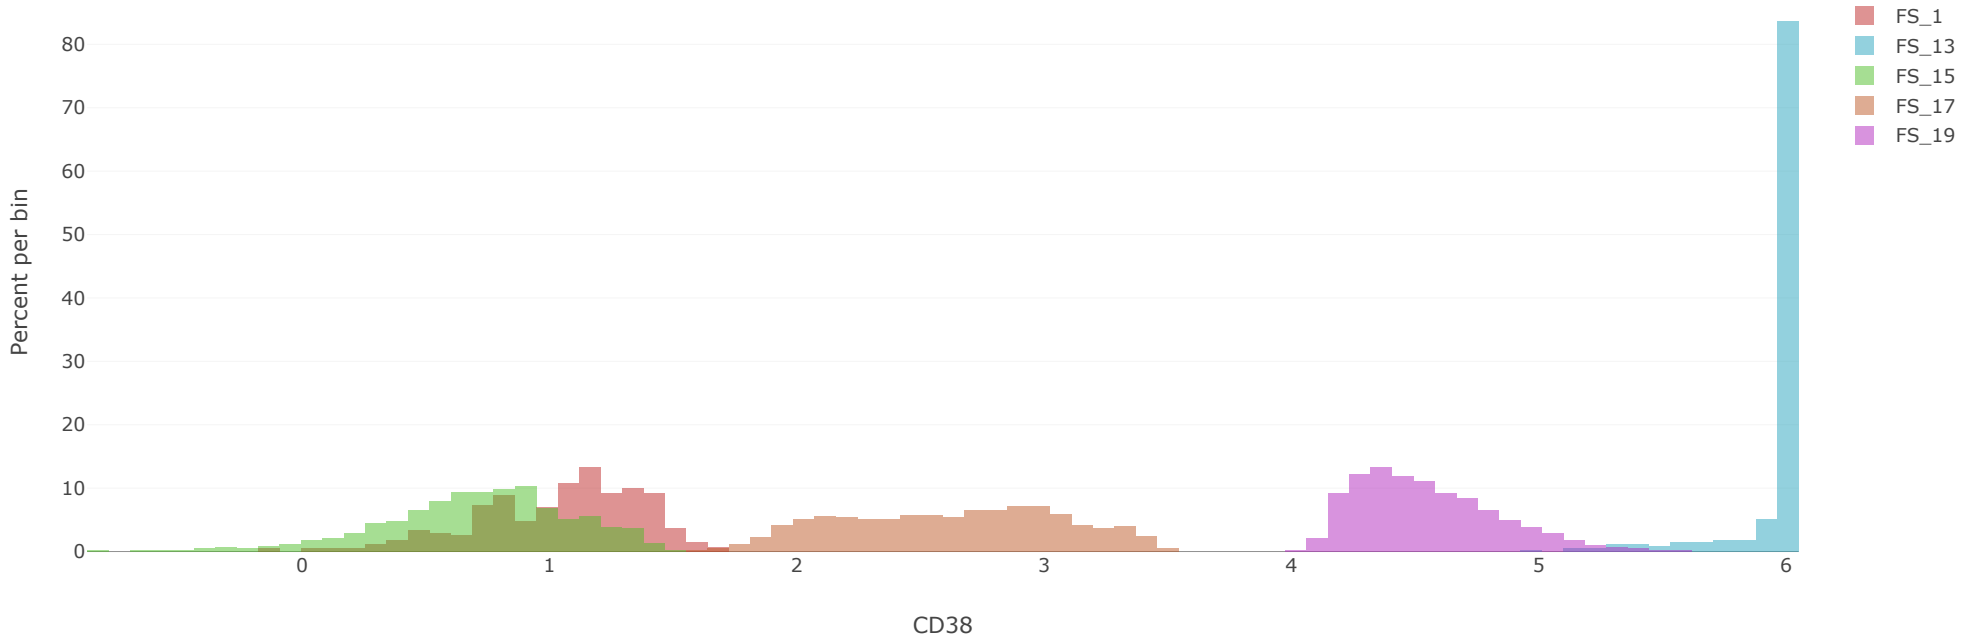

Stacked cluster composition

Mean file percent weights each file equally; pooled percent weights by clustered event count. Neither is a donor-level statistical estimate.

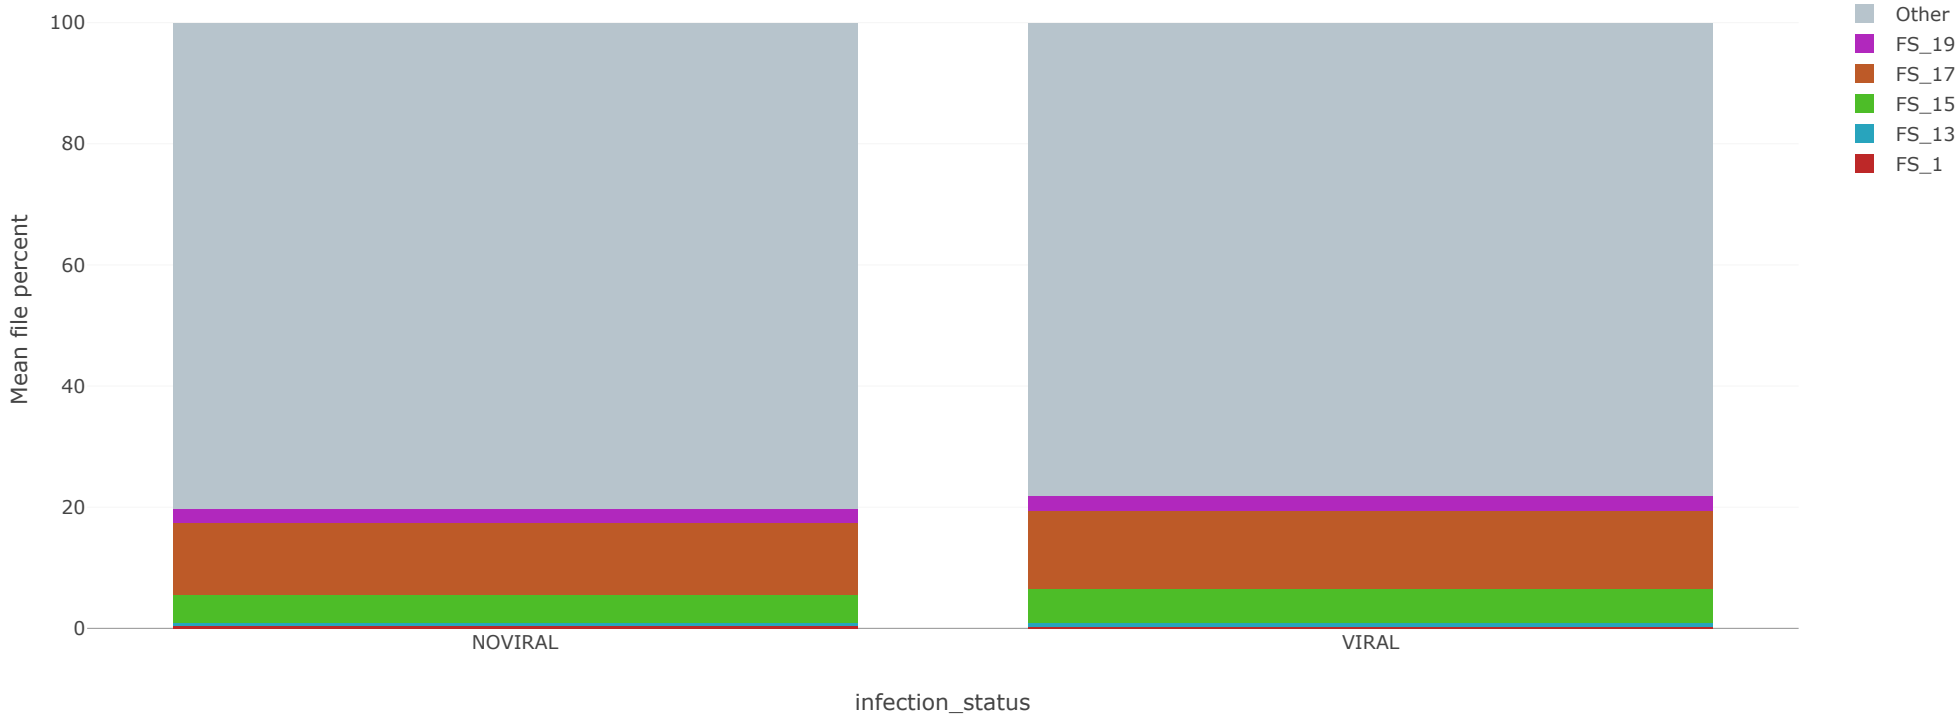

Displayed values

Click a column heading to sort; type below a heading to filter that column. These controls affect only this table and its CSV export.

12 / 12 rows

Filter group	Filter cluster	Filter value	Filter metric	Filter files	Filter denomin
NOVIRAL	FS_1	0.34750	Mean file percent	20	40000
NOVIRAL	FS_13	0.58000	Mean file percent	20	40000
NOVIRAL	FS_15	4.6450	Mean file percent	20	40000
NOVIRAL	FS_17	11.817	Mean file percent	20	40000
NOVIRAL	FS_19	2.3750	Mean file percent	20	40000
NOVIRAL	Other	80.235	Mean file percent	20	40000
VIRAL	FS_1	0.29773	Mean file percent	22	44000
VIRAL	FS_13	0.57727	Mean file percent	22	44000
VIRAL	FS_15	5.6864	Mean file percent	22	44000
VIRAL	FS_17	12.766	Mean file percent	22	44000
VIRAL	FS_19	2.6068	Mean file percent	22	44000
VIRAL	Other	78.066	Mean file percent	22	44000

Provenance

```
Source run: clustering_flowsom_20261102_161553_81b341d095e
Histograms use stored transformed/corrected intensities. No new clustering or transformation.
```