

Portable Document Format (), standardized as ISO 32000, is a file format developed by Adobe in 1992 to present documents, including text formatting and images, in a manner independent of application software, hardware, and operating systems. Based on the PostScript language, each file encapsulates a complete description of a fixed-layout flat document, including the text, fonts, vector graphics, raster images and other information needed to display it. has its roots in "The Camelot Project" initiated by Adobe co-founder John Warnock in 1991. was standardized as ISO 32000 in 2008. The last edition as ISO 32000-2:2020 was published in December 2020.

files may contain a variety of content besides flat text and graphics including logical structuring elements, interactive elements such as annotations and form-fields, layers, rich media (including video content), three-dimensional objects using U3D or PRC, and various other data formats. The specification also provides for encryption and digital signatures, file attachments, and metadata to enable workflows requiring these features.

History

Adobe Systems made the specification available free of charge in 1993. In the early years was popular mainly in desktop publishing workflows, and competed with several other formats, including DjVu, Envoy, Common Ground Digital Paper, Farallon Replica and even Adobe's own PostScript format.

was a proprietary format controlled by Adobe until it was released as an open standard on July 1, 2008, and published by the International Organization for Standardization as ISO 32000-1:2008, at which time control of the specification passed to an ISO Committee of volunteer industry experts. In 2008, Adobe published a Public Patent License to ISO 32000-1 granting royalty-free rights for all patents owned by Adobe necessary to make, use, sell, and distribute -compliant implementations.

1.7, the sixth edition of the specification that became ISO 32000-1, includes some proprietary technologies defined only by Adobe, such as Adobe XML Forms Architecture (XFA) and JavaScript extension for Acrobat, which are referenced by ISO 32000-1 as normative and indispensable for the full

Portable Document Format



Adobe icon

Filename extension	.
Internet media type	application/ ^[1] application/x- application/x- bz application-gz
Type code	^[1] (including a single space)
Uniform Type Identifier (UTI)	com.adobe.
Magic number	%
Developed by	Adobe Inc. (1991– 2008) ISO (2008–)
Initial release	June 15, 1993
Latest release	2.0
Extended to	<div><div><div><div><div>/A,</div><div>/E,</div></div><div><div>/UA,</div><div>/VT,</div></div><div><div>/X</div></div></div></div></div>
Standard	ISO 32000-2
Open format?	Yes
Website	iso.org/standard /75839.html (https://i so.org/standard/7583 9.html)

implementation of the ISO 32000-1 specification.^[9] These proprietary technologies are not standardized, and their specification is published only on Adobe's website.^{[10][11][12]} Many of them are not supported by popular third-party implementations of

ISO's published ISO 32000-2 in 2017, available for purchase, replacing the free specification provided by Adobe.^[13] In December 2020, the second edition of 2.0, ISO 32000-2:2020, was published, with clarifications, corrections, and critical updates to normative references^[14] (ISO 32000-2 does not include any proprietary technologies as normative references).^[15] In April 2023 the Association made ISO 32000-2 available for download free of charge.^[13]

Technical details

A file is often a combination of vector graphics, text, and bitmap graphics. The basic types of content in a are:

- Typeset text stored as content streams (i.e., not encoded in plain text);
- Vector graphics for illustrations and designs that consist of shapes and lines;
- Raster graphics for photographs and other types of images
- Multimedia objects in the document.

In later revisions, a document can also support links (inside document or web page), forms, JavaScript (initially available as a plugin for Acrobat 3.0), or any other types of embedded contents that can be handled using plug-ins.

combines three technologies:

- An equivalent subset of the PostScript page description programming language but in declarative form, for generating the layout and graphics.
- A font-embedding/replacement system to allow fonts to travel with the documents.
- A structured storage system to bundle these elements and any associated content into a single file, with data compression where appropriate.

PostScript language

PostScript is a page description language run in an interpreter to generate an image, a process requiring many resources. It can handle graphics and standard features of programming languages such as `if` statements and `loop` commands. is largely based on PostScript, but simplified to remove flow control features like these, while graphics commands equivalent to `line to` remain.

Historically, the PostScript-like code is generated from a source PostScript file. The graphics commands that are output by the PostScript code are collected and tokenized. Any files, graphics, or fonts to which the document refers also are collected. Then, everything is compressed into a single file. Therefore, the entire PostScript world (fonts, layout, measurements) remains intact.

As a document format, has several advantages over PostScript:

- contains tokenized and interpreted results of the PostScript source code, for direct correspondence between changes to items in the page description and changes to the resulting page appearance.
- Since version 1.4 supports transparent graphics; PostScript does not.

- PostScript is an interpreted programming language with an implicit global state, so instructions accompanying the description of one page can affect the appearance of any following page; consequently all preceding pages in a PostScript document must be processed to determine the correct appearance of a given page, unless the optional PostScript Document Structuring Conventions have been carefully compiled and included. In contrast, each page in a PDF document is unaffected by the others, so it is possible to jump quickly to any page of a long document.

since v1.6 supports embedding of interactive 3D documents: 3D drawings can be embedded using U3D or PRC and various other data formats.^{[16][17][18]}

File format

A PDF file is organized using ASCII characters, except for certain elements that may have binary content. The file starts with a header containing a magic number (as a readable string) and the version of the format, for example %PDF-1.7. The format is a subset of a COS ("Carousel" Object Structure) format.^[19] A COS tree file consists primarily of *objects*, of which there are nine types:^[15]

- Boolean values, representing *true* or *false*
- Real numbers
- Integers
- Strings, enclosed within parentheses ((. . .)) or represented as hexadecimal within single angle brackets (< . . . >). Strings may contain 8-bit characters.
- Names, starting with a forward slash (/)
- Arrays, ordered collections of objects enclosed within square brackets ([. . .])
- Dictionaries, collections of objects indexed by names enclosed within double angle brackets (<< . . . >>)
- Streams, usually containing large amounts of optionally compressed binary data, preceded by a dictionary and enclosed between the `stream` and `endstream` keywords.
- The null object

Comments using 8-bit characters prefixed with the percent sign (%) may be inserted.

Objects may be either *direct* (embedded in another object) or *indirect*. Indirect objects are numbered with an *object number* and a *generation number* and defined between the `obj` and `endobj` keywords if residing in the document root. Beginning with version 1.5, indirect objects (except other streams) may also be located in special streams known as *object streams* (marked `/Type /ObjStm`). This technique enables non-stream objects to have standard stream filters applied to them, reduces the size of files that have large numbers of small indirect objects and is especially useful for *Tagged PDF*. Object streams do not support specifying an object's *generation number* (other than 0).

An index table, also called the cross-reference table, is located near the end of the file and gives the byte offset of each indirect object from the start of the file.^[20] This design allows for efficient random access to the objects in the file, and also allows for small changes to be made without rewriting the entire file (*incremental update*). Before version 1.5, the table would always be in a special ASCII format, be marked with the `xref` keyword, and follow the main body composed of indirect objects. Version 1.5 introduced optional *cross-reference streams*, which have the form of a standard stream object, possibly with filters applied. Such a stream may be used instead of the ASCII cross-reference table and contains the

offsets and other information in binary format. The format is flexible in that it allows for integer width specification (using the `/W` array), so that for example, a document not exceeding 64 KiB in size may dedicate only 2 bytes for object offsets.

At the end of a file is a footer containing


- The `startxref` keyword followed by an offset to the start of the cross-reference table (starting with the `xref` keyword) or the cross-reference stream object, followed by
- The `%%EOF` end-of-file marker.

If a cross-reference stream is not being used, the footer is preceded by the `trailer` keyword followed by a dictionary containing information that would otherwise be contained in the cross-reference stream object's dictionary:

- A reference to the root object of the tree structure, also known as the *catalog* (`/Root`)
- The count of indirect objects in the cross-reference table (`/Size`)
- Other optional information

Within each page, there are one or multiple content streams that describe the text, vector and images being drawn on the page. The content stream is stack-based, similar to PostScript.^[21]

There are two layouts to the files: non-linearized (not "optimized") and linearized ("optimized"). Non-linearized files can be smaller than their linear counterparts, though they are slower to access because portions of the data required to assemble pages of the document are scattered throughout the file. Linearized files (also called "optimized" or "web optimized" files) are constructed in a manner that enables them to be read in a Web browser plugin without waiting for the entire file to download, since all objects required for the first page to display are optimally organized at the start of the file.^[22] files may be optimized using Adobe Acrobat software or Q

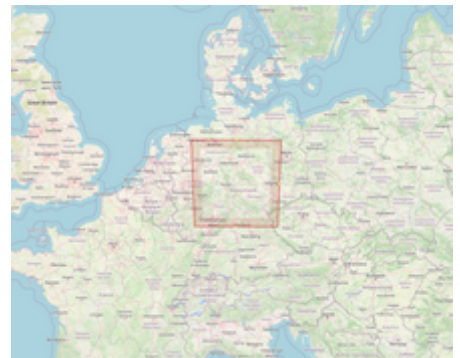

The maximum size of an Acrobat page, superimposed on a map of Europe.

Page dimensions are not limited by the format itself. However, Adobe Acrobat imposes a limit of 15 million by 15 million inches, or 225 trillion in² (145,161 km²).^[2]

Imaging model

The basic design of how graphics are represented in is very similar to that of PostScript, except for the use of transparency, which was added in 1.4.

graphics use a device-independent Cartesian coordinate system to describe the surface of a page. A page description can use a matrix to scale, rotate, or skew graphical elements. A key concept in is that of the *graphics state*, which is a collection of graphical parameters that may be changed, saved, and restored by a *page description*. has (as of version 2.0) 25 graphics state properties, of which some of the most important are:

- The *current transformation matrix* (CTM), which determines the coordinate system
- The clipping path
- The color space

- The *alpha constant*, which is a key component of transparency
- *Black point compensation* control (introduced in 2.0)

Vector graphics

As in PostScript, vector graphics in [PDF](#) are constructed with *paths*. Paths are usually composed of lines and cubic *Bézier curves*, but can also be constructed from the outlines of text. Unlike PostScript, [PDF](#) does not allow a single path to mix text outlines with lines and curves. Paths can be stroked, filled, fill then stroked, or used for clipping. Strokes and fills can use any color set in the graphics state, including *patterns*.

[PDF](#) supports several types of patterns. The simplest is the *tiling pattern* in which a piece of artwork is specified to be drawn repeatedly. This may be a *colored tiling pattern*, with the colors specified in the pattern object, or an *uncolored tiling pattern*, which defers color specification to the time the pattern is drawn. Beginning with [PDF](#) 1.3 there is also a *shading pattern*, which draws continuously varying colors. There are seven types of shading patterns of which the simplest are the *axial shading* (Type 2) and *radial shading* (Type 3).

Raster images

Raster images in [PDF](#) (called *Image XObjects*) are represented by dictionaries with an associated stream. The dictionary describes the properties of the image, and the stream contains the image data. (Less commonly, small raster images may be embedded directly in a page description as an *inline image*.) Images are typically *filtered* for compression purposes. Image filters supported in [PDF](#) include the following general-purpose filters:

- *ASCII85Decode*, a filter used to put the stream into 7-bit ASCII,
- *ASCIIHexDecode*, similar to ASCII85Decode but less compact,
- *FlateDecode*, a commonly used filter based on the *deflate* algorithm defined in RFC 1951 (<https://datatracker.ietf.org/doc/html/rfc1951>) (deflate is also used in the gzip, PNG, and zip file formats among others); introduced in [PDF](#) 1.2; it can use one of two groups of predictor functions for more compact zlib/deflate compression: *Predictor 2* from the TIFF 6.0 specification and predictors (filters) from the PNG specification (RFC 2083 (<https://datatracker.ietf.org/doc/html/rfc2083>)),
- *LZWDecode*, a filter based on LZW Compression; it can use one of two groups of predictor functions for more compact LZW compression: *Predictor 2* from the TIFF 6.0 specification and predictors (filters) from the PNG specification,
- *RunLengthDecode*, a simple compression method for streams with repetitive data using the run-length encoding algorithm and the image-specific filters,
- *DCTDecode*, a *lossy* filter based on the JPEG standard,
- *CCITTFaxDecode*, a *lossless* bi-level (black/white) filter based on the Group 3 or Group 4 CCITT (ITU-T) *fax* compression standard defined in ITU-T T.4 and T.6,
- *JBIG2Decode*, a *lossy* or *lossless* bi-level (black/white) filter based on the JBIG2 standard, introduced in [PDF](#) 1.4, and
- *JPXDecode*, a *lossy* or *lossless* filter based on the JPEG 2000 standard, introduced in [PDF](#) 1.5.

Normally all image content in a [PDF file](#) is embedded in the file. But [PDF/A](#) allows image data to be stored in external files by the use of *external streams* or *Alternate Images*. Standardized subsets of [PDF/A](#) including [PDF/A-1](#) and [PDF/A-2](#), prohibit these features.

Text

Text in [PDF](#) is represented by *text elements* in page content streams. A text element specifies that *characters* should be drawn at certain positions. The characters are specified using the *encoding* of a selected *font resource*.

A font object in [PDF](#) is a description of a digital *typeface*. It may either describe the characteristics of a typeface, or it may include an embedded *font file*. The latter case is called an *embedded font* while the former is called an *unembedded font*. The font files that may be embedded are based on widely used standard digital font formats: [Type 1](#) (and its compressed variant CFF), [TrueType](#), and (beginning with [PDF 1.6](#)) [OpenType](#). Additionally [PDF 1.6](#) supports the Type 3 variant in which the components of the font are described by [Type 3](#) graphic operators.

Fourteen typefaces, known as the *standard 14 fonts*, have a special significance in [PDF](#) documents:

- [Times](#) (v3) (in regular, italic, bold, and bold italic)
- [Courier](#) (in regular, oblique, bold and bold oblique)
- [Helvetica](#) (v3) (in regular, oblique, bold and bold oblique)
- [Symbol](#)
- [Zapf Dingbats](#)

These fonts are sometimes called the *base fourteen fonts*.^[23] These fonts, or suitable substitute fonts with the same metrics, should be available in most [PDF](#) readers, but they are not *guaranteed* to be available in the reader, and may only display correctly if the system has them installed.^[24] Fonts may be substituted if they are not embedded in a [PDF](#) file.

Within text strings, characters are shown using *character codes* (integers) that map to glyphs in the current font using an *encoding*. There are several predefined encodings, including *WinAnsi*, *MacRoman*, and many encodings for East Asian languages and a font can have its own built-in encoding. (Although the *WinAnsi* and *MacRoman* encodings are derived from the historical properties of the [Windows](#) and [Macintosh](#) operating systems, fonts using these encodings work equally well on any platform.) [PDF](#) can specify a predefined encoding to use, the font's built-in encoding or provide a lookup table of differences to a predefined or built-in encoding (not recommended with *TrueType* fonts).^[2] The encoding mechanisms in [PDF](#) were designed for *Type 1* fonts, and the rules for applying them to *TrueType* fonts are complex.

For large fonts or fonts with non-standard glyphs, the special encodings *Identity-H* (for horizontal writing) and *Identity-V* (for vertical) are used. With such fonts, it is necessary to provide a *ToUnicode* table if semantic information about the characters is to be preserved.

A text document which is [scanned](#) to [PDF](#) without the text being recognised by [optical character recognition](#) (OCR) is an image, with no fonts or text properties.

Transparency

The original imaging model of [PDF 1.2](#) was, like PostScript's, *opaque*: each object drawn on the page completely replaced anything previously marked in the same location. In [PDF 1.4](#) the imaging model was extended to allow transparency. When transparency is used, new objects interact with previously marked objects to produce blending effects. The addition of transparency to [PDF 1.4](#) was done by means of new extensions that were designed to be ignored in products written to [PDF 1.3](#) and earlier specifications. As a result, files that use a small amount of transparency might be viewed acceptably by older viewers, but files making extensive use of transparency could be viewed incorrectly by an older viewer.

The transparency extensions are based on the key concepts of *transparency groups*, *blending modes*, *shape*, and *alpha*. The model is closely aligned with the features of [Adobe Illustrator](#) version 9. The [blend modes](#) were based on those used by [Adobe Photoshop](#) at the time. When the [PDF 1.4](#) specification was published, the formulas for calculating blend modes were kept secret by Adobe. They have since been published.^[25]

The concept of a transparency group in [PDF 1.4](#) specification is independent of existing notions of "group" or "layer" in applications such as [Adobe Illustrator](#). Those groupings reflect logical relationships among objects that are meaningful when editing those objects, but they are not part of the imaging model.

Additional features

Logical structure and accessibility

A "tagged" [PDF](#) (see clause 14.8 in [ISO 32000](#)) includes document structure and semantics information to enable reliable text extraction and [accessibility](#). Technically speaking, tagged [PDF](#) is a stylized use of the format that builds on the logical structure framework introduced in [PDF 1.3](#). Tagged [PDF](#) defines a set of standard structure types and attributes that allow page content (text, graphics, and images) to be extracted and reused for other purposes.^[26]

Tagged [PDF](#) is not required in situations where a [PDF](#) file is intended only for print. Since the feature is optional, and since the rules for Tagged [PDF](#) were relatively vague in [ISO 32000-1](#), support for tagged [PDF](#) among consuming devices, including [assistive technology](#) (AT), is uneven as of 2021.^[27] [ISO 32000-2](#), however, includes an improved discussion of tagged [PDF](#) which is anticipated to facilitate further adoption.

An ISO-standardized subset of [PDF](#) specifically targeted at accessibility, [PDF/A](#), was first published in 2012.

Optional Content Groups (layers)

With the introduction of [PDF](#) version 1.5 (2003) came the concept of Layers. Layers, more formally known as Optional Content Groups (OCGs), refer to sections of content in a [PDF](#) document that can be selectively viewed or hidden by document authors or viewers. This capability is useful in CAD drawings, layered artwork, maps, multi-language documents, etc.

Basically, it consists of an Optional Content Properties Dictionary added to the document root. This dictionary contains an array of Optional Content Groups (OCGs), each describing a set of information and each of which may be individually displayed or suppressed, plus a set of Optional Content Configuration Dictionaries, which give the status (Displayed or Suppressed) of the given OCGs.

Encryption and signatures

A file may be encrypted, for security, in which case a password is needed to view or edit the contents. 2.0 defines 256-bit AES encryption as the standard for 2.0 files. The Reference also defines ways that third parties can define their own encryption systems for

files may be digitally signed, to provide secure authentication; complete details on implementing digital signatures in are provided in ISO 32000-2.

files may also contain embedded DRM restrictions that provide further controls that limit copying, editing, or printing. These restrictions depend on the reader software to obey them, so the security they provide is limited.

The standard security provided by consists of two different methods and two different passwords: a *user password*, which encrypts the file and prevents opening, and an *owner password*, which specifies operations that should be restricted even when the document is decrypted, which can include modifying, printing, or copying text and graphics out of the document, or adding or modifying text notes and AcroForm fields. The user password encrypts the file, while the owner password does not, instead relying on client software to respect these restrictions. An owner password can easily be removed by software, including some free online services.^[28] Thus, the use restrictions that a document author places on a document are not secure, and cannot be assured once the file is distributed; this warning is displayed when applying such restrictions using Adobe Acrobat software to create or edit files.

Even without removing the password, most freeware or open source readers ignore the permission "protections" and allow the user to print or make copy of excerpts of the text as if the document were not limited by password protection.^{[29][30][31]}

Beginning with 1.5, Usage rights (UR) signatures are used to enable additional interactive features that are not available by default in a particular viewer application. The signature is used to validate that the permissions have been granted by a bona fide granting authority. For example, it can be used to allow a user:^[32]

- To save the document along with a modified form or annotation data
- Import form data files in FDF, XFDF, and text (CSV/TSV) formats
- Export form data files in FDF and XFDF formats
- Submit form data
- Instantiate new pages from named page templates
- Apply a digital signature to existing digital signature form field
- Create, delete, modify, copy, import, and export annotations

For example, Adobe Systems grants permissions to enable additional features in Adobe Reader, using public-key cryptography. Adobe Reader verifies that the signature uses a certificate from an Adobe-authorized certificate authority. Any application can use this same mechanism for its own purposes.^[32]

Under specific circumstances including non-patched systems of the receiver, the information the receiver of a digital signed document sees can be manipulated by the sender after the document has been signed by the signer.^[33]

PAdES (*Advanced Electronic Signatures*) is a set of restrictions and extensions to PDF/A and ISO 32000-1^[34] making it suitable for advanced electronic signatures. This is published by ETSI as TS 102 778.^[35]

File attachments

files can have file attachments which processors may access and open or save to a local filesystem.^[36]

Metadata

files can contain two types of metadata.^[2] The first is the Document Information Dictionary, a set of key/value fields such as author, title, subject, creation and update dates. This is optional and is referenced from an Info key in the trailer of the file. A small set of fields is defined and can be extended with additional text values if required. This method is deprecated in PDF/A 2.0.

In PDF/A 1.4, support was added for Metadata Streams, using the Extensible Metadata Platform (XMP) to add XML standards-based extensible metadata as used in other file formats. PDF/A 2.0 allows metadata to be attached to any object in the document, such as information about embedded illustrations, fonts, and images, as well as the whole document (attaching to the document catalog), using an extensible schema.

documents can also contain display settings, including the page display layout and zoom level in a Viewer Preferences object. Adobe Reader uses these settings to override the user's default settings when opening the document.^[37] The free Adobe Reader cannot remove these settings.

Accessibility

files can be created specifically to be accessible to people with disabilities.^{[38][39][40][41][42]} file formats in use as of 2014 can include tags, text equivalents, captions, audio descriptions, and more. Some software can automatically produce tagged PDF/As, but this feature is not always enabled by default.^{[43][44]} Leading screen readers, including JAWS, Window-Eyes, Hal, and Kurzweil 1000 and 3000 can read tagged PDF/As.^{[45][46]} Moreover, tagged PDF/As can be re-flowed and magnified for readers with visual impairments. Adding tags to older PDF/As and those that are generated from scanned documents can present some challenges.

One of the significant challenges with PDF/A accessibility is that PDF/A documents have three distinct views, which, depending on the document's creation, can be inconsistent with each other. The three views are (i) the physical view, (ii) the tags view, and (iii) the content view. The physical view is displayed and printed (what most people consider a PDF/A document). The tags view is what screen readers and other assistive technologies use to deliver high-quality navigation and reading experience to users with disabilities. The content view is based on the physical order of objects within the PDF/A's content stream and may be displayed by software that does not fully support the tags' view, such as the Reflow feature in Adobe's Reader.

_____/UA, the International Standard for accessible _____ based on ISO 32000-1 was first published as ISO 14289–1 in 2012 and establishes normative language for accessible _____ technology.

Multimedia

Rich Media _____ is a _____ file including interactive content that can be embedded or linked within the file. It can contain images, audio, video content, or buttons. For example, if the interactive _____ is a digital catalog for an E-commerce business, products can be listed on the _____ pages and can be added with images and links to the website and buttons to order directly from the document.

Forms

Interactive Forms is a mechanism to add forms to the _____ file format. _____ currently supports two different methods for integrating data and _____ forms. Both formats today coexist in the specification:^{[32][47][48][49]}

- AcroForms (also known as Acrobat forms), was introduced in the _____ 1.2 format specification and included in all later _____ specifications.
- XML Forms Architecture (XFA) forms, introduced in the _____ 1.5 format specification. Adobe XFA Forms are not compatible with AcroForms.^[50] XFA was deprecated from _____ with 2.0.

AcroForms were introduced in the _____ 1.2 format. AcroForms permit the uses of objects (*e.g.* text boxes, Radio buttons, *etc.*) and some code (*e.g.* JavaScript). Alongside the standard _____ action types, interactive forms (AcroForms) support submitting, resetting, and importing data. The "submit" action transmits the names and values of selected interactive form fields to a specified uniform resource locator (URL). Interactive form field names and values may be submitted in any of the following formats, (depending on the settings of the action's ExportFormat, Submi _____ and XFDF flags):^[32]

HTML Form format

HTML 4.01 Specification since _____ 1.5; HTML 2.0 since 1.2

Forms Data Format (FDF)

based on _____ uses the same syntax and has essentially the same file structure, but is much simpler than _____ since the body of an FDF document consists of only one required object. Forms Data Format is defined in the _____ specification (since _____ 1.2). The Forms Data Format can be used when submitting form data to a server, receiving the response, and incorporating it into the interactive form. It can also be used to export form data to stand-alone files that can be imported back into the corresponding _____ interactive form. FDF was originally defined in 1996 as part of ISO 32000-2:2017.

XML Forms Data Format (XFDF)

(external XML Forms Data Format Specification, Version 2.0; supported since _____ 1.5; it replaced the "XML" form submission format defined in _____ 1.4) the XML version of Forms Data Format, but the XFDF implements only a subset of FDF containing forms and annotations. Some entries in the FDF dictionary do not have XFDF equivalents – such as the Status, Encoding, JavaScript, Page's keys, EmbeddedFDFs, Differences, and Target. In addition, XFDF does not allow the spawning, or addition, of new pages based on the given data; as can be done when using an FDF file. The XFDF specification is referenced (but not included) in _____ 1.5 specification (and in later versions). It is described separately in *XML Forms Data Format Specification*.^[51] The _____ 1.4 specification allowed form submissions in XML format, but this was replaced by submissions in XFDF format in the _____ 1.5 specification. XFDF conforms to the XML standard. XFDF can be used in the same way as FDF; *e.g.*, form data is submitted to a server, modifications are made, then

sent back and the new form data is imported in an interactive form. It can also be used to export form data to stand-alone files that can be imported back into the corresponding interactive form. As of August 2019, XFDF 3.0 is an ISO/IEC standard under the formal name *ISO 19444-1:2019 - Document management — XML Forms Data Format — Part 1: Use of ISO 32000-2 (XFDF 3.0)*.^[52] This standard is a normative reference of ISO 32000-2.

The entire document can be submitted rather than individual fields and values, as was defined in 1.4.

AcroForms can keep form field values in external stand-alone files containing key-value pairs. The external files may use Forms Data Format (FDF) and XML Forms Data Format (XFDF) files.^{[53][51][54]} The usage rights (UR) signatures define rights for import form data files in FDF, XFDF, and text (CSV/TSV) formats, and export form data files in FDF and XFDF formats.^[32]

In 1.5, Adobe Systems introduced a proprietary format for forms; Adobe XML Forms Architecture (XFA). Adobe XFA Forms are not compatible with ISO 32000's AcroForms feature, and most processors do not handle XFA content. The XFA specification is referenced from ISO 32000-1 1.7 as an external proprietary specification and was entirely deprecated from with ISO 32000-2 (2.0).

Licensing

Anyone may create applications that can read and write files without having to pay royalties to Adobe Systems; Adobe holds patents to but licenses them for royalty-free use in developing software complying with its specification.^[55]

Security

Changes to content

In November 2019, researchers from Ruhr University Bochum and Hackmanit GmbH published attacks on digitally signed s.^[56] They showed how to change the visible content in a signed without invalidating the signature in 21 of 22 desktop viewers and 6 of 8 online validation services by abusing implementation flaws. At the same conference, they additionally showed how to exfiltrate the plaintext of encrypted content in s.^[57] In 2021, they showed new so-called *shadow attacks* on s that abuse the flexibility of features provided in the specification.^[58] An overview of security issues in s regarding denial of service, information disclosure, data manipulation, and arbitrary code execution attacks was presented by Jens Müller.^{[59][60]}

Malware vulnerability

files can be infected with viruses, Trojans, and other malware. They can have hidden JavaScript code that might exploit vulnerabilities in a hidden objects executed when the file that hides them is opened, and, less commonly, a malicious can launch malware.^[61]

attachments carrying viruses were first discovered in 2001. The virus, named *OUTLOOK*. *Worm* or *Peachy*, uses Microsoft Outlook to send itself as an attached Adobe file. It was activated with Adobe Acrobat, but not with Acrobat Reader.^[62]

From time to time, new vulnerabilities are discovered in various versions of Adobe Reader,^[63] prompting the company to issue security fixes. Other readers are also susceptible. One aggravating factor is that a reader can be configured to start automatically if a web page has an embedded file, providing a vector for attack. If a malicious web page contains an infected file that takes advantage of a vulnerability in the reader, the system may be compromised even if the browser is secure. Some of these vulnerabilities are a result of the standard allowing documents to be scripted with JavaScript. Disabling JavaScript execution in the reader can help mitigate such future exploits, although it does not protect against exploits in other parts of the viewing software. Security experts say that JavaScript is not essential for a reader and that the security benefit that comes from disabling JavaScript outweighs any compatibility issues caused.^[64] One way of avoiding file exploits is to have a local or web service convert files to another format before viewing.

On March 30, 2010, security researcher Didier Stevens reported an Adobe Reader and Foxit Reader exploit that runs a malicious executable if the user allows it to launch when asked.^[65]

Software

Viewers and editors

Many viewers are provided free of charge from a variety of sources. Programs to manipulate and edit files are available, usually for purchase.

There are many software options for creating s, including the printing capabilities built into macOS, iOS,^[66] and most Linux distributions. Much document processing software including LibreOffice, Microsoft Office 2007 (if updated to SP2) and later,^[67] WordPerfect 9, and Scribus can export documents in format. There are many print drivers for Microsoft Windows, the TeX typesetting system, the DocBook tools, applications developed around Ghostscript and Adobe Acrobat itself as well as Adobe InDesign, Adobe FrameMaker, Adobe Illustrator, Adobe Photoshop, that allow a "printer" to be set up, which when selected sends output to a file instead of a physical printer. Google's online office suite Google Docs allows uploading and saving to Some web apps offer free editing and annotation tools.

The Free Software Foundation were "developing a free, high-quality and fully functional set of libraries and programs that implement the file format and associated technologies to the ISO 32000 standard", as one of their high priority projects.^{[68][69]} In 2011, however, the GNU project was removed from the list of "high priority projects" due to the maturation of the Poppler library,^[70] which has enjoyed wider use in applications such as Evince with the GNOME desktop environment. Poppler is based on X^{[71][72]} code base. There are also commercial development libraries available as listed in List of software.

The Apache Box project of the Apache Software Foundation is an open source Java library, licensed under the Apache License, for working with documents.^[73]

Printing

Raster image processors (RIPs) are used to convert files into a raster format suitable for imaging onto paper and other media in printers, digital production presses and prepress in a process known as rasterization. RIPs capable of processing directly include the Adobe Print Engine^[74] from Adobe Systems and Jaws^[75] and the Harlequin RIP from Global Graphics.

In 1993, the Jaws raster image processor from Global Graphics became the first shipping prepress RIP that interpreted [native](#) without conversion to another format. The company released an upgrade to their Harlequin RIP with the same capability in 1997.^[76]

[Agfa-Gevaert](#) introduced and shipped Apogee, the first prepress workflow system based on [native](#) in 1997.

Many commercial offset printers have accepted the submission of press-ready [native](#) files as a print source, specifically the [/X-1a](#) subset and variations of the same.^[77] The submission of press-ready [native](#) files is a replacement for the problematic need for receiving collected native working files.

In 2006, [native](#) was widely accepted as the standard print job format at the [Open Source Development Labs](#) Printing Summit. It is supported as a print job format by the [Common Unix Printing System](#) and desktop application projects such as [GNOME](#), [KDE](#), [Firefox](#), [Thunderbird](#), [LibreOffice](#) and [OpenOffice](#) have switched to emit print jobs in [native](#)^[78]

Some desktop printers also support direct [native](#) printing, which can interpret [native](#) data without external help.

Native display model

[native](#) was selected as the "native" [metafile](#) format for Mac OS X, replacing the [PICT](#) format of the earlier [classic Mac OS](#). The imaging model of the [Quartz](#) graphics layer is based on the model common to [Display PostScript](#) and [native](#) leading to the nickname *Display native*. The Preview application can display [native](#) files, as can version 2.0 and later of the [Safari](#) web browser. System-level support for [native](#) allows Mac OS X applications to create [native](#) documents automatically, provided they support the OS-standard printing architecture. The files are then exported in [native](#) 1.3 format according to the file header. When taking a screenshot under Mac OS X versions 10.0 through 10.3, the image was also captured as a [native](#); later versions save screen captures as a PNG file, though this behavior can be set back to [native](#) if desired.

Annotation

Adobe Acrobat is one example of proprietary software that allows the user to annotate, highlight, and add notes to already created [native](#) files. One UNIX application available as [free software](#) (under the [GNU General Public License](#)) is [native](#) edit. The [freeware](#) Foxit Reader, available for Microsoft Windows, macOS and Linux, allows annotating documents. Tracker Software's [native](#)-XChange Viewer allows annotations and markups without restrictions in its freeware alternative. Apple's macOS's integrated [native](#) viewer, Preview, does also enable annotations as does the open-source software Skim, with the latter supporting interaction with [LaTeX](#), [SyncTeX](#), and [native](#) Sync and integration with [BibDesk](#) reference management software. Freeware Qiqqa can create an annotation report that summarizes all the annotations and notes one has made across their library of [native](#) s. The Text Verification Tool exports differences in documents as annotations and markups.

There are also [web annotation](#) systems that support annotation in [native](#) and other document formats. In cases where [native](#) s are expected to have all of the functionality of paper documents, ink annotation is required.

Alternatives

The [Open XML Paper Specification](#) is a competing format used both as a page description language and as the native print spooler format for Microsoft Windows since [Windows Vista](#).

Mixed Object: Document Content Architecture is a competing format. MO:DCA-P is a part of Advanced Function Presentation.

See also

- Web page
- XSL Formatting Objects
- Page margin
- portfolio

References

1. Hardy, M.; Masinter, L.; Markovic, D.; Johnson, D.; Bailey, M. (March 2017). *The application Media Type* (<https://datatracker.ietf.org/doc/html/rfc8118>). IETF. doi:10.17487/RFC8118 (<https://doi.org/10.17487%2FRFC8118>). RFC 8118 (<https://datatracker.ietf.org/doc/html/rfc8118>).
2. Adobe Systems Incorporated (November 2006). "Reference" (https://web.archive.org/web/20081001170454/https://www.adobe.com/devnet/acrobat/s/reference_1-7) (). 1.7 (6th ed.). Archived from the original (https://www.adobe.com/devnet/acrobat/s/reference_1-7) () on October 1, 2008. Retrieved January 12, 2023.
3. Warnock, J. (October 14, 2004) [Original date 5 May 1995]. "The Camelot Project" (https://www.a.org/norm-refs/warnock_camelot) (). Archived (https://web.archive.org/web/20110718230852/http://www.plane.com/plane/s/warnock_camelot) () from the original on July 18, 2011.
4. "What is a ? Portable Document Format | Adobe Acrobat DC" (<https://www.adobe.com/acrobat/about-adobe-> html). Adobe Systems Inc. Archived (<https://web.archive.org/web/20230130032548/https://www.adobe.com/acrobat/about-adobe-> html) from the original on January 30, 2023. Retrieved January 12, 2023.
5. "ISO 32000-1:2008" (https://web.archive.org/web/20180726064724/http://www.images.adobe.com/www.adobe.com/content/dam/acom/en/devnet/s/32000_2008) (). Archived from the original (http://www.images.adobe.com/www.adobe.com/content/dam/acom/en/devnet/s/32000_2008) () on July 26, 2018.
6. "ISO 32000-1:2008 – Document management – Portable document format – Part 1: 1.7" (http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=51502). ISO. July 1, 2008. Archived (https://web.archive.org/web/20101206175751/http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=51502) from the original on December 6, 2010. Retrieved February 21, 2010.
7. Orion, Egan (December 5, 2007). "1.7 is approved as ISO 32000" (<https://web.archive.org/web/20071213004627/http://www.theinquirer.net/gb/inquirer/news/2007/12/05-approved-iso-32000>). *The Inquirer*. Archived from the original (<http://www.theinquirer.net/gb/inquirer/news/2007/12/05-approved-iso-32000>) on December 13, 2007. Retrieved December 5, 2007.
8. "Public Patent License, ISO 32000-1: 2008 – 1.7" (<https://www.adobe.com/s/ISO32000-1PublicPatentLicense>) (). Adobe Systems Inc. 2008. Archived (<https://web.archive.org/web/20090618144613/http://www.adobe.com/s/ISO32000-1PublicPatentLicense>) () from the original on June 18, 2009. Retrieved January 12, 2023.

9. "Guide for the procurement of standards-based ICT – Elements of Good Practice, Against lock-in: building open ICT systems by making better use of standards in public procurement" (<https://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=SWD:2013:0224:FIN:EN>). European Commission. June 25, 2013. Archived (<https://web.archive.org/web/20200919174545/https://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=SWD:2013:0224:FIN:EN>) from the original on September 19, 2020. Retrieved January 12, 2023. "Example: ISO/IEC 29500, ISO/IEC 26300 and ISO 32000 for document formats reference information that is not accessible by all parties (references to proprietary technology and brand names, incomplete scope or dead web links)."
10. "ISO/TC 171/SC 2/WG 8 N 603 – Meeting Report" (https://web.archive.org/web/20121126013025/http://editme.com/files/REF-meetings/ISO-TC171-SC2-WG8_N0603_SC2WG8_MtgRept_SLC) (). *Edit me*. June 27, 2011. Archived from the original (http://editme.com/files/REF-meetings/ISO-TC171-SC2-WG8_N0603_SC2WG8_MtgRept_SLC.pdf) () on November 26, 2012 – via Archive. "XFA is not to be ISO standard just yet. The Committee urges Adobe Systems to submit the XFA Specification, XML Forms Architecture (XFA), to ISO for standardization The Committee is concerned about the stability of the XFA specification Part 2 will reference XFA 3.1"
11. "Embedding and publishing interactive, 3-dimensional, scientific figures in Portable Document Format () files" (<https://doi.org/10.1371%2Fjournal.pone.0069446.s001>). *PLOS ONE*. 8 (9). 2013. doi:10.1371/journal.pone.0069446.s001 (<https://doi.org/10.1371%2Fjournal.pone.0069446.s001>). "the implementation of the U3D standard was not complete and proprietary extensions were used."
12. Leonard Rosenthol (2012). " and Standards" (https://web.archive.org/web/20130902000323/http://cdn.parleys.com/p/5148922a0364bc17fc56c6e5/iSUM2012_00_LRO_presentation) (). Adobe Systems. Archived from the original (http://cdn.parleys.com/p/5148922a0364bc17fc56c6e5/iSUM2012_00_LRO_presentation) () on September 2, 2013. Retrieved October 20, 2013 – via Parleys.
13. "Announcing no-cost access to the latest standard: ISO 32000-2 (2.0)" (<https://a.org/sponsored-standards>) (Press release). Association. June 16, 2023 [Updated; originally published 5 April 2023].
14. "ISO 32000-2:2020 is now available" (<https://www.a.org/iso-32000-22020-is-now-available/>). A. December 14, 2020. Archived (<https://web.archive.org/web/20221204112238/https://www.a.org/iso-32000-22020-is-now-available/>) from the original on December 4, 2022. Retrieved February 3, 2021.
15. "ISO 32000-2 – Document management — Portable document format — Part 2: 2.0" (<https://www.iso.org/standard/75839.html>). ISO. January 5, 2021. Archived (<https://web.archive.org/web/20210128003836/https://www.iso.org/standard/75839.html>) from the original on January 28, 2021. Retrieved February 3, 2021.
16. "3D supported formats" (<https://web.archive.org/web/20100212072951/http://www.adobe.com/manufacturing/resources/3dformats/>). Adobe Systems Inc. July 14, 2009. Archived from the original (<https://www.adobe.com/manufacturing/resources/3dformats/>) on February 12, 2010. Retrieved February 21, 2010.
17. "Supported file formats in Acrobat and Reader" (https://helpx.adobe.com/acrobat/kb/supported-file-formats-acrobat-reader.html#main_2D_and_3D_formats_Acrobat_9_Pro_Extended_Adobe_3D_Reviewer). Adobe Systems Inc. November 11, 2022. Archived (https://web.archive.org/web/20221221111958/https://helpx.adobe.com/acrobat/kb/supported-file-formats-acrobat-reader.html#main_2D_and_3D_formats_Acrobat_9_Pro_Extended_Adobe_3D_Reviewer) from the original on December 21, 2022. Retrieved January 12, 2023.

18. "JavaScript for Acrobat 3D | Adobe Acrobat Developer Center" (https://web.archive.org/web/20091112231130/https://www.adobe.com/devnet/acrobat/javascript_acrobt_3d.html). Adobe Systems Inc. Archived from the original (https://www.adobe.com/devnet/acrobat/javascript_acrobt_3d.html) on November 12, 2009. Retrieved January 12, 2023.
19. Pravetz, Jim. "In Defense of COS, or Why I Love JSON and Hate XML" (<https://web.archive.org/web/20140502013429/http://jimpravetz.com/blog/2012/12/in-defense-of-cos/>). *jimpravetz.com*. Archived from the original on May 2, 2014.
20. Adobe Systems, Reference, pp. 39–40.
21. Pike documentation. "Working with content streams" (https://pike.readthedocs.io/en/latest/topics/content_streams.html). Archived (https://web.archive.org/web/20220705084446/https://pike.readthedocs.io/en/latest/topics/content_streams.html) from the original on July 5, 2022. Retrieved May 8, 2022.
22. "Adobe Developer Connection: Reference and Adobe Extensions to the Specification" (<https://web.archive.org/web/20061115132507/https://www.adobe.com/devnet/reference.html>). Adobe Systems Inc. Archived from the original (<https://www.adobe.com/devnet/reference.html>) on November 15, 2006. Retrieved December 13, 2010.
23. Howard, Jacci. "Desktop Publishing: Base 14 Fonts – Definition" (<https://web.archive.org/web/20160614134144/http://desktoppub.about.com/od/glossary/g/base14fonts.htm>). *About.com Tech*. Archived from the original (<http://desktoppub.about.com/od/glossary/g/base14fonts.htm>) on June 14, 2016.
24. Merz, Thomas (June 2003). "The Font Aquarium" (https://web.archive.org/web/20110718231502/http://www.plane.com/plane/s/2k/03e/merz_fontaquarium/) (). Archived from the original on July 18, 2011.
25. "Blend Modes Addendum" (https://web.archive.org/web/20111014100004/https://www.adobe.com/content/dam/Adobe/en/devnet/s/reference_archives/blend_modes.pdf) (). Archived from the original (https://www.adobe.com/content/dam/Adobe/en/devnet/pdf/s/reference_archives/blend_modes/) () on October 14, 2011. Retrieved January 12, 2023.
26. Johnson, Duff (April 22, 2004). "What is Tagged ?" (<https://www.talking.org/what-is-tagged->). Archived (<https://web.archive.org/web/20040807132851/http://www.plane.com/enterprise/article.asp?ContentID=6067>) from the original on August 7, 2004.
27. "Is accessible?" (<https://www.washington.edu/doit/-accessible?1002=>). *DO-IT - Disabilities, Opportunities, Internetworking, and Technology*. University of Washington. October 4, 2022. Archived (<https://web.archive.org/web/20230210114239/https://www.washington.edu/doit/-accessible?1002=>) from the original on February 10, 2023. Retrieved January 12, 2023.
28. "FreeMy com – Removes passwords from viewable s" (<http://freemy.com/>). *freemy.com*. Archived (<https://web.archive.org/web/20210220014724/https://freemy.com/>) from the original on February 20, 2021. Retrieved June 23, 2009.
29. Kirk, Jeremy (December 4, 2008). "Adobe admits new password protection is weaker" (<http://www.macworld.com/article/1137343.html>). *Macworld*. IDG Communications Inc. Archived (<https://web.archive.org/web/20170117225255/http://www.macworld.com/article/1137343.html>) from the original on January 17, 2017. Retrieved September 14, 2016.
30. Guignard, Bryan. "How secure is " (<https://web.archive.org/web/20051024235303/http://www.cs.cmu.edu/~dst/Adobe/Gallery/security/>) (). Carnegie Mellon University. Archived from the original (<https://www.cs.cmu.edu/~dst/Adobe/Gallery/security/>) () on October 24, 2005.

31. Merz, Thomas (November 2001). *Security Overview: Strengths and Weaknesses* (http://web.archive.org/web/20101011050457/http://www.plane.com/plane_s_2k/01W/merz_securitykeynote) (). 2001 conference. Scottsdale/Arizona. Archived from the original on October 11, 2010.
32. Adobe Systems Inc. (July 1, 2008). "Document Management – Portable Document Format – Part 1: 1.7, First Edition" (https://web.archive.org/web/20081203002256/https://www.adobe.com/devnet/acrobat_s_32000_2008) (). Archived from the original (http://www.adobe.com/devnet/acrobat_s_32000_2008) () on December 3, 2008. Retrieved January 12, 2023.
33. "Insecurity Website" (<https://insecurity.org/signature-shadow/shadow-attacks.html>). *insecurity.org*. Archived (<https://web.archive.org/web/20230326024850/https://insecurity.org/signature-shadow/shadow-attacks.html>) from the original on March 26, 2023. Retrieved January 12, 2023.
34. "ISO 32000-1:2008 Document management -- Portable document format -- Part 1: 1.7" (http://www.iso.org/iso/catalogue_detail.htm?csnumber=51502). International Organization for Standardization ISO. Archived (https://web.archive.org/web/20170210072051/http://www.iso.org/iso/catalogue_detail.htm?csnumber=51502) from the original on February 10, 2017. Retrieved March 22, 2016.
35. "ETSI TS 102 778-1 - Electronic Signatures and Infrastructures (ESI); Advanced Electronic Signature Profiles; Part 1: PAdES Overview - a framework document for PAdES" (http://www.etsi.org/deliver/etsi_ts%5C102700_102799%5C10277801%5C01.01.01_60%5Cts_10277801v010101p) (). 1.1.1. European Telecommunications Standards Institute ETSI. July 2009. Archived (https://web.archive.org/web/20230308052536/https://www.etsi.org/deliver/etsi_ts%5C102700_102799%5C10277801%5C01.01.01_60%5Cts_10277801v010101p) () from the original on March 8, 2023. Retrieved January 12, 2023.
36. "Links and attachments in s" (<https://helpx.adobe.com/uk/acrobat/using/links-attachments-s-s.html>). Archived (<https://web.archive.org/web/20210423155713/https://helpx.adobe.com/uk/acrobat/using/links-attachments-s-s.html>) from the original on April 23, 2021. Retrieved April 23, 2021.
37. "Getting Familiar with Adobe Reader > Understanding Preferences" (<http://www.adobepress.com/articles/article.asp?p=412914>). *Adobe Press*. Pearson. September 2, 2005. Archived (<https://web.archive.org/web/20121023144614/https://www.adobepress.com/articles/article.asp?p=412914>) from the original on October 23, 2012. Retrieved January 12, 2023.
38. "Accessibility" (<https://webaim.org/techniques/acrobat/>). WebAIM. Archived (<https://web.archive.org/web/20230112153237/https://webaim.org/techniques/acrobat/>) from the original on January 12, 2023. Retrieved January 12, 2023.
39. Clark, Joe (August 22, 2005). "Facts and Opinions About Accessibility" (http://www.alistapart.com/articles_accessibility). Archived (https://web.archive.org/web/20130124140051/http://alistapart.com/articles_accessibility) from the original on January 24, 2013. Retrieved January 12, 2023.
40. "Accessibility and documents" (<https://web.archive.org/web/20100427062242/http://wac.osu.edu>). *Web Accessibility Center*. The Ohio State University. Archived from the original (<http://wac.osu.edu>) on April 27, 2010. Retrieved January 12, 2023.
41. "Accessibility Standards" (https://web.archive.org/web/20100529035503/http://www.bbc.co.uk/guidelines/futuremedia/accessibility/accessible_shtml). 1.2. BBC. Archived from the original (https://www.bbc.co.uk/guidelines/futuremedia/accessibility/accessible_shtml) on May 29, 2010. Retrieved January 12, 2023.
42. "Accessibility" (https://web.archive.org/web/20100527215445/http://www.csus.edu/training/handouts/workshops/creating_accessible_s) (). California State University. 2009. Archived from the original (http://www.csus.edu/training/handouts/workshops/creating_accessible_s) () on May 27, 2010. Retrieved January 12, 2023.

43. "LibreOffice Help – Export as _____" (https://help.libreoffice.org/7.4/en-US/text/shared/01/ref_export.html). Archived (https://web.archive.org/web/20230112153247/https://help.libreoffice.org/7.4/en-US/text/shared/01/ref_export.html) from the original on January 12, 2023. Retrieved January 12, 2023.
44. Z., Andrew (January 11, 2008). "Exporting _____/A for long-term archiving" (<http://www.oooninja.com/2008/01/generating-a-for-long-term-archiving.html>). Archived (<https://web.archive.org/web/20210224185200/https://www.oooninja.com/2008/01/generating-a-for-long-term-archiving.html>) from the original on February 24, 2021. Retrieved September 22, 2012.
45. Biersdorfer, J.D. (April 10, 2009). "Tip of the Week: Adobe Reader's 'Read Aloud' Feature" (<http://gadgetwise.blogs.nytimes.com/2009/04/10/tip-of-the-week-adobe-readers-read-aloud-feature/>). *The New York Times*. Archived (<https://web.archive.org/web/20201122205912/http://gadgetwise.blogs.nytimes.com/2009/04/10/tip-of-the-week-adobe-readers-read-aloud-feature/>) from the original on November 22, 2020. Retrieved January 12, 2023.
46. "Accessing _____ documents with assistive technology: A screen reader user's guide" (<https://web.archive.org/web/20080728093103/https://www.adobe.com/accessibility/s/accessing-sr>) (_____). Adobe Systems Inc. Archived from the original ([https://www.adobe.com/accessing-sr](https://www.adobe.com/accessibility/s/accessing-sr)) (_____) on July 28, 2008. Retrieved January 12, 2023.
47. "Gnu _____ Knowledge – Forms Data Format" (https://web.archive.org/web/20130101054615/http://www.gnu.org/Forms_Data_Format). Archived from the original (http://gnupdf.org/Forms_Data_Format) on January 1, 2013. Retrieved January 12, 2023.
48. "About _____ forms" (https://web.archive.org/web/20110429032948/http://livedocs.adobe.com/coldfusion/8/htmldocs/help.html?content=forms_02.html). Adobe Systems Inc. Archived from the original (http://livedocs.adobe.com/coldfusion/8/htmldocs/help.html?content=forms_02.html) on April 29, 2011. Retrieved February 19, 2010.
49. Demling, Peter (July 1, 2008). "Convert XFA Form to AcroForm?" (<https://community.adobe.com/t5/acrobat-sdk-discussions/convert-xfa-form-to-acroform/td-p/1175365>). Archived (<https://web.archive.org/web/20230112153241/https://community.adobe.com/t5/acrobat-sdk-discussions/convert-xfa-form-to-acroform/td-p/1175365>) from the original on January 12, 2023. Retrieved January 12, 2023.
50. "Migrating from Adobe Acrobat forms to XML forms" (https://web.archive.org/web/20101006151011/http://partners.adobe.com/public/developer/tips/topic_tip2.html). Archived from the original (http://partners.adobe.com/public/developer/tips/topic_tip2.html) on October 6, 2010. Retrieved January 12, 2023.
51. "XML Forms Data Format Specification, version 2" (<https://web.archive.org/web/20180730100811/https://www.immagic.com/eLibrary/ARCHIVES/TECH/ADOBE/A070914X>) (_____). September 2007. Archived from the original (<https://www.immagic.com/eLibrary/ARCHIVES/TECH/ADOBE/A070914X>) (_____) on July 30, 2018. Retrieved February 19, 2010.
52. "ISO 19444-1:2019(en)" (<https://www.iso.org/obp/ui/#iso:std:iso:19444:-1:ed-2:v1:en>). The International Organization for Standardization. Archived (<https://web.archive.org/web/20160617031837/https://www.iso.org/obp/ui/#iso:std:iso:19444:-1:ed-2:v1:en>) from the original on June 17, 2016. Retrieved December 3, 2020.
53. Adobe Systems Incorporated (September 20, 2022). "Using Acrobat forms and form data on the web" (<https://helpx.adobe.com/acrobat/kb/acrobat-forms-form-data-web.html>). Archived (<https://web.archive.org/web/20230112153235/https://helpx.adobe.com/acrobat/kb/acrobat-forms-form-data-web.html>) from the original on January 12, 2023. Retrieved January 12, 2023.
54. "FDF Data Exchange Specification" (https://web.archive.org/web/20081203041943/https://www.adobe.com/devnet/acrobat/s/fdf_data_exchange) (_____). February 8, 2007. Archived from the original ([https://www.adobe.com/devnet/acrobat/s/fdf_data_exchange.p](https://www.adobe.com/devnet/acrobat/s/fdf_data_exchange.pdf)df) (_____) on December 3, 2008. Retrieved January 12, 2023.

55. "Developer Resources" (https://web.archive.org/web/20160227041714/http://partners.adobe.com/public/developer/support/topic_legal_notices.html). Adobe Systems Inc. Archived from the original (http://partners.adobe.com/public/developer/support/topic_legal_notices.html) on February 27, 2016.
56. Mladenov, Vladislav; Mainka, Christian; Meyer Zu Selhausen, Karsten; Grothe, Martin; Schwenk, Jörg (November 6, 2019). "1 Trillion Dollar Refund: How to Spoof Signatures". *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security* (<https://dl.acm.org/doi/10.1145/3319535.3339812>). CCS '19. ACM Digital Library, ACM SIGSAC Conference on Computer and Communications Security. pp. 1–14. doi:10.1145/3319535.3339812 (<https://doi.org/10.1145/3319535.3339812>). ISBN 9781450367479. S2CID 199367545 (<https://api.semanticscholar.org/CorpusID:199367545>). Archived (<https://web.archive.org/web/20210426223722/https://dl.acm.org/doi/10.1145/3319535.3339812>) from the original on April 26, 2021. Retrieved April 6, 2021.
57. Müller, Jens; Ising, Fabian; Mladenov, Vladislav; Mainka, Christian; Schinzel, Sebastian; Schwenk, Jörg (November 6, 2019). "Practical Decryption exFiltration: Breaking Encryption". *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security* (<https://dl.acm.org/doi/10.1145/3319535.3354214>). CCS '19. ACM Digital Library, ACM SIGSAC Conference on Computer and Communications Security. pp. 15–29. doi:10.1145/3319535.3354214 (<https://doi.org/10.1145/3319535.3354214>). ISBN 9781450367479. S2CID 207959243 (<https://api.semanticscholar.org/CorpusID:207959243>). Archived (<https://web.archive.org/web/20210426223415/https://dl.acm.org/doi/10.1145/3319535.3354214>) from the original on April 26, 2021. Retrieved April 6, 2021.
58. "Shadow Attacks: Hiding and Replacing Content in Signed PDFs" (<https://www.ndss-symposium.org/ndss-paper/shadow-attacks-hiding-and-replacing-content-in-signed-pdf>). Internet Society, The Network and Distributed System Security Symposium. Archived (<https://web.archive.org/web/20210421094100/https://www.ndss-symposium.org/ndss-paper/shadow-attacks-hiding-and-replacing-content-in-signed-pdf>) from the original on April 21, 2021. Retrieved April 6, 2021.
59. "Processing Dangerous Paths – On Security and Privacy of the Portable Document Format" (<https://www.ndss-symposium.org/ndss-paper/processing-dangerous-paths-on-security-and-privacy-of-the-portable-document-format/>). Internet Society, The Network and Distributed System Security Symposium. Archived (<https://web.archive.org/web/20210421094018/http://www.ndss-symposium.org/ndss-paper/processing-dangerous-paths-on-security-and-privacy-of-the-portable-document-format/>) from the original on April 21, 2021. Retrieved April 6, 2021.
60. "Portable Document Flaws 101" (<https://www.blackhat.com/us-20/briefings/schedule/#portable-document-flaws--20387>). Blackhat. Archived (<https://web.archive.org/web/20210409131634/https://www.blackhat.com/us-20/briefings/schedule/#portable-document-flaws--20387>) from the original on April 9, 2021. Retrieved April 6, 2021.
61. "Can PDFs have viruses? Keep your files safe" (<https://www.adobe.com/acrobat/resources/can-pdf-files-contain-viruses.html>). Adobe. Retrieved October 3, 2023.
62. Adobe Forums, Announcement: PDF Attachment Virus "Peachy" (<https://forums.adobe.com/thread/302989>) Archived (<https://web.archive.org/web/20150904151955/https://forums.adobe.com/thread/302989>) September 4, 2015, at the Wayback Machine, August 15, 2001.
63. "Security bulletins and advisories" (<https://helpx.adobe.com/security.html#readerwin>). Adobe Systems Inc. January 10, 2023. Archived (<https://web.archive.org/web/20100406041941/http://www.adobe.com/support/security/#readerwin>) from the original on April 6, 2010. Retrieved January 12, 2023.

64. Gibson, Steve; Laporte, Leo (March 12, 2009). "Steve Gibson – SecurityNow Podcast" (<http://www.grc.com/sn/sn-187.txt>). Archived (<https://web.archive.org/web/20200508100301/http://www.grc.com/sn/sn-187.txt>) from the original on May 8, 2020. Retrieved January 11, 2011.
65. "Malicious `s` Execute Code Without a Vulnerability" (https://web.archive.org/web/20100404034752/http://blogs.pcmag.com/securitywatch/2010/03/malicious_s_execute_code_wi.php). *PCMAG*. Archived from the original (http://blogs.pcmag.com/securitywatch/2010/03/malicious_s_execute_code_wi.php) on April 4, 2010.
66. Pathak, Khamosh (October 7, 2017). "How to Create a `from` Web Page on iPhone and iPad in iOS 11" (<https://ijunkie.com/how-to-create-from-web-page-safari-iphone-ipad-ios-11/>). *iJunkie*. Archived (<https://web.archive.org/web/20230112153246/https://ijunkie.com/how-to-create-from-web-page-safari-iphone-ipad-ios-11/>) from the original on January 12, 2023. Retrieved January 12, 2023.
67. "Description of 2007 Microsoft Office Suite Service Pack 2 (SP2)" (<https://web.archive.org/web/20090429212434/http://support.microsoft.com/kb/953195>). Microsoft. Archived from the original (<http://support.microsoft.com/kb/953195>) on April 29, 2009. Retrieved January 12, 2023.
68. On 2014-04-02, a note dated February 10, 2009 referred to Current FSF High Priority Free Software Projects (<http://www.fsf.org/campaigns/priority.html>) Archived (<https://web.archive.org/web/20070810230457/http://www.fsf.org/campaigns/priority.html>) August 10, 2007, at the Wayback Machine as a source. Content of the latter page, however, changes over time.
69. "Goals and Motivations" (http://gnu.org/Goals_and_Motivations). *gnu.org*. GNU November 28, 2007. Archived (https://web.archive.org/web/20140704114405/http://www.gnu.org/Goals_and_Motivations) from the original on July 4, 2014. Retrieved April 2, 2014.
70. Lee, Matt (October 6, 2011). "GNU `project` leaves FSF High Priority Projects list; mission complete!" (<http://www.fsf.org/blogs/community/gnu-project-leaves-high-priority-projects-list-mission-complete>). *fsf.org*. Free Software Foundation. Archived (<https://web.archive.org/web/20141228050435/http://www.fsf.org/blogs/community/gnu-project-leaves-high-priority-projects-list-mission-complete>) from the original on December 28, 2014.
71. "Poppler Homepage" (<http://poppler.freedesktop.org/>). Archived (<https://web.archive.org/web/20150108235708/http://poppler.freedesktop.org/>) from the original on January 8, 2015. Retrieved January 12, 2023. "Poppler is a `rendering` library based on the `x-3.0` code base."
72. "X `License`" (<http://cgkit.freedesktop.org/poppler/poppler/tree/README-X>). Archived (<https://archive.today/20130414194348/http://cgkit.freedesktop.org/poppler/poppler/tree/README-X>) from the original on April 14, 2013. Retrieved January 12, 2023. "X `is` licensed under the GNU General Public License (GPL), version 2 or 3."
73. "The Apache `Box` project- Apache `Box` 3.0.0 released" (<http://box.apache.org/>). August 17, 2023. Archived (<https://web.archive.org/web/20230107234923/https://box.apache.org/>) from the original on January 7, 2023. Updated for new releases.
74. "Adobe `Print Engine`" (https://www.adobe.com/products_printengine/overview.html). Adobe Systems Inc. Archived (https://web.archive.org/web/20130822034446/http://www.adobe.com/products_printengine/overview.html) from the original on August 22, 2013. Retrieved August 20, 2014.
75. "Jaws® 3.0 `and` PostScript RIP SDK" (https://web.archive.org/web/20160305090728/http://globalgraphics.com/products/jaws_rip). *globalgraphics.com*. Archived from the original (http://www.globalgraphics.com/products/jaws_rip/) on March 5, 2016. Retrieved November 26, 2010.

76. "Harlequin MultiRIP" (<https://web.archive.org/web/20140209215413/http://www.globalgraphics.com/products/harlequin-multi-rip/>). Archived from the original (<http://www.globalgraphics.com/products/harlequin-multi-rip/>) on February 9, 2014. Retrieved March 2, 2014.
77. "Press-Ready Files" (<https://web.archive.org/web/20090205151505/http://www.prepress.com/>). Archived from the original on February 5, 2009. Retrieved January 12, 2023. "For anyone interested in having their graphic project commercially printed directly from digital files or s."
78. " as Standard Print Job Format" (https://web.archive.org/web/20091114130224/https://www.linuxfoundation.org/collaborate/workgroups/openprinting _as_standard_print_job_for_mat). *The Linux Foundation*. Linux Foundation. October 23, 2009. Archived from the original (http://www.linuxfoundation.org/collaborate/workgroups/openprinting _as_standard_print_job_format) on November 14, 2009. Retrieved January 12, 2023.

Further reading

- Hardy, M. R. B.; Brailsford, D. F. (2002). "Mapping and displaying structural transformations between XML and ". *Proceedings of the 2002 ACM symposium on Document engineering – DocEng '02* (https://www.cs.nott.ac.uk/~psadb1/Publications/Download/2002/Hardy02_) (). Proceedings of the 2002 ACM symposium on Document engineering. pp. 95–102. doi:10.1145/585058.585077 (<https://doi.org/10.1145/585058.585077>). ISBN 1-58113-594-7. S2CID 9371237 (<https://api.semanticscholar.org/CorpusID:9371237>).
- 2.0 "ISO 32000-2:2020(en), Document management — Portable document format — Part 2: 2.0" (<https://www.iso.org/standard/75839.html>). *www.iso.org*. Retrieved December 16, 2020.
- 2.0 "ISO 32000-2:2017(en), Document management — Portable document format — Part 2: 2.0" (<https://www.iso.org/standard/63534.html>). *www.iso.org*. August 3, 2017. Retrieved January 31, 2019.
- 1.7 (ISO 32000-1:2008) (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_32000_2008_)
- 1.7 (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_reference1.7.0 Id) and errata to 1.7 (https://web.archive.org/web/20220306202833/https://www.adobe.com/content/dam/acom/en/devnet_reference_archive_17_errata_) at the Wayback Machine (archived March 6, 2022)
- 1.6 (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_reference1.6.) (ISBN 0-321-30474-8) and errata to 1.6 (https://web.archive.org/web/20220306152230/https://www.adobe.com/content/dam/acom/en/devnet_reference_archive_16Errata_) at the Wayback Machine (archived March 6, 2022)
- 1.5 (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_reference1.5_v6_) and errata to 1.5 (https://web.archive.org/web/20211222122128/https://www.adobe.com/content/dam/acom/en/devnet_reference_archive/errata.txt) at the Wayback Machine (archived December 22, 2021)
- 1.4 (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_reference1.4.) (ISBN 0-201-75839-3) and errata to 1.4 (https://web.archive.org/web/20220306152229/https://www.adobe.com/content/dam/acom/en/devnet_reference_archive_14errata.txt) at the Wayback Machine (archived March 6, 2022)
- 1.3 (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_reference1.3.) (ISBN 0-201-61588-6) and errata to 1.3 (https://web.archive.org/web/20220306152234/https://www.adobe.com/content/dam/acom/en/devnet_s_errata.txt) at the Wayback Machine (archived March 6, 2022)
- 1.2 (https://opensource.adobe.com/dc-acrobat-sdk-docs_standards_reference1.2.)

- [1.0 \(https://opensource.adobe.com/dc-acrobat-sdk-docs/standards/reference1.0/\)](https://opensource.adobe.com/dc-acrobat-sdk-docs/standards/reference1.0/) (ISBN 0-201-62628-4)

External links

- [Association \(https://www.adobe.com/devnet/pdf/Association.html\)](https://www.adobe.com/devnet/pdf/Association.html) – The Association is the industry association for software developers producing or processing PDF files.
- [Adobe 101: Summary of PDF \(https://web.archive.org/web/20101007220449/http://partners.adobe.com/public/developer/tips/topic_tip31.html\)](https://web.archive.org/web/20101007220449/http://partners.adobe.com/public/developer/tips/topic_tip31.html)
- [Adobe: PostScript vs. PDF \(https://web.archive.org/web/20160413212438/https://www.adobe.com/print/features/psvs.html\)](https://web.archive.org/web/20160413212438/https://www.adobe.com/print/features/psvs.html) – Official introductory comparison of PS, EPS vs. PDF
- [Standards....transitioning the PDF specification from a de facto standard to a de jure standard \(https://web.archive.org/web/20110424013530/http://www.aiim.org/Resources/Archive/Magazine/2007-Jul-Aug/33448\)](https://web.archive.org/web/20110424013530/http://www.aiim.org/Resources/Archive/Magazine/2007-Jul-Aug/33448) at the Wayback Machine (archived April 24, 2011) – Information about PDF/E and PDF/UA specification for accessible documents file format (archived by The Wayback Machine)
- [/A-1 ISO standard \(https://www.iso.org/standard/38920.html\)](https://www.iso.org/standard/38920.html) published by the International Organization for Standardization (with corrigenda)
- [Reference and Adobe Extensions to the PDF Specification \(https://web.archive.org/web/20210116133007/https://www.adobe.com/devnet/pdf/reference.html\)](https://web.archive.org/web/20210116133007/https://www.adobe.com/devnet/pdf/reference.html)
- [Portable Document Format: An Introduction for Programmers \(http://preserve.mactech.com/articles/mactech/Vol.15/15.09_PDF_Intro/index.html\)](http://preserve.mactech.com/articles/mactech/Vol.15/15.09_PDF_Intro/index.html) – Introduction to PDF vs. PostScript and PDF internals (up to v1.3)
- [The Camelot Paper \(https://web.archive.org/web/20190422013101/http://www.plane.com/enterprise/article.asp?ContentID=6519\)](https://web.archive.org/web/20190422013101/http://www.plane.com/enterprise/article.asp?ContentID=6519) – the paper in which John Warnock outlined the project that created PDF
- [Everything you wanted to know about PDF but was afraid to ask \(https://web.archive.org/web/20160118105015/http://river-valley.zeeba.tv/everything-you-wanted-to-know-about-pdf-but-were-afraid-to-ask/\)](https://web.archive.org/web/20160118105015/http://river-valley.zeeba.tv/everything-you-wanted-to-know-about-pdf-but-were-afraid-to-ask/) – recording of a talk by Leonard Rosenthol (<https://www.youtube.com/watch?v=poc9PVmFzpc>) (45 mins) (Adobe Systems) at TUG 2007

Retrieved from "<https://en.wikipedia.org/w/index.php?title=PDF&oldid=1178904157>"

▪