



1. 当应用程序启动之后，依照中央提示文字进行操作，首先点击右上方的开始按钮，当服务开启之后点击左上方菜单可以查看服务信息，和授权信息，授权信息包含授权码，默认过期时间 30 分钟，超过过期时间默认会返回错误码 500，过期后点击右上方按钮，可在次获取授权，下面的步骤有设置 Wi-Fi 代理的介绍，如果应用关闭，或者超过过期时间记得关闭代理，否则会无法正常访问网络。

When the application is started, please follow the central prompt text to operate. First, click the start button on the upper right. When the service is opened, click the menu on the upper left to view the service information and authorization information. The authorization information contains authorization code. The default expiration time is 30 minutes. If the expiration time exceeds, the default error code 500 will be returned. After expiration, click the button on the upper right. The next step is to set up Wi-Fi proxy. If the application shuts down, or if it expires, remember to shut down the proxy. Otherwise, it will not be able to access the network normally.

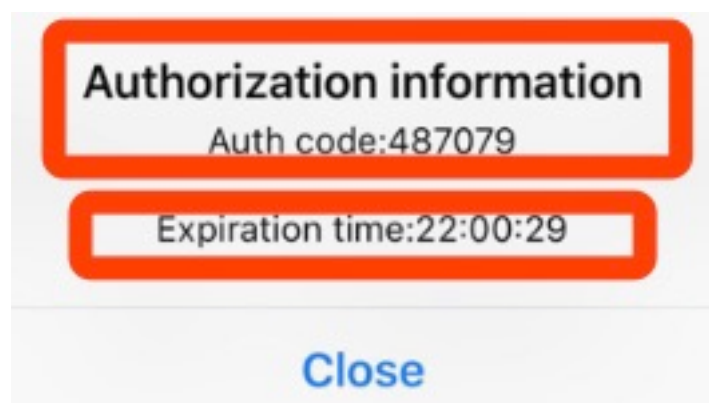

2. 之后点击左上方按钮，弹出菜单选择服务信息，拷贝配置 ip。


Then click the upper left button, pop-up menu to select service information, copy configuration ip.

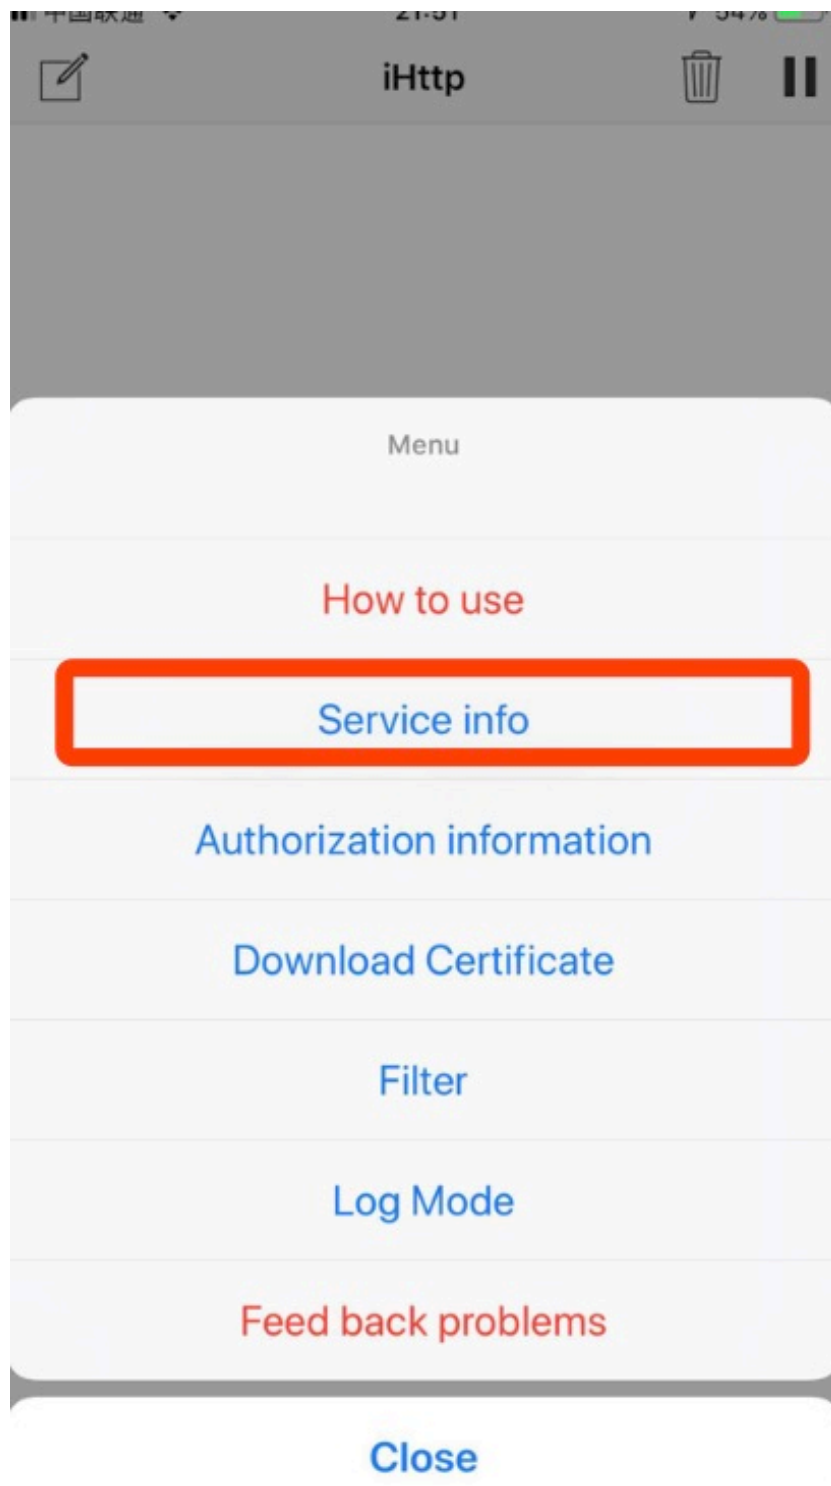



3. 前往 设置>>无线局域网，然后点击当前所连接 Wi-Fi 后面蓝色蓝色圆圈的 i 图标。

When the service has been started, you need to go to “Settings->WLAN” and click the icon of the blue circle behind the current Wi-Fi connection.

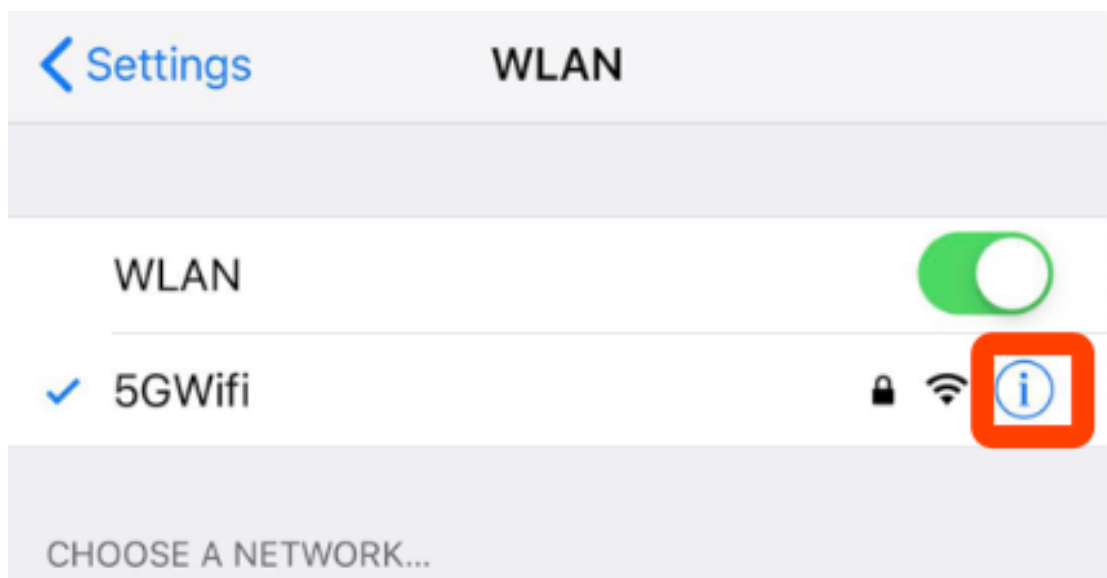

4. 点击 HTTP 代理一栏，选择手动，将刚才拷贝的 IP 地址复制到服务器一栏，端口号填写 8001，点击右上方保存。

Click on the HTTP proxy column, select manual, copy the IP address just copied to the server column, fill in the port number 8001, click the upper right to save.

< WLAN

5GWifi

Forget This Network

Auto-Join ☒

IPV4 ADDRESS

Configure IP

Automatic >

IP Address

192.168.2.172

Subnet Mask

255.255.255.0

Router

192.168.2.1

Renew Lease

DNS

Configure DNS

Automatic >

HTTP PROXY

Configure Proxy

Manual >

5GWifi
Configure Proxy
Save

Off
Manual
Automatic

Server
39.106.92.159
Port
8001
Authentication

5. 同时可以在电脑上查看具体的数据，访问的地址是 [http://\\*. \\*. \\*. \\*.8002](http://*. *. *. *.8002)，这里的 \*. \*. \*. \*就是您刚才所设置的 IP。

At the same time, you can view datas on the computer. The address of access is [http://\\*. \\*. \\*. \\*.8002](http://*. *. *. *.8002), where \*. \*. \*. \* is the IP you just set.

Stop

Clear

Proxy Info


1489	GET	200	t7.baidu.com	/it/u=1410173139,1617789692&fm=190&app=63&size=r3,2&n=0&g=4...	image/jpeg	18:55:39
1490	POST	200	mbd.baidu.com	/aps?service=package&action=api&cfom=1099a&from=1099a&netw...	text/html	18:55:39
1491	GET	200	m.baidu.com	/se/static/amd_modules/@searchfe/user-agent_4125833.js	application/x-javascript	18:55:39
1492	POST	200	mbd.baidu.com	/searchbox?action=userx&type=attribute&userx_source_from=cboot&...	text/html	18:55:39
1493	GET	200	m.baidu.com	/se/static/js/base/ala/invokeApp_b50fb9d.js	application/x-javascript	18:55:39
1494	GET	200	m.baidu.com	/se/static/wiseatom/feedback/pack_c003b83.js	application/x-javascript	18:55:39
1495	CONNECT	200	gateway.icloud.com			18:55:39
1496	CONNECT	200	fclick.baidu.com			18:55:39
1497	GET	200	ss0.bdstatic.com	/9bA1vGfa2gU2pMbfm9GUKT-w/timg?wisealaddin&size=f593_395&...	image/jpeg	18:55:39
1498	GET	200	m.baidu.com	/se/static/font/pmd/cicon_625c395.woff	application/octet-stream	18:55:39
1499	CONNECT	200	c.mipcdn.com			18:55:39
1500	CONNECT	200	c.mipcdn.com			18:55:39
1501	CONNECT	200	c.mipcdn.com			18:55:39
1502	CONNECT	200	ada.baidu.com			18:55:39
1503	CONNECT	200	sp1.baidu.com			18:55:39
1504	GET	304	cambrian-images.cdn.bcebos.co	/c3f636979614ff3bae251ca619cc89dd_1536990551020.jpeg@w_100,...	image/jpeg	18:55:39
1505	GET	304	cambrian-images.cdn.bcebos.co	/ed9d88c8efeb8c594b237559a244db61_1530459453729.jpeg@w_10,...	image/jpeg	18:55:39
1506	GET	304	cambrian-images.cdn.bcebos.co	/c34997f5e55baa2efc77a9a046822dfd_1586724226518171.jpeg@w_1,...	image/jpeg	18:55:39
1507	GET	200	sp1.baidu.com	/5b1ZeDe5KgQFm2e88luM_a/mwb.gif?type=3&fm=disp&data=%5B...	image/gif	18:55:39
1508	GET	200	sp1.baidu.com	/5b1ZeDe5KgQFm2e88luM_a/wbcj.gif?pid=1_1&lid=81638500429589...	image/gif	18:55:39
1509	GET	200	sp1.baidu.com	/5b1ZeDe5KgQFm2e88luM_a/cm.gif?type=flowmonitor&lid=8163850...	image/gif	18:55:39
1510	CONNECT	200	cjie.baidu.com			18:55:39

6. 提示 :当关闭应用程序后记得关闭 HTTP 代理,否则的话会无法正常访问网络。

Tip: When shutting down the application, remember to shut down the HTTP proxy, otherwise you will not be able to access the network properly.



7. 关闭的方式同样是前往 设置>>无线局域网, 然后点击当前所连接 Wi-Fi 后面蓝色蓝色圆圈的 i 图标, 点击 HTTP 代理一栏, 选择关闭, 之后点击右上方的存储按钮。

The same way to close is to go to Settings > WLAN, click on the icon I of the blue circle behind the Wi-Fi currently connected, click on the HTTP proxy column, select Close, and then click save button on the upper right.

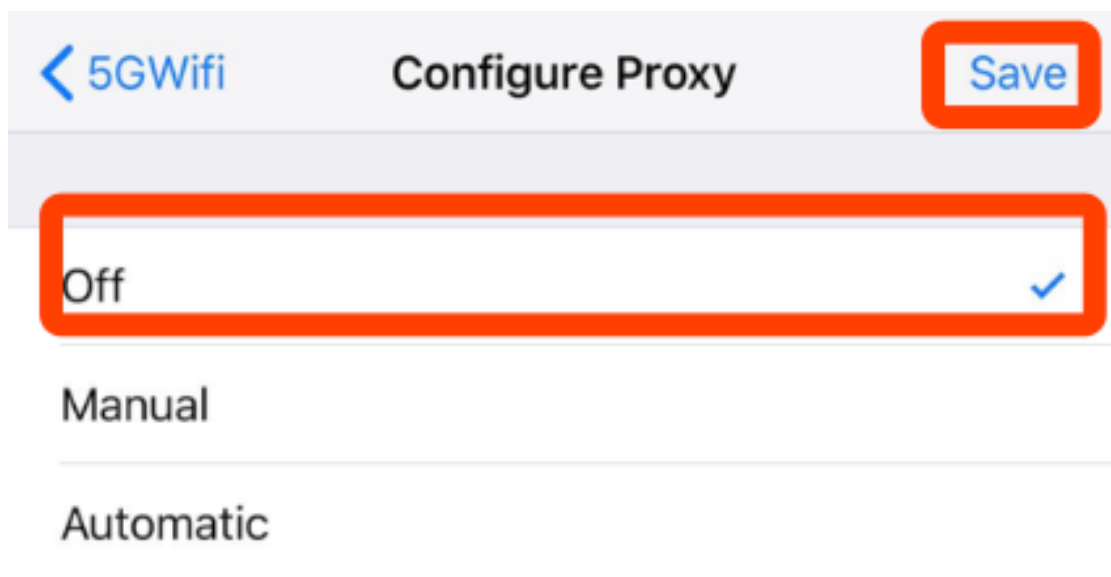


8. 如果要支持 HTTPS，需要下载证书并信任，点击左上方按钮在菜单中选择下载证书。

If you want to support HTTPS, you need to download the certificate and trust it. Click the upper left button to select the download Certificate in the menu.

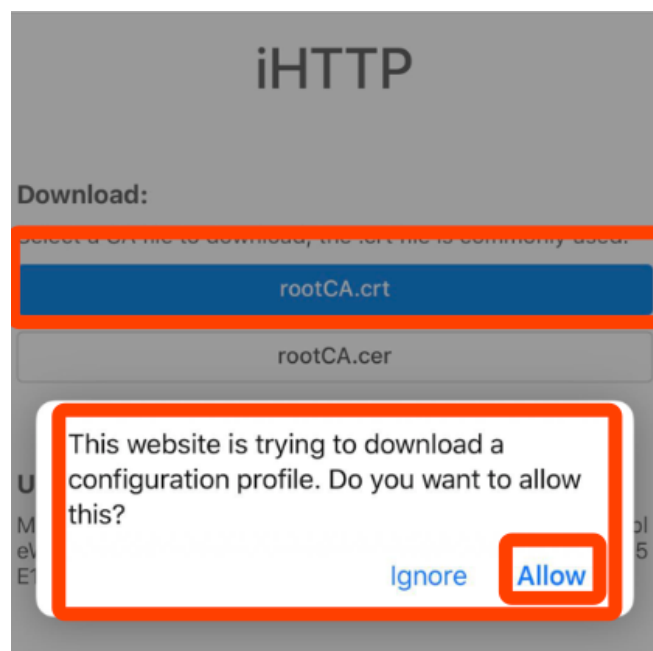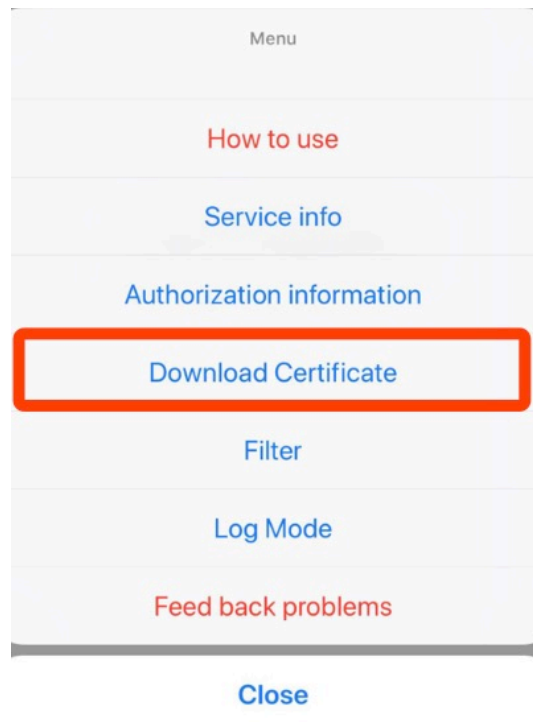

9. 信任证书需要前往 设置>>通用>>描述文件及设备管理，找到刚才的证书，按照步骤完成安装。

Trust Certificate needs to go to Settings > General > Profilefile and Device Management, find the certificate just now, and complete the installation step by step.

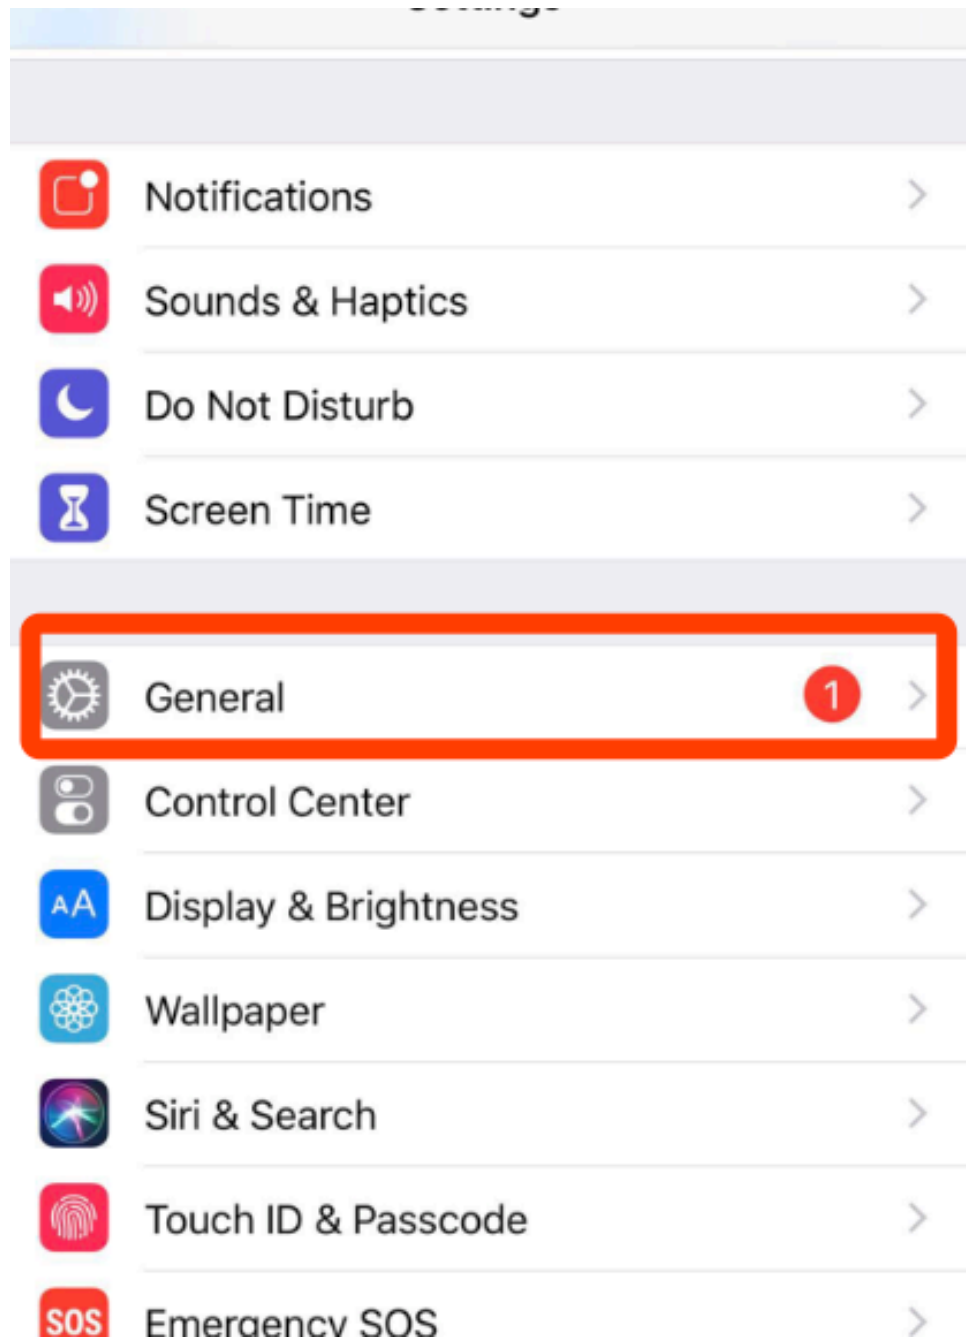



[Settings](#)

## General

Background App Refresh >

Date & Time >

Keyboard >

Language & Region >

Dictionary >

iTunes WLAN Sync >

VPN Not Connected >

Profiles & Device Management 3 >

Regulatory >

DOWNLOADED PROFILE



iHTTP Tracker



[Cancel](#)

Install Profile

[Install](#)



iHTTP Tracker

Signed by iHTTP Tracker


**Not Verified**

Contains Certificate

More Details



[Remove Downloaded Profile](#)

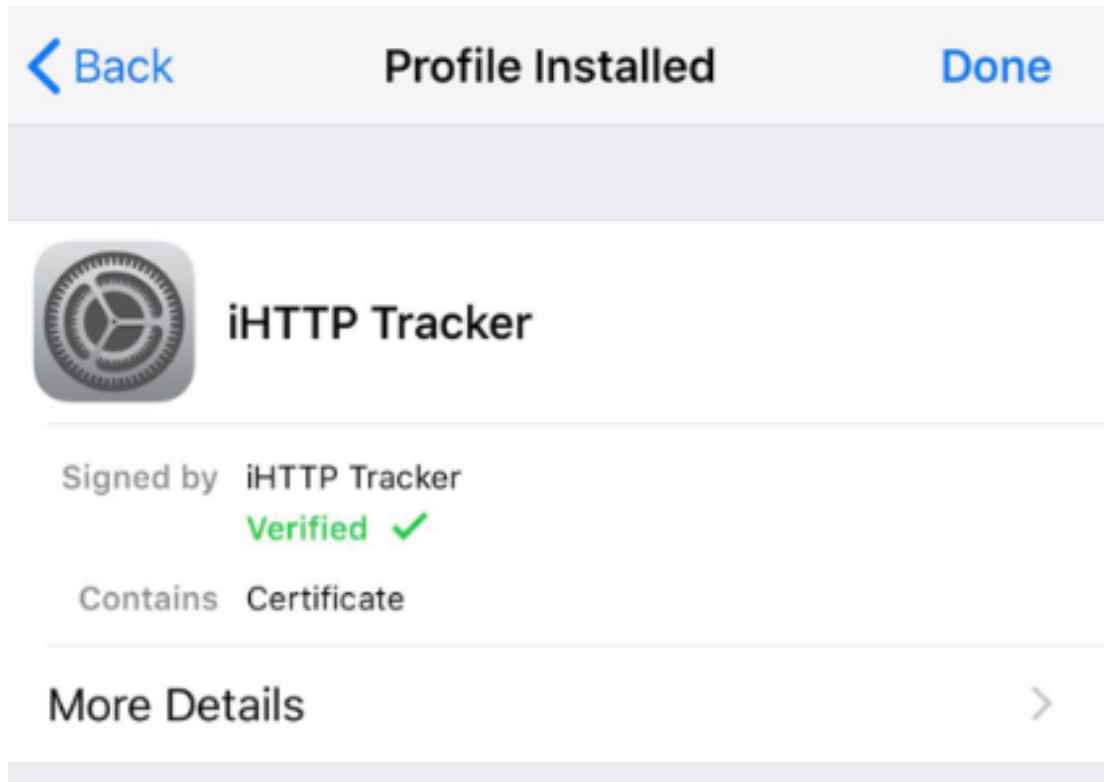

10. 如需要支持浏览器需要前往 设置>>通用>>关于本机>>证书信任设置>>选择证书开启

If you need to support browsers, you need to go to Settings > General > About > Certificate Trust Settings > Select Certificate and opening

