


CEN4802C Module 5 Project

For this project we will use GitHub Actions to automate the Docker components created in the Module 4 project for consistent building and testing.

- Start by adding the Module 4 Docker project code in your repo after accepting the invite.
- Notify your instructor that you have accepted the invitation so they can modify the permissions on your forked repository to allow access to the repo settings.
- Create a .github/workflows folder.
- Create a yaml file which checks out the code, configures the build, logs in to Docker hub, builds and runs the project, then stops it (use the .yaml file attached to this assignment). Add this to the .github/workflows folder.
- NOTE: the docker-compose.yml file in Module 4 should remain in the project at the top level of the repo, this is used for the actual build operation.
- Log in to Docker and create a personal access token (PAT) as shown below. You can deactivate or delete this token after completing the assignment.
- Add your Docker Hub user ID and PAT information as repo secrets under Settings/Secrets and Variables/Actions as shown below.
- Push your changes; each time you push a change, your workflow should execute. You can track the execution using the Actions tab on the repo page.
- If the workflow fails you can click on it from the Actions tab and re-run it using the button at the top right of the page in order to debug.

Submit your repo to the GitHub classroom assignment and include screen snips demonstrating the operation of your workflow.

Setting Up Secrets in Docker

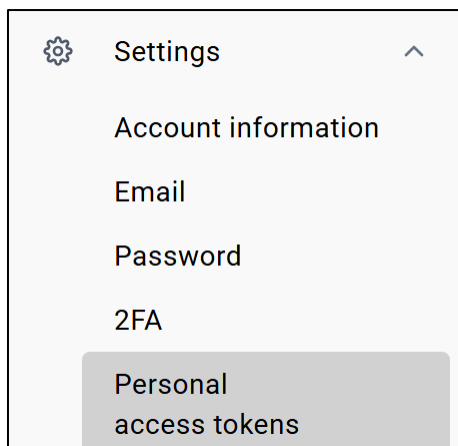

Create access token

A personal access token is similar to a password except you can have many tokens and revoke access to each one at any time. [Learn more](#)

Access token description

Summer25

Expiration date

None

Optional

Access permissions

Read & Write

Read & Write tokens allow you to push images to any repository managed by your account.

Cancel

Generate

You need to set the credentials in your repository to allow the workflow to log in during workflow execution. Be careful to not include any trailing spaces in the secret name or value.

- Click on Settings in your repository.
- Click on Secrets and Variables > Actions in the left sidebar.
- Click on New repository secret.
- Add the following two secrets:
 - DOCKER_USERNAME — your Docker Hub username
 - DOCKER_PASSWORD — your Docker PAT