

**Phon**



# Contents

|   |            |
|---|------------|
| <b>Getting Started.....</b>               | <b>vii</b> |
| Introduction.....                         | vii        |
| New Features in Phon 3.....               | vii        |
| Revamped query and reporting systems..... | vii        |
| Built-in analyses.....                    | vii        |
| The Analysis Composer.....                | vii        |
| Download Phon.....                        | vii        |
| Phon 3.0.5.....                           | vii        |
| Phon 3.1.0-beta.2.....                    | viii       |
| Other Information.....                    | viii       |
| Citing Phon.....                          | viii       |
| Discussion group & Support.....           | viii       |
| Acknowledgments.....                      | viii       |
| Installing Phon.....                      | ix         |
| Install Required Fonts.....               | ix         |
| Windows.....                              | ix         |
| macOS.....                                | ix         |
| Ubuntu (16.04/18.04).....                 | ix         |
| Known Issues.....                         | x          |
| Re-encode Audio File for Phon.....        | x          |

## Chapter 1: User Interface..... 11

|  |    |
|--|----|
| Welcome Window.....                      | 12 |
| Actions.....                             | 12 |
| Workspace.....                           | 13 |
| Recent Projects.....                     | 16 |
| Preferences.....                         | 16 |
| Autosaves.....                           | 16 |
| Change Application Fonts.....            | 17 |
| Change Dictionary Language.....          | 17 |
| Change Syllabifier Language.....         | 17 |
| Media Folders.....                       | 17 |
| Project Manager.....                     | 18 |
| About Project File Structure.....        | 18 |
| Project Media Folders.....               | 19 |
| About Corpora.....                       | 19 |
| About Sessions.....                      | 21 |
| Check Transcriptions.....                | 24 |
| Reset Syllabification.....               | 24 |
| Reset Phone Alignment.....               | 25 |
| Refresh Project.....                     | 25 |
| Import from CSV file(s).....             | 25 |
| Export to CSV file(s).....               | 26 |
| Session Editor.....                      | 26 |
| Session Editor - Keyboard Shortcuts..... | 26 |
| Records.....                             | 27 |
| About Editor Views.....                  | 30 |
| About Editor Layouts.....                | 34 |
| View: Session Information.....           | 35 |
| View: Tier Management.....               | 38 |

|  |    |
|--|----|
| View: Record Data.....                 | 40 |
| View: Syllabification & Alignment..... | 43 |
| View: IPA Validation.....              | 45 |
| View: Media Player.....                | 46 |
| View: Speech Analysis.....             | 49 |
| View: Timeline (beta).....             | 57 |
| View: IPA Lookup.....                  | 61 |
| View: Find & Replace.....              | 62 |
| Tools.....                             | 63 |
| IPA Map.....                           | 63 |
| PhonShell.....                         | 66 |
| ISO Language Codes.....                | 68 |

## Chapter 2: IPA Transcription..... 69

|                                   |    |
|-----------------------------------|----|
| IPA Elements.....                 | 70 |
| Phone.....                        | 70 |
| Compound Phone.....               | 70 |
| Pause (Intra-word).....           | 71 |
| Pause (Inter-word).....           | 71 |
| Stress Marker.....                | 71 |
| Syllable Boundary.....            | 71 |
| Word Boundary.....                | 72 |
| Other Transcription Items.....    | 72 |
| Intonation Group.....             | 72 |
| Compound Word.....                | 72 |
| Sandhi.....                       | 72 |
| Listing of IPA Characters.....    | 73 |
| Listing of phonetic features..... | 95 |

## Chapter 3: Phonex..... 101

|                             |     |
|-----------------------------|-----|
| Introduction.....           | 102 |
| Language Reference.....     | 102 |
| Phone Matchers.....         | 102 |
| Boundaries.....             | 103 |
| Quantifiers.....            | 104 |
| Groups.....                 | 104 |
| Comments.....               | 106 |
| Phonex Constructs.....      | 107 |
| Supplementary Matchers..... | 109 |
| Examples.....               | 112 |
| Basic Phone Matching.....   | 112 |
| Example Phones Queries..... | 112 |

## Chapter 4: Queries..... 117

|                                 |     |
|---------------------------------|-----|
| Query and Report Wizard.....    | 118 |
| Step 1: Query.....              | 118 |
| Step 2: Report Composer.....    | 123 |
| Step 3: Report.....             | 147 |
| Query: Data Tiers.....          | 149 |
| Usage.....                      | 150 |
| Query: Phones.....              | 151 |
| Parameters.....                 | 151 |
| Query: Segmental Relations..... | 152 |

|   |            |
|---|------------|
| Common Query Options.....                                   | 153        |
| Group Options.....  | 153        |
| Aligned Group Options.....                                  | 153        |
| Word Options.....   | 153        |
| Aligned Word Options.....                                   | 154        |
| Syllable Options.....                                       | 154        |
| Participant Filter.....                                     | 155        |
| <b>Chapter 5: Analyses.....</b>                             | <b>157</b> |
| Analysis: Consonants.....                                   | 158        |
| Outline.....  | 158        |
| Singletons.....   | 158        |
| Clusters.....   | 158        |
| Analysis: PPC.....  | 158        |
| Report Outline.....   | 158        |
| Data Preparation.....                                       | 159        |
| Parameters.....   | 159        |
| PPC Calculation.....  | 159        |
| PPC Summary.....  | 160        |
| PPC Listing.....  | 160        |
| Analysis: Phone Inventory.....                              | 161        |
| Outline.....  | 161        |
| Analyses: Phonological Processes.....                       | 162        |
| Analysis: Phonological Mean Length of Utterance (PMLU)..... | 162        |
| Outline.....  | 162        |
| Analysis: Word List.....                                    | 162        |
| Specialized.....  | 162        |
| Analysis: Word Match.....                                   | 162        |
| Analysis: Multisyllabic Nonlinear Analysis.....             | 162        |
| Analysis: Vocalization.....                                 | 165        |
| Analysis: Word-level Analysis of Polysyllables (WAP).....   | 165        |
| Custom Analysis using Composer (simple).....                | 173        |
| <b>Chapter 6: CHAT Support.....</b>                         | <b>175</b> |
| PhonTalk.....   | 176        |
| Download.....   | 176        |
| CHAT Main Line.....   | 176        |
| Special Form Markers.....                                   | 176        |



# Getting Started

---

## Introduction

Phon is a software program that supports the building of textual and phonological data corpora. While it was originally created to support the study of child language development, Phon can be used across virtually all types of corpus studies (e.g. textual, phonological, acoustic, clinical) based on child or adult language data. Among other features, Phon offers specialized support for research on phonological units (e.g. phones, phonological features, stress, tones) and includes some specialized functions for clinical speech analysis. Phon also incorporates [Praat](#) functions for acoustic data analysis.

## New Features in Phon 3

### Revamped query and reporting systems

Phon 3 combines brand new approaches to data query, analysis and reporting with a more uniform, streamlined interface across virtually every aspect of the application. At the level of the query and reporting system, we have continued to expand the Phonex language in ways that add both power and flexibility for data analysis. The reports generated from data queries can also be personalized using the new Report Composer, a new interface to build reports after running a query.

### Built-in analyses

New within Phon 3 is a set of ready-to-use analyses geared toward clinical analyses of speech sound disorders as well as other general reports on phonological performance that can be used to obtain ready assessments of phonological performance. These analyses are intuitively grouped within the new "Analysis" menu option.

### The Analysis Composer

Phon users can utilize the Analysis Composer to combine pre-defined queries and analyses and assemble uniform reports on different aspects of linguistic, phonological or acoustic patterns. Using this system, students, researchers, and clinicians can obtain ready data classifications useful both for research and for the diagnosis of speech disorders.

All results extracted from Phon queries and analyses can now be saved in print-ready HTML format, CSV, and Excel workbooks. The reports generated by Phon offer 'hot' links between query/analysis results and Phon data. The user can click on these links to automatically open the transcript data that correspond to these results, which greatly facilitates validation or verification tasks: each individual token reported through a data query or analysis is only a click away from each place where it appears within query and analysis reports.

Finally, Phon 3 comes with multiple improvements in the areas of workspace/project management (e.g. support for multiple workspace folders), data transcription (e.g. new IPA and transliteration dictionaries; syllabification algorithms for additional languages), improved phone alignment, more robust methods to generate, import, and edit TextGrid data, and additional functions for acoustic analysis (e.g. Spectral moments; VOT analysis).

## Download Phon

### Phon 3.0.5

- [macOS 10.9+ \(dmg\)](#)
- [Windows \(64-bit\) \(installer\)](#) | [Windows \(64 bit\) \(zip\)](#)
- [Linux \(64-bit\) \(deb\)](#)

- [Unix \(64-bit\) \(installer\)](#)

## Phon 3.1.0-beta.2

- [macOS 10.9+ \(dmg\)](#)
- [Windows \(64-bit\) \(installer\)](#) | [Windows \(64 bit\) \(zip\)](#)

## Other Information

---

- [Brief introduction](#) to some of the new functions in Phon 2
- [Demo Project](#)
  - [README for Demo Project](#)

## Citing Phon

---

Hedlund, Gregory & Yvan Rose. 2019. Phon 3.0 [Computer Software]. Retrieved from <https://phon.ca>.

Rose, Yvan & Brian MacWhinney. 2014. The [PhonBank](#) Project: Data and Software-Assisted Methods for the Study of Phonology and Phonological Development. In Jacques Durand, Ulrike Gut & Gjert Kristoffersen (eds.), *The Oxford Handbook of Corpus Phonology*. Oxford: Oxford University Press. 308-401.

Rose, Yvan, Brian MacWhinney, Rodrigue Byrne, Gregory Hedlund, Keith Maddocks, Philip O'Brien & Todd Wareham. 2006. Introducing Phon: A Software Solution for the Study of Phonological Acquisition. In David Bamman, Tatiana Magnitskaia & Colleen Zaller (eds.), *Proceedings of the 30th Annual Boston University Conference on Language Development*. Somerville, MA: Cascadilla Press. 489-500.

## Discussion group & Support

---

We encourage you to subscribe to the discussion group for helpful information and technical support. Please click on the following link to request membership to the [PhonBank](#) (or other TalkBank-related) discussion group:

- <http://talkbank.org/share/email.html>
  - No Google mail (gmail) account is required to subscribe
  - Group's email address (for message posting): [phon@googlegroups.com](mailto:phon@googlegroups.com)

## Acknowledgments

---

**Funding:** Current development of Phon and [PhonBank](#) is supported by the National Institutes of Health. Earlier development of Phon was funded by grants from National Science Foundation, Canada Fund for Innovation, Social Sciences and Humanities Research Council of Canada, Petro-Canada Fund for Young Innovators, and the Office of the Vice-President (Research) and the Faculty of Arts at Memorial University of Newfoundland.

**Dictionaries:** Built-in dictionaries of pronounced forms were obtained from generous organizations and people, to whom we are indebted:

- Catalan: Universitat Politècnica de Catalunya (<http://www.upc.es/>)
- Dutch (Flemish): Fonilex Database (<http://bach.arts.kuleuven.be/fonilex/>)
- English (British): Cambridge University Engineering Department, Cambridge, UK (<http://svr-www.eng.cam.ac.uk/comp.speech/Section1/Lexical/beep.html>)
- English (North American): CMU Pronouncing Dictionary (Speech at CMU) (<http://www.speech.cs.cmu.edu/speech/>)
- French: Lexique Database (<http://www.lexique.org/>)
- German: Universität Bonn (<http://www.sk.uni-bonn.de/forschung/phonetik/sprachsynthese/bomp>)

- Icelandic: The Icelandic Centre for Language Technology (<http://www.tungutaekni.is/materials/e001.html>)
- Italian: ISTC-SPFD CNR, Istituto di Scienze e Tecnologie della Cognizione (<http://www2.pd.istc.cnr.it/FESTIVAL/home/default.htm>)
- Norwegian: Norwegian Computational Lexicon (NorKompLeks), Institutt for språk og litteratur, Norges teknisk-naturvitenskapelige universitet (<https://www.ntnu.no/isl>)
- Spanish (Spain): Universitat Politècnica de Catalunya (<http://www.upc.es/>)
- Spanish (Latin America): Scott Sadowsky (<http://sadowsky.cl/>)

**Special thanks:** While it is impossible to name everyone who ended up being involved in one way or another in this project, we owe special thanks to a wonderful group of early adopters and beta testers, students and researchers alike, without whom it would have been much more difficult to produce the current software program. We are also grateful to Paul Boersma for this tremendous collaboration toward the interactions between Praat and related functions within Phon 2.

## Installing Phon

---

Phon 3.0+ requires a 64-bit operating system.

### Install Required Fonts

Download required fonts from <https://www.phon.ca/downloads/ipafonts.zip>.

### Windows

- Installer - Download and execution the newest `Phon_windows-x64_<version>.exe` installer from the [releases](#) page.
- Manual Installation - Download the `Phon_windows-x64_<version>.zip` package from the [releases](#) page.

### macOS

- Download the newest `Phon_macos_<version>.dmg` file from the [releases](#) page. After opening the disk image, drag Phon into your Applications folder.

### Ubuntu (16.04/18.04)

- Install Java 11

```
sudo add-apt-repository ppa:linuxuprising/java
sudo apt update
sudo apt install oracle-java11-installer
```

- Install VLC

```
sudo apt install vlc
```

- Install Phon Download the newest .deb from the [releases](#) page and install using dpkg.

```
sudo dpkg -i Phon_linux_<version>.deb
```

To uninstall Phon:

```
sudo dpkg --remove phon
```

## Known Issues

---

Some common issues with Phon are listed in the table below. To report a problem goto <http://github.com/phon-ca/phon/issues>.

|                    |    |   |
|--------------------|----|---|
| Issue   Resolution | -- | Phon freezes when loading .wav file in session editor.   If the .wav file was taken from a digital recording device it may be missing header information. Re-encode .wav file before using in Phon (see below.)                               |
|                    |    | Unable to use IPA input fields after stacking multiple combining diacritics.   No known solution at this time.  |
|                    |    | Unable to view reports/application logs. Blank window displayed.   If running on a managed Windows system running AppLocker or other security software required binaries may be blocked from execution. Please see your system administrator. |

## Re-encode Audio File for Phon

Using the latest version of [Audacity](#):

- Open your original file
- Select menu `File > Export as WAV`
- Choose either `WAV (Microsoft) signed 16-bit PCM format` or `WAV (Microsoft) signed 24-bit PCM format`
- Link your Phon transcript file to this newly-created WAV file

---

# Chapter

# 1

---


## User Interface

---

**Topics:**

- Welcome Window
  - Preferences
  - Project Manager
  - Session Editor
  - Tools
- 

## Welcome Window

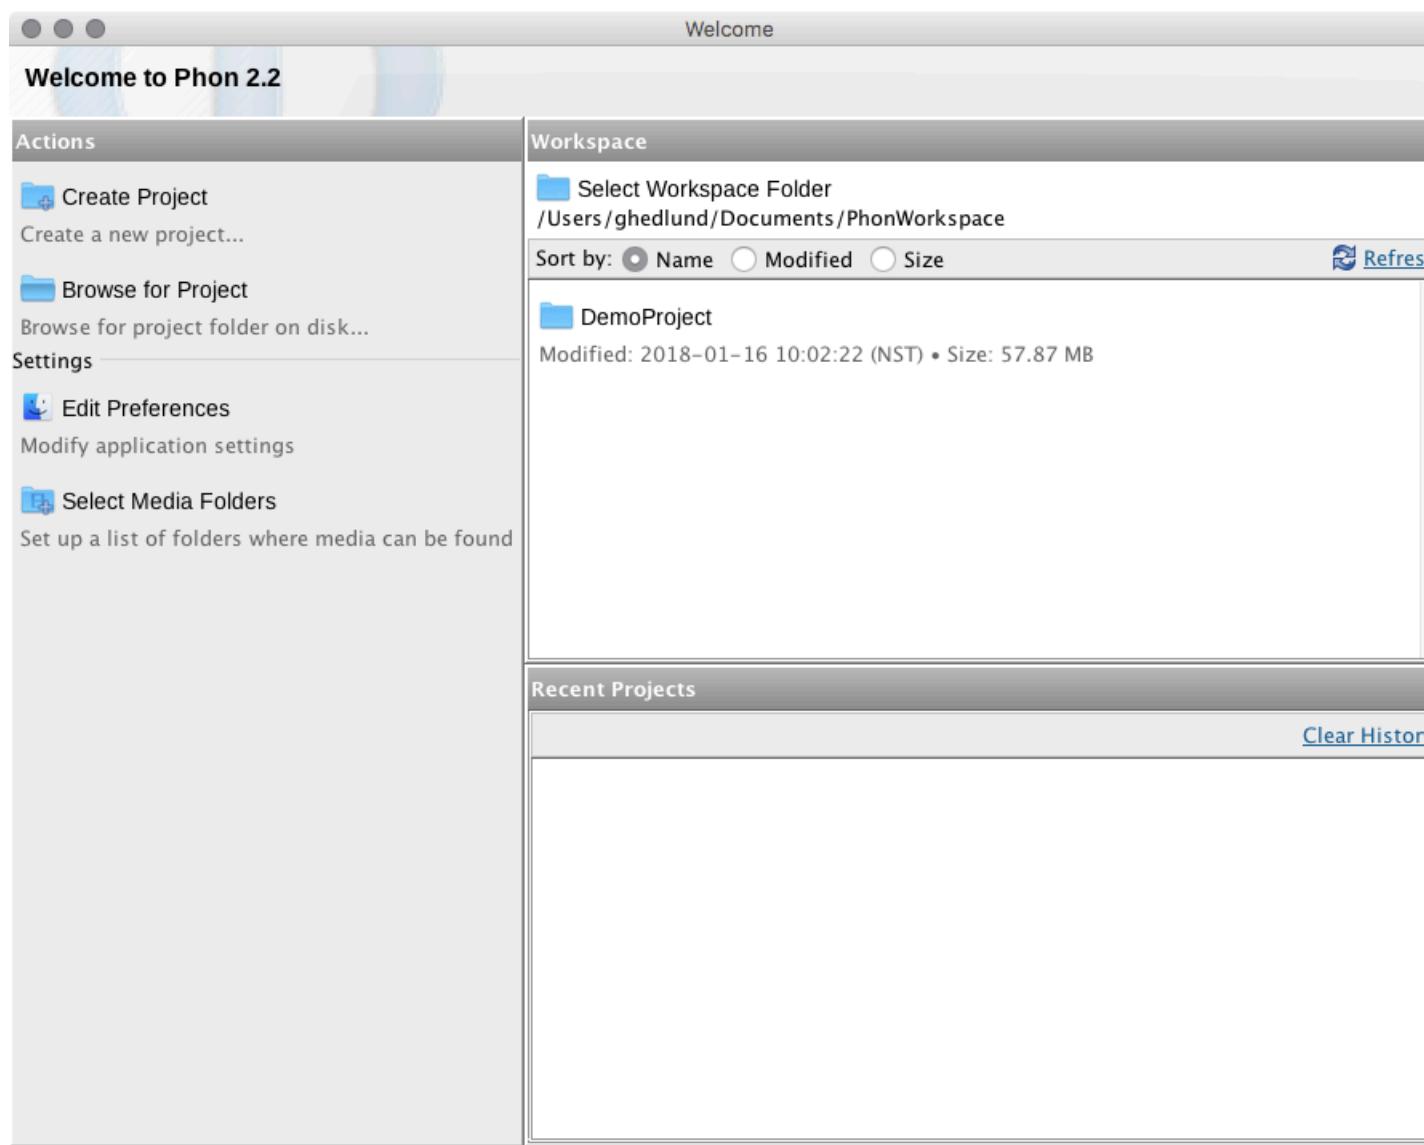

The *Welcome* window is the first window displayed when opening *Phon*. It is divided into three sections: Actions, Workspace, and Recent Projects.

### Actions

#### Create Project

Create a new *Phon* project.

From the **Workspace** window:

1. Click the **Create Project** button in the **Workspace Actions** pane.  
A text field will appear in which you can enter a project name.
2. If you do not wish to create a project at this time, click **Cancel create new project/X** or press **ESC**. Otherwise, type a name for your project and click the **Create new project in workspace/+** button or press **Enter**.  
This action will save the project in your current workspace folder and open it in the **Project Manager**.

#### Open Project

Open an existing *Phon* project.

From the **Workspace** window:

If the project is in your current workspace folder, click on it in the **Project List**, or right-click (CMD/CTRL+click) and choose **Open project** from the context menu. If the project is not in your current workspace folder, click the **Browse for Project** button in the **Other Actions** pane, locate the project using the resulting dialog and click **Open**. The **Project Manager** window will appear.

-  **Note:** If the project was created using an earlier version of *Phon* (and is a *.phon* or *.zip* file), you must extract the project before you can open it (see [Extract Project](#) on page 15 for instructions).

## Workspace

### Workspace Folder

The *Phon* workspace is the default location for *Phon* projects. Operations which are available from the **Welcome** window (such as creating, extracting, or archiving projects) affect files in the workspace folder. The default workspace folder is <userhome>/Documents/PhonWorkspace.

The workspace folder may contain a folder called '*backups*'. Compressed *Phon* projects are moved to this folder when they are archived or extracted from the workspace folder.


### Change Workspace Folder

Change the default workspace folder.

From the **Workspace** window:

1. Click the specified folder name in the **Workspace Folder** pane.  
A **Browse** window will appear.
  2. If desired, click **New Folder** to create a new directory in the current location. Browse to the appropriate directory and click **Open**.
- The chosen directory will be your new workspace folder.

-  **Note:** To reset the workspace folder to its default location, mouse over the specified **Workspace Folder** and click the **Use default workspace folder** button on the right.

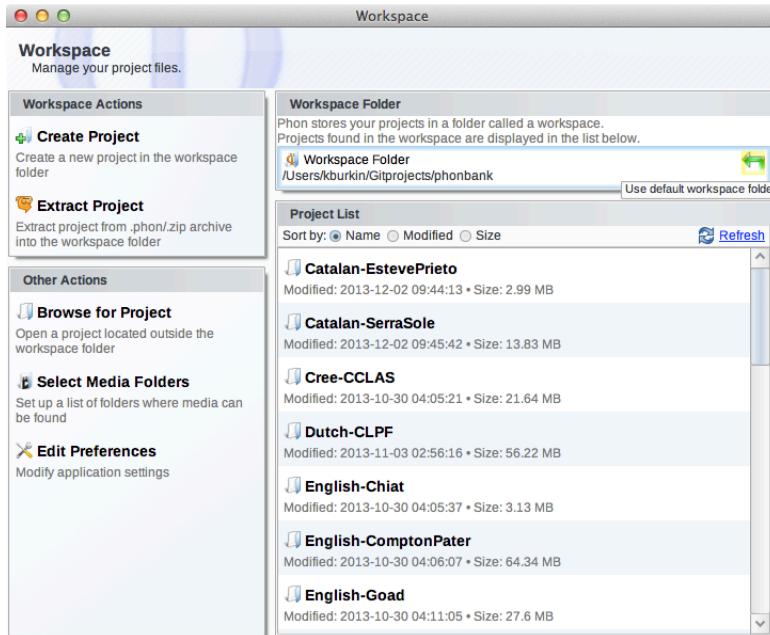


### Project List

The **Project List** pane displays the projects that are located in the current workspace folder.

This pane lists expanded projects (see [About Project File Structure](#) on page 18) with a folder icon next to them, and compressed projects with an orange arrow next to them.

Compressed projects may be expanded by clicking on them in the list, or by right-clicking (CTRL+click) and choosing **Extract project** from the context menu.

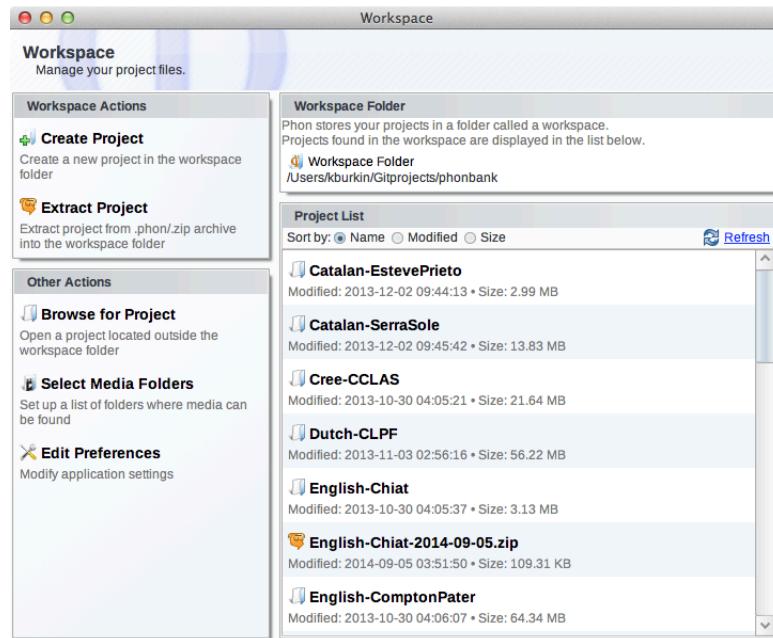


## Sort Project List

Sort the **Project List** in the **Workspace** window by name, date modified, or size.

From the **Workspace** window:

To sort the **Project List** by name, click **Name** in the **Sort by** field of the **Project List** pane. To sort by date modified, click **Modified**. To sort projects by their size on disk, click **Size**.

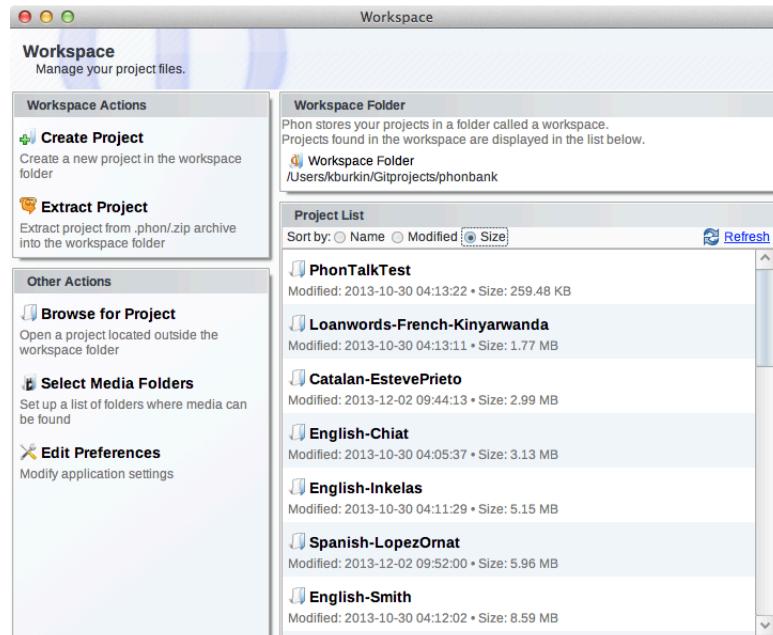

Your projects will appear in the **Project List** pane in the order specified.

- Note:** When sorting by name, projects that start with uppercase letters will be sorted before ones with lowercase letters.


## Show Project in File System Viewer

Show a project's location using your computer's file system viewer.

From the **Workspace** window:

1. Mouse over the project you wish to archive in the **Project List** pane.

Two buttons will appear next to your project name; **Create .zip archive of phon project...** and **Show project in file system viewer**.

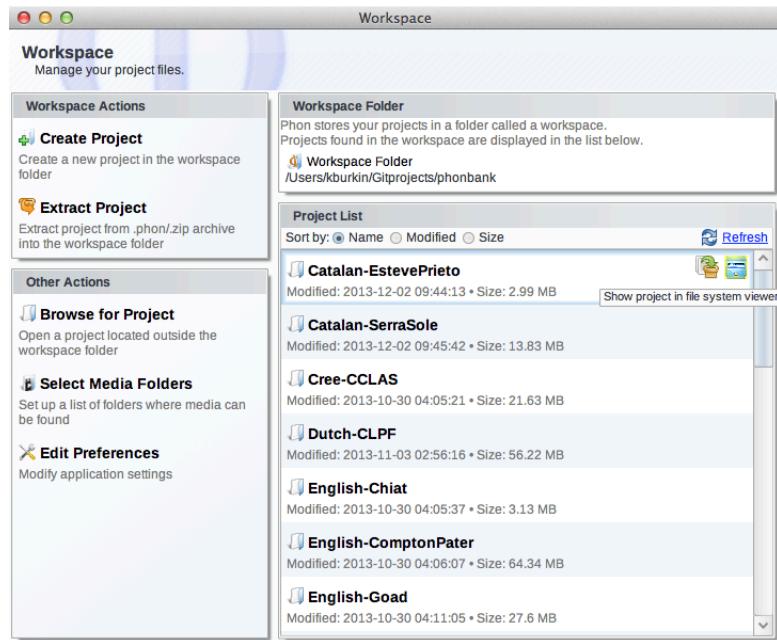

2. Click **Show project in file system viewer**. Alternately, right-click (CTRL+click) on your project and choose **Show project** from the context menu.

Your computer's file system viewer will open to the folder containing your project, which will be highlighted.

## Open Project

Open an existing *Phon* project.

From the **Workspace** window:

If the project is in your current workspace folder, click on it in the **Project List**, or right-click (CMD/CTRL+click) and choose **Open project** from the context menu. If the project is not in your current workspace folder, click the **Browse for Project** button in the **Other Actions** pane, locate the project using the resulting dialog and click **Open**. The **Project Manager** window will appear.


**Note:** If the project was created using an earlier version of *Phon* (and is a *.phon* or *.zip* file), you must extract the project before you can open it (see [Extract Project](#) on page 15 for instructions).

## Extract Project

Expand an old *.phon* or *.zip* project for use with the current version of *Phon*.

From the **Workspace** window:

Click on a compressed project in the **Project List** pane to extract it to a directory in your workspace folder, or right-click (CTRL+click) on it and choose **Extract project** from the context menu.

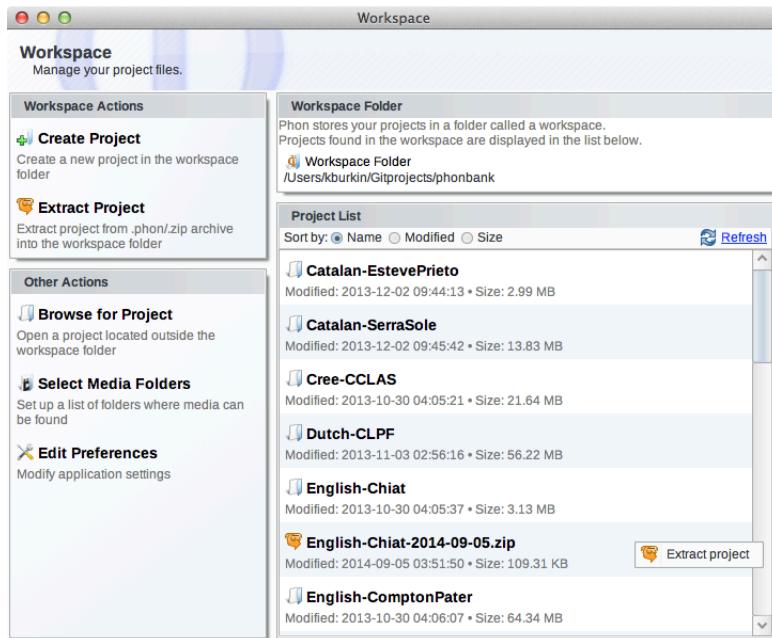

The project will be extracted to the workspace folder, and it will appear as an expanded (regular) project in the **Project List**. The original compressed project will be moved to the *backups* folder in your workspace.

**Note:** If the compressed project is not located in your current workspace folder, click **Extract Project** in the **Workspace Actions** pane, find and select the project in the **Browse** window, and click **Open**. This will extract the compressed project to your workspace folder. Original compressed projects extracted from locations outside the workspace folder will not be moved to the *backups* folder.

## Recent Projects

A second project list is displayed below the Workspace section of the *Welcome* window which displays a list of recently opened projects. A button to clear the recent project history is shown in the top-left portion of the list.

## Preferences

---

Change *Phon* preferences.

- From any *Phon* window, choose the **Edit > Preferences** (CMD/CTRL+,) menu item, or from the **Workspace** window, click the **Edit Preferences** button in the **Other Actions** pane. The **Preferences** dialog will appear.
- From the **General** tab of the **Preferences** dialog, choose whether to **Check for updates when application starts** using the check box. You may also choose to re-enable any disabled information messages in the *Phon* interface by clicking **Reset Information Messages**.
- From the **Session Editor** tab, you may change the settings for *Dictionary Language*, *Syllabifier Language*, and *Autosave Sessions* as you see fit.
- From the **Media** tab, specify any global media folders you wish to use
- From the **Fonts** tab, change font sizes or options for different fields.
- When you are finished editing preferences, simply close the **Preferences** dialog. If a session was already open before the preferences were changed, close and reopen that session in order to implement the changes.

## Autosaves

To prevent loss of data in the event of an unexpected shutdown, *Phon* has the option of auto-saving sessions at regular intervals. Session autosaves are named with the '\_\_autosave\_' prefix.

If an unexpected shutdown occurs and the user was unable to save changes to a session, the next time an auto-saved session is opened *Phon* will prompt the user to open the session in either its last user-saved state, or its last auto-saved state.

To use the auto-saved session as the main session file, open it and then save it.

To change the interval between autosaves, open the **Preferences** dialog. In the **Session Editor** tab, click on the menu in the **Autosave Sessions** field and choose the desired time interval.

To de-activate the autosave option, select **Never** as the autosave interval.

## Change Application Fonts

Change tier fonts and/or user interface (UI) fonts.

From the **F**onts tab of the **Preferences** dialog:

1. Click the font listed underneath each UI element to change it.  
The **Choose font** dialog will appear.
2. Choose the desired **Font** and **Size**, select **Bold** and/or **Italic** if required, then click **Ok**.  
The font displayed in **Session Editor** will reflect your choices.
3. Adjust size for all UI fonts using the slider.



**Note:** To reset default options for a UI element, mouse over that element and click the **Reset to default** button which appears on the right.

## Change Dictionary Language

Change the default **Dictionary Language** for use within sessions.

From the **Session Editor** tab of the **Preferences** dialog:

Click the **Dictionary Language** combo box and select the appropriate language.

## Change Syllabifier Language


Change the default **Syllabifier Language** for use within sessions.

From the **Session Editor** tab of the **Preferences** dialog:

Click the **Syllabifier Language** combo box and select the appropriate language.

## Media Folders

A list of global **Media Folders** can be set using the **Media** tab of the **Preferences** dialog. *Phon* will look at each of these folders (in the order in which they appear) for media files.

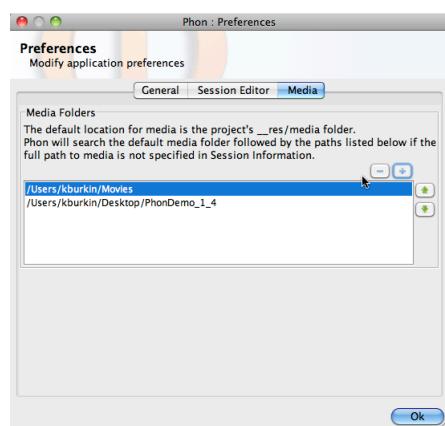

The media folders can be internally structured to match *Phon*'s project/corpus layout. *Phon* will search the following locations for media (where <media> is the media folder defined in **Preferences**, <project> is the project name, <corpus> is the corpus name, and <session> is the session name):


- <media>/<project>/<corpus>/<session>.[aif;avi;mov;mpg;mp4;wav;mp3;m4a;...]
- <media>/<project>/<session>.[...]
- <media>/<corpus>/<session>.[...]
- <media>/<session>.[...]

If the **Media** field in the **Session Information** view of the **Session Editor** has been manually changed:

- if the path is absolute (or fully-specified), the above rules are ignored and the media file is loaded from the specified path
- if the path is relative, the value of '<session>' above is replaced by the value in the media field.

## Project Manager

The *Project Manager* window is displayed when you open a project from the *Welcome* window or by using the **File** -> **Open** menu item.

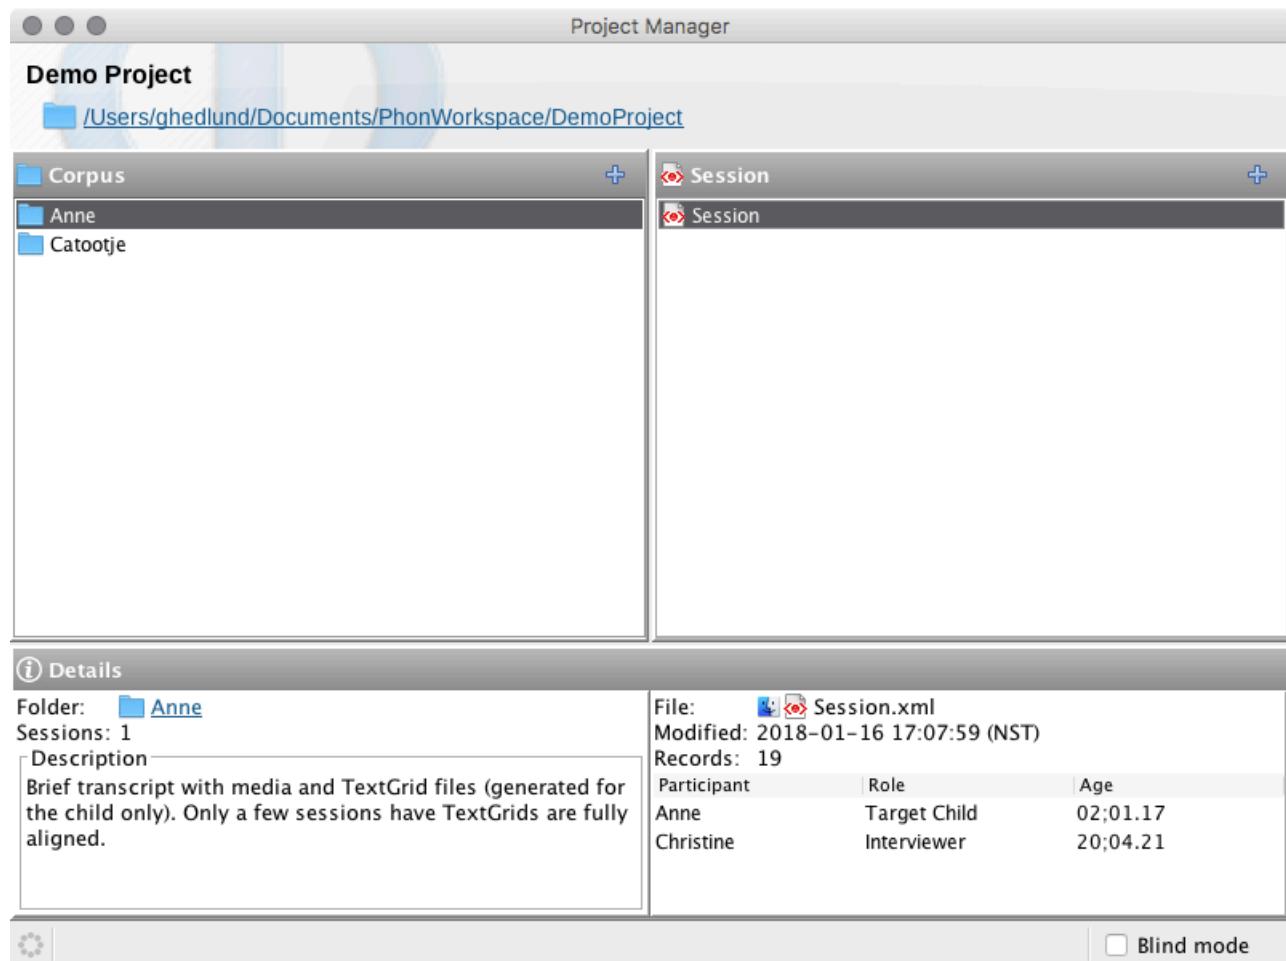

## About Project File Structure

*Phon* projects are stored on a hard drive as directories.

The directory for each project will contain the following:

- A *project.xml* file which contains the information *Phon* requires for the project.
- A series of folders which correspond to each of the project's *corpora* (usually a collection of transcribed sessions for a specific target speaker).
  - Within each corpus folder are a series of xml files corresponding to each session. The xml files which are named beginning with '~' are session autosaves, created in order to prevent loss of data in the event of an unexpected shutdown.

The directory for each project may also contain the following:

- A project resources folder called '*\_\_res*', which is a system directory created by *Phon* to contain useful components for the project. This folder may contain:
  - A media folder, which is the default location for the media for the project and may contain media segments exported from *Phon*.
- A folder to contain saved query results, called '*\_\_search*'.

 **Note:** Projects created using earlier versions of *Phon* may exist as *.phon* files. These projects will need to be extracted (i.e. expanded to directories using the **Workspace** window) to be used with the current version of *Phon*.

## Project Media Folders

A media folder may be assigned for a project and for each individual corpus in a project. The default media folder for a project is *\_\_res/media* inside the project folder. The default media folder for a corpus will be the project media folder. The search order for media files is:

1. Corpus media folder (if assigned)
2. Project media folder
3. Global media folders (see [Media Folders](#) on page 17)


To assign project/corpus media folders, select **Project > Select project/corpus media folder...** from the **Project Manager** window. Context menu items are also available in the corpus and session list components.

## About Corpora

Within a project, individual transcripts (or *sessions*) are organized into a series of one or more *corpora*.

Each corpus typically contains a series of sessions relating to one specific participant in a study. The corpus may contain as many sessions as desired for that participant, spanning any length of time. This allows the user to easily search all transcripts relating to one participant, by searching within the relevant corpus.

When a corpus is selected, the number of sessions and a description of that corpus is displayed at the bottom of the list of corpora.

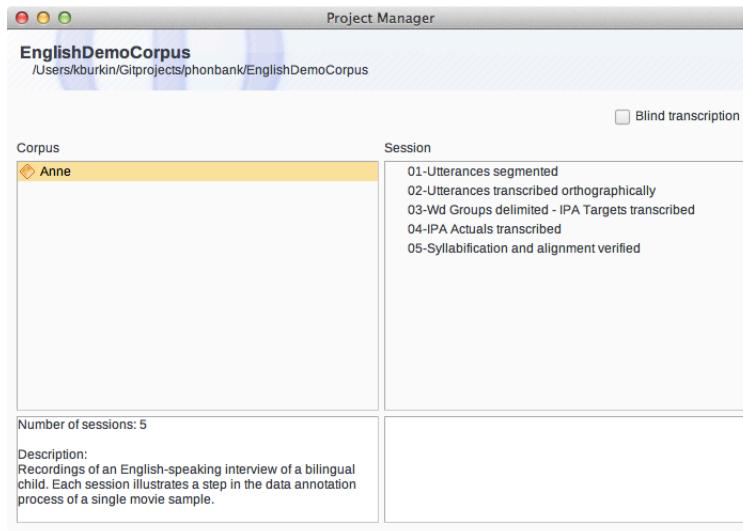


## Create Corpus

Create a new corpus in an existing project.

First, a project must be open.

From the **Project Manager** window:

1. Choose the **Project > New Corpus...** menu item.  
The **New Corpus** dialog will appear.

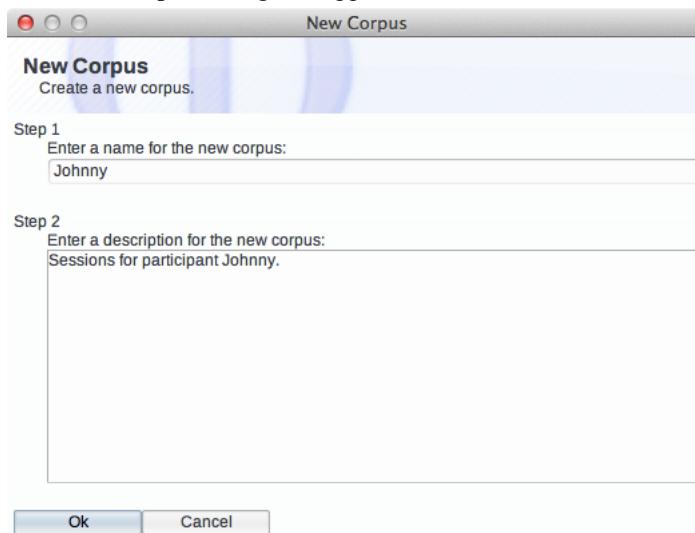

2. Enter a name (and optionally a description) for the new corpus. Click **Ok**.

This creates a new corpus with the specified name inside the open project. An error message will appear if a corpus with that name already exists.

**Note:** You may return to edit the description at any time by clicking on the corpus name in the **Project Manager** and typing a description in the field below the *Corpus list*.

## Duplicate Corpus

Duplicate a corpus folder in your project.

From the **Project Manager** window:

Right-click (CTRL+click) on the corpus you wish to duplicate and choose **Duplicate Corpus** from the context menu.

The corpus folder will be duplicated with an integer suffix (e.g., '(1)') appended.

## Edit Corpus Template

Set default participants and tiers for all sessions to be created in a corpus.

From **Project Manager** window:

1. Right-click (CTRL+click) on the corpus whose template you wish to edit and select **Edit corpus template...** from the context menu.  
A **Session Template** window will appear for the selected corpus, showing the **Session Information** and **Tier Management** views.
2. Edit options as you see fit. Close this window when you are finished making changes.  
These settings will be applied to any sessions subsequently created within the corpus.



**Note:** For further instructions on how to specify information in the **Session Information** and **Tier Management** views, consult [Input Session Language](#) on page 37, [About Participants](#) on page 36, [Link Media to Transcript](#) on page 36, [Edit Tier Display Options](#) on page 39, and other related pages.

## Rename Corpus

Rename a corpus in your project.

From the **Project Manager** window:

1. Right-click (CTRL+click) on the corpus you wish to rename and choose **Rename Corpus** from the context menu.  
The **Rename Corpus** window will appear.
2. Follow the instructions in the **Rename Corpus** window. If you are unsure whether you want to rename your corpus, click **Cancel**. To continue and rename the corpus, click **OK**.  
You will return to the **Project Manager** window and the corpus will be renamed accordingly.

## Delete Corpus

Delete a corpus in your project.

From the **Project Manager** window:

1. Right-click (CTRL+click) on the corpus you wish to delete and choose **Delete Corpus** from the context menu.  
A dialog will appear asking you to confirm whether you would like to delete this corpus and informing you that this action cannot be undone.
2. If you are unsure, click **No**. To continue and delete the corpus, click **Yes**.  
The deleted corpus will no longer appear in the **Project Manager** window.


## About Sessions

A session in *Phon* is a transcript of a portion of field data targeting one or more participants in a project.

*Phon* is designed to facilitate the transcription of media recordings (audio or video) taken of participants in a study. As such, a *Phon* session usually corresponds to one media recording and the transcript of this recording.

A session is organized into a series of records which correspond to individual utterances.

Sessions can be viewed in the **Project Manager** window. When a session is selected, the number of records in that session and the date it was last modified are displayed at the bottom of the list of sessions.

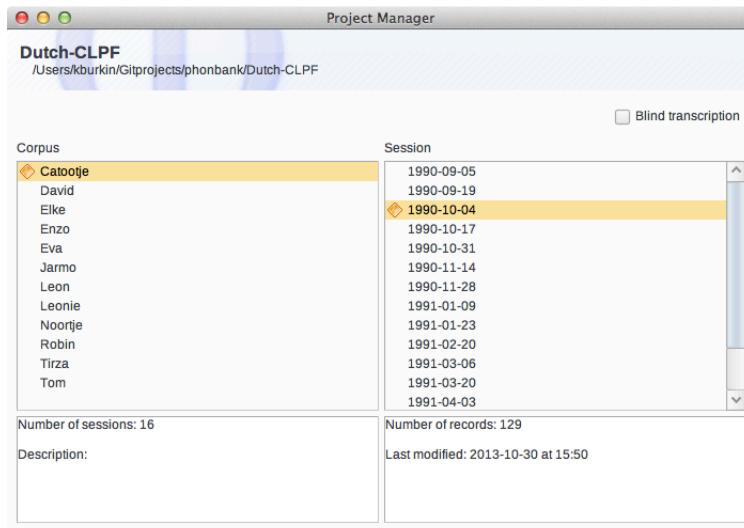

## Create Session

Create a new session in an existing corpus.

A project with at least one corpus must be open.

From the **Project Manager** window:

1. Select the **Project > New Session** menu item, or right-click (CTRL+click) in the **Corpus** list. The **New Session** dialog will appear.
2. Enter a name for the new session, choose the destination corpus and click **Ok**. If you require a new corpus for the new session, click the plus sign to the right of the corpus selection field and enter the new corpus information as per the description at [Create Corpus](#) on page 20, and then select this new corpus as your destination. The new session will be created in the specified corpus and opened for editing. An error message will appear if a session with that name already exists.



**Note:** Each new session is created with an empty record at the beginning of it.

## Open Session: Default Mode

Open a session in the default mode.

From the **Project Manager** window:

Ensure that the **Blind transcription** box is deselected to open a session in default mode. Click the desired corpus, and double-click on the session that you would like to transcribe.

The selected session will open in the **Session Editor**.

## Open Session: Blind Transcription

Transcribe in multi-blind mode.

From the **Project Manager** window:

1. Select the **Blind transcription** check box and double-click on the session that you would like to transcribe. This will open a dialog prompting you to indicate whether you are a new or existing transcriber.
2. • If you are a new transcriber, choose the first option and enter your full name as well as a username. If you wish to use a password, select **Use password** and enter your chosen password into the two fields provided (the text

in both fields must match). There is no password reminder function in *Phon*. Ensure that your password is memorable or store it in a safe location. Click **Ok** to continue.

- If you are a returning transcriber, choose the second option and select your username from the list. If you have chosen to use a password, you will be prompted to enter that password now. Do so and click **Ok**.

This will open the **Session Editor** window.

-  **Note:** Upon opening a session for the first time, there will be an empty record at the beginning of each session.

### Duplicate Session

Create a copy of a session within the corpus that contains it.

From **Project Manager** window:

Right-click (CTRL+click) on the session you wish to duplicate, and choose **Duplicate Session** from the context menu.

A duplicate of your session, with the suffix "(copy)" will appear in the **Project Manager**.

### Derive Session

Derive a new session using records from existing sessions.

From the **Project Manager** window:

1. Choose the **Project > Derive Session...** menu item.

A **Merge Sessions** dialog will appear.

2. Enter a **Session name** and Destination **Corpus** in the provided fields. Select one or more of the sessions for the split or merge and click **Next**.

The second page of the **Merge Sessions** dialog will appear.

-  **Note:** If you chose only one session, the selected records will be put into the new session. If you select more than one session, the selected records will be merged into a new session.

3. Select a session from the **Session** list at the left and choose whether to merge or split **All records**, a subset of **Specific records**, **Records for participant(s)** or **Records from Search results**. Repeat this process for all sessions in the **Session** list. Click **Next**.

This will begin the merging of the selected records/sessions.

-  **Note:** If you choose to merge only specific records, you will have to specify the relevant record numbers. To specify several individual records, separate them with a comma and a space. To specify a range, separate the beginning and end record numbers with two periods and a space. If you choose to merge records for specific participants, you must select the participants from the list. If you choose to merge records from search results, you must select a past search from the list.

4. Once the *Session Merger shutdown* alert appears, click **Close**.

The newly derived session will appear in the specified **Corpus** in the **Project Manager**.

### Move Session

Move a session to a different corpus.

From **Project Manager** window:

Right-click (CTRL+click) on the session you wish to move, choose **Move Session To** from the context menu, and click on the corpus you wish to move your session to.

A dialog will appear asking you to confirm that you would like to delete the session from its original location. Click **Yes**. Your session will be moved to the selected corpus.

-  **Note:** You may move your session to a corpus within the current project, to another open project, or to any project in your workspace folder.

### Rename Session

Change a session name in your project.

From **Project Manager** window:

1. Right-click (CTRL+click) on the session you wish to rename, and choose **Rename Session** from the context menu.  
The **Rename Session** window will appear.
2. Follow the steps in the **Rename Session** window and click **OK**.  
You will be returned to the **Project Manager** window, with the session renamed.

### **Copy Session to Disk/Other Application**

Save a copy of a session to a location outside your project.

From **Project Manager** window:

1. Select the sessions you wish to copy in the **Project Manager** window.
2. Drag the selected sessions from the **Project Manager** window to a location on your host computer. (e.g., To the Desktop, an open folder in explorer/Finder, or an open application such as a mail client.)

### **Delete Session**

Remove a session from your project.

From **Project Manager** window:

1. Right-click (CTRL+click) on the session you wish to delete, and choose **Delete Session** from the context menu. A dialog will appear asking you to confirm that you would like to delete this session and informing you that this action cannot be undone.
2. If you are unsure, click **No**. To continue and delete the session, click **Yes**.  
The session will no longer appear in the **Project Manager** window.

## **Check Transcriptions**

Check sessions for phone transcription errors.

From the **Project Manager** window:

1. Select the **Project > Check Transcriptions...** menu item.  
This will open the **Check Transcriptions** window.
  2. Select the **Check IPA Tiers** option.
  3. Select the project, corpora, or sessions whose transcriptions you wish to check, and click **Next**.  
*Phon* will check each selected session, and any phone transcription errors will be printed in red, with their corpus, session, record number, and tier (*IPA Target* or *IPA Actual*).
-  **Note:** To resolve a reported error, return to the **Project Manager** window and open the session in which the error occurred, then navigate to the relevant record and visually check its IPA tiers.

## **Reset Syllabification**

In the event of display issues in *Target Syllables* or *Actual Syllables* in the **Syllabification & Alignment** view, it may be necessary to reset the syllabification of *IPA Target* and *IPA Actual* transcriptions.

From the **Project Manager** window:

1. Select the **Project > Check Transcriptions...** menu item.  
This will open the **Check Transcriptions** window.
2. Select the **Reset syllabification** option. To reset phone alignment as well, select the **also reset phone alignment** check box.
3. Choose an appropriate syllabifier by selecting it from the drop-down menu.
4. Select the project, or the corpora or sessions whose syllabification you wish to reset, and click **Next**.  
*Phon* will re-perform the syllabification for each selected session using the *Syllabifier Language* chosen in the **Preferences** dialog.



**Note:** After resetting syllabification or alignment, it will be necessary to visually verify these tiers.

## Reset Phone Alignment

In the event of display issues in the *Alignment* tier of the **Syllabification & Alignment** view, it may be necessary to reset the phone alignment of *IPA Target* and *IPA Actual* transcriptions.

From the **Project Manager** window:

1. Select the **Project > Check Transcriptions...** menu item.  
This will open the **Check Transcriptions** window.
2. Select the **Reset phone alignment** option.
3. Select the project, corpora, or sessions whose alignment you wish to reset, and click **Next**.  
*Phon* will re-perform the alignment for each selected session.

 **Note:** After resetting syllabification or alignment, it will be necessary to visually verify these tiers.

## Refresh Project

Refresh **Project Manager** window to reflect changes.

From the **Project Manager** window:

Choose the **Project > Refresh** menu item or press F5.

## Import from CSV file(s)

Import a folder of CSV (comma-separated values) files into *Phon* as sessions.

The CSV import module can import a folder of CSV files with identical column formats into *Phon*. Where possible, CSV column labels should match *Phon* default tiers. *Phon* can automatically extract session date information from a CSV file if its name reflects its session date, in YYYY-MM-DD format.

From the **Project Manager** window:

1. Select the **Plugins > Import from CSV...** menu item.  
This action will generate a **CSV Import** window.
2. Click the **Browse** button to the right of the **Folder** field and locate the directory containing the CSV files for import. Also, ensure you select the proper **File encoding** option from the drop-down menu. Click the **Next** button.  
This action will prompt you to select files for import and the destination corpus.
3. Enter a corpus name in the **Destination Corpus** field and using the check boxes, select the files for import into that corpus. For each file, edit **Session Name** and **Session Date** as desired by double-clicking on either of them. Click the **Next** button.  
This will prompt you to set up the participants for that corpus: any participant information entered here will appear in all imported sessions for that corpus.
4. Click the **Add Participant/+** button at the right of the window. Enter participant name, sex, date of birth, language and other pertinent information in the appropriate fields and click **Ok**. To delete a participant from the import, highlight the participant in the table and use the Delete/Backspace key. Then click the **Next** button.
5. Set up column mapping such that each CSV column header has been assigned a tier name in *Phon*. To do this, highlight an item in the **CSV column** on the left, then use the drop down menu on the right to select the appropriate *Phon Tier* or enter a new tier into **Tier Name** field. You may also select the **Don't Import** menu item for columns that are repetitive or unnecessary. In the **Options** section, you may use the **Syllabifier** drop down menu to specify the correct syllabifier and the **Transcription filter** to convert the *IPA Target* and/or *IPA Actual* tiers from YAPA, SAMPA, IPAPhon or IPAKit. Click the **Next** button.  
This action will activate the import.

 **Note:** If the column name in the CSV file is the same as a *Phon* default tier name, the CSV column will be automatically mapped to the appropriate tier in *Phon*.

 **Note:** If mapping a CSV column to the *Segment* tier in *Phon*, segments times must be listed in mmm:ss.uuu format (minutes:seconds:milliseconds).

6. Once the *Import finished* alert appears at the bottom of the **CSV Import** window, click the **Close** button. This action will return the user to the **Project Manager** window with the newly imported corpus. Each row from your CSV file will become one record in *Phon* with the tiers as specified.

After import, each CSV file should become a new session in *Phon*. The number of records in the session should match the number of rows in the CSV file (minus the header.) A file named *importsettings.xml* is also created in the source folder. If this file is present when the directory is selected in Step 1 the previous import settings are loaded (except for Syllabifier and Filter settings).

## Export to CSV file(s)

Export *Phon* sessions as CSV (comma-separated values) files.

The CSV export module can export *Phon* sessions into a specified folder as UTF-8 encoded CSV files.

From the **Project Manager** window:

1. Select the **Plugins > Export to CSV...** menu item. This action will generate a **CSV Export** window.
2. To select the destination folder for the export, click the **Browse for folder...** button to the right of the **Destination folder** field, locate the desired folder and click **Open**. Select the sessions you would like to export using the check boxes at the left of the **Sessions** list. Click the **Next** button. This action will prompt you to set up columns for the export.
3. To add a column to the export, type its name in the provided field and press **Enter** or click **Add column/+**. To remove a tier from the list, select it and click the **Remove Column/-** button. To export a tier which is not available in the existing list, type "**Tier:<tier name>**" in the provided field and click the **Add Column/+** or press **Enter**. Click on any tier name in the list and use the **up/down arrow** buttons to change the column ordering. Click the **Next** button.

This action will activate the export.

 **Note:** The default column list for export includes: Session Name, Record #, and all default *Phon* tiers. The default can be restored by using the **Reset to default** button on the bottom right corner of the column list. This list of columns is saved after export and re-loaded the next time CSV export is opened.

 **Note:** To export blind user transcriptions, add the tier "**IPA [Target|Actual] (<username>)**" (e.g. Tier:IPA Target (JSmith)).

4. Once the *Export complete* alert appears at the bottom of the **CSV Export** window, click the **Close** button. Session files for all corpora in the exported project will appear in the chosen directory with the format *Corpus name-Session name.csv*.

---

## Session Editor

### Session Editor - Keyboard Shortcuts

Editor keystrokes:

| Command    | Mac         | Windows      | Notes  |
|------------|-------------|--------------|--|
| Save       | CMD+S       | CTRL+S       |  |
| New Record | CMD+N       | CTRL+N       | The new record will be added after the current record in the session.                          |
| Cut Record | Shift+CMD+X | Shift+CTRL+X | The current record will be deleted and its contents will be copied to your system's clipboard. |

| Command                                  | Mac          | Windows      | Notes  |
|--|--------------|--------------|--|
| Copy Record                              | Shift+CMD+C  | Shift+CTRL+C | All tiers and and tier content visible in <b>Record Data</b> will be copied to your system's clipboard.            |
| Paste Record                             | Shift+CMD+V  | Shift+CTRL+V | The most recently copied or cut record will appear as a new record at the current position in <b>Record Data</b> . |
| Next Record                              | CMD+]        | CTRL+]       |  |
| Previous Record                          | CMD+[        | CTRL+[       |  |
| Last Record                              | CTRL+SHIFT+N | ALT+SHIFT+N  |  |
| First Record                             | CTRL+SHIFT+P | ALT+SHIFT+P  |  |
| Play Segment (Media Player)              | CMD+R        | CTRL+R       | Only available when the external media player is open.   |
| Play Segment/Selection (Speech Analysis) | Shift+CMD+R  | Shift+CTRL+R | Only available when the waveform is displayed.   |
| View IPA Chart                           | CMD+M        | CTRL+M       |  |

The following keystrokes are available when a tier is focused:

| Command             | Mac             | Windows          | Notes  |
|---------------------|-----------------|------------------|--|
| Next Group/Tier     | Tab             | Tab              | Will move the caret to the beginning of the next group or the next tier.   |
| Previous Group/Tier | Shift+Tab       | Shift+Tab        | Will move the caret to the beginning of the previous group or previous tier.   |
| New Group           | CMD+G           | CTRL+G           | Creates a new group after the current (or end if no current group is focused.)   |
| Merge Group         | CTRL+ALT+G      | CTRL+ALT+G       | Merges the current group with the next group.  |
| Split/New Group     | CTRL+ALT+K      | CTRL+ALT+K       | Creates a new group at the caret position. Creates a new group at the beginning of the record if caret is at beginning of first group. |
| Delete Group        | CMD+ALT+Shift+G | CTRL+ALT+Shift+G | Delete the current group.  |

## Records

### Add New Record

Add a new record to an existing session.

From the **Session Editor** window:

Display the record after which you would like to create a new record and click the **New record** button in the top left corner of the **Session Editor** or choose the **Session > New Record** (CMD/CTRL+N) menu item. This will create a new record immediately following the selected record. The new record will be visible from the **Record Data** view.

### **Copy Record**

Copy all visible **Record Data** information to the clipboard.

From the **Session Editor** window:

Display the record you wish to copy and choose the **Session > Copy record** menu item (Shift+CMD+C). All visible tiers will be copied to the clipboard, with tier names and tier data separated by tabs. It can be pasted into the **Session Editor** as a new record, or into another window.

-  **Note:** When pasted into a word processor, you will likely be able to automatically convert the copied record into a table. Ensure that you use tabs to separate cells.

### **Duplicate Record**

Duplicate a record in an existing session.

From the **Session Editor** window:

Display the record which you would like to duplicate and click the **Duplicate record** button in the top left corner of the **Session Editor** or choose the **Session > Duplicate record** (CMD/CTRL+D) menu item.

This will create a duplicate record immediately following the original. The duplicate record will be visible from the **Record Data** view.

### **Cut Record**

Copy all visible **Record Data** information to the clipboard and delete current record.

From the **Session Editor** window:

Dispaly the record you wish to cut and choose the **Session > Cut record** menu item (Shift+CMD+X). All visible tiers will be copied to the clipboard, and then the record will be deleted. It can be pasted into the **Session Editor** as a new record, or into another window.

-  **Note:** When pasted into a word processor, you will likely be able to automatically convert the copied record into a table. Ensure that you use tabs to separate cells.

### **Paste Record**

Paste a record from the clipboard into the **Session Editor**.

From the **Session Editor** window:

Display the record after which you would like to paste, and choose the **Session > Paste record** menu item (Shift +CMD+V).

The record will be created in the **Session Editor** directly after the currently visible record.

### **Delete Record**

Delete a record from an existing session.

From the **Session Editor** window:

1. Display the record that you would like to delete and choose the **Session > Delete Record** (CMD/CTRL+E) menu item.  
A dialog will appear asking you to confirm that you would like to delete this record and informing you that this action cannot be undone.
2. If you are unsure, click **No**. To continue and delete the record, click **Yes**.  
The record will no longer appear in the **Record Data** view; the next record will be displayed.

### **Navigate Between Records**

Navigate between records in the **Session Editor** window.

1. To go to the next record in your session, select the **Session > Next record** menu item or click the **right arrow** at the top of the **Session Editor**.  
Views will update to display information for the next record in your session, and the number of the currently visible record will be displayed.
2. To go to the previous record in your session, select the **Session > Previous record** menu item or click the **left arrow**.
3. To jump to the last record in your session, select the **Session > Last record** menu item or click the **right arrow with vertical line**.
4. To jump to the first record in your session, select the **Session > First record** menu item or click the **left arrow with vertical line**.
5. To navigate to a specific record using its number, click on the current record number and type in the desired number.

### **View Record List**

View a list of records in a session.

From the **Session Editor** window:

1. Click the drop down menu on the left of the **Search** bar and select **Open Record List**, or click within the empty **Search** bar and press **Enter**. Alternately, you may enter a search term in the **Search** bar and open a list of only records containing that term.  
This will open the **Record List** view, which shows a list of the records in a session with their *Record #* and all tier information.
 

 **Note:** To arrange by a column, click on its header. To reorder columns, click and drag their header to the left or right.
2. Click on any record in the list to navigate to it in the **Session Editor**.

### **Sort Records**

Sort records in an existing session by start time.

From the **Session Editor** window:

1. Choose the **Session > Sort records...** menu item.  
The **Sort Records** dialog will appear.
2. Click the **Sort by:** menu and select a tier by which to sort your records. For example, you may sort your records in chronological order (by choosing **Segment**), or alphabetically by their **Orthography**.
 

 **Note:** You may choose up to three tiers by which to sort your records; they will be sorted by the first chosen tier, and then records with the same information in the first tier will be sorted by the next chosen tier, and so forth.
3. By default, records will be sorted in ascending order. To sort in descending order by any tier, select **descending**.
4. When you have finished selecting sort options, click **Ok**. If you do not wish to sort records at this time, click **Cancel**.  
The records for the current session will be sorted by the tier(s) you have chosen.

### **Search Within Session**

Run a quick search within your session and navigate to records containing results.

From the **Session Editor** window:

1. The **Search** bar is located in the top right portion of the **Session Editor** window. Click the drop down arrow on the left of the **Search** bar to choose options for your search, such as whether to **Include excluded records**, or **Case sensitive**.

**2.** Enter your search term in the **Search** bar.

A list of all records containing your search term in the specified search tiers will be displayed, showing the record numbers and tier data. If there are no results, this list will be empty.



**Note:** To view a **Record List** generated from your search results, either press enter with results visible, or click the drop down arrow on the left of the **Search** bar and select **Open Record List**. This will open a list of the search results in a new, undocked view. If no search terms have been entered, the **Record List** will contain all records in the session.

**3.** Click on a row in the search results or **Record List** to navigate to that record.

The **Session Editor** will navigate to the chosen record, and the list of search results will remain open.

**4.** To hide the list of search results, press **Esc**, and continue to use the **Session Editor** as per normal. To show the list again, click on the **Search** bar.

**5.** To clear the **Search** bar, click **Clear field/X**.



**Note:** Any **Search** options specified in *Step 1* will remain in place until they are manually changed or the session is closed.

### About Table Quick Search

In this type of search field, the following syntax is accepted:

```
[<column>(<column>)*:]<expr>(; [<column>(<column>)*:]<expr>)*
```

Possible elements:

- <column>  
The name of a column in the displayed table.
- <expr>  
Either a regular expression (regex), a phone sequence expression (phonex) or plain text.

Some example expressions:

**Table 1:**

| Expression                        | Matches  |
|-----------------------------------|--|
| b                                 | Any row with a column that contains 'b'  |
| Speaker:Anne; b                   | Any row where column 'Speaker' is 'Anne' and any other column contains 'b'                                 |
| IPA Target:b{v}                   | Any row where the IPA Target column contains 'b' followed by a vowel                                       |
| IPA Target,IPA Actual:k{v}        | Any row where either the IPA Target or the IPA Actual column contains 'k' followed by a vowel              |
| Orthography:c; IPA Target:{c} {g} | Any row where the Orthography column contains 'c' and IPA Target contains a consonant followed by a glide. |

### About Editor Views

Information in each session is displayed in a series of small windows within the **Session Editor**, called views. There are several types of views:

**1.** Views with access/reference to the entire session:

- **Session Information**
- **Tier Management**

2. Views with information relating to individual records:
  - **Record Data**
  - **Syllabification & Alignment**
  - **IPA Validation**
3. Views with media functions:
  - **Media Player**
  - **Speech Analysis** (formally **Waveform**)
  - **Segmentation**
4. Views that allow you to search for text within a session:
  - **Find & Replace**
5. Utility views which help with IPA transcription:
  - **IPA Lookup**

To open a view, select it from the **View** menu. Functions for open views are available both within the views themselves, and in the **View** menu. To close a view, click the **Close/X** in the top right corner of that view or choose the **View > <view title> > Close** menu selection.

Not all views must be open at any given time, and views may be moved around within the **Session Editor** or "undocked" as their own separate window.

Views retain their currently defined size and position each time you exit *Phon.*


### **Maximize View**

Maximize a view within the Session Editor window.

From the **Session Editor** or an undocked view:

1. Click the maximize button near the top right corner of the view you wish to maximize, or when the view is focused, press **CTRL+M**.

If the view was docked, it will expand to fill the **Session Editor** window. If the view was undocked, it will expand to fill your computer screen.

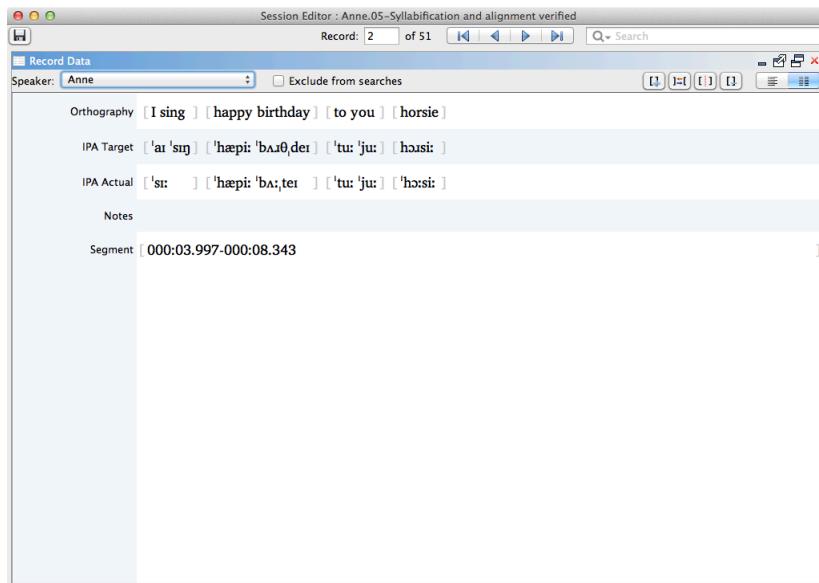


2. To restore the view to its previous size, click the restore button near the top right corner (this button looks like two windows), or press **CTRL+N** when the view is in focus.
- The view will return to its previous unmaximized position.

### **Minimize View**

Minimize a view within the **Session Editor** window.

From the **Session Editor** or an undocked view:

- Click the **minimize/** button near the top right corner of the view.  
A small title bar for that view will appear at an edge of the **Session Editor**.

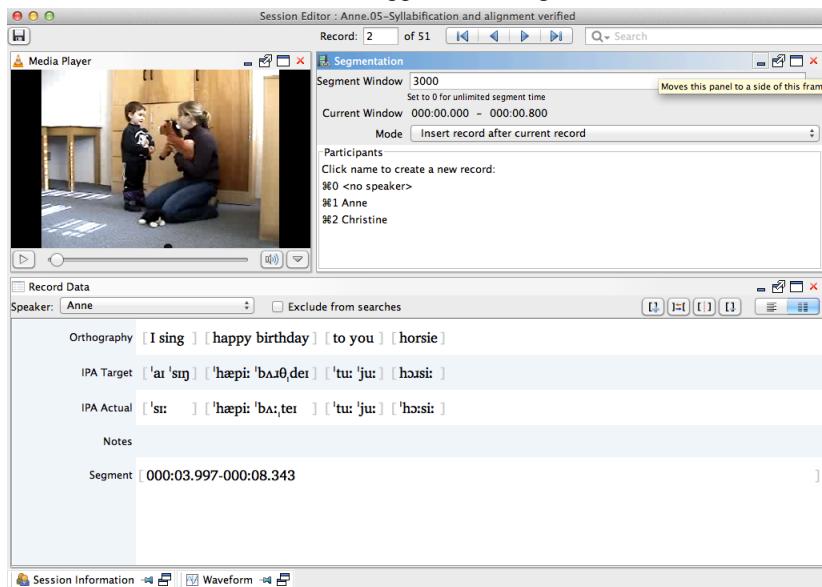

- To make a minimized view temporarily reappear, click on its name or icon.

When the focus is changed to another view (i.e. another view is selected), the view will return to its minimized position.


- Note:** To make the view retain its opened position when focus is lost, click the thumbtack button near the top right corner of the title bar. To deactivate this option, click the thumbtack again.
- To restore the minimized view to a normal position within the **Session Editor** frame, click the restore button near the top right corner (this button looks like two windows), or press **CTRL+N** when the view is in focus.  
The view will return to its previous docked position in the **Session Editor**, even if it was undocked when you minimized it.

### Relocate View

Move a view to a new position within the **Session Editor**.

From the **Session Editor** window:

- Click on the view's title bar and drag it to the desired location within the **Session Editor** window. As you drag the view, the **Session Editor** will show the alternate position of that view. When it appears as you wish, release the mouse button.

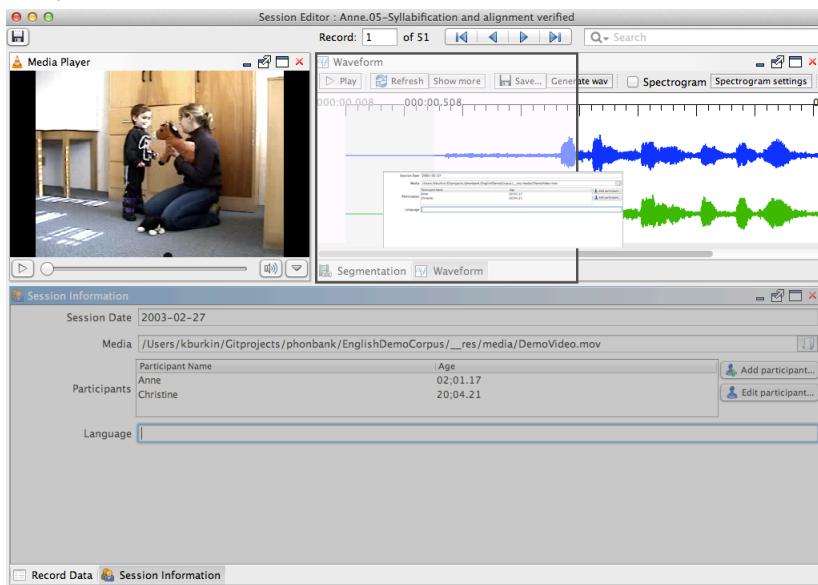

- Two or more views may occupy the same location in the **Session Editor**. To do so, drag and drop one view to the title bar of the other view.


You can switch between views in the same position by selecting the appropriate tab at the bottom of either view.

### Dock View

Return an undocked view to the **Session Editor** window.

From the **Session Editor** window, with a view undocked:

In the top right corner of the view, click the button that looks like a window with an inward arrow (on mouseover it will say **Connects this panel with the frame**). Alternately, select the title bar of the view and press **CTRL+N**.

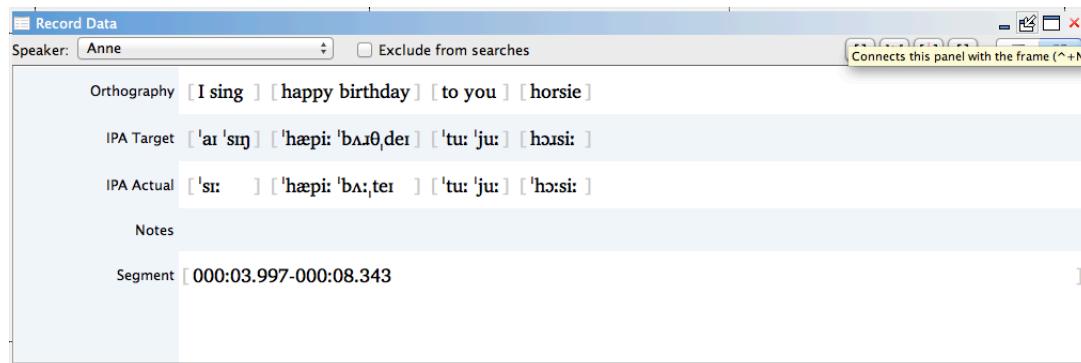

The view will reappear in the **Session Editor** window in its previous docked position.


- Note:** You may also click and drag the view's title bar to return it to the **Session Editor** window in a different position.

### Undock View

Disconnect or "undock" a view from the **Session Editor**, making it its own separate window.

From the **Session Editor** window, with the view you wish to undock open:

- In the top right corner of the view, click the button that looks like a window with an outward arrow (on mouseover it will say **Disconnects this panel from the frame**). Alternately, select the title bar of the view and press CTRL + E.

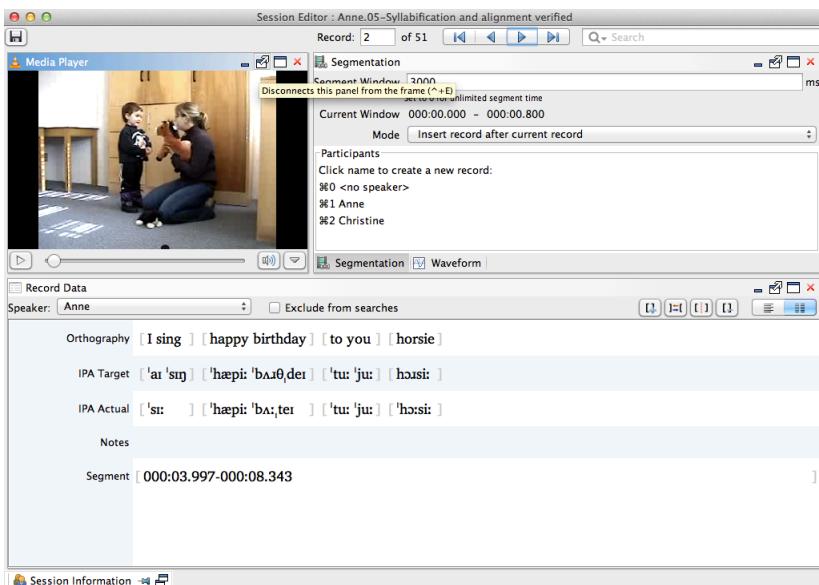

The view will appear as a separate window in front of the **Session Editor**.

- To move the view while it is undocked, click and drag on the small bar centred above the title bar. To resize the view, click and drag on any other edge or corner.  
The view will retain its undocked size and position when you exit and reopen *Phon*.

## About Editor Layouts

The **Session Editor** has several built-in view layouts to assist users in session-related tasks.

The following layouts are available:

- Default**

The default layout when you first open a session, corresponds to the **Segmentation** layout.

- Find & Replace**

This layout facilitates searching and replacing terms across multiple records in a session. It includes the **Media Player**, **Find & Replace**, **Tier Management**, and **Record Data** views.

- Segmentation**

Designed to facilitate media linkage and segmentation and other tasks in new sessions, this layout includes the **Media Player**, **Segmentation**, **Waveform**, **Record Data**, and **Session Information** views.

- Syllabification & Alignment**

This layout facilitates manual verification of syllabification and alignment data in a session. It includes the **Record Data**, **Syllabification & Alignment**, and **Waveform** views.

- Transcription**

This layout is designed to facilitate the transcription of records. It includes the **Media Player**, **Waveform**, and **Record Data** views; the **IPA Lookup** view is also included to streamline or automatize the transcription process.

- Validation**

The **Validation** layout is designed for validating blind transcriptions. It includes the **Media Player**, **IPA Validation**, and **Record Data** views, with **IPA Lookup** and **Waveform** minimized at the bottom. Note that the **IPA Validation** view will not display blind transcriptions when in *Blind mode*, so that one user's blind transcriptions will not influence the other's.

- *User-defined layouts*

Any layouts which have been created and saved by the user will be available at the bottom of the list of views.

- **Previous**

The previous user-defined layout is available here. User-defined layouts are automatically saved to **Previous** when the **Session Editor** window is closed.

### **Save Current Layout**

Save currently visible **Session Editor** layout for future use.

From the **Session Editor** window, with views arranged in desired format:

1. Click the **Select layout** button at the top left corner of the **Session Editor** window and choose **Save current layout...**, or select the **View > Save current layout...** menu item.  
A window will appear prompting you to give the layout a name.
2. Enter a name for the layout (usually reflective of the task you would use that layout to perform). Click **OK**, or click **Cancel** if you are unsure.  
The new layout will now be available in layout menus.

### **Delete Saved Layout**

Delete a user-created **Session Editor** layout.

From the **Session Editor** window:

1. Click the **Select layout** button at the top left of the **Session Editor** window and go to the **Delete layout** menu item, or go to the **View > Delete layout** menu, and select the layout you wish to delete.  
A confirmation dialog will appear, asking whether you wish to delete the layout.
2. If you are unsure whether you'd like to delete this layout, click **No**. Otherwise, click **Yes** to continue.  
The user-created layout will no longer appear in layout menus.

### **Change to Preset Editor Layout**

Quickly change the arrangement of views within the **Session Editor** to the default layout or to a previously saved layout.


From the **Session Editor**:

Click the **Select layout** button at the top left of the **Session Editor** window, or go to the **View > Load layout** menu and select the desired layout.

The views in the **Session Editor** will move to reflect the chosen layout.

## **View: Session Information**

The *Session Information* displays and edits the session date, media file, participant list, and language list for the session.

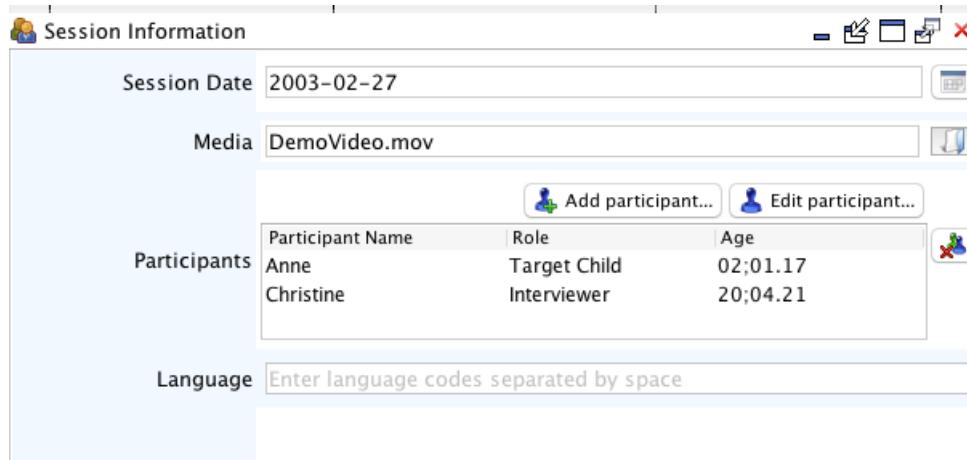

## Edit Session Date

Edit a session's date to reflect the date of its associated media recording.

From the **Session Information** view:

Click on the existing **Session Date** and type the new date over it.

Participants' ages will be calculated using their birthday and the session date.

## Link Media to Transcript

Link a media file to the corresponding session.

From the **Session Information** view:

1. Click on the **Browse** button to the right of the **Media** field.

A **Browse** window will appear allowing you to search your file system for the desired media file.

2. Locate and select the media file and click **Open**.

This action will return the user to the **Session Editor**, from which the **Media File** will be available.


 **Note:** The project resources folder is the default media location for an individual project ('`__res/media`'). Placing your media in this folder allows you to keep your project's media within the project folder, and allows *Phon* to display the media's filename in the **Session Information** view without specifying the full path to it.

 **Note:** You may set one or more default media folders in *Phon*. Media files stored in your default media folders can also be displayed without their full file path.

## About Participants

In the **Phon Session Editor**, the Participant(s) in a session may be specified and records may be associated with individual participants.

'Participant', in this case means a speaker in a research study. Often, only one target speaker is listed and transcribed as a participant in a session. However, there may be more than one target speaker per session, or it may be useful to have records that include the utterances of interlocutors for the purpose of establishing context for the target's utterances.

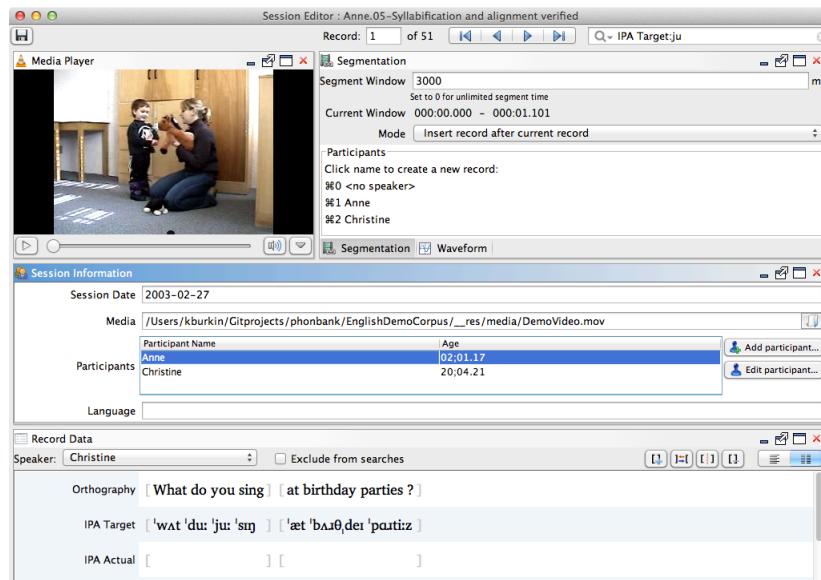

Associating an utterance with a speaker allows you to:

- study intra-speaker speech patterns and changes
- compare the patterns of multiple speakers
- compile several speakers' data together to make more generalizable observations.

Since a corpus often contains data mostly relevant to a specific participant, *Phon* allows users to specify one set of participants for an entire corpus, in what is known as a corpus template. See [Edit Corpus Template](#) on page 21 for instructions.

## Add Participant

Add a new participant to a session.

From the **Session Information** view:

1. Click the **Add Participant** button at the right of the **Participants** field.  
The **Edit Participant** window will appear.
2. Enter the participants *Name, Birthday, Language, Group, Gender, Education* and *Role*. Click **Ok**.

 **Note:** The age for each participant is calculated automatically based on the birth date and the session date.  
You must enter a birthday (or a best guess) such that the application will not calculate a negative age.

3. Repeat Steps 1 and 2 for each participant.

## Edit Participant

Edit a participant for a session.

From the **Session Information** view:

1. Select an existing participant's name and click the **Edit Participant** button to the right.  
The **Edit Participant** window will appear.
2. Edit the participant's **Name, Birthday, Language, Group, Gender, Education** and **Role** as you see fit and click **Ok**.  
Any changes to the participant's name or age will be reflected in the **Session Information** view.

## Input Session Language

The main language for each session can be specified in the **Language** field in **Session Information**.

From the **Session Information** view:

1. Select the **Tools > ISO-639-3 Language Codes** menu item for a list of the ISO-639-3 language codes.  
This will bring up the **ISO-639-3 Language Codes** window, which displays a list of languages and language codes which you can look through.  
 **Note:** By default, the list is organized by language code. To sort by language name, click on the **Language Name** column heading.
2. Find the desired language code. In the **Session Information** view, click in **Language** field and type language name or code.  
 **Note:** The search field in the **ISO-639-3 Language Codes** is case-sensitive.

## View: Tier Management

| Locked                   | Show Tier                           | Tier Name   | Grouped | Tier Font           |
|--------------------------|-------------------------------------|-------------|---------|---------------------|
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | Orthography | Yes     | Charis SIL-PLAIN... |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | IPA Target  | Yes     | Charis SIL-PLAIN... |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | IPA Actual  | Yes     | Charis SIL-PLAIN... |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | Notes       | No      | Charis SIL-PLAIN... |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | Segment     | No      | Charis SIL-PLAIN... |

### Create User Defined Tiers

Create a new user-defined tier.

From the Tier Management view:


1. Click on the **New tier** button in the top right corner of the view.  
This action will generate a dialog prompting you specify details about the new tier.
2. Enter a name for the new tier. If the new tier should be a group aligned tier, select the **Grouped (word-aligned)** check box. Select an appropriate font for the new tier, or click the **Use default font** button to choose the default editor font. Click **Ok**.

The new tier will show up at the bottom of each record.

The screenshot shows the Session Editor interface with two main windows open. On the left is the Media Player window, displaying a video of a child speaking. On the right is the Tier Management view, which is identical to the one shown above but includes a new row for a "User-defined tier". The "Tier Name" column shows "User-defined tier", the "Grouped" column has a checked checkbox, and the "Tier Font" column shows "Charis SIL-PLAIN...". Below the Tier Management view, the Session Editor's main workspace displays various tiers (Orthography, IPA Target, IPA Actual, Notes, Segment) and a "User-defined tier" entry, all corresponding to the video frame shown in the Media Player.

- To edit the font for a user-defined tier, select it from the list of tiers in the **Tier Management** view and click the **Edit tier...** button at the top right corner, or right-click on a tier and choose **Edit tier <tier name>**. Select the new font options and click **Ok**.

That tier will reflect your new font choice in the **Record Data** view.

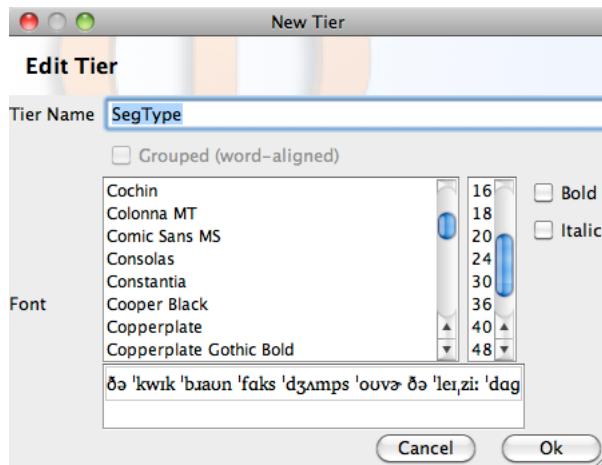

- Note:** To reset the tier font to the default, right-click (CTRL+click) on the tier and choose **Reset font** from the context menu.

### Remove User Defined Tiers

Remove an existing user-defined tier.

From the **Tier Management** view:

- Select an existing user defined tier and press **Delete** or **Backspace**, or right-click on a tier and choose **Delete tier <tier name>**.

This action will generate a dialog asking you to confirm that you would like to delete the tier and informing you that this action cannot be undone.

- Note:** Default *Phon* tiers (such as *Orthography*, *IPA Target*, *Notes*, etc.) cannot be deleted. If you do not wish to use one or more of these tiers, you can make them invisible following instructions at [Edit Tier Display Options](#) on page 39.

- If you are unsure about removing the tier, click **Cancel**. If you would like to continue and remove the tier and all its contents, click **Ok**.

The user defined tier will no longer appear in the **Tier Management** or **Record Data** views for this session.

### Edit Tier Display Options

Select which tiers are visible in **Record Data** and change the order in which they appear.

From the **Tier Management** view:

- Click on the check box to the left of each tier, under **Show Tier**, to select or de-select the tier for visualization. Selected tiers will be visible in the **Record Data** view, de-selected tiers will not be visible.

- Note:** To hide or show all tiers, use the **Hide all tiers/Show all tiers** button.

- Select any tier which you would like to reorder and use the green up and down arrows to the right of the tier names to change its position within the list.

The tiers will appear in the revised order in the **Record Data** view.

- Repeat Step 2 for any tiers you would like to reorder.

### Lock or Unlock Tiers

Lock or unlock tiers against editing.

From the **Tier Management** view:

To lock a tier, select the check box to the left of its name under the *Locked* column. To unlock a tier, de-select the check box.

Selected tiers will be locked against editing in the **Record Data** view.

 **Note:** To lock or unlock all tiers, use the **Lock all tiers/Unlock all tiers** button.

## View: Record Data

The record data view displays tier data for the current record.

### New Group

Add a new word group to a record.

From the **Record Data** view:

1. Position the cursor in the *Orthography* tier within a group.
2. Click the **New record after current** button in the **Record Data** view, or select the **View > Record Data > New record after current** (CMD/CTRL+G) menu item.  
A new group will be created after the current group.

### Merge Group

Merge multiple word groups into a single word group.

From the **Record Data** view:

1. Position the cursor inside a group in the *Orthography* tier which you would like to merge with a following group.
2. Click the **Merge group with next** button in the **Record Data** view, or select the **View > Record Data > Merge group with next** (OPT/ALT+G) menu item.  
The adjacent groups will be merged into a single group, with a space between the original contents.

### Split Group

Split the contents of a group.

From the **Record Data** view:

1. Position the cursor inside a group in the *Orthography* tier where the group should be split (at or after a space between words).

2. Click the **Split group** button in the **Record Data** view, or select the **View > Record Data > Split group** (OPT / ALT+K) menu item.  
The group data will be split into two separate groups. If only one word was present in the group, an empty preceding group will be created. Only data in the *Orthography* tier will be divided. Other grouped tiers may require manual editing.

### Delete Group

Delete a word group.

From the **Record Data** view:

1. Position the cursor inside a group in the *Orthography* tier that you wish to delete.
2. Click the **Delete current group** button in the **Record Data** view, or select the **View > Record Data > Delete current group** (OPT / ALT + Shift + CMD + G) menu item.  
The selected group will be deleted, including all data in aligned groups.

### Exclude Records

Exclude selected records from queries.

From the **Record Data** view, with the record you wish to exclude focused:

Select the check box to the right of the speaker's name.

When running a query, this record will be excluded from the search.

-  **Note:** To include previously excluded records in a session level query, from the **Query** view, select the **Include excluded records** check box.

### Transcribe Data

Transcribe data from the media file.

With the **Media Player** open, from the **Record Data** view:


1. Click on the play button to the left of the *Segment* tier (CMD / CTRL + R) and type or use the **IPA Map** to enter the utterance into the *Orthography* tier.
2. Click on the *Orthography* tier and add word groups for each word by clicking **New group after current**. This will generate corresponding word groups in the *IPA Target* and *IPA Actual* tiers as well as any other group-aligned tiers.
3. If you wish to use built-in dictionaries of pronounced forms, select the **View > IPA Lookup** menu item. Otherwise, type or use the **IPA Map** to enter the *IPA Target* and *IPA Actual* transcriptions into the fields with the same name.  
If you use **IPA Lookup**, a new view will appear with two tabs: **Record Lookup** and **Console**. **Record Lookup** is focused by default.

-  **Note:** To change dictionary language, click on the **IPA Dictionary** menu in the **IPA Lookup** view and select desired dictionary (listed by ISO-639-3 Language Code, see [Input Session Language](#) on page 37 for instructions for viewing the codes list). Language preferences may also be changed in the **Preferences** dialog.

4. In **Record Lookup**, choose whether to **Overwrite** existing transcriptions, and select whether to transcribe **IPA Target** or **IPA Actual** by clicking on the check boxes.

5. Click **Set** to the right of the utterance in **Record Lookup** to transcribe the record as shown, or click the **Set** button next to an individual group to transcribe only that group.  
 The selected transcription will appear in the *IPA Target* and/or *IPA Actual* tiers.

 **Note:** If there is more than one transcription available in the selected dictionary for a word, there will be multiple entries listed in the **Record Lookup**. Select the desired transcription by clicking on it before you **Set** the group or utterance.

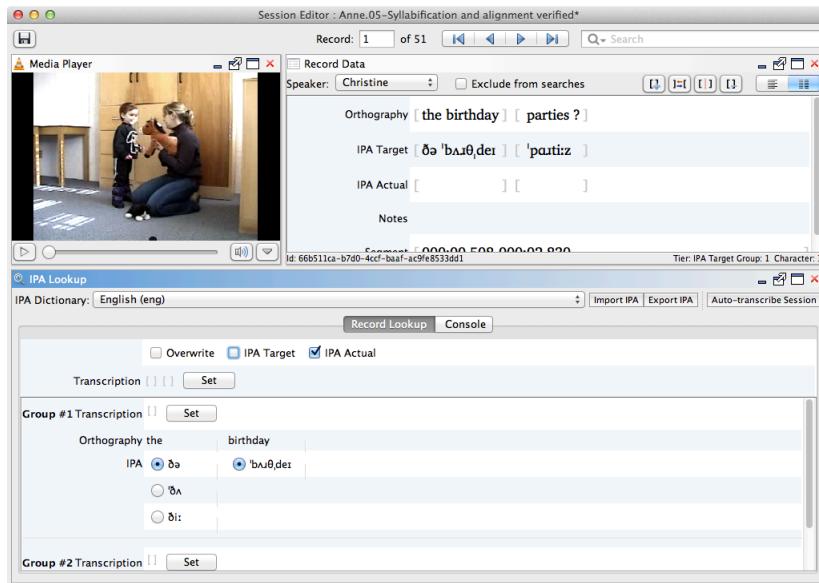

6. You may further modify any transcriptions in the *IPA Target* and *IPA Actual* fields by typing or using the **IPA Map**.

### About Boundaries and Pauses

There are three types of boundary markers that are supported in *Phon* transcriptions:

**Table 2: Boundary Markers**

| Character | Name  | Meaning           |
|-----------|-------|-------------------|
| .         | Dot   | Syllable boundary |
|           | Space | Word boundary     |
| +         | Plus  | Compound word     |

If there is a noticeable pause in the transcribed utterance, these transcription codes are also available:

**Table 3: Pauses**

| Code  | Meaning                           |
|-------|-----------------------------------|
| (.)   | Short pause between words         |
| (..)  | Medium-length pause between words |
| (...) | Long pause between words          |
| ^     | Pause within a word               |

## View: Syllabification & Alignment

The screenshot shows the 'Syllabification & Alignment' view in Phon. At the top, there are several checkboxes: 'Syllabifier Settings' (unchecked), 'Target Syllables' (checked), 'Actual Syllables' (checked), 'Alignment' (checked), and 'Color in alignment' (unchecked). Below these are three sections: 'Target Syllables', 'Actual Syllables', and 'Alignment'. Each section displays a sequence of IPA phones in colored boxes. In the 'Target Syllables' section, the first phone 's' is green, while others are blue. In the 'Actual Syllables' section, the first phone 's' is red, while others are blue. In the 'Alignment' section, the phones are grouped into syllables, with some phones in red boxes and others in blue boxes, showing the alignment between target and actual syllables.

### About Syllabification

In the **Syllabification & Alignment** view, the syllable position for each phone in *IPA Target* and *IPA Actual* is displayed.

A number of syllable positions are available, including appendices, onsets, nuclei and codas. Each different phone position is displayed in a distinct color.

Syllabification plays a role in *Phon* Queries; it allows a user to search for a phone in a specific syllable position. For example, phonetic or phonological processes which only occur in onsets may be observed by focusing specifically on consonants in onset positions.

*Phon* will automatically syllabify transcriptions in the *IPA Target* and *IPA Actual* tiers, using any one of its built-in syllable templates (based on syllable structure of the following languages):

- Berber
- Catalan
- Cree
- Dutch
- English
- French
- Gurindji
- Italian
- Portuguese (European)
- Spanish
- Vietnamese

The syllabifier language for a project can be chosen from the **Preferences** dialog. Also, the syllabifier for an individual record may be changed by right-clicking (CTRL+click) on that record's *Target Syllables* or *Actual Syllables* in the **Syllabification & Alignment** view and choosing **Syllabify with > <Language name>** (the current default syllabifier is highlighted in bold in this menu).

**Note:** When faced with irregular utterances or transcriptions, *Phon* may make errors in syllabification. It is important to perform a visual verification of the syllabification of transcriptions in your project in order to ensure that Queries including syllabification information will return accurate results.

## Verify Alignment

Check to ensure proper alignment between *IPA Target* and *IPA Actual* phones.

In order for the Alignment module to work, the *IPA Target* and/or *IPA Actual* transcriptions must be completed (verified in the case of blind transcriptions) and saved. From the **Syllabification & Alignment** view:


1. Select any phone in the *Alignment* tier which does not appear to be properly aligned. An outline will appear around the phone in question.
2. Use OPT/ALT+left/right arrows to move the phone into proper alignment. Alternately, click and drag a phone to re-align it.
3. Use OPT/ALT+up/down arrows to alternate phone selection between Target phones and Actual phones. Repeat Step 2 until all phones are aligned to your satisfaction.

## About Alignment

Displayed in the **Syllabification & Alignment** view, the **Alignment** tier allows a comparison to be made between target (model) forms of utterances and their actual (spoken) realizations.

Alignment is visualized in *Phon* as an arrangement of transcribed phones from *IPA Actual* lined up underneath phones from *IPA Target*. *Phon* makes a comparison between the number, order, and features of target phones and actual phones, in order to determine what phonetic information may have been lost, retained, or added in production.

 **Note:** To include syllabification visualization in the *Alignment* tier, select **Color in alignment** in the **Syllabification & Alignment** view.

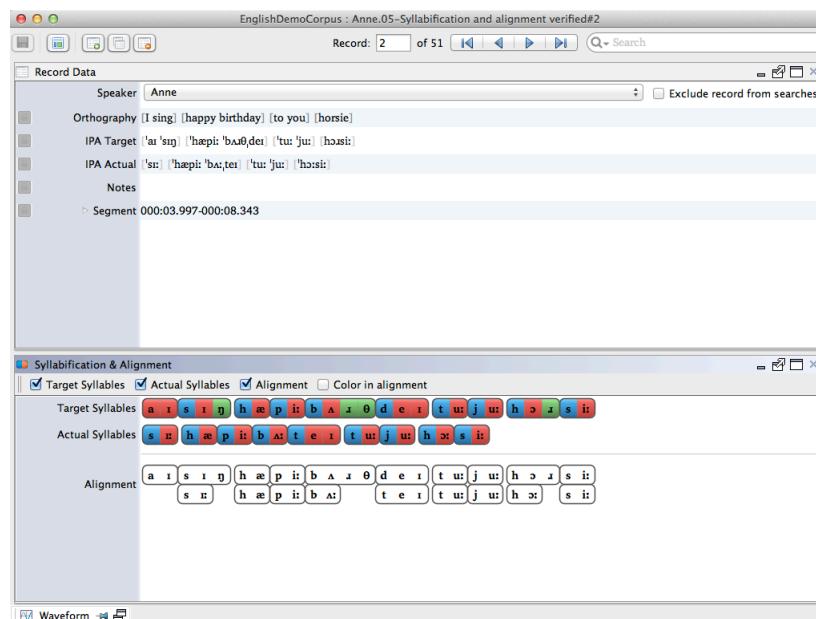

This comparison is important for a number of query scripts in *Phon*, such as **Phones**, **Metathesis**, and **Harmony**. These queries require information from both the *IPA Target* and *IPA Actual* tiers, and how the two tiers relate.

 **Note:** When faced with irregular utterances or transcriptions, *Phon* may make errors in alignment. It is important to perform a visual verification of the alignment of transcriptions in your project in order to ensure that queries including alignment information will return accurate results.

## Verify Syllabification

Check to ensure proper syllabification of *IPA Target* and *IPA Actual* phones.

In order for the Syllabification module to work, the *IPA Target* and/or *IPA Actual* transcriptions must be completed (verified in the case of blind transcriptions) and saved. From the **Syllabification & Alignment** view:

1. Visually observe the syllabification for each record to determine whether phones are properly syllabified in the *Target Syllables* and/or *Actual Syllables* tier(s).

2. Right click (CTRL+click) on any phone which appears to be improperly syllabified and select the proper syllable constituent from the context menu. Alternately, select the phone in question and type the character underlined in the list below for the proper syllable constituent.
    - Left Appendix
    - Onset
    - Nucleus
    - Coda
    - Right Appendix
    - OEHS (Onset of an Empty-Headed Syllable)
    - Ambisyllabic
    - Unknown
-  **Note:** When a transcription contains a sequence of two or more vowels in a row, the Toggle Hiatus option becomes available. This allows the vowels to be either included in the same or separate nuclei.

## View: IPA Validation

### About Blind Transcription

Due to the subjective nature of phonetic transcription (where measurement and verification of all relevant segments may not be feasible), *Phon* has a built-in system for performing multiple-blind transcriptions.

In a multiple-blind transcription process, records are transcribed by any number of separate users, who do not see each other's transcriptions. These separate transcriptions may then be resolved by an objective party, who can choose one over the other or compare them to reach a consensus transcription.

A typical example of multiple-blind transcription in *Phon* may proceed as follows:

- Two users perform separate blind transcriptions of all records in one session (see [Open Session: Blind Transcription](#) on page 22 for instructions).
- A team of two different users review both sets of blind transcriptions together, while listening to each record.
- For each record, this team does one of three things:
  - chooses the best of the two transcriptions
  - combines both transcriptions to reach a consensus
  - creates an alternate transcription which they agree upon (in extreme cases in which both blind transcriptions seem to be in error).

The transcription which is settled upon is entered into the **IPA Target** or **IPA Actual** field, and can be analyzed accordingly by project researchers, who will now have access to the best and most objective transcriptions possible.

### Validate Blind Transcriptions

Validate completed blind transcriptions.

From the **Project Manager**:

1. Ensure that the **Blind transcription** check box is de-selected and double-click on the session that you would like to validate.  
This will open the **Session Editor** for the specific session.
2. Select the **View > IPA Validation** menu item.  
The **IPA Validation** view will open, with two tiers: *IPA Target Validation* and *IPA Actual Validation*.
3. For each group in the tier(s) you are validating, select the most accurate transcription for that group and click **Set**. Alternately, select the most accurate transcription for all groups in a tier and click **Validate <tier>**.  
The chosen transcriptions will appear in the appropriate tier in the **Record Data** view.
4. From the *IPA Target* and *IPA Actual* tiers, transcriptions can be further modified as the validator sees fit, by typing or by using the **IPA Map** (CMD/CTRL+M).
5. Repeat Steps 3 and 4 until validation has been completed for the entire session.

## Auto-Validate Blind Transcriptions

Automatically validate completed blind transcriptions.

From the **Project Manager**:

1. Ensure that the **Blind transcription** check box is deselected and double-click on the session that you would like to validate.

This will open the **Session Editor** for the specific session.

2. Open the **IPA Validation** view and click the **Auto validate** button at the top.

This will open the **Auto-validate Session** dialog.

3. In the **Tiers** field, choose whether to **Auto-validate IPA Target** and/or **Auto-validate IPA Actual** by selecting the check boxes. Also choose whether to overwrite existing data present in the selected tiers by selecting the **Overwrite existing data** check box.


 **Note:** By default, auto-validation will not overwrite data already present in the selected tier(s). The purpose of this is to preserve any transcription which was entered in default mode, or chosen in earlier validations.

4. In the **IPA Selection** field, select a preferred transcriber.

In the event that there is more than one blind transcription for the selected tier in a single record, this transcriber's input will be chosen to fill the tier.

5. In the **Record Selection** field, choose whether to validate **All records**, **Specific records**, **Records for participant(s)**, or **Records from search results**.

 **Note:** If you choose to validate only specific records, you will have to specify the relevant record numbers. To specify several individual record numbers, separate them with a comma and a space. To specify a range, separate the beginning and end record numbers with two periods and a space. If you choose to validate records for specific participants, you must select the participants from the list. If you choose the validate records from search results, you must select a past search from the list.

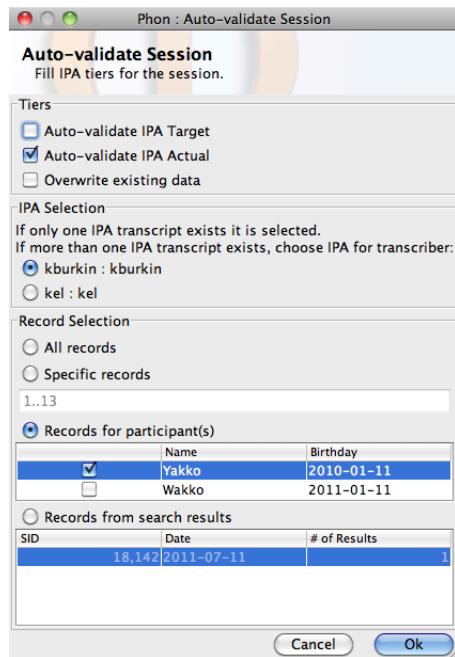

6. When you have selected the appropriate validation options, click **Ok**.

A dialog will appear asking you confirm that you want to auto-validate the selected IPA Tiers and informing you that this action is not undoable. If you are unsure, click **Cancel**. To continue with the auto-validation, click **Ok**.

## View: Media Player

The *Media Player* view allows for playback of session media using VLC.



## About Media

Sessions in *Phon* usually consist of a media recording (either audio or video) coupled with transcriptions of utterances from the recording and separated into *Records*. Each *Record* can be associated via a process called segmentation to the time in the recording during which the utterance occurred.

To facilitate the segmentation and transcription of media files, *Phon* has a built-in media player. This player is available in the **Media Player** view. To use the media player, you must first have a media file linked to your session (see [Link Media to Transcript](#) on page 36 for instructions).

### Basic Media functions:

- **Play**  
To play your media, click the play button in the **Media Player** view.
- **Volume and Muting**  
To change the volume of playback, click the **Volume** button to the right of the media progress slider, move the volume slider to the desired level (or click the **Toggle mute** button) and then click away from the volume area.
- **Jump playback to another time**  
To change playback time, click on the desired position on the media progress slider. To jump to a specific playback time see .

Other media-related functions include creating and exporting media segments, adjusting segment times, viewing a waveform of a segment's audio, and taking snapshots of your media.

### Open Media

Open a media file which has already been linked to a session.

From the **Session Editor** window:

Choose the **View > Media Player** menu item.  
The **Media Player** view will appear.

### Go to a Specific Playback Time

Jump to a specific playback time (either user-specified, at the end of segmented media, or at the end of the last segment for a certain speaker).

From the **Media Player** view:

1. Click on the context menu in the bottom right corner.
2. • To go to a user-specified playback time, choose **Go to...** and type over the displayed time value.  
• To go to the end of the last segment in your session, choose **Go to end of segmented media**.  
• To go to the end of the last segment for a particular speaker, choose **Go to end of last segment for <speaker name>**.

### **Move Media Position with Record**

Choose whether the current media position should move to align with the start of each segment as you navigate between records.

From the **Media Player** view:

Click the context menu in the bottom right corner and select or deselect **Move media position with record**. When this option is selected, the position marker on the **Media Player** will jump to the beginning of each record to which you navigate in the **Session Editor**.

### **Play Adjacency Sequence**

Play the current record and the following one, regardless of **Speaker**.

From the **Media Player** view:

Click the context menu in the bottom right corner and choose **Play adjacency sequence**. The current record's segment and the following record's segment will be played.

### **Play Current Segment**

Play the media segment specified in the currently visible record.

With the **Media Player** open:

Click the **Play** button next to the *Segment* tier in the **Record Data** view (CMD/CTRL+R). Alternately, click on the context menu in the bottom right corner of the **Media Player** and select **Play current segment**.

### **Play Current Speech Turn**

Play adjacent utterances produced by the current speaker, starting with the current record.

From the **Media Player** view:

Click the context menu in the bottom right corner and choose **Play current speech turn**. The current record will be played, followed by subsequent adjacent records by the same speaker.

### **Play Custom Segment**

Play a user-defined segment of your media file.

From the **Media Player** view:

1. Click the context menu in the bottom right corner and choose **Play custom segment**.
2. Select either **Current segment**, **Speaker turn**, **Adjacency sequence**, **Record range**, or **Specific range**. If you choose **Specific range**, type over the segment values to customize the segment. If you choose **Record range**, click and drag the arrows along the slider to specify a range of records (e.g. records 7 to 9).

 **Note:** It may be useful to click one of the first four segment types before selecting **Specific range**; the previously selected segment type will appear in the range window and you can adjust it from there.

3. Click **Play** to play the specified segment, or click **Close** to cancel.

### **Export Media from Media Player**

Export clips of your media file from the **Media Player** view.

A media file must be linked to your session.

From the **Media Player** view:

1. Click the arrow at the bottom right of the media field.

This will open a context menu with the options **Take snapshot**, **Export media...**, **Go to...**, **Go to end of segmented media**.



**Note:** If you wish to export the segment for a particular record, this record must be displayed in **Record Data**.

2. Click the **Export media...** menu item.

This will bring you to the **Export Media** window.

3. Select the destination directory for your exported media clip. To do so, click the **Browse** button to the right of the **Output file** field. Specify file name and location for your clip and click **Save**.  
The directory and file name you chose will appear in the **Output file** field.

**Note:** By default, your media clip will save in <project\_name>/\_\_res/media/segments/.

4. Specify *Extract segment*, *Include video*, *Include audio*, and *Other arguments* details and click **Next**.  
This action will activate the export.

**Note:** If you choose not to *Extract segment*, the entire media file will be exported.

5. Once the *PhonWorker shutdown* alert appears at the bottom of the **Export media** window, click the **Close** button.  
Your media clip will be exported to the specified directory.

### Take Snapshot of Media

Take a snapshot of linked media at the current viewpoint.

From the **Media Player** view, with media open:

1. Click on the arrow to the bottom right of your media and choose the **Take snapshot** option from the context menu.

A **Save As** window will appear.


2. Choose a file name and destination directory for your snapshot and click **Save**.

An image of the current frame of your media will be created in the specified location.

**Note:** The image will have the same dimensions as the original video file; the size of the video in the **Media Player** view is irrelevant.

### View: Speech Analysis

The *Speech Analysis* view displays the waveform, spectrogram, and *TextGrid* for the session.

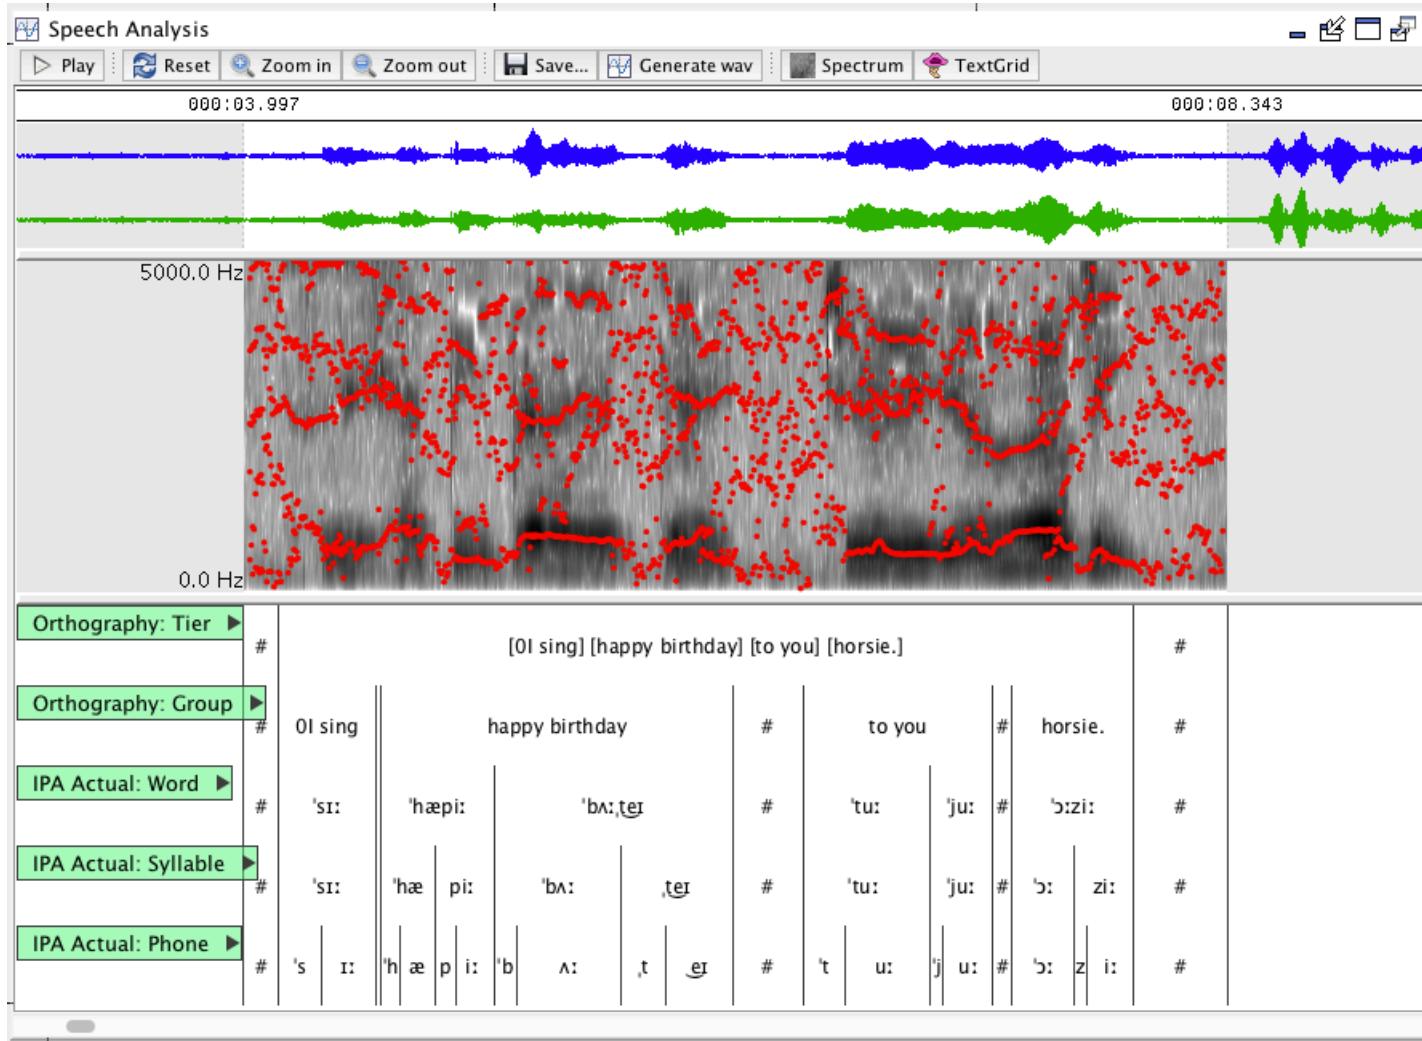

## Waveform

View the speech analysis view for a particular segment.

From the Session Editor:

1. Select the **View > Speech Analysis** menu item.

The waveform will appear.

**Note:** The **Speech Analysis** view displays a buffer of 500ms on either end of each segment. This allows you to expand the segment when adjusting from the **Speech Analysis** view. To view a larger portion of the waveform, click **Show More**. This extends the displayed interval by one second on each side. To redisplay the 500ms buffer, click **Refresh**.

2. To play back the entire waveform, click the **Play** button inside the **Speech Analysis** view. To play back a portion of the segmented audio, highlight that portion in the waveform. Click on the **Play** button inside the **Speech Analysis** view (CMD/CTRL+Shift+R).

The sound will play with the cursor following the corresponding portion of the waveform.

**Note:** If your media is not in **.wav** format, the first time you open the **Speech Analysis** view with your media linked, you will see a message in the **Speech Analysis** view saying "Audio file not found. Click here to create." Click on this message to export an audio-only version of your media to the project resources folder. The **Speech Analysis** view will access this file to draw the waveform.


**Note:** You may generate a **.wav** version of your media file at any time, by clicking the **Generate wav...** button.

## Adjust Segment Start and End Times

Adjust segment start and end times to refine segments.

From the **Speech Analysis** view:

1. Click the **Play** button (CMD/CTRL+Shift+R).  
This action will replay the segment for the displayed record.
2. Select a portion of the waveform for your revised segment and press **Enter**. Alternately, typeover the existing time values in the **Record Data** view with revised values and click the **Refresh** button in the top left area of the **Speech Analysis** view.

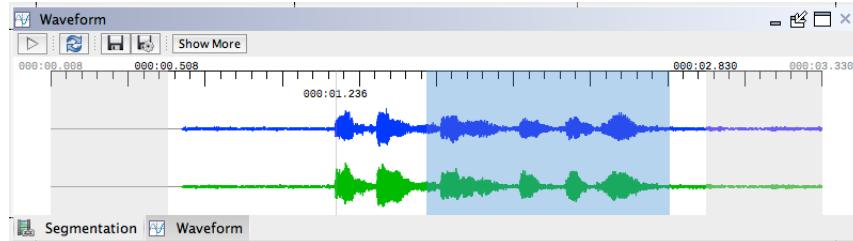

This action will adjust your segment start and end times.

**Note:** To view a larger portion of the waveform, click **Show More**. This extends the displayed interval by one second on each side. To redisplay the 500ms buffer, click **Refresh**.

3. If you would like to listen to or further revise the segments, repeat steps 1 and 2.

## Export Audio from Speech Analysis

Export the current audio (.wav) segment from the **Speech Analysis** view.

A media file must already be linked to the session and segmented.

From the **Speech Analysis** view:

1. Click the **Save...** button inside the **Speech Analysis** view.  
A **Browse** window will appear prompting you to choose a save location for your segment.
2. Specify a filename for the segment, navigate to the appropriate save location in the **Browse** window, and click **Save**.  
A .wav audio file of the current segment will be created at the specified file location.

## Spectrogram Tier

The Spectrogram tier for Phon allows for visualization of the segment spectrogram, formants, pitch, and intensity from within Phon's Session Editor window. To display the Spectrogram view choose **Show Spectrogram** from the **Praat** menu in the Speech Analysis view. Options for toggling the display of formant, pitch and intensity data can also be found in the **Praat** menu.

### Spectrogram Settings

Configuring the spectrogram.

Adapted from [http://www.fon.hum.uva.nl/praat/manual/Intro\\_3\\_2\\_\\_Configuring\\_the\\_spectrogram.html](http://www.fon.hum.uva.nl/praat/manual/Intro_3_2__Configuring_the_spectrogram.html)

#### Max Frequency (Hz)

the range of frequencies to display. The standard is 0 Hz at the bottom and 5000 Hz at the top. If this maximum frequency is higher than the Nyquist frequency of the Sound (which is half its sampling frequency), some values in the spectrogram will be zero, and the higher frequencies will be drawn in white. You can see this if you record a Sound at 44100 Hz and set the view range from 0 Hz to 25000 Hz.

#### Window length

the duration of the analysis window. If this is 0.005 seconds (the standard), Praat uses for each frame the part of the sound that lies between 0.0025 seconds before

and 0.0025 seconds after the centre of that frame (for Gaussian windows, Praat actually uses a bit more than that). The window length determines the *bandwidth* of the spectral analysis, i.e. the width of the horizontal line in the spectrogram of a pure sine wave (see below). For a Gaussian window, the -3 dB bandwidth is  $2\sqrt{6\ln(2)}/(\pi \cdot \text{Window length})$ , or 1.2982804 / *Window length*. To get a 'broad-band' spectrogram (bandwidth 260 Hz), keep the standard window length of 5 ms; to get a 'narrow-band' spectrogram (bandwidth 43 Hz), set it to 30 ms (0.03 seconds). The other window shapes give slightly different values.

#### **Dynamic range (dB)**

All values that are more than *Dynamic range* dB below the maximum will be drawn in white. Values in-between have appropriate shades of grey. Thus, if the highest peak in the spectrogram has a height of 30 dB/Hz, and the dynamic range is 50 dB (which is the standard value), then values below -20 dB/Hz will be drawn in white, and values between -20 dB/Hz and 30 dB/Hz will be drawn in various shades of grey.

#### **Window shape**

the shape of the analysis window. To compute the spectrum at, say, 3.850 seconds, samples that lie close to 3.850 seconds are given more weight than samples further away. The relative extent to which each sample contributes to the spectrum is given by the window shape. You can choose from: Gaussian, Square (none, rectangular), Hamming (raised sine-squared), Bartlett (triangular), Welch (parabolic), and Hanning (sine-squared). The Gaussian window is superior, as it gives no *sidelobes* in your spectrogram (see below); it analyzes a factor of 2 slower than the other window shapes, because the analysis is actually performed on twice as many samples per frame.

#### **Time step**

the maximum number of points along the time window for which Praat has to compute the spectrum. If your screen is not wider than 1200 pixels, then the standard of 1000 is appropriate, since there is no point in computing more than one spectrum per one-pixel-wide vertical line. If you have a really wide screen, you may see improvement if you raise this number to 1500.

#### **Frequency step**

the maximum number of points along the frequency axis for which Praat has to compute the spectrum. If your screen is not taller than 768 pixels, then the standard of 250 is appropriate, since there is no point in computing more than one spectrum per one-pixel-height horizontal line. If you have a really tall screen, you may see improvement if you raise this number.

#### **Window shape**

the shape of the analysis window. To compute the spectrum at, say, 3.850 seconds, samples that lie close to 3.850 seconds are given more weight than samples further away. The relative extent to which each sample contributes to the spectrum is given by the window shape. You can choose from: Gaussian, Square (none, rectangular), Hamming (raised sine-squared), Bartlett

(triangular), Welch (parabolic), and Hanning (sine-squared). The Gaussian window is superior, as it gives no *sidelobes* in your spectrogram (see below); it analyzes a factor of 2 slower than the other window shapes, because the analysis is actually performed on twice as many samples per frame.

#### **Preemphasis (dB/octave)**

determines the steepness of a high-pass filter, i.e., how much the power of higher frequencies will be raised before drawing, as compared to lower frequencies. Since the spectral slope of human vowels is approximately -6 dB per octave, the standard value for this setting is +6 dB per octave, so that the spectrum is flattened and the higher formants look as strong as the lower ones. When you raise the preemphasis, frequency bands above 1000 Hz will become darker, those below 1000 Hz will become lighter.

#### **Dynamic compression**

determines how much stronger weak spectra should be made before drawing. Normally, this parameter is between 0 and 1. If it is 0 (the standard value), there is no dynamic compression. If it is 1, all spectra will be drawn equally strong, i.e., all of them will contain frequencies that are drawn in black. If this parameter is 0.4 and the global maximum is at 80 dB, then a spectrum with a maximum at 20 dB (which will normally be drawn all white if the dynamic range is 50 dB), will be raised by  $0.4 * (80 - 20) = 24$  dB, so that its maximum will be seen at 44 dB (thus making this frame visible).

### **List Formants**

List formant values from the **Speech Analysis** view.

A listing of formants can be obtained from the **Speech Analysis** view. To print a formant listing use the following procedure.

1. (Optional) Make a selection in the **Speech Analysis** view.
2. From the **Praat** menu in the **Speech Analysis** view, select **Formant listing**.
3.  **Note:** Options for formant listings can be changed through the **Formant settings** window.

The list of formants will be displayed in a new **Buffers** window for the audio segment/selection.

### **Formant Settings**

Settings for Formant analysis.

Adapted from [http://www.fon.hum.uva.nl/praat/manual/Sound\\_To\\_Formant\\_burg\\_\\_.html](http://www.fon.hum.uva.nl/praat/manual/Sound_To_Formant_burg__.html)

The **Formant settings** window can be opened by choosing **Formant settings...** from the **Praat** menu in the **Speech Analysis** view of the **Session Editor** window.

#### **Time step (s)**

the time between the centres of consecutive analysis frames. If the sound is 2 seconds long, and the time step is 0.01 seconds, there will be approximately 200 analysis frames.

#### **Maximum number of formants**

for most analyses of human speech, you will want to extract 5 formants per frame. This, in combination with the **Maximum formant** setting, is the only way in which this procedure will give you results compatible with how people tend to interpret formants for vowels, i.e. in terms

of vowel height (F1) and vowel place (F2). Otherwise, the **Maximum number of formants** can be any multiple of 0.5, you can choose 4, 4.5, 5, 5.5, 6, and so on.

#### **Maximum formant (Hz)**

the ceiling of the formant search range, in hertz. It is crucial that you set this to a value suitable for your speaker. The standard value of 5500 Hz is suitable for an average adult female. For a male, use 5000 Hz; if you use 5500 Hz for an adult male, you may end up with too few formants in the low frequency region, e.g. analysing an [u] as having a single formant near 500 Hz whereas you want two formants at 300 and 600 Hz. For a young child, use a value much higher than 5500 Hz, for instance 8000 Hz (experiment with it on steady vowels).

#### **Window length (s)**

the effective duration of the analysis window, in seconds. The actual length is twice this value, because Praat uses a Gaussian-like analysis window with sidelobes below -120 dB. For instance, if the **Window length** is 0.025 seconds, the actual Gaussian window duration is 0.050 seconds. This window has values below 4% outside the central 0.025 seconds, and its frequency resolution (-3 dB point) is  $1.298 / (0.025 \text{ s}) = 51.9 \text{ Hz}$ , as computed with the formula given at [Sound: To Spectrogram....](#). This is comparable to the bandwidth of a Hamming window of 0.025 seconds, which is  $1.303 / (0.025 \text{ s}) = 52.1 \text{ Hz}$ , but that window (which is the window most often used in other analysis programs) has three spectral lobes of about -42 dB on each side.

#### **Pre-emphasis from (Hz)**

the +3 dB point for an inverted low-pass filter with a slope of +6 dB/octave. If this value is 50 Hz, then frequencies below 50 Hz are not enhanced, frequencies around 100 Hz are amplified by 6 dB, frequencies around 200 Hz are amplified by 12 dB, and so forth. The point of this is that vowel spectra tend to fall by 6 dB per octave; the pre-emphasis creates a flatter spectrum, which is better for formant analysis because we want our formants to match the local peaks, not the global spectral slope.

#### **Dot size**

Size of formant dots in the display. Use increments of .5 (e.g., 1.5, 2, 2.5, etc.).

Settings for formant listings:

##### **Include num formants**

Include number of formants column

##### **Include intensity**

Include intensity column

##### **Include bandwidths**

Include a bandwidth column for each formant

##### **List Intensity**

List intensity values from the **Speech Analysis** view.

A listing of intensity values can be obtained from the **Speech Analysis** view. To print intensity values use the following procedure.

1. (Optional) Make a selection in the **Speech Analysis** view.
2. From the **Praat** menu in the **Speech Analysis** view, select **Intensity Listing**.

3.  **Note:** Options for intensity listings can be changed through the **Intensity settings** window.

The list of formants will be displayed in a new **Buffers** window for the audio segment/selection.

### Intensity Settings

Configuring the intensity contour

Adapted from [http://www.fon.hum.uva.nl/praat/manual/Sound\\_To\\_Intensity\\_\\_.html](http://www.fon.hum.uva.nl/praat/manual/Sound_To_Intensity__.html)

#### Minimum pitch (Hz)

the minimum periodicity frequency in your signal. If you set it too high, you will end up with a pitch-synchronous intensity modulation. If you set it too low, your intensity contour may appear smeared, so you should set it as high as allowed by the signal if you want a sharp contour.

#### Time step (s)

the time step of the resulting intensity contour. If you set it to zero, the time step is computed as one quarter of the effective window length, i.e. as  $0.8 / (\text{minimum\_pitch})$ .

#### Subtract mean

Modify the intensity value at a time point is computed by subtracting the mean pressure around this point, and then applying the Gaussian window.

### List Pitch

List pitch values from the **Speech Analysis** view.

A pitch listing can be obtained from the **Speech Analysis** view. To print a pitch listing use the following procedure.

1. (Optional) Make a selection in the **Speech Analysis** view.
2. From the **Praat** menu in the **Speech Analysis** view, select **Pitch listing**.
3.  **Note:** Options for pitch listings can be changed through the **Pitch settings** window.

The list of pitch values will be displayed in a new **Buffers** window for the audio segment/selection.

### Pitch Settings

Configuring the pitch contour.

Adapted from [http://www.fon.hum.uva.nl/praat/manual/Sound\\_To\\_Pitch\\_ac\\_\\_.html](http://www.fon.hum.uva.nl/praat/manual/Sound_To_Pitch_ac__.html) and [http://www.fon.hum.uva.nl/praat/manual/Sound\\_To\\_Pitch\\_cc\\_\\_.html](http://www.fon.hum.uva.nl/praat/manual/Sound_To_Pitch_cc__.html)

The **Pitch settings** window can be opened by choosing **Pitch settings...** from the **Praat** menu in the **Speech Analysis** view of the **Session Editor** window. The behaviour of the *Time step* and *Pitch floor* parameters differ depending on the choice of Auto-correlation or Cross-correlation.

Sound to Pitch (Auto-correlate)

#### Time step (s) (standard value: 0.0)

the measurement interval (frame duration), in seconds. If you supply 0, Praat will use a time step of  $0.75 / (\text{pitch floor})$ , e.g. 0.01 seconds if the pitch floor is 75 Hz; in this example, Praat computes 100 pitch values per second.

#### Pitch floor (Hz) (standard value: 75 Hz)

candidates below this frequency will not be recruited. This parameter determines the effective length of the analysis window: it will be 3 longest periods long, i.e., if the pitch floor is 75 Hz, the window will be effectively  $3/75 = 0.04$  seconds long.

Sound to Pich (Cross-correlate)

#### Time step (s) (standard value: 0.0)

the measurement interval (frame duration), in seconds. If you supply 0, Praat will use a time step of  $0.25 / (\text{pitch floor})$ , e.g. 0.0033333 seconds if the pitch floor is 75

**Pitch floor (Hz) (standard value: 75 Hz)**

**Note:** Note that if you set the time step to zero, the analysis windows for consecutive measurements will overlap appreciably: Praat will always compute 4 pitch values within one window length, i.e., the degree of *oversampling* is 4.

**Very accurate (standard value: off)**

Hz; in this example, Praat computes 300 pitch values per second.

candidates below this frequency will not be recruited. This parameter determines the length of the analysis window: it will be 1 longest period long, i.e., if the pitch floor is 75 Hz, the window will be  $1/75 = 0.01333333$  seconds long.

A post-processing algorithm seeks the cheapest path through the candidates. The settings that determine the cheapest path are:

**Pitch ceiling (Hz) (standard value: 600 Hz)**

if *off*, the window is a Hanning window with a physical length of  $3 / (\text{pitch floor})$ . If *on*, the window is a Gaussian window with a physical length of  $6 / (\text{pitch floor})$ , i.e. twice the effective length.

**Silence threshold (standard value: 0.03)**

candidates above this frequency will be ignored.

frames that do not contain amplitudes above this threshold (relative to the global maximum amplitude), are probably silent.

**Voicing threshold (standard value: 0.45)**

the strength of the unvoiced candidate, relative to the maximum possible autocorrelation. To increase the number of unvoiced decisions, increase this value.

**Octave cost (standard value: 0.01 per octave)**

degree of favouring of high-frequency candidates, relative to the maximum possible autocorrelation. This is necessary because even (or: especially) in the case of a perfectly periodic signal, all undertones of *F0* are equally strong candidates as *F0* itself. To more strongly favour recruitment of high-frequency candidates, increase this value.

**Octave-jump cost (standard value: 0.35)**

degree of disfavouring of pitch changes, relative to the maximum possible autocorrelation. To decrease the number of large frequency jumps, increase this value. In contrast with what is described in the article, this value will be corrected for the time step: multiply by  $0.01 \text{ s} / \text{TimeStep}$  to get the value in the way it is used in the formulas in the article.

**Voiced / unvoiced cost (standard value: 0.14)**

degree of disfavouring of voiced/unvoiced transitions, relative to the maximum possible autocorrelation. To decrease the number of voiced/unvoiced transitions, increase this value. In contrast with what is described in the article, this value will be corrected for the time step: multiply by  $0.01 \text{ s} / \text{TimeStep}$  to get the value in the way it is used in the formulas in the article.

Display settings:

**Dot size**

Size of pitch dots in display.

**TextGrid Tier**

The TextGrid viewer in Phon displays basic TextGrid information about the TextGrid assigned to the current session.

To display the TextGrid view, choose **Show TextGrid** from the **Praat** menu in the Speech Analysis view. You can select audio segments by clicking intervals in the displayed TextGrid.

### Generate TextGrids

Generate TextGrids from Phon records.

The following procedure outlines how to generate new TextGrids from Phon record data.

1.  **Note:** You may also open the Generate TextGrids wizard from the **Session Editor** window, in which case skip step 2.

From the **Project Manager** window choose **Plugins > Generate TextGrids...** from the window menu.

2. In the wizard window, select a single session for which TextGrids will be generated. Click **Next**.
3. Choose the records that will be processed. Click **Next**.
4. Select the location for generated TextGrid files. You can generate TextGrid data in the default project location (this is where Phon will look for TextGrid data for records) or into an external folder. In the same screen, choose which Phon tiers will be exported in the TextGrid. When done, click **Generate TextGrids**.

### Import TextGrids

Import TextGrids as Phon records.

TextGrids created with Praat may be imported as Phon records. Data from tiers in selected TextGrids will be mapped to Phon tier data.

1. Open the Import TextGrids wizard by using the menu command **Plugins > Import TextGrids...** from the **Project Manager** window.
2. In the first step of the wizard, select a folder containing the TextGrids you wish to import using the browse button on the right-hand side of the text field. When you select the folder, a list of detected tier names from the TextGrids will be displayed in the table.
3. For each TextGrid tier you wish to import, type the name of the Phon tier in the column titled **PhonTier**. You may assign more than one TextGrid tier to the same Phon tier. You may also assign a group marker for each imported tier. When a TextGrid interval with this marker as its text is encountered a new group is created in the Phon record. By default, this is set to '#' as this is how Phon will generate TextGrid files. Click next.
4. Choose which session in the project to which you wish to add the imported records or specify a new session name to be created. Click next.
5. The TextGrids will now be imported. If any errors are encountered they will be displayed in the text area shown in the wizard.

### Open TextGrid in Praat

Open a TextGrid managed by Phon in the Praat application.

The TextGrid view in Phon does not provide editing support for TextGrids. To open TextGrids from Phon in Praat use the following procedure.

1.  **Note:** You will need Praat version 5.3.85 or later. Praat must also be open.

From the **Speech Analysis** view in the **Session Editor** window, choose **Open TextGrid in Praat...** from the Praat menu. The TextGrid in Phon will fade and a button to unlock the TextGrid will be displayed.

2.  **Note:** Phon uses TextGrid tier naming to map values onto Phon tiers. Do not change the names or delete any of the tiers generated by Phon.

In Praat, edit TextGrid intervals as you see fit. You may also add new tiers to the TextGrid.

3. When finished editing the TextGrid, you can send the data back to Phon by choosing **File > Send back to calling program**. The TextGrid in Phon will unlock and its contents updated.

### View: Timeline (beta)

The Timeline view displays record data, and optionally the waveform for the session audio, along a horizontal timeline. The primary purpose of the Timeline view is to aid with segmentation and alterations of existing record segments.

// INSERT TIMELINE SCREENSHOT

The Timeline view has three main components:

1. The timeline

The timeline is displayed at the top of the Timeline view and extends across the entire width. Ticks are drawn every 10px with a major tick at every 100px. Time values are printed at every 2nd major tick.

2. The waveform

The waveform is displayed if session audio is available.

3. The record grid

Records are displayed with selected tier data along the timeline by speaker in rows. The current record will have a blue border and record number will be printed in black. Record segments may be adjusted via mouse interaction by either dragging the record segment along the timeline; or by adjusting the start/end values using displayed markers (dotted lines).

## **Actions**

### **Media**

The Timeline view interacts with the session media player if media is available.

#### *Browse for media*

If no media file has been assigned to the current session you may browse for a media file by selecting **Browse for Media** in the context menu.

#### *Generate session audio*

If media is available for a session but no audio file (.wav) was found it may be generated by selecting **Generate session audio** in the context menu.

### **Play segment**

To play the segment of the current record - in the **Media Player** editor view - press the **space** key (only when record grid is focused and not in segmentation mode.)

### **Adjust segment times**

Segment start and end times may be adjusting using the markers (dotted lines) shown at the beginning and end of records. The start and end markers are always visible for the current record and are displayed when hovering over the end points of other record segments. Records may also be dragged horizontally along the timeline to adjust both start and end times.

### **Delete record**

To delete the current record select **Delete record** from the context menu or press **Delete** on the keyboard (only when record grid is focused.)

### **Participants**

Record data is printed by participant in rows. By default all participants plus a row for **Unidentified** records are visible.

#### *Hide/Show Participant*

Participant visibility can be toggled using the **Participants** submenu of the context menu or using the drop down menu displayed when clicking the **Participants** button in the toolbar.

#### *Add Participant*

To add a new participant to the session click **Add Participant** in the **Participants** submenu of the context menu or the dropdown menu displayed by clicking the **Participants** button in the toolbar.

### *Change Participant*

Participant assignment for a record may be altered using the mouse by dragging the record segment up and down in the record grid. You may also use CMD/CTRL + 1...9 to select participant using the keyboard. Participant number is determined by position in the list of currently visible participants. CMD/CTRL + 0 will remove participant assignment.

### **Hide/Show Tier**

By default the Orthography and Segment tiers are shown in the record grid. Tier visibility may be toggled using the Tiers submenu of the context menu or the drop down menu displayed by clicking the Tiers button in the toolbar.

### **Zoom Out/In**

The zoom out/in actions will decrease/increase horizontal resolution of the timeline. These actions are available in the context menu and as toolbar buttons.

### **Special Modes** **Segmentation**

Segmentation is the process of identifying records using the keyboard, usually while media is playing. To enter Segmentation Mode click the Start Segmentation button in the Timeline editor view. Before segmentation begins a dialog is displayed with options for media playback and segmentation behaviour.

// INSERT START SEGMENTATION DIALOG SCREENSHOT

If session media is loaded the following media playback options are available:

1. Play media from beginning.
2. Play media from current position (in media player view.) This is the default option.
3. Play media from end of last record (by media time.)
4. Play media from end of last record for participant (with participant selection.)

Playback start position will determine where segmentation begins in the timeline. If no media is available segmentation will always begin at 000:00.000.

There are two behaviours available when a new record is identified in segmentation mode:

1. Insert new record at end of session

Use this option when segmenting a new media file or continuing segmentation.

2. Replace segment for current record

Use this option when re-segmenting an already segmented session. Once all records segments have been overwritten new records will be inserted at end of the session.

During segmentation mode all keyboard input for the application will be blocked except the following keystrokes:

#### *Segmentation Controls*

| Action                             | Keystroke(s)                 |
|------------------------------------|------------------------------|
| Stop segmentation                  | Esc                          |
| Break (e.g., silence, noise, etc.) | b or Numpad decimal          |
| New segment (unidentified)         | Space or 0 or Numpad 0       |
| New segment (participant 1...9)    | 1...9 or Numpad 1...Numpad 9 |

#### *Media Controls*

| Action      | Keystroke(s)          |
|-------------|-----------------------|
| Volume up   | Up or Numpad multiply |
| Volume down | Down or Numpad divide |

| Action        | Keystroke(s)                        |
|---------------|-------------------------------------|
| Go back 1s    | Left or Numpad subtract             |
| Go forward 1s | Right or Numpad add                 |
| Go back 5s    | Shift+Left or Shift+Numpad subtract |
| Go forward 5s | Shift+Right or Shift+Numpad add     |

While segmentation mode is active, a yellow segment will be painted in the Timeline view. When a new record is identified using the Space or 1...9 or Numpad 1...Numpad 9 keys the segment identified by yellow will become the media segment for the new record.

// INSERT SCREENSHOT OF SEGMENTATION WINDOW

### Split Record


Records segments may be split using the record grid. To enter Split mode press the S key or select Split record from the context menu. A new marker will appear in the middle of the current record segment. This new marker can be dragged to adjust the position of the record split. Press Enter to accept the record split as shown and create the new record. Split mode can be exited using the Escape key and will also exit if the current editor record is switched or the current record segment is modified.

// INSERT SCREENSHOT OF SPLIT MODE

Record data may be split by group number by using the 0...9 keys on the keyboard. 0 will move all record data into the new record while 1...9 will split data after group 1, 2, etc,. Split position can be set using the context menu as well.

// INSERT RECORD OF SPLIT MODE W/ GROUP SPLIT

## View: IPA Lookup

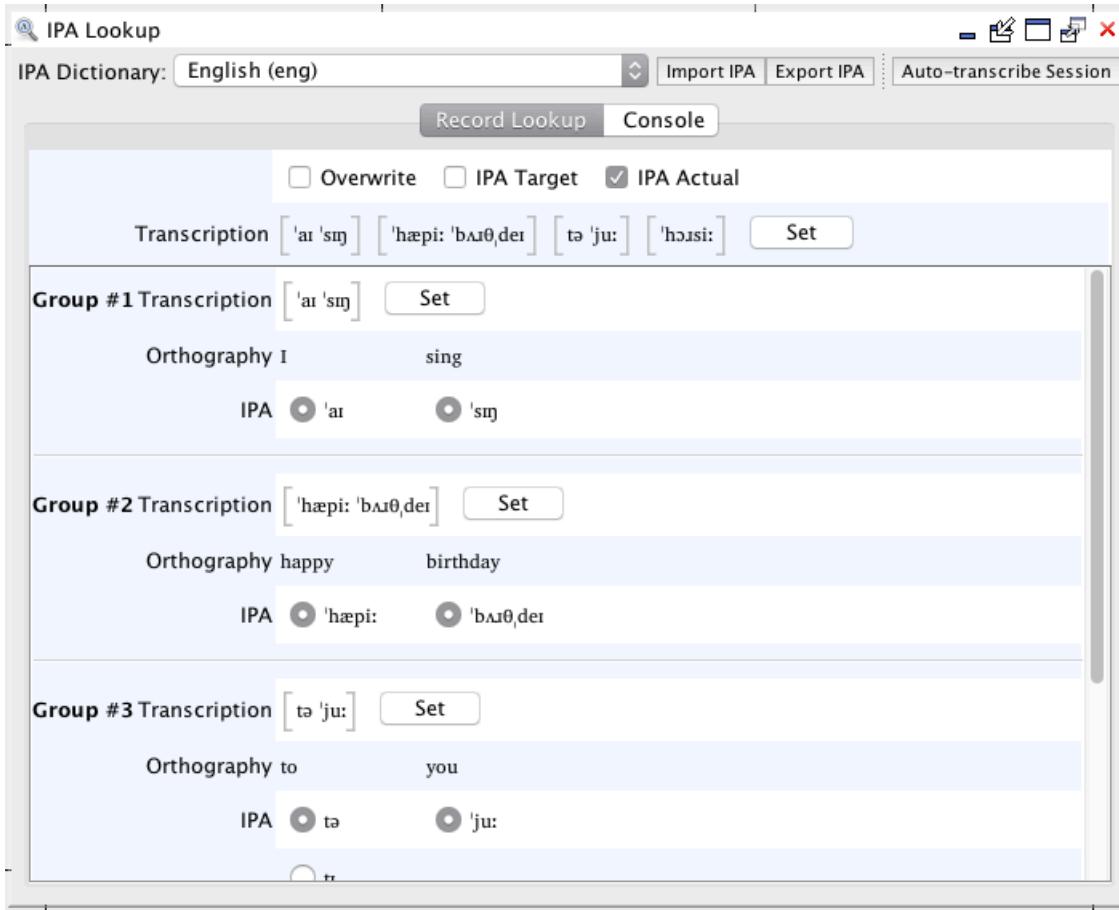

### Auto Transcribe Session

Automatically transcribe a session using an available built-in dictionary.

The *Orthography* tier must be filled in with words that are valid in the target language.

From the **IPA Lookup** view:

1. Select the appropriate dictionary language in the **IPA Dictionary** field.  
IPA transcriptions filled in through automatic transcription will be selected from this dictionary.
2. Click the **Auto-transcribe Session** button.  
This will open the **Automatic Transcription** dialog.
3. In the **Tier Options** field, choose whether to overwrite existing transcriptions by selecting **Overwrite**. Select whether to transcribe the **IPA Target** tier and/or the **IPA Actual** tier, and choose a **Syllabifier** language.
 

**Note:** The **Syllabifier** language may differ from the chosen **Dictionary** language. Choosing a **Syllabifier** language allows *Phon* to draw syllabification information in the **Syllabification & Alignment** view.
4. In the **Record Selection** tier, choose whether to transcribe **All records**, **Specific records**, **Records for participant(s)**, or **Records from search results**.
 

**Note:** If you choose to transcribe only specific records, you will have to specify the relevant record numbers. To specify several individual record numbers, separate them with a comma and a space. To specify a range, separate the beginning and end record numbers with two periods and a space. If you choose to transcribe records for specific participants, you must select the participants from the list. If you choose the transcribe records from search results, you must select a past search from the list.
5. If you are unsure, click **Close**. Otherwise, click **Ok** to perform the automatic transcription.  
The selected tier will be filled in with entries from the chosen built-in dictionary.

## About IPA Lookup Console

The IPA Lookup Console is a function which allows users to lookup transcriptions, and to create and edit IPA dictionaries in *Phon*. The window can be opened by clicking the menu entry **View > IPA Lookup**, and then clicking the **Console** tab. Commands can be entered into the text field located at the bottom of the window, use **Enter** to run the command.

The following commands can be performed on dictionary files (include any quotation marks):

- **use <dictionary>**

Switch to the specified dictionary. This can also be done using the combo box at the top of the window.

- **create <dictionary>**

Create a new dictionary with the given name. You may choose to name your dictionary using an *ISO-639-3 Language Code*; for a list of these, see the **ISO-639-3 Language Codes** window.

- **drop <dictionary>**

Delete a user-created dictionary which you no longer wish to use.

- **list**

List the available dictionaries.

- **import "</full path/file>"**

Import entries from the given file into the current dictionary. The specified file should be in UTF-8 encoding with one entry per line in the format "<orthography><tab><ipa>". Alternately, click the **Import IPA** button at the top of the **IPA Lookup** view, locate and select the file for import, and click **Open**.

- **export "</full path/file>"**

Export user-defined entries in the current dictionary to a UTF-8 encoded text file. Alternately, click the **Export IPA** button at the top of the **IPA Lookup** view, choose a filename and location for export, and click **Save**.

The following commands can be performed on entries (include any quotation marks):

- **add "<orthography>=<ipa>"**

Add an entry into the IPA database for the currently selected dictionary.

 **Note:** Characters in <orthography> should be in lower-case.

- **lookup "<orthography>"**

Look up the IPA transcription for the given orthography. The command can also be executed by entering only the orthography (without quotes) in the command field.

- **remove "<orthography>=<ipa>"**

Remove the IPA transcription for a user-added entry in the currently selected dictionary.

- **remove all**

Remove the IPA transcriptions for all user-added entries in the currently selected dictionary.

Other commands:

- **help**

List all available **Console** commands.

## View: Find & Replace

### Find and Replace


Find and replace text in records within a session.

From **Session Editor** window:

1. Select the **View > Find & Replace** menu item.

The **Find & Replace** view will appear in the **Session Editor**.

 **Note:** The **Find & Replace** view will only show tiers visible in **Record Data**. To change tier visibility options, use the **Tier Management** view (see [Edit Tier Display Options](#) on page 39 for more information).

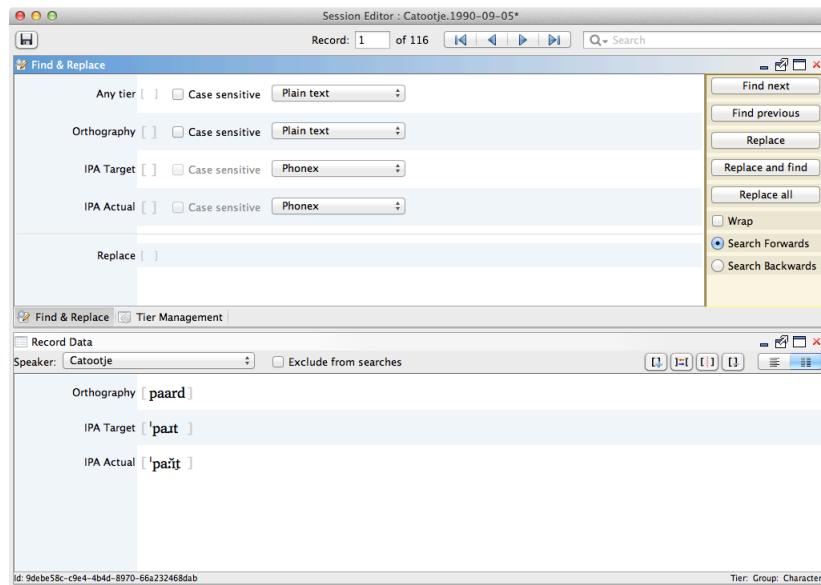

2. Using the keyboard or the **IPA Map**, enter a search term within the square brackets in the **Any tier** field or in any visible tier. You may enter search terms in multiple tiers at once.
3. If your search term is in plain text or a regular expression, you may specify whether the search should be **Case sensitive** by using the check box. Use the drop-down menu to select whether the search should use **Plain text**, **Regular expression**, or **Phonex**.
4. Enter a replacement term in the **Replace** field if desired.
5. Click **Find next** to find the next occurrence of the search term(s) in the session, or **Find previous** to find the previous occurrence.

If the term is found in a record, that record will appear in the **Record Data** view with the term highlighted.

 **Note:** You may also select whether your search should **Wrap** by using the check box, and you may choose whether to **Search Fowards** or **Search Backwards**.

6. Click **Replace** to replace the highlighted string with the specified replacement.

The highlighted string will be replaced in the **Record Data** view. Repeat Steps 5 and 6 until all occurrences of the string have been replaced.

 **Note:** Alternately, click **Replace & Find** to replace the string highlighted in the current record and navigate to the next occurrence of the term. To replace all occurrences of the term in the session at once, click **Replace all**. You will be asked to confirm that you want to **Replace all**. If you are unsure, click **No**. To continue, click **Yes**; this will generate a dialog informing you of the number of times the string occurred and was replaced.

## Tools

---

### IPA Map

#### About IPA Map

About the **IPA Map** in *Phon.*


**Phon's IPA Map** provides an easy-to-use interface for composing phonetic transcriptions. There are eight sections in the window, each with a layout which aids in the lookup of phones and diacritics. These sections may be collapsed or expanded by clicking on the appropriate title bar.

### IPA Map sections:

- Consonants
- Clicks and Implosives
- Vowels
- Suprasegmentals
- Contours
- Diacritics
- Tones
- ExtIPA

Not all characters in the **IPA Map** are meant to be the base glyph in a phone (e.g. suprasegmentals, word boundaries, diacritics). Often, a dependent character is displayed in the **IPA Map** with a circle to represent its relation to the base glyph.

To view the *Name*, *Unicode* value, and *Features* of a character in the **IPA Map**, mouse over the character and a **Tooltip** window will appear.

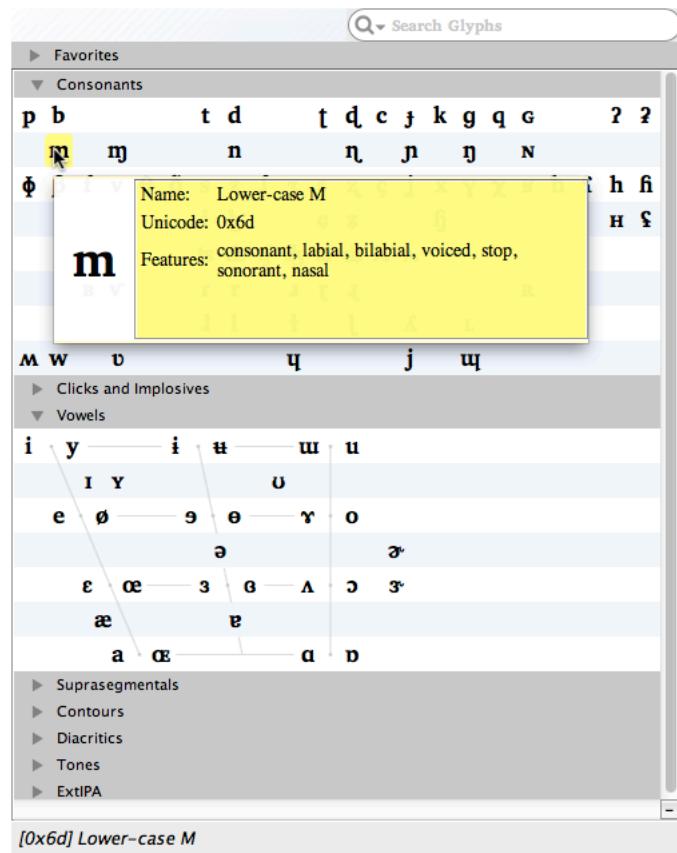

### Input Text with IPA Map

Create or modify phonetic transcriptions using the **IPA Map**.

The **IPA Map** can be used in any text-input field in *Phon*.

1. Place the cursor in a text-input field and select the **Tools > IPA Map** (CMD/CTRL+M) menu item.  
This will generate a window containing the **IPA Map**.

2. Click on the buttons in the **IPA Map** which correspond to the characters you would like to enter into the text-input field.

The data in the text-input field will reflect your selections.



**Note:** While the **IPA Map** is open, you may still proceed to type normally.

3. To close the **IPA Map**, select the **Tools > IPA Map** (CMD/CTRL+M) menu item.

### **Copy Character**

Copy a character to your computer's clipboard.

From the **IPA Map** window:

Right-click (CTRL+click) on any character in the **IPA Map**. From the context menu, select either **Copy character** to copy as a plain text string, **Copy as HTML** to copy as an HTML code, or **Copy as Unicode HEX** to copy the unicode number.

The character will be copied to your computer's clipboard in the chosen format and can then be pasted into text fields both within *Phon* and in other programs.

### **Add Character to Favorites**

Add and remove characters from **Favorites** in the **IPA Map**.

From the **IPA Map** window:

1. Right-click (CTRL+click) on any character in the **IPA Map** and select **Add to favorites** from the context menu. The selected character will appear at the top of the **IPA Map** window in the **Favorites** section. The character will remain in this section until it is removed.
2. To remove a character from the **Favorites** section, right-click (CTRL+click) on it either in the **Favorites** section or in its original section, and select **Remove from favourites** from the context menu.

### **Scroll to a Section**

Jump to a specific section in the **IPA Map**.

From the **IPA Map** window:

Right-click (CTRL+click) within any section of the **IPA Map** and select a section from the **Scroll to** list. The **IPA Map** will scroll such that the selected section appears within the window.

### **Resize Font and Window**

Change the font display size and window size of the **IPA Map**.

From the **IPA Map** window:

Right-click (CTRL+click) within any section in the **IPA Map** and move the **Font size** slider to the preferred font size.

The characters in the **IPA Map** will be displayed in the selected font size; the window will resize itself accordingly.



**Note:** The font display size in the **IPA Map** will not affect the size of characters when input into text fields.

### **Highlight Recently Used Characters**


Highlight recently used characters in the **IPA Map**.

From the **IPA Map** window:

1. Right-click (CTRL+click) within any section of the **IPA Map** and select **Highlight recently used** from the context menu. The last twenty characters entered with the **IPA Map** will be highlighted in yellow; the most recently used characters will be the brightest.
2. To turn off this feature, right-click (CTRL+click) within any section of the **IPA Map** and deselect **Highlight recently used** from the context menu.

## PhonShell

*PhonShell* is a plug-in introduced with *Phon 2.0* which provides a scripting environment for *Phon*. *PhonShell* is available from the *Tools* windows menu. The *PhonShell* console is associated to the window from which it was opened and will be closed when the parent window is closed.

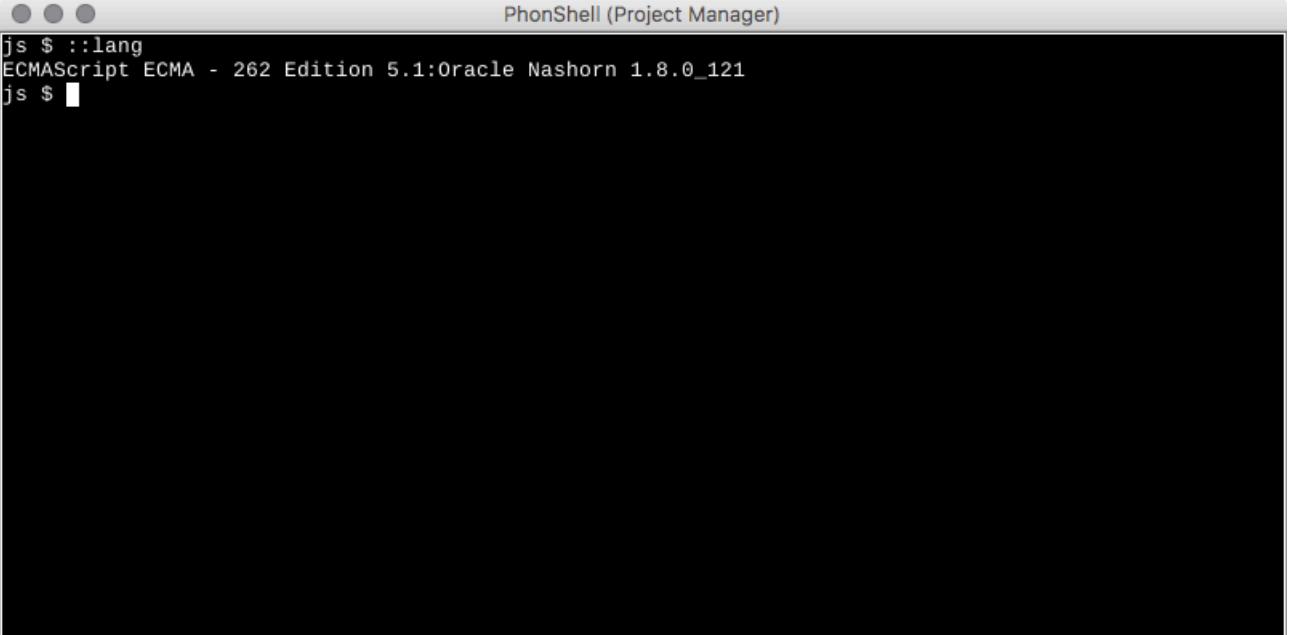

The screenshot shows a window titled "PhonShell (Project Manager)". Inside the window, there is a terminal-like interface with a black background and white text. At the top, it displays "js \$ ::lang" followed by "ECMAScript ECMA - 262 Edition 5.1:Oracle Nashorn 1.8.0\_121". Below this, it shows "js \$ [cursor]". The rest of the window is mostly blank, indicating a large scrollable area.

### Usage

When opening *PhonShell*, you will be presented with a prompt such as:

```
js $
```

The first part of the prompt `js` indicates the language being processed (in this case it's JavaScript.) *PhonShell* can execute statements in any scripting language available to the running Java virtual machine. By default, *PhonShell* supports JavaScript and [Groovy](#).

#### Built-in Commands

`::langs`

Print a list of available languages.

```
js $ ::langs
ECMAScript 1.8:Mozilla Rhino 1.7 release 3 PRERELEASE
Groovy 2.2.1:Groovy Scripting Engine 2.0
```

`::lang <lang>`

Switch to the specified language. Excluding `<lang>` will print the current language setting.

```
js $ ::lang Groovy
Groovy 2.2.1:Groovy Scripting Engine 2.0
groovy $
```

Notice how the prompt has changed to indicate the new language setting.

**::exec <script>**

Execute the specified script. The script may be a file on disk, or any readable URL.

```
js $ ::exec "C:\Users\Me\MyPhonScripts\SomeScript.js"
...
```

**clear**

Clears the screen.

```
js $ clear
```

**reset**

Reset the scripting environment, discarding all variables in the current context.

```
js $ reset
```

**> <buffer>**

Output from statements/scripts is output to the console by default. To re-direct the output to a *Phon* buffer window, terminate your statement with **> <buffer>**, where **<buffer>** is the name of a new *Phon* buffer. If a buffer with the given name already exists, it is overwritten.

```
js $ println("Hello World!");
Hello World!
js $ println("Hello World!"); > out
js $
```

After executing the second statement, "Hello World!" will be printed in a new *Phon* buffer named 'out'.

**>> <buffer>**

Data may also be appended to currently a existing buffer by using the **>>** operator. If the named buffer does not exist it will be created.

```
js $ println("Hello World..."); >> out
js $ println("goodbye sanity!"); >> out
js $
```

In the first statement, 'Hello World...' is printed in a new *Phon* buffer named 'out'. In the second statement 'goodbye sanity!' is appended to the same buffer.

**Built-in Variables****window**

Provides a reference to the window from which the *PhonShell* console was opened. For the Project Manager this will be an instance of `ca.phon.app.project.ProjectWindow` and for the Session Editor this will be an instance of `ca.phon.app.session.SessionEditor`. References to the current project and session can be obtained using the `window` variable.

```
js $ window.project
ca.phon.project.LocalProject@2d014748
js $ window.project.name
MyProject
js $ window.session.name
MySession
js $ window.session.recordCount
45
```

## last

The last value returned by executing a statement.

```
js $ x = 1+4;  
5.0  
js $ __last  
5.0  
js $ __last + 1  
6.0
```

## ISO Language Codes

| Language Codes   |                |
|--|----------------|
| ISO-639-3 Language Codes   |                |
| For more information see <a href="http://en.wikipedia.org/wiki/ISO_639-3">http://en.wikipedia.org/wiki/ISO_639-3</a> |                |
| ISO-639-3  | Language Name  |
| ---  |                |
| kku  | Tumi           |
| kkv  | Kangean        |
| kkw  | Teke-Kukuya    |
| kkx  | Kohin          |
| kky  | Guguyimidjir   |
| kkz  | Kaska          |
| kla  | Klamath–Modoc  |
| klb  | Kiliwa         |
| klc  | Kolbila        |
| kld  | Gamilaraay     |
| kle  | Kulung (Nepal) |
| klf  | Kendeje        |
| klg  | Tagakaulo      |
| kh   | Weliki         |
| kli  | Kalumpang      |
| klj  | Turkic Khalaj  |
| klk  | Kono (Nigeria) |
| kll  | Kagan Kalagan  |
| klm  | Migum          |
| kln  | Kalenjin       |

---

# Chapter

# 2

---

---

## IPA Transcription

---

**Topics:**

- IPA Elements
  - Other Transcription Items
  - Listing of IPA Characters
  - Listing of phonetic features
- 

## IPA Elements

---

### Phone

Phones are the main unit of an IPA transcription. They are composed of a vowel or consonant (or *base glyph*) along with optional diacritics. Diacritics are of the following types: prefix (e.g., pre-nasalization), combining (e.g., devoicing), length, suffix (e.g., aspiration), and tone. The following sections outline each part of a single Phone.

#### Prefix Diacritic

A prefix diacritic must appear before the base glyph. A phone may have multiple prefix diacritics.

#### Base Glyph

The base glyph can be any IPA vowel or consonant.

#### Combining Diacritic

Combining diacritics must appear directly after the base glyph; any number of combining diacritics may be used. Combining diacritics may also be added to prefix and suffix diacritics.

#### Length

Phone length is indicated using character 0x02D0 (long) and 0x02D1 (half-long.) Length diacritics must appear after the phone to which they belong.

#### Suffix Diacritic

A suffix diacritic must appear after the base glyph. A phone may have multiple suffix diacritics.

#### Tone

Tone diacritics (such as upstep or tone numbers) must appear as the last element in a phone.

 **Note:** Please consult for a list of possible IPA elements and their character types.

| Some Possible Phones | Description   |
|----------------------|---|
| t <sup>h</sup>       | Aspirated dental [t]  |
| a::: <sup>1</sup>    | Triple-long [a], Tone 1   |
| ⁿd                   | Prenasalised [d]  |
| ṁu                   | Prenasalised, breathy voiced [u], with combining diacritic low tone |

#### Related concepts

[Listing of IPA Characters](#) on page 73

Listing of IPA characters.

### Compound Phone

Compound phones are the combination of two phones using a ligature symbol (either character 0x0361 or 0x035c) between them. Each of the two phones may include prefix, combining, suffix, length, or tone diacritics.

| Some Possible Compound Phones | Description                        |
|-------------------------------|------------------------------------|
| bð                            | Combined production of [b] and [ð] |

| Some Possible Compound Phones | Description  |
|-------------------------------|--|
| aʊ̩:                          | Diphthong [aʊ̩] with second component sound lengthened |

## Pause (Intra-word)

Intra-word pauses are transcribed using a '^' symbol.

**Table 4: Intra-word pauses**

| Orthography | Transcription |
|-------------|---------------|
| ca^che      | 'kæ^s         |

## Pause (Inter-word)

Inter-word pauses in speech may be transcribed in one of three ways, depending on their length.

**Table 5: Inter-word pauses**

| Code  | Meaning             |
|-------|---------------------|
| (.)   | Short pause         |
| (..)  | Medium-length pause |
| (...) | Long pause          |

**Table 6: Example**

| Orthography     | Transcription |
|-----------------|---------------|
| cache (.) cache | 'kaʃ(.) 'kaʃ  |

## Stress Marker

Prosodically prominent syllables may be coded for primary or secondary stress. Primary stress is transcribed using a superior vertical stroke (0x2C8) preceding the syllable. Secondary stress is transcribed using an inferior vertical stroke (0x2CC) preceding the syllable.

**Table 7: Some Examples**

| Orthography | Transcription |
|-------------|---------------|
| cake        | 'keɪk         |
| revoke      | rə'veʊk       |
| epiglottis  | 'ɛpɪglɔtɪs    |

## Syllable Boundary

In cases where syllable boundaries may not be obvious, they can be transcribed with a period between syllables.

**Table 8: Some Examples**

| Orthography | Transcription |
|-------------|---------------|
| re-enter    | 'ri:, ˌentər  |

| Orthography | Transcription |
|-------------|---------------|
| sighing     | 'saɪ.ɪŋ       |

## Word Boundary

Boundaries between words are indicated via a space.

**Table 9: Some Examples**

| Orthography | Transcription |
|-------------|---------------|
| ten cats    | 'tʰen 'kæts   |
| on the roof | 'on ðə 'ru:f  |

## Other Transcription Items

---

### Intonation Group

Intonation groups are prosodic domains or units which include complete intonational contours. Intonation groups can be minor (e.g. corresponding to noun, verb, or prepositional phrases) or major (e.g. corresponding to entire sentences). Minor groups are separated by a single pipe symbol (0x1C0), and major groups are separated by a double pipe symbol (0x1C1).

**Table 10: Some Example Intonation Groups**

| Minor                             | Major                                      |
|-----------------------------------|--|
| the dog   jumped   over the fence | It's twelve o'clock    It's time for lunch |
| the cold wind   gusted strongly   | I'm tired    Let's go inside               |

### Compound Word

Compound words are transcribed using a plus sign between each word.

**Table 11: Some Possible Compound Words**

| Orthography   | Transcription |
|---------------|---------------|
| dog+house     | 'dag+hau:s    |
| picture+frame | 'pɪktʃə+fle:m |

### Sandhi

Description of sandhi.

Linkers are symbols to express a phonological relation between two words, for example in the case of external sandhi phenomenon. For example, while 'an' and 'apple' for two separate words, the final 'n' of the determiner is syllabified within the onset of the following syllable. We represent this relations as 'an\_apple' [ə'næpəl].

### Contraction

A contraction is a combination of two words within a phrase, involving the reduction of one of the words. In Phon, contractions may be transcribed using the overtie character, 0x2040.

## Contraction

Orthography: [l'ami]  
IPA Actual: [l‿ami]

## Linkers (including Liaison)

Linkers are transcribed using the undertie character 0x203f.

### Liaison

Orthography: [les‿ami]  
IPA Target: [le‿zami]

## Listing of IPA Characters

---

Listing of IPA characters.

The following is a listing of all supported IPA characters along with the glyph unicode value, name, token type and feature set.

**Table 12: Supported IPA Characters**

| Glyph | Unicode Value | Name                         | Type             | Features   |
|-------|---------------|------------------------------|------------------|--|
| ∅     | 0x2205        | Empty Set                    | cover symbol     | null   |
|       | 0x20          | Space                        | space            | diacritic  |
| \$    | 0x24          | Dollar Sign                  | dollar sign      |  |
| {     | 0x7B          | Open Brace                   | open brace       |  |
| }     | 0x7D          | Close Brace                  | close brace      |  |
| :     | 0x3A          | Colon                        | colon            |  |
| 0     | 0x30          | Zero                         | digit            |  |
| 1     | 0x31          | One                          | digit            |  |
| 2     | 0x32          | Two                          | digit            |  |
| 3     | 0x33          | Three                        | digit            |  |
| 4     | 0x34          | Four                         | digit            |  |
| 5     | 0x35          | Five                         | digit            |  |
| 6     | 0x36          | Six                          | digit            |  |
| 7     | 0x37          | Seven                        | digit            |  |
| 8     | 0x38          | Eight                        | digit            |  |
| 9     | 0x39          | Nine                         | digit            |  |
| ^     | 0x5E          | Caret                        | intra word pause |  |
| ↔     | 0x2194        | Left Right Arrow             | alignment        | diacritic  |
| !     | 0x1C3         | Latin Letter Retroflex Click | consonant        | consonant coronal lingual alveolar voiceless stop<br>obstruent click oral ingressive |

| Glyph | Unicode Value | Name                   | Type         | Features                   |
|-------|---------------|------------------------|--------------|----------------------------|
| (     | 0x28          | Left Parenthesis       | open paren   | diacritic                  |
| )     | 0x29          | Right Parenthesis      | close paren  | diacritic                  |
| *     | 0x2A          | Asterisk               | cover symbol | unintelligible cover       |
| +     | 0x2B          | Plus sign              | plus         | diacritic                  |
| .     | 0x2E          | Full Stop              | period       | diacritic                  |
| A     | 0x41          | Latin Capital Letter A | cover symbol | cover                      |
| B     | 0x42          | Latin Capital Letter B | cover symbol | cover                      |
| C     | 0x43          | Latin Capital Letter C | cover symbol | consonant cover oral       |
| D     | 0x44          | Latin Capital Letter D | cover symbol | cover                      |
| E     | 0x45          | Latin Capital Letter E | cover symbol | cover                      |
| F     | 0x46          | Latin Capital Letter F | cover symbol | cover semiresonant         |
| G     | 0x47          | Latin Capital Letter G | cover symbol | consonant glide cover oral |
| H     | 0x48          | Latin Capital Letter H | cover symbol | cover                      |
| I     | 0x49          | Latin Capital Letter I | cover symbol | cover                      |
| J     | 0x4A          | Latin Capital Letter J | cover symbol | cover                      |
| K     | 0x4B          | Latin Capital Letter K | cover symbol | cover                      |
| L     | 0x4C          | Latin Capital Letter L | cover symbol | cover                      |
| M     | 0x4D          | Latin Capital Letter M | cover symbol | cover                      |
| N     | 0x4E          | Latin Capital Letter N | cover symbol | cover                      |
| O     | 0x4F          | Latin Capital Letter O | cover symbol | cover                      |
| P     | 0x50          | Latin Capital Letter P | cover symbol | cover                      |
| Q     | 0x51          | Latin Capital Letter Q | cover symbol | cover quasiresonant        |
| R     | 0x52          | Latin Capital Letter R | cover symbol | cover raspberry            |

| Glyph | Unicode Value | Name                   | Type         | Features   |
|-------|---------------|------------------------|--------------|--|
| S     | 0x53          | Latin Capital Letter S | cover symbol | cover  |
| T     | 0x54          | Latin Capital Letter T | cover symbol | cover  |
| U     | 0x55          | Latin Capital Letter U | cover symbol | cover  |
| V     | 0x56          | Latin Capital Letter V | cover symbol | vowel cover  |
| W     | 0x57          | Latin Capital Letter W | cover symbol | cover  |
| X     | 0x58          | Latin Capital Letter X | cover symbol | unintelligible cover   |
| Y     | 0x59          | Latin Capital Letter Y | cover symbol | cover  |
| Z     | 0x5A          | Latin Capital Letter Z | cover symbol | cover  |
| >     | 0x3E          | Greater-than Sign      | glide        | consonant glide transition   |
| a     | 0x61          | Latin Letter Small A   | vowel        | vowel low lax central  |
| b     | 0x62          | Latin Letter Small B   | consonant    | consonant labial bilabial voiced stop obstruent oral   |
| c     | 0x63          | Latin Letter Small C   | consonant    | consonant palatal coronal lingual posterior voiceless stop obstruent oral                              |
| d     | 0x64          | Latin Letter Small D   | consonant    | consonant coronal lingual anterior alveolar voiced stop obstruent oral                                 |
| e     | 0x65          | Latin Letter Small E   | vowel        | vowel mid tense atr front  |
| f     | 0x66          | Latin Letter Small F   | consonant    | consonant labial labiodental voiceless continuant obstruent fricative oral                             |
| g     | 0x67          | Latin Letter Small G   | consonant    | consonant dorsal velar lingual voiced stop obstruent oral  |
| h     | 0x68          | Latin Letter Small H   | consonant    | consonant guttural laryngeal voiceless continuant obstruent fricative oral                             |
| i     | 0x69          | Latin Letter Small I   | vowel        | vowel high tense atr front   |
| j     | 0x6A          | Latin Letter Small J   | glide        | consonant glide palatal coronal lingual posterior voiced approximant continuant sonorant oral          |
| k     | 0x6B          | Latin Letter Small K   | consonant    | consonant dorsal velar lingual voiceless stop obstruent oral   |
| l     | 0x6C          | Latin Letter Small L   | consonant    | consonant coronal lingual anterior alveolar voiced approximant liquid lateral continuant sonorant oral |

| Glyph        | Unicode Value | Name                              | Type      | Features  |
|--------------|---------------|-----------------------------------|-----------|---|
| m            | 0x6D          | Latin Letter Small M              | consonant | consonant labial bilabial voiced stop sonorant nasal  |
| n            | 0x6E          | Latin Letter Small N              | consonant | consonant coronal lingual anterior alveolar voiced stop sonorant nasal                                      |
| o            | 0x6F          | Latin Letter Small O              | vowel     | vowel round mid tense atr back  |
| p            | 0x70          | Latin Letter Small P              | consonant | consonant labial bilabial voiceless stop obstruent oral   |
| q            | 0x71          | Latin Letter Small Q              | consonant | consonant dorsal uvular lingual voiceless stop obstruent oral   |
| r            | 0x72          | Latin Letter Small R              | consonant | consonant coronal lingual anterior alveolar voiced approximant liquid rhotic continuant sonorant trill oral |
| s            | 0x73          | Latin Letter Small S              | consonant | consonant coronal lingual anterior alveolar voiceless continuant obstruent fricative oral strident          |
| t            | 0x74          | Latin Letter Small T              | consonant | consonant coronal lingual anterior alveolar voiceless stop obstruent oral                                   |
| u            | 0x75          | Latin Letter Small U              | vowel     | vowel round high tense atr back   |
| v            | 0x76          | Latin Letter Small V              | consonant | consonant labial labiodental voiced continuant obstruent fricative oral                                     |
| w            | 0x77          | Latin Letter Small W              | glide     | consonant glide labial bilabial dorsal velar lingual voiced approximant continuant sonorant oral            |
| x            | 0x78          | Latin Letter Small X              | consonant | consonant dorsal velar lingual voiceless continuant obstruent fricative oral                                |
| y            | 0x79          | Latin Letter Small Y              | vowel     | vowel round high tense atr front  |
| z            | 0x7A          | Latin Letter Small Z              | consonant | consonant coronal lingual anterior alveolar voiced continuant obstruent fricative oral strident             |
| í            | 0xA1          | Inverted Exclamation Mark         | consonant | consonant coronal lingual anterior voiceless stop click oral ingressive subapical                           |
| <sup>1</sup> | 0xB9          | Superscript One tone (Number 1)   |           | diacritic tone1   |
| <sup>2</sup> | 0xB2          | Superscript Two tone (Number 2)   |           | diacritic tone2   |
| <sup>3</sup> | 0xB3          | Superscript Three tone (Number 3) |           | diacritic tone3   |
| <sup>4</sup> | 0x2074        | Superscript Four tone (Number 4)  |           | diacritic tone4   |

| Glyph | Unicode Value | Name                                     | Type      | Features  |
|-------|---------------|--|-----------|---|
| ៥     | 0x2075        | Superscript Five (Number 5)              | tone      | diacritic tone5   |
| ៥     | 0x2076        | Superscript Six (Number 6)               | tone      | diacritic tone6   |
| ៥     | 0x2077        | Superscript Seven (Number 7)             | tone      | diacritic tone7   |
| ៥     | 0x2078        | Superscript Eight (Number 8)             | tone      | diacritic tone8   |
| ៥     | 0x2079        | Superscript Nine (Number 9)              | tone      | diacritic tone9   |
| æ     | 0xE6          | Latin Letter Small AE                    | vowel     | vowel low lax front   |
| ç     | 0xE7          | Latin Letter Small C with cedilla        | consonant | consonant palatal coronal lingual posterior voiceless continuant obstruent fricative oral strident    |
| ð     | 0xF0          | Latin Letter Small Eth                   | consonant | consonant interdental coronal lingual anterior distributed voiced continuant obstruent fricative oral |
| ø     | 0xF8          | Latin Letter Small O with Stroke         | vowel     | vowel round mid tense atr front   |
| ħ     | 0x127         | Latin Letter Small H with Stroke         | consonant | consonant guttural pharyngeal voiceless continuant obstruent fricative oral                           |
| ŋ     | 0x14B         | Latin Letter Small Eng                   | consonant | consonant dorsal velar lingual voiced stop sonorant nasal   |
| œ     | 0x153         | Latin Small Ligature OE                  | vowel     | vowel round mid rtr lax front   |
| ƀ     | 0x180         | Latin Letter Small B with Stroke         | consonant | consonant labial bilabial voiced continuant obstruent fricative oral                                  |
| ϲ     | 0x188         | Latin Letter Small C with Hook           | consonant | consonant palatal coronal lingual posterior voiceless stop obstruent implosive oral                   |
| ƙ     | 0x199         | Latin Letter Small K with Hook           | consonant | consonant dorsal velar lingual voiceless stop obstruent implosive oral                                |
| ƛ     | 0x19B         | Latin Letter Small Lamda with Stroke     | consonant | consonant coronal lingual anterior alveolar voiceless lateral obstruent affricate oral                |
| ɳ     | 0x19E         | Latin Letter Small N with Long Right Leg | consonant | consonant coronal lingual anterior alveolar voiced stop sonorant nasal                                |

| Glyph | Unicode Value | Name                                   | Type      | Features   |
|-------|---------------|--|-----------|--|
| þ     | 0x1A5         | Latin Letter Small P with Hook         | consonant | consonant labial bilabial voiceless stop obstruent implosive oral  |
| ȝ     | 0x1AB         | Latin Letter Small T with Palatal Hook | consonant | consonant palatal coronal lingual anterior posterior alveolar voiceless stop obstruent oral                              |
| ȝ     | 0x1B9         | Latin Letter Small Ezh Reversed        | consonant | consonant guttural pharyngeal voiced continuant obstruent fricative oral   |
| ȝ     | 0x1BA         | Latin Letter Small Ezh with Tail       | consonant | consonant palatal coronal lingual posterior alveopalatal distributed voiced continuant obstruent fricative oral strident |
|       | 0x1C0         | Latin Letter Dental Click              | consonant | consonant dental coronal lingual anterior voiceless stop obstruent click oral ingressive                                 |
|       | 0x1C1         | Latin Letter Lateral Click             | consonant | consonant coronal lingual anterior alveolar voiceless lateral stop obstruent click oral ingressive                       |
| ‡     | 0x1C2         | Latin Letter Alveopalatal Click        | consonant | consonant coronal lingual posterior alveopalatal voiceless stop obstruent click oral ingressive                          |
| l     | 0x234         | Latin Letter Small L with Curl         | consonant | consonant palatal coronal lingual posterior voiced approximant liquid lateral continuant sonorant oral                   |
| ɳ     | 0x235         | Latin Letter Small N with Curl         | consonant | consonant coronal lingual posterior alveopalatal voiced stop sonorant nasal  |
| ʈ     | 0x236         | Latin Letter Small T with Curl         | consonant | consonant coronal lingual posterior alveopalatal voiceless stop obstruent oral   |
| ڻ     | 0x250         | Latin Letter Small Turned A            | vowel     | vowel low lax central  |
| ڻ     | 0x251         | Latin Letter Small Alpha               | vowel     | vowel low lax back   |
| ڻ     | 0x252         | Latin Letter Small Turned Alpha        | vowel     | vowel round low lax back   |
| ڦ     | 0x253         | Latin Letter Small B with Hook         | consonant | consonant labial bilabial voiced stop obstruent implosive oral   |
| ڻ     | 0x254         | Latin Letter Small Open O              | vowel     | vowel round mid rtr lax back   |
| ڻ     | 0x255         | Latin Letter Small C with Curl         | consonant | consonant palatal laminal coronal lingual posterior distributed voiceless continuant obstruent fricative oral strident   |

| Glyph | Unicode Value | Name   | Type      | Features  |
|-------|---------------|--|-----------|---|
| ɖ     | 0x256         | Latin Letter Small D with Tail               | consonant | consonant coronal lingual posterior retroflex voiced stop obstruent oral                            |
| ڏ     | 0x257         | Latin Letter Small D with Hook               | consonant | consonant coronal lingual anterior alveolar voiced stop obstruent implosive oral                    |
| ڻ     | 0x258         | Latin Letter Small Reversed E                | vowel     | vowel mid tense atr central   |
| ڹ     | 0x259         | Latin Letter Small Schwa                     | vowel     | vowel schwa mid rtr lax central   |
| ڻ     | 0x25A         | Latin Letter Small Schwa with Hook           | vowel     | vowel schwa rhotic mid rtr lax central  |
| ڻ     | 0x25B         | Latin Letter Small Open E                    | vowel     | vowel mid rtr lax front   |
| ڙ     | 0x25C         | Latin Letter Small Reversed Open E           | vowel     | vowel mid rtr lax central   |
| ڙ     | 0x25D         | Latin Letter Small Reversed Open E with Hook | vowel     | vowel rhotic mid rtr lax central  |
| ڻ     | 0x25E         | Latin Letter Small Closed Reversed Open E    | vowel     | vowel round mid rtr lax central   |
| ڢ     | 0x25F         | Latin Letter Small Dotless J with Stroke     | consonant | consonant palatal coronal lingual posterior voiced stop obstruent oral                              |
| ڦ     | 0x260         | Latin Letter Small G with Hook               | consonant | consonant dorsal velar lingual voiced stop obstruent implosive oral                                 |
| ڻ     | 0x261         | Latin Letter Small Script G                  | consonant | consonant dorsal velar lingual voiced stop obstruent oral   |
| ڻ     | 0x262         | Latin Letter Small Capital G                 | consonant | consonant dorsal uvular lingual voiced stop obstruent oral  |
| ڻ     | 0x263         | Latin Letter Small Gamma                     | consonant | consonant dorsal velar lingual voiced continuant obstruent fricative oral                           |
| ڻ     | 0x264         | Latin Letter Small Ram's Horns               | vowel     | vowel mid tense atr back  |
| ڻ     | 0x265         | Latin Letter Small Turned H                  | glide     | consonant glide labial bilabial palatal coronal lingual voiced approximant continuant sonorant oral |

| Glyph | Unicode Value | Name                                      | Type      | Features  |
|-------|---------------|---|-----------|---|
| ڻ     | 0x266         | Latin Letter Small H with Hook            | consonant | consonant guttural laryngeal voiced continuant obstruent fricative oral                                       |
| ڻ     | 0x267         | Latin Letter Small Heng with Hook         | consonant | consonant dorsal velar coronal lingual posterior alveopalatal voiceless continuant obstruent fricative oral   |
| ڦ     | 0x268         | Latin Letter Small I with Stroke          | vowel     | vowel high tense atr central  |
| ڦ     | 0x269         | Latin Letter Small Iota                   | vowel     | vowel high rtr lax front  |
| ڦ     | 0x26A         | Latin Letter Small Capital I              | vowel     | vowel high rtr lax front  |
| ڻ     | 0x26B         | Latin Letter Small L with middle Tilde    | consonant | consonant velar coronal lingual anterior posterior voiced approximant liquid lateral continuant sonorant oral |
| ڻ     | 0x26C         | Latin Letter Small L with Belt            | consonant | consonant coronal lingual anterior alveolar voiceless lateral continuant obstruent fricative oral             |
| ڻ     | 0x26D         | Latin Letter Small L with Retroflex Hook  | consonant | consonant coronal lingual posterior retroflex voiced approximant liquid lateral continuant sonorant oral      |
| ڻ     | 0x26E         | Latin Letter Small LEzh                   | consonant | consonant coronal lingual anterior alveolar voiced lateral continuant obstruent fricative oral                |
| ڻ     | 0x26F         | Latin Letter Small Turned M               | vowel     | vowel high tense atr back   |
| ڻ     | 0x270         | Latin Letter Small Turned M with Long Leg | glide     | consonant glide dorsal velar lingual voiced approximant continuant sonorant oral                              |
| ڻ     | 0x271         | Latin Letter Small M with Hook            | consonant | consonant labial labiodental voiced stop sonorant nasal   |
| ڻ     | 0x272         | Latin Letter Small N with Left Hook       | consonant | consonant palatal coronal lingual posterior voiced stop sonorant nasal  |
| ڻ     | 0x273         | Latin Letter Small N with Retroflex Hook  | consonant | consonant coronal lingual posterior retroflex voiced stop sonorant nasal                                      |
| ڻ     | 0x274         | Latin Letter Small Capital N              | consonant | consonant dorsal uvular lingual voiced stop sonorant nasal  |
| ڻ     | 0x275         | Latin Letter Small Barred O               | vowel     | vowel round mid tense atr central   |
| ڻ     | 0x276         | Latin Letter Small Capital OE             | vowel     | vowel round low lax front   |

| Glyph | Unicode Value | Name  | Type      | Features  |
|-------|---------------|---|-----------|---|
| ῳ     | 0x277         | Latin Letter Small Closed Omega                   | vowel     | vowel round high rtr lax back   |
| ɸ     | 0x278         | Latin Letter Small Phi                            | consonant | consonant labial bilabial voiceless continuant obstruent fricative oral   |
| ՚     | 0x279         | Latin Letter Small Turned R                       | consonant | consonant coronal lingual anterior alveolar voiced approximant liquid rhotic continuant sonorant oral                       |
| ՚     | 0x27A         | Latin Letter Small Turned R with Long Leg         | consonant | consonant coronal lingual anterior alveolar voiced approximant liquid lateral continuant sonorant flap oral                 |
| ՚     | 0x27B         | Latin Letter Small Turned R with Hook             | consonant | consonant coronal lingual posterior retroflex voiced approximant liquid rhotic continuant sonorant oral                     |
| ՚     | 0x27C         | Latin Letter Small R with Long Leg                | consonant | consonant coronal lingual alveolar voiced approximant rhotic continuant sonorant trill oral                                 |
| ՚     | 0x27D         | Latin Letter Small R with Tail                    | consonant | consonant coronal lingual posterior retroflex voiced approximant liquid rhotic continuant sonorant flap oral                |
| ՚     | 0x27E         | Latin Letter Small R with Fish Hook               | consonant | consonant coronal lingual anterior alveolar voiced approximant liquid rhotic continuant sonorant flap oral                  |
| ՚     | 0x280         | Latin Letter Small Capital R                      | consonant | consonant dorsal uvular lingual voiced approximant liquid rhotic continuant sonorant trill oral                             |
| ՚     | 0x281         | Latin Letter Small Capital Inverted R             | consonant | consonant dorsal uvular lingual voiced rhotic continuant obstruent fricative oral   |
| ՚     | 0x282         | Latin Letter Small S with Hook                    | consonant | consonant coronal lingual posterior retroflex voiceless continuant obstruent fricative oral strident                        |
| ՚     | 0x283         | Latin Letter Small Esh                            | consonant | consonant laminal coronal lingual posterior alveopalatal distributed voiceless continuant obstruent fricative oral strident |
| ՚     | 0x284         | Latin Letter Small Dotless J with Stroke and Hook | consonant | consonant palatal coronal lingual posterior voiced stop obstruent implosive oral  |
| ՚     | 0x286         | Latin Letter Small Esh with Curl                  | consonant | consonant palatal coronal lingual posterior alveopalatal distributed voiceless continuant obstruent fricative oral strident |
| ՚     | 0x287         | Latin Letter Small Turned T                       | consonant | consonant coronal lingual anterior voiceless stop obstruent click oral ingressive   |
| ՚     | 0x288         | Latin Letter Small T with Retroflex Hook          | consonant | consonant coronal lingual posterior retroflex voiceless stop obstruent oral   |

| Glyph | Unicode Value | Name                                     | Type      | Features   |
|-------|---------------|--|-----------|--|
| ꝑ     | 0x289         | Latin Letter Small U Bar                 | vowel     | vowel round high tense atr central   |
| Ꝓ     | 0x28A         | Latin Letter Small Upsilon               | vowel     | vowel round high rtr lax back  |
| ꝓ     | 0x28B         | Latin Letter Small V with Hook           | consonant | consonant glide labial voiced approximant continuant sonorant oral   |
| Ꝕ     | 0x28C         | Latin Letter Small Turned V              | vowel     | vowel mid rtr lax back   |
| ꝕ     | 0x28D         | Latin Letter Small Turned W              | consonant | consonant labial bilabial dorsal velar lingual voiceless continuant obstruent fricative oral                             |
| Ꝗ     | 0x28E         | Latin Letter Small Turned Y              | consonant | consonant palatal coronal lingual posterior voiced approximant liquid lateral continuant sonorant oral                   |
| ꝗ     | 0x28F         | Latin Letter Small Capital Y             | vowel     | vowel round high rtr lax front   |
| Ꝙ     | 0x290         | Latin Letter Small Z with Retroflex Hook | consonant | consonant coronal lingual posterior retroflex voiced continuant obstruent fricative oral strident                        |
| ꝙ     | 0x291         | Latin Letter Small Z with Curl           | consonant | consonant palatal laminal coronal lingual posterior distributed voiced continuant obstruent fricative oral strident      |
| Ꝛ     | 0x292         | Latin Letter Small Ezh                   | consonant | consonant laminal coronal lingual posterior alveopalatal distributed voiced continuant obstruent fricative oral strident |
| ꝛ     | 0x293         | Latin Letter Small Ezh with Curl         | consonant | consonant palatal coronal lingual posterior alveopalatal distributed voiced continuant obstruent fricative oral strident |
| Ꝝ     | 0x294         | Latin Letter Glottal Stop                | consonant | consonant guttural laryngeal voiceless stop obstruent oral   |
| ꝝ     | 0x295         | Latin Letter Pharyngeal Voiced Fricative | consonant | consonant guttural pharyngeal voiced continuant obstruent fricative oral   |
| Ꝟ     | 0x296         | Latin Letter Inverted Glottal Stop       | consonant | consonant coronal lingual anterior alveolar voiceless lateral stop obstruent click oral ingressive                       |
| ꝟ     | 0x297         | Latin Letter Stretched C                 | consonant | consonant coronal lingual anterior alveolar voiceless stop obstruent click oral ingressive                               |
| Ꝡ     | 0x298         | Latin Letter Bilabial Click              | consonant | consonant labial bilabial voiceless stop obstruent click oral ingressive   |
| ꝡ     | 0x299         | Latin Letter Small Capital B             | consonant | consonant labial bilabial labiodental voiced approximant continuant sonorant trill oral                                  |
| Ꝣ     | 0x29A         | Latin Letter Small Closed Open E         | vowel     | vowel round mid rtr lax central  |

| Glyph | Unicode Value | Name   | Type      | Features   |
|-------|---------------|--|-----------|--|
| g̙    | 0x29B         | Latin Letter Small Capital G with Hook         | consonant | consonant dorsal uvular lingual voiced stop<br>obstruent implosive oral  |
| h̙    | 0x29C         | Latin Letter Small Capital H                   | consonant | consonant guttural epiglottal voiceless continuant<br>obstruent fricative oral   |
| j̙    | 0x29D         | Latin Letter Small J with Crossed-Tail         | consonant | consonant palatal coronal lingual posterior voiced<br>continuant obstruent fricative oral strident                     |
| k̙    | 0x29E         | Latin Letter Small Turned K                    | consonant | consonant dorsal velar lingual voiceless stop<br>obstruent click oral ingressive                                       |
| l̙    | 0x29F         | Latin Letter Small Capital L                   | consonant | consonant dorsal velar lingual voiced approximant<br>liquid lateral continuant sonorant oral                           |
| q̙    | 0x2A0         | Latin Letter Small Q with Hook                 | consonant | consonant dorsal uvular lingual voiceless stop<br>obstruent implosive oral   |
| ꝑ     | 0x2A1         | Latin Letter Glottal Stop with Stroke          | consonant | consonant guttural epiglottal voiceless stop<br>obstruent oral   |
| Ꝕ     | 0x2A2         | Latin Letter Reversed Glottal Stop with Stroke | consonant | consonant guttural epiglottal voiced continuant<br>obstruent fricative oral  |
| dꝑ    | 0x2A3         | Latin Letter Small DZ Digraph                  | consonant | consonant coronal lingual anterior alveolar voiced<br>obstruent affricate oral strident                                |
| dꝓ    | 0x2A4         | Latin Letter Small DEzh Digraph                | consonant | consonant laminal coronal lingual posterior<br>alveopalatal distributed voiced obstruent affricate<br>oral strident    |
| dꝑ    | 0x2A5         | Latin Letter Small DZ Digraph with Curl        | consonant | consonant palatal laminal coronal lingual posterior<br>distributed voiced obstruent affricate oral strident            |
| tꝑ    | 0x2A6         | Latin Letter Small TS Digraph                  | consonant | consonant coronal lingual anterior alveolar voiceless<br>obstruent affricate oral strident                             |
| ꝑ     | 0x2A7         | Latin Letter Small TEsh Digraph                | consonant | consonant laminal coronal lingual posterior<br>alveopalatal distributed voiceless obstruent affricate<br>oral strident |
| tꝑ    | 0x2A8         | Latin Letter Small TC Digraph with Curl        | consonant | consonant palatal laminal coronal lingual posterior<br>distributed voiceless obstruent affricate oral strident         |
| fꝑ    | 0x2A9         | Latin Letter Small FEng Digraph                | consonant | consonant obstruent fricative nasal velopharyngeal   |

| Glyph | Unicode Value | Name                                       | Type             | Features  |
|-------|---------------|--|------------------|---|
| ls    | 0x2AA         | Latin Letter Small LS Digraph              | consonant        | consonant coronal lingual anterior alveolar voiceless lateral continuant obstruent fricative oral |
| lz    | 0x2AB         | Latin Letter Small LZ Digraph              | consonant        | consonant coronal lingual anterior alveolar voiced lateral continuant obstruent fricative oral    |
| ƿ     | 0x2AC         | Latin Letter Bilabial Percussive           | consonant        | consonant labial bilabial stop obstruent oral percussive  |
| ȝ     | 0x2AD         | Latin Letter Bidental Percussive           | consonant        | consonant dental stop obstruent oral lowerdental percussive                                       |
| ƿ     | 0x2AE         | Latin Letter Small Turned H with Fish Hook | vowel            | vowel round high rtr lax back   |
| h     | 0x2B0         | Modifier Letter Small H                    | suffix diacritic | diacritic aspirated   |
| ɦ     | 0x2B1         | Modifier Letter Small H with Hook          | suffix diacritic | diacritic breathyvoiced   |
| j     | 0x2B2         | Modifier Letter Small J                    | suffix diacritic | diacritic palatal   |
| r     | 0x2B3         | Modifier Letter Small R                    | suffix diacritic | diacritic rhotic  |
| ɹ     | 0x2B4         | Modifier Letter Small Turned R             | suffix diacritic | diacritic rhotic  |
| ɿ     | 0x2B5         | Modifier Letter Small Turned R with Hook   | suffix diacritic | diacritic rhotic  |
| ƿ     | 0x2B6         | Modifier Letter Small Capital Inverted R   | suffix diacritic | diacritic rhotic  |
| w     | 0x2B7         | Modifier Letter Small W                    | suffix diacritic | diacritic labial  |
| y     | 0x2B8         | Modifier Letter Small Y                    | suffix diacritic | diacritic labial  |
| ‘     | 0x2BB         | Modifier Letter Turned Comma               | suffix diacritic | diacritic aspirated   |
| ’     | 0x2BC         | Modifier Letter Apostrophe                 | suffix diacritic | diacritic ejective  |
| ՝     | 0x2BD         | Modifier Letter Reversed Comma             | suffix diacritic | diacritic weaklyaspirated   |

| Glyph | Unicode Value | Name                                  | Type                | Features                |
|-------|---------------|---------------------------------------|---------------------|-------------------------|
| '     | 0x2BE         | Modifier Letter Right Half Ring       | suffix diacritic    | diacritic morerounded   |
| '     | 0x2BF         | Modifier Letter Left Half Ring        | suffix diacritic    | diacritic lessrounded   |
| ?     | 0x2C0         | Modifier Letter Glottal Stop          | suffix diacritic    | diacritic laryngeal     |
| ‘     | 0x2C1         | Modifier Letter Reversed Glottal Stop | suffix diacritic    | diacritic epiglottal    |
| '     | 0x2C8         | Modifier Letter Vertical Line         | primary stress      | diacritic prstress      |
| '     | 0x2CC         | Modifier Letter Low Vertical Line     | secondary stress    | diacritic secstress     |
| :     | 0x2D0         | Modifier Letter Triangular Colon      | long                | diacritic long          |
| :     | 0x2D1         | Modifier Letter Half Triangular Colon | half long           | diacritic halflong      |
| '     | 0x2DE         | Modifier Letter Rhotic Hook           | suffix diacritic    | diacritic rhotic        |
| γ     | 0x2E0         | Modifier Letter Small Gamma           | suffix diacritic    | diacritic velar         |
| ι     | 0x2E1         | Modifier Letter Small L               | suffix diacritic    | diacritic lateral       |
| ˥     | 0x2E5         | Modifier Letter Extra-High Tone Bar   | suffix diacritic    | diacritic toneextrahigh |
| ˧     | 0x2E6         | Modifier Letter High Tone Bar         | suffix diacritic    | diacritic tonehigh      |
| ˧     | 0x2E7         | Modifier Letter Mid Tone Bar          | suffix diacritic    | diacritic tonemid       |
| ˨     | 0x2E8         | Modifier Letter Low Tone Bar          | suffix diacritic    | diacritic tonelow       |
| ˩     | 0x2E9         | Modifier Letter Extra-Low Tone Bar    | suffix diacritic    | diacritic toneextralow  |
| ~     | 0x2EC         | Modifier Letter Voicing               | suffix diacritic    | diacritic voiced        |
| =     | 0x2ED         | Modifier Letter Unaspirated           | suffix diacritic    | diacritic unaspirated   |
| ◦     | 0x300         | Combining Grave Accent                | combining diacritic | diacritic tonelow       |

| Glyph               | Unicode Value | Name                           | Type                | Features                               |
|---------------------|---------------|--------------------------------|---------------------|--|
| ó                   | 0x301         | Combining Acute Accent         | combining diacritic | diacritic tonehigh                     |
| ó̄                  | 0x302         | Combining Circumflex Accent    | combining diacritic | diacritic tonefalling                  |
| ó̂                  | 0x303         | Combining Tilde                | combining diacritic | diacritic nasal                        |
| ó̄̄                 | 0x304         | Combining Macron               | combining diacritic | diacritic tonemid                      |
| ó̄̄̄                | 0x306         | Combining Breve                | combining diacritic | diacritic extrashort                   |
| ó̄̄̄̄               | 0x307         | Combining Dot Above            | combining diacritic | diacritic lenis                        |
| ó̄̄̄̄̄              | 0x308         | Combining Diaeresis            | combining diacritic | diacritic central                      |
| ó̄̄̄̄̄̄             | 0x30A         | Combining Ring Above           | combining diacritic | diacritic voiceless                    |
| ó̄̄̄̄̄̄̄            | 0x30B         | Combining Double Acute Accent  | combining diacritic | diacritic toneextrahigh                |
| ó̄̄̄̄̄̄̄̄           | 0x30C         | Combining Caron                | combining diacritic | diacritic tonerising                   |
| ó̄̄̄̄̄̄̄̄̄          | 0x30F         | Combining Double Grave Accent  | combining diacritic | diacritic toneextralow                 |
| ó̄̄̄̄̄̄̄̄̄̄         | 0x311         | Combining Inverted Breve       | combining diacritic | diacritic fronted                      |
| ó̄̄̄̄̄̄̄̄̄̄̄        | 0x318         | Combining Left Tack Below      | combining diacritic | diacritic atr                          |
| ó̄̄̄̄̄̄̄̄̄̄̄̄       | 0x319         | Combining Right Tack Below     | combining diacritic | diacritic rtr                          |
| ó̄̄̄̄̄̄̄̄̄̄̄̄̄      | 0x31A         | Combining Left Angle Above     | combining diacritic | diacritic unreleased                   |
| ó̄̄̄̄̄̄̄̄̄̄̄̄̄̄     | 0x31C         | Combining Left Half Ring Below | combining diacritic | diacritic lessrounded                  |
| ó̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄    | 0x31D         | Combining Up Tack Below        | combining diacritic | diacritic raised                       |
| ó̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄   | 0x31E         | Combining Down Tack Below      | combining diacritic | diacritic approximant sonorant lowered |
| ó̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄̄ | 0x31F         | Combining Plus Sign Below      | combining diacritic | diacritic advanced                     |

| Glyph | Unicode Value | Name                                 | Type                | Features                     |
|-------|---------------|--------------------------------------|---------------------|------------------------------|
| ꝑ     | 0x320         | Combining Minus Sign Below           | combining diacritic | diacritic retracted          |
| Ꝓ     | 0x323         | Combining Dot Below                  | combining diacritic | diacritic lenis              |
| ꝓ     | 0x324         | Combining Diaeresis Below            | combining diacritic | diacritic breathyvoiced      |
| Ꝕ     | 0x325         | Combining Ring Below                 | combining diacritic | diacritic voiceless          |
| ꝕ     | 0x329         | Combining Vertical Line Below        | combining diacritic | diacritic syllabic           |
| Ꝗ     | 0x32A         | Combining Bridge Below               | combining diacritic | diacritic dental             |
| ꝗ     | 0x32C         | Combining Caron Below                | combining diacritic | diacritic voiced             |
| Ꝙ     | 0x32F         | Combining Inverted Breve Below       | combining diacritic | diacritic nonsyllabic        |
| ꝙ     | 0x330         | Combining Tilde Below                | combining diacritic | diacritic creakyvoiced       |
| Ꝛ     | 0x334         | Combining Tilde Overlay              | combining diacritic | diacritic pharyngeal         |
| ꝛ     | 0x339         | Combining Right Half Ring Below      | combining diacritic | diacritic morerounded        |
| Ꝝ     | 0x33A         | Combining Inverted Bridge Below      | combining diacritic | diacritic apical             |
| ꝝ     | 0x33B         | Combining Square Below               | combining diacritic | diacritic laminal            |
| Ꝟ     | 0x33C         | Combining Seagull Below              | combining diacritic | diacritic labial             |
| ꝟ     | 0x33D         | Combining X Above                    | combining diacritic | diacritic mid                |
| Ꝡ     | 0x346         | Combining Bridge Above               | combining diacritic | diacritic lowerdental        |
| ꝡ     | 0x347         | Combining Equal Sign Below           | combining diacritic | diacritic alveolar           |
| Ꝣ     | 0x348         | Combining Double Vertical Line Below | combining diacritic | diacritic strongarticulation |

| Glyph             | Unicode Value | Name                                    | Type                | Features   |
|-------------------|---------------|---|---------------------|--|
| ጀ                 | 0x349         | Combining Left Angle Below              | combining diacritic | diacritic weak articulation  |
| ጀጀ                | 0x34A         | Combining Not Tilde Above               | combining diacritic | diacritic denasalized  |
| ጀጀጀ               | 0x34B         | Combining Homothetic Above              | combining diacritic | diacritic nasal  |
| ጀጀጀጀ              | 0x34C         | Combining Almost Equal To Above         | combining diacritic | diacritic velopharyngeal   |
| ጀጀጀጀጀ             | 0x34D         | Combining Left Right Arrow Below        | combining diacritic | diacritic labialspread   |
| ጀጀጀጀጀጀ            | 0x34E         | Combining Upwards Arrow Below           | combining diacritic | diacritic whistled   |
| ጀጀጀጀጀጀጀ           | 0x354         | Combining Left Arrow Head Below         | combining diacritic | diacritic fronted  |
| ጀጀጀጀጀጀጀጀ          | 0x355         | Combining Right Arrow Head Below        | combining diacritic | diacritic backed   |
| ጀጀጀጀጀጀጀጀጀ         | 0x35C         | Combining Double Breve Below            | ligature            | diacritic  |
| ጀጀጀጀጀጀጀጀጀጀ        | 0x361         | Combining Double Inverted Breve         | ligature            | diacritic  |
| ጀጀጀጀጀጀጀጀጀጀጀ       | 0x362         | Combining Double Rightwards Arrow Below | ligature            | diacritic sliding  |
| ጀጀጀጀጀጀጀጀጀጀጀጀ      | 0x3B1         | Greek Small Letter Alpha                | vowel               | vowel low lax central  |
| ጀጀጀጀጀጀጀጀጀጀጀጀጀ     | 0x3B2         | Greek Small Letter Beta                 | consonant           | consonant labial bilabial voiced continuant obstruent fricative oral                                     |
| ጀጀጀጀጀጀጀጀጀጀጀጀጀጀ    | 0x3B4         | Greek Small Letter Delta                | consonant           | consonant dental coronal lingual anterior distributed voiced continuant obstruent fricative oral         |
| ጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀ   | 0x3B8         | Greek Small Letter Theta                | consonant           | consonant interdental coronal lingual anterior distributed voiceless continuant obstruent fricative oral |
| ጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀ  | 0x3BB         | Greek Small Letter Lamda                | consonant           | consonant coronal lingual anterior alveolar voiced lateral obstruent affricate oral                      |
| ጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀ | 0x3C0         | Greek Small Letter Pi                   | consonant           | consonant labial dental voiced stop obstruent oral   |

| Glyph | Unicode Value | Name   | Type             | Features  |
|-------|---------------|--|------------------|---|
| χ     | 0x3C7         | Greek Small Letter Chi   | consonant        | consonant dorsal uvular lingual voiceless continuant obstruent fricative oral     |
| ◦     | 0x1D4A        | Modifier Letter Small Schwa                                    | suffix diacritic | diacritic schwa   |
| 𝒎     | 0x1D50        | Modifier Letter Small M  | prefix diacritic | diacritic bilabial nasal  |
| 𝒏     | 0x1D51        | Modifier Letter Small Eng                                      | prefix diacritic | diacritic velar nasal   |
| 𝒏     | 0x207F        | Modifier Letter Small N  | prefix diacritic | diacritic nasal   |
| 𝒎     | 0x1DAC        | Modifier Letter Small M with Hook                              | prefix diacritic | diacritic labial dental nasal   |
| 𝒏     | 0x1DAE        | Modifier Letter Small N with Left Hook                         | prefix diacritic | diacritic palatal nasal   |
| ɳ     | 0x1DAF        | Modifier Letter Small N with Retroflex Hook                    | prefix diacritic | diacritic retroflex nasal   |
| ɳ     | 0x1DB0        | Modifier Letter Small Capital N                                | prefix diacritic | diacritic uvular nasal  |
| ɖ     | 0x1D91        | Latin Letter Small D with Hook and Tail                        | consonant        | consonant coronal lingual posterior alveolar retroflex voiced stop implosive oral |
| ॥     | 0x2016        | Double Vertical Line   | major group      | diacritic   |
| ।     | 0x7C          | Vertical Line  | minor group      | diacritic   |
| ↑     | 0x2191        | Upwards Arrow  | tone             | diacritic egressive   |
| ↓     | 0x2193        | Downwards Arrow  | tone             | diacritic ingressive  |
| ↗     | 0x2197        | Northeast Arrow  | tone             | diacritic toneglobalrise  |
| ↘     | 0x2198        | Southeast Arrow  | tone             | diacritic toneglobalfall  |
| #     | 0xA71B        | Up Arrow   | tone             | diacritic toneupstep  |
| #     | 0xA71C        | Down Arrow   | tone             | diacritic tonedownstep  |
| -     | 0x335         | Combining Short Stroke Overlay - Affix Diacritic Role Switcher | role reversal    | diacritic   |

| Glyph | Unicode Value | Name                                      | Type                | Features   |
|-------|---------------|---|---------------------|--|
| f     | 0x192         | Latin Letter Small F with Hook            | consonant           | consonant labial bilabial voiceless continuant obstruent fricative oral                                    |
| ᬁ     | 0x203F        | Undertie                                  | sandhi              | diacritic sandhi   |
| ᜀ     | 0x2040        | Overtie                                   | sandhi              | diacritic  |
| ᜁ     | 0x1AA         | Latin Letter Reversed Esh with Loop       | consonant           | consonant coronal lingual posterior alveopalatal distributed voiceless continuant obstruent fricative oral |
| ᜂ     | 0x1AD         | Latin Letter Small T with Hook            | consonant           | consonant coronal lingual anterior alveolar voiceless stop obstruent implosive oral                        |
| ᜃ     | 0x265         | Latin Letter Small Turned H               | consonant           | consonant glide labial bilabial palatal coronal lingual voiced approximant continuant sonorant oral        |
| ᜄ     | 0x270         | Latin Letter Small Turned M with Long Leg | consonant           | consonant glide dorsal velar lingual voiced approximant continuant sonorant oral                           |
| ᜅ     | 0x131         | Latin Letter Small Dotless I              | vowel               | vowel high tense atr front   |
| ᜆ     | 0x1DC4        | Combining Macron-Acute                    | combining diacritic | diacritic tonerising tonehigh  |
| ᜇ     | 0x1DC5        | Combining Grave-Macron                    | combining diacritic | diacritic tonelowrising  |
| ᜈ     | 0x1DC6        | Combining Macron-Grave                    | combining diacritic | diacritic  |
| ᜉ     | 0x1DC7        | Combining Acute-Macron                    | combining diacritic | diacritic  |
| ᜊ     | 0x1DC8        | Combining Grave-Acute-Grave               | combining diacritic | diacritic tonerisingfalling  |
| ᜋ     | 0x2191        | Upwards Arrow                             | tone                | diacritic egressive  |
| ᜌ     | 0x2193        | Downwards Arrow                           | tone                | diacritic ingressive   |
| ᜍ     | 0x2197        | North-East arrow                          | tone                | diacritic toneglobalrise   |
| ᜎ     | 0x2198        | South-East Arrow                          | tone                | diacritic toneglobalfall   |
| #     | 0xA71B        | Modifier Letter Raised Up Arrow           | tone                | diacritic toneupstep   |
| #     | 0xA71C        | Modifier Letter Raised Down Arrow         | tone                | diacritic tonedownstep   |

| Glyph | Unicode Value | Name  | Type             | Features                |
|-------|---------------|---|------------------|-------------------------|
| <     | 0x2C2         | Modifier Letter Left Arrowhead              | suffix diacritic | diacritic fronted       |
| >     | 0x2C3         | Modifier Letter Right Arrowhead             | suffix diacritic | diacritic backed        |
| ^     | 0x2C4         | Modifier Letter Up Arrowhead                | suffix diacritic | diacritic raised        |
| ∨     | 0x2C5         | Modifier Letter Down Arrowhead              | suffix diacritic | diacritic lowered       |
| ^     | 0x2C6         | Modifier Letter Circumflex Accent           | tone             | diacritic tonefalling   |
| ˇ     | 0x2C7         | Caron                                       | tone             | diacritic tonerising    |
| -     | 0x2C9         | Modifier Letter Macron                      | tone             | diacritic tonemid       |
| '     | 0x2CA         | Modifier Letter Acute Accent                | tone             | diacritic tonehigh      |
| `     | 0x2CB         | Modifier Letter Grave Accent                | tone             | diacritic toneextrahigh |
| ˘     | 0x2D4         | Modifier Letter Up Tack                     | tone             | diacritic raised        |
| ˙     | 0x2D5         | Modifier Letter Down Tack                   | tone             | diacritic lowered       |
| +     | 0x2D6         | Modifier Letter Plus Sign                   | suffix diacritic | diacritic advanced      |
| -     | 0x2D7         | Modifier Letter Minus Sign                  | suffix diacritic | diacritic retracted     |
| ~     | 0x2DC         | Small Tilde                                 | suffix diacritic | diacritic nasal         |
| ˘     | 0x2E2         | Modifier Letter Small S                     | suffix diacritic | diacritic affricate     |
| ˟     | 0x2E3         | Modifier Letter Small X                     | suffix diacritic | diacritic velar         |
| ˟     | 0x2E4         | Modifier Letter Small Reversed Glottal Stop | suffix diacritic | diacritic pharyngeal    |
| ˘     | 0x2EF         | Modifier Letter Low Down Arrowhead          | suffix diacritic | diacritic lowered       |
| ˘     | 0x2F0         | Modifier Letter Low Up Arrowhead            | suffix diacritic | diacritic raised        |

| Glyph | Unicode Value | Name                                       | Type             | Features   |
|-------|---------------|--|------------------|--|
| ‘     | 0x2F1         | Modifier Letter Low Left Arrowhead         | suffix diacritic | diacritic fronted  |
| ’     | 0x2F2         | Modifier Letter Low Right Arrowhead        | suffix diacritic | diacritic backed   |
| “     | 0x2F5         | Modifier Letter Middle Double Grave Accent | tone             | diacritic toneextralow   |
| ”     | 0x2F6         | Modifier Letter Middle Double Acute Accent | tone             | diacritic toneextrahigh  |
| ⋮     | 0x2F8         | Modifier Letter Raised Colon               | tone             | diacritic long   |
| ‘     | 0x2F9         | Modifier Letter Begin High Tone            | tone             | diacritic tonehigh   |
| ‘     | 0x2FA         | Modifier Letter End High Tone              | tone             | diacritic tonehigh   |
| ‘     | 0x2FB         | Modifier Letter Begin Low Tone             | tone             | diacritic tonelow  |
| ‘     | 0x2FC         | Modifier Letter End Low Tone               | tone             | diacritic tonelow  |
| ‘     | 0x2FD         | Modifier Letter Shelf                      | tone             | diacritic  |
| ‘     | 0x2FE         | Modifier Letter Open Shelf                 | tone             | diacritic  |
| ‘     | 0x2FF         | Modifier Letter Low Left Arrow             | tone             | diacritic  |
| ‘     | 0x1DBB        | Modifier Letter Small Z                    | suffix diacritic | diacritic affricate  |
| ‘     | 0x1DB4        | Modifier Letter Small Esh                  | suffix diacritic | diacritic affricate  |
| ‘     | 0x1DBE        | Modifier Letter Small Ezh                  | suffix diacritic | diacritic affricate  |
| ‘     | 0x1DBF        | Modifier Letter Small Theta                | suffix diacritic | diacritic dental coronal lingual anterior distributed voiceless continuant obstruent |
| ‘     | 0x1D56        | Modifier Letter Small P                    | suffix diacritic | diacritic labial   |
| ‘     | 0x1D57        | Modifier Letter Small T                    | suffix diacritic | diacritic coronal  |
| ‘     | 0x1D4F        | Modifier Letter Small K                    | suffix diacritic | diacritic dorsal   |

| Glyph           | Unicode Value | Name                                 | Type                | Features                  |
|-----------------|---------------|--------------------------------------|---------------------|---------------------------|
| b̥              | 0x1D47        | Modifier Letter Smalll B             | suffix diacritic    | diacritic labial          |
| d̥              | 0x1D48        | Modifier Letter Small D              | suffix diacritic    | diacritic coronal         |
| g̥              | 0x1D4D        | Modifier Letter Small G              | suffix diacritic    | diacritic dorsal          |
| =̥              | 0x207C        | Superscript Equals Sign              | suffix diacritic    | diacritic unaspirated     |
| ጀ               | 0x309         | Combining Hook Above                 | combining diacritic | diacritic                 |
| ጀጀ              | 0x310         | Combining Candrabindu                | combining diacritic | diacritic                 |
| ጀጀጀ             | 0x312         | Combining Turned Comma Above         | combining diacritic | diacritic aspirated       |
| ጀጀጀጀ            | 0x314         | Combining Reversed Comma Above       | combining diacritic | diacritic weaklyaspirated |
| ጀጀጀጀጀ           | 0x316         | Combining Grave Accent Below         | combining diacritic | diacritic tonerising      |
| ጀጀጀጀጀጀ          | 0x32B         | Combining Inverted Double Arch Below | combining diacritic | diacritic                 |
| ጀጀጀጀጀጀጀ         | 0x32E         | Combining Breve Below                | combining diacritic | diacritic derhoticized    |
| ጀጀጀጀጀጀጀጀ        | 0x331         | Combining Macron Below               | combining diacritic | diacritic retracted       |
| ጀጀጀጀጀጀጀጀጀ       | 0x332         | Combining Low Line                   | combining diacritic | diacritic alveolar        |
| ጀጀጀጀጀጀጀጀጀጀ      | 0x333         | Combining Double Low Line            | combining diacritic | diacritic                 |
| ጀጀጀጀጀጀጀጀጀጀጀ     | 0x33E         | Combining Vertical Tilde             | combining diacritic | diacritic distorted       |
| ጀጀጀጀጀጀጀጀጀጀጀጀ    | 0x33F         | Combining Double Overline            | combining diacritic | diacritic unaspirated     |
| ጀጀጀጀጀጀጀጀጀጀጀጀጀጀጀ | 0x350         | Combining Right Arrowhead Above      | combining diacritic | diacritic backed          |

| Glyph          | Unicode Value | Name   | Type                | Features              |
|----------------|---------------|--|---------------------|-----------------------|
| {o'            | 0x351         | Combining Left Half Ring Above                   | combining diacritic | diacritic lessrounded |
| {o'̇           | 0x352         | Combining Fermata                                | combining diacritic | diacritic             |
| {o'_           | 0x353         | Combining X Below                                | combining diacritic | diacritic             |
| {o'_̇          | 0x356         | Combining Right Arrowhead and Up Arrowhead Below | combining diacritic | diacritic             |
| {o'_̇̇         | 0x357         | Combining Right Half Ring Above                  | combining diacritic | diacritic morerounded |
| {o'̄           | 0x35D         | Combining Double Breve                           | combining diacritic | diacritic             |
| {o'̄̄          | 0x35E         | Combining Double Macron                          | combining diacritic | diacritic             |
| {o'̄̄̄         | 0x35F         | Combining Double Macron Below                    | combining diacritic | diacritic             |
| {o'̄̄̄̄        | 0x360         | Combining Double Tilde                           | combining diacritic | diacritic             |
| {o'̄̄̄̄̄       | 0x363         | Combining Latin Letter Small A                   | combining diacritic | diacritic             |
| {o'̄̄̄̄̄̄      | 0x364         | Combining Latin Letter Small E                   | combining diacritic | diacritic             |
| {o'̄̄̄̄̄̄̄     | 0x365         | Combining Latin Letter Small I                   | combining diacritic | diacritic             |
| {o'̄̄̄̄̄̄̄̄    | 0x366         | Combining Latin Letter Small O                   | combining diacritic | diacritic             |
| {o'̄̄̄̄̄̄̄̄̄   | 0x367         | Combining Latin Letter Small U                   | combining diacritic | diacritic             |
| {o'̄̄̄̄̄̄̄̄̄̄  | 0x368         | Combining Latin Letter Small C                   | combining diacritic | diacritic             |
| {o'̄̄̄̄̄̄̄̄̄̄̄ | 0x369         | Combining Latin Letter Small D                   | combining diacritic | diacritic             |

| Glyph | Unicode Value | Name                                 | Type                | Features  |
|-------|---------------|--------------------------------------|---------------------|---|
| ⓘ     | 0x36A         | Combining Latin Letter Small H       | combining diacritic | diacritic aspirated   |
| ⓘn    | 0x36B         | Combining Latin Letter Small M       | combining diacritic | diacritic nasal   |
| ⓘr    | 0x36C         | Combining Latin Letter Small R       | combining diacritic | diacritic rhotic  |
| ⓘt    | 0x36D         | Combining Latin Letter Small T       | combining diacritic | diacritic   |
| ⓘy    | 0x36E         | Combining Latin Letter Small V       | combining diacritic | diacritic   |
| ⓘx    | 0x36F         | Combining Latin Letter Small X       | combining diacritic | diacritic   |
| ·     | 0x387         | Greek Ano Teleia                     | suffix diacritic    | diacritic halflong  |
| ⓘ~    | 0x1DC9        | Falling Rising Tone                  | combining diacritic | diacritic tonefallingrising   |
| #     | 0x2C71        | Latin Letter Small V with Right Hook | consonant           | consonant labial labiodental lingual voiced approximant continuant sonorant flap oral |
| #     | 0xA71D        | MODIFIER LETTER AFRICANIST DOWNSTEP  | suffix diacritic    | diacritic tonedownstep  |
| #     | 0xA71E        | MODIFIER LETTER AFRICANIST UPSTEP    | suffix diacritic    | diacritic toneupstep  |
| ⓘ     | 0x1DA6        | MODIFIER LETTER SMALL CAPITAL I      | suffix diacritic    | diacritic palatal   |
| ⓘv    | 0x1DB7        | MODIFIER LETTER SMALL UPSILON        | suffix diacritic    | diacritic labial  |

## Listing of phonetic features

---

Listing of phonetic features.

The following is a listing of all the supported phonetic features.

**Table 13: Features**

| Name           | Synonyms         | Primary Family | Secondary Family |
|----------------|------------------|----------------|------------------|
| null           |                  |                |                  |
| diacritic      |                  |                |                  |
| unintelligible |                  |                |                  |
| unreleased     |                  | diacritic      |                  |
| consonant      | c                |                |                  |
| vowel          | v                |                |                  |
| glide          | g                |                |                  |
| cover          |                  |                |                  |
| schwa          | sch              |                |                  |
| labial         | lab              | place          | labial           |
| bilabial       | bil              | place          | labial           |
| round          |                  | place          | labial           |
| palatal        | pal              | place          | dorsal           |
| dorsal         | dor              | place          | dorsal           |
| velar          | vel              | place          | dorsal           |
| uvular         | uvu              | place          | dorsal           |
| guttural       | gut              | place          | guttural         |
| pharyngeal     | pha              | place          | guttural         |
| laryngeal      | lar glottal      | place          | guttural         |
| epiglottal     | epi              | place          | guttural         |
| dental         | den              | place          | coronal          |
| labiodental    |                  | place          | coronal          |
| interdental    |                  | place          | coronal          |
| apical         | api              | place          | coronal          |
| laminal        | lam              | place          | coronal          |
| coronal        | cor              | place          | coronal          |
| lingual        | lin              | place          |                  |
| anterior       | ant              | place          | coronal          |
| posterior      | pos              | place          | coronal          |
| alveolar       | alv              | place          | coronal          |
| alveopalatal   | alp postalveolar | place          | coronal          |
| retroflex      |                  | place          | coronal          |
| distributed    | dis              | place          | coronal          |
| voiceless      | vcl              | voicing        | voicing          |
| voiced         | ved              | voicing        | voicing          |

| Name             | Synonyms            | Primary Family | Secondary Family |
|------------------|---------------------|----------------|------------------|
| aspirated        |                     | voicing        | voicing          |
| weakly aspirated |                     | voicing        | voicing          |
| unaspirated      |                     | voicing        | voicing          |
| approximant      | app                 | manner         | continuancy      |
| liquid           | liq                 | manner         | continuancy      |
| lateral          | lat                 | manner         | continuancy      |
| rhotic           | rho                 | manner         | continuancy      |
| stop             | plosive             | manner         | continuancy      |
| continuant       | cnt                 | manner         | continuancy      |
| obstruent        | obs                 | manner         | continuancy      |
| sonorant         | son                 | manner         | continuancy      |
| fricative        | fri                 | manner         | continuancy      |
| affricate        | aff delayed release | manner         | continuancy      |
| click            |                     | manner         | continuancy      |
| implosive        |                     | manner         | continuancy      |
| flap             | tap                 | manner         | continuancy      |
| trill            |                     | manner         | continuancy      |
| ejective         |                     | manner         | continuancy      |
| nasal            | nas                 | manner         | nasality         |
| oral             |                     | manner         | nasality         |
| prenasalized     |                     | manner         | nasality         |
| strident         | str                 | manner         | stridency        |
| low              |                     | height         |                  |
| mid              |                     | height         |                  |
| high             |                     | height         |                  |
| tense            |                     | tongue root    |                  |
| atr              |                     | tongue root    |                  |
| rtr              |                     | tongue root    |                  |
| lax              |                     | tongue root    |                  |
| front            |                     | backness       |                  |
| central          |                     | backness       |                  |
| back             |                     | backness       |                  |
| derhoticized     |                     | diacritic      |                  |
| syllabic         | syl                 | diacritic      |                  |
| nonsyllabic      |                     | diacritic      |                  |
| advanced         |                     | diacritic      |                  |

| Name              | Synonyms | Primary Family | Secondary Family |
|-------------------|----------|----------------|------------------|
| retracted         |          | diacritic      |                  |
| lowered           |          | diacritic      |                  |
| raised            |          | diacritic      |                  |
| fronted           |          | diacritic      |                  |
| backed            |          | diacritic      |                  |
| morerounded       |          | diacritic      |                  |
| lessrounded       |          | diacritic      |                  |
| long              |          | diacritic      |                  |
| halflong          |          | diacritic      |                  |
| extrashort        |          | diacritic      |                  |
| breathyvoiced     |          | diacritic      |                  |
| creakyvoiced      |          | diacritic      |                  |
| prstress          | 1        | diacritic      |                  |
| secstress         | 2        | diacritic      |                  |
| toneglobalrise    |          | diacritic      |                  |
| tonedownstep      |          | diacritic      |                  |
| tonefalling       |          | diacritic      |                  |
| tonerisingfalling |          | diacritic      |                  |
| tonefallingrising |          | diacritic      |                  |
| tonelowrising     |          | diacritic      |                  |
| tonehighrising    |          | diacritic      |                  |
| tonerising        |          | diacritic      |                  |
| tonehigh          |          | diacritic      |                  |
| tonemid           |          | diacritic      |                  |
| toneglobalfall    |          | diacritic      |                  |
| toneextrahigh     |          | diacritic      |                  |
| tonelow           |          | diacritic      |                  |
| toneupstep        |          | diacritic      |                  |
| toneextralow      |          | diacritic      |                  |
| tone1             |          | diacritic      |                  |
| tone2             |          | diacritic      |                  |
| tone3             |          | diacritic      |                  |
| tone4             |          | diacritic      |                  |
| tone5             |          | diacritic      |                  |
| tone6             |          | diacritic      |                  |
| tone7             |          | diacritic      |                  |

| Name                    | Synonyms | Primary Family | Secondary Family |
|-------------------------|----------|----------------|------------------|
| tone8                   |          | diacritic      |                  |
| tone9                   |          | diacritic      |                  |
| pause                   |          | diacritic      |                  |
| denasalized             |          | diacritic      | nasality         |
| egressive               |          | diacritic      | manner           |
| ingressive              |          | diacritic      | manner           |
| labialspread            |          | diacritic      | labial           |
| lowerdental             |          | diacritic      | place            |
| narealfricative         |          | nasality       | manner           |
| percussive              |          | manner         |                  |
| sliding                 |          | diacritic      | manner           |
| strongarticulation      |          | diacritic      | manner           |
| weakarticulation        |          | diacritic      | manner           |
| distorted               |          | diacritic      |                  |
| subapical               |          | place          | coronal          |
| velopharyngeal          |          | place          |                  |
| velopharyngealfricative |          | diacritic      | manner           |
| whistled                |          | diacritic      | manner           |
| lenis                   |          | diacritic      | manner           |
| sandhi                  |          | diacritic      |                  |
| quasiresonant           |          | place          |                  |
| semiresonant            |          | place          |                  |
| raspberry               |          | place          |                  |
| transition              |          | place          |                  |



---

# Chapter

# 3

---

## Phonex

---

**Topics:**

- Introduction
  - Language Reference
  - Examples
- 

## Introduction

---

Phonex is a pattern matching language for IPA transcriptions. *Phonex* is used to query IPA transcriptions for sequences of phones based on both segmental and prosodic criteria.

Features include:

- Query based on features. E.g., {fricative}
- Custom phone classes. E.g., \c, \v, \w (consonants, vowels, consonant or vowel respectively.)
- Query based on constituent type. E.g., {fricative} :C (fricative codas)
- Query based on stress. E.g., \c!1 (stressed consonants)

Note: *regular expressions* are a powerful text searching tool that are available in many applications. An understanding of *regular expressions* (or *regex*) is useful for understanding *phonex*. *Regular expression* guides can be found [here](#).

## Language Reference

---

### Phone Matchers

Various methods of matching phones using phonex 2.0.

As outlined in the Phonex Constructs section, there are several methods for matching phones in phonex. This section describes these methods in more detail.

#### Character matchers

Character matchers are defined by simply typing the character for the desired phone. Character matchers will match any phone with the specified *base-character* - regardless of attached diacritics. Characters may also be written using their unicode values.

**Table 14: Character matcher examples**

| Expression | Matches                                 |
|------------|---|
| a          | The vowel a                             |
| ba         | The consonant b followed by the vowel a |
| \u0068     | The consonant h                         |

#### Feature set matchers

Every IPA character can be described using a set of phonetic features. Feature set matchers are denoted by enclosing a list of feature names inside braces. Features contained within a phonex feature set matcher can be required (default) or unwanted (prefixed by – (minus)). Feature names are case-insensitive and can be written using the full feature name or shorthand equivalent (e.g., {consonant} is the same as {c}).

**Table 15: Feature set matcher examples**

| Expression              | Matches                    |
|-------------------------|----------------------------|
| {consonant,<br>coronal} | All coronal consonants     |
| {c, -coronal}           | All non-coronal consonants |
| { }                     | Anything                   |

## Regex matchers

Since IPA transcriptions are composed of unicode strings, regular expressions can also be used to match phones. To use a regex matcher, place the desired regular expression inside single quote characters.

**Table 16: Regex matcher examples**

| Expression | Matches  |
|------------|--|
| 'a'        | The vowel a. Unlike the un-quoted version, 'a' will not match cases that have attached diacritics. |
| '[e-i]'    | Characters in the range 'e' to 'i'.  |

## Phone class matchers

Phone class matchers combine several phone matchers into a 'class.' Phone classes are denoted by enclosing a set of phone matchers inside brackets. The phone class will match if any of the inner-matchers match. If the phone class starts with a - (minus) symbol, then the class will match any phone *not* matched by the inner-matchers.

**Table 17: Phone class examples**

| Expression      | Matches                                     |
|-----------------|---|
| [{glide}\v]     | Any glide or vowel.                         |
| [^{c,labial}\v] | Anything not a labial consonant or a vowel. |

## Compound phone matchers

Compound phones are composed of two single-phones bi-sected by a ligature. To match compound phones in phonex, connect two phone matchers using a \_ (underscore) character.

**Table 18: Compound phone matcher examples**

| Expression    | Matches   |
|---------------|---|
| t_{fricative} | Any compound phone starting with the consonant 't' and ending with a fricative. |
| ._.           | Any compound phone.   |

## Boundaries

Description of special boundary markers.

Boundary markers perform special operations. Since they have the ability to match nothing, quantifiers and plug-in matchers cannot be applied to boundary matchers.

## Beginning/End of Input

The beginning and end of input characters ('^' and '\$' respectively) match exactly what their names imply and should only appear at the beginning/end of a phonex expression.

## Word Boundaries

Word boundaries detect and match the edges of words in the given input. Word boundaries are detected at the beginning/end of input as well as whitespace.

## Syllable Boundaries

Syllable boundaries detect and match the edges of syllables in the given input. Syllable boundaries are detected at the beginning/end of input, whitespace, ipa punctuation (stress, pauses, periods, etc.), and - if available - using syllabification information. When reading an input string from left to right, if a space and stress marker are adjacent then the syllable boundary will match *once* (i.e., only one syllable boundary is detected - not two.)

## Quantifiers

Description of phonex quantifiers.

Quantifiers modify the number of times a phone matcher or group can be repeated. Quantifiers are always applied to the preceding matcher or group. There are three types of quantifiers in phonex: *greedy*, *reluctant*, and *possessive*.

*Greedy* quantifiers are such called because they attempt to match the entire input on first match. If the match fails, the matcher backs off one phone at a time until a match is obtained or until the number of choices has been exhausted.

*Reluctant* quantifiers do the opposite; they will reluctantly process phones, only attempting a full input match as a last resort.

*Possessive* quantifiers never back off; they will always process as many phones as possible, never attempting to backtrack - even if doing so would allow the match to succeed.

To illustrate the difference between different quantifiers, consider the following examples using the input string: hello.

**Table 19: Greedy vs. Reluctant Quantifiers**

| Expression                     | Finds   |
|--------------------------------|---|
| . * \v ( <i>greedy</i> )       | 1 occurrences - hello   |
| . * ? \v ( <i>reluctant</i> )  | 2 occurrences - he, llo   |
| . * + \v ( <i>possessive</i> ) | 0 occurrences since '.*+' initially matches the final 'o' in the input and will not backtrack |

## Groups

Phonex allows defining groups by placing any subpattern between the parenthesis - ( and ) - metacharacters.

Some reasons to use groups:

- Repeating subpatterns
- Extract information for further processing
- Exclude part of the pattern from the final match
- Denote different possible subpatterns

### Capture Group

Capture groups are used to extract portions of matches for further processing. In Phon this is often used to create a new column in query result listings containing the data matched by the group subpattern.

For example, say you were searching for any CV pattern (e.g., \c\ \v) but you wanted the consonant and vowel in their own separate columns in a Phon query report. You would place each phone matcher into a group using parenthesis. (It's also required to 'name' the group in this situation, see 'Group Names' below.)

E.g.

```
(\c) (\v)
```

Capture groups may be quantified. The following expression will match a consonant followed by a vowel repeatedly:

```
(\c\ \v) +
```

## Lookahead and Lookbehind Groups

Lookahead and lookbehind groups allow matching subpatterns around a pattern without including the content matched by the lookahead or lookbehind group. These groups are considered to be zero-width assertions (i.e., the length of matched content is zero) like the start-of-input ^ and end-of-input \$ boundary matchers.

Lookahead patterns are contained within parenthesis like regular groups with the special prefix ?>. An example of using a lookahead group would be to search for all consonants \c which are followed by a high vowel {v, high}.

```
\c(?>{v, high})
```

Lookbehind patterns are specified by the group prefix ?<. They behave in the same manner as lookahead groups, but look backwards in the input rather than forwards. An example would be to search for all vowels \v which are preceded by a b.

```
(?<b)\v
```

Lookahead and lookbehind groups can be used together in the same pattern.

## Conditional Groups

Conditional groups allow for choices within patterns. To specify choices, subpatterns in a group are separated by the logical-or (or pipe) | metacharacter. The following example will match the sequence bab as well as dib.

```
(ba|di)b
```

Conditional groups may be quantified.

## Group Numbers

Groups in a phonex pattern are numbered left to right. Each open parenthesis ( metacharacter will increment the group index by 1 unless the group is 'non-capturing' such as for lookbehind and lookahead groups. The following example pattern has two groups, the first group includes both the consonant \c and vowel \v matchers; the second group includes only the vowel \v matcher:

```
(\c(\v))
```

The next example also has two groups as the lookbehind group is not included in group indexing:

```
(?<^\s)(\c(\v))
```

Phonex includes syntax to exclude a group from indexing (the group's content will not be stored.) These groups are called non-capturing or organizational groups. To exclude a group from indexing the group content must start with ?=. The following phonex pattern has two capturing groups: group 1 includes a syllable boundary \s, consonant \c, and vowel \v matcher; group 2 includes just the vowel \v matcher. There is one non-capturing group containing the consonant \c matcher.

```
(\s(=?\c)(\v))
```

Note that while the consonant is considered part of a non-capturing group it will still be included in the enclosing group's matched data.

## Group Names

Capturing groups may also be named. To name a group the group content should start with the desired group name followed by an equals = metacharacter. The group name must start with a letter and consist of only letters, numbers, and underscore \_ . The following expression has two named groups; the first group name is 'onset' and will match

a consonant in the onset position \c:O; the second group name is 'nucleus' and will match a vowel in the nucleus position \v:N.

```
(onset=\c:O) (nucleus=\v:N)
```

When used in Phon queries named groups will be added to result listings in a new column with a title matching the phonex group name. The group name X is reserved in Phon queries to mark the portion of the phonex pattern to be used as the query result.

## Back References

Back references are used to match a subpattern previously matched by a capture group. Back references can be specified using either the group number or group name. For a numbered back reference enter a backslash \ metacharacter followed by the group number. The following pattern will match a consonant, store the value of the matched consonant in group number 1, and then match the value of group 1 again (i.e., it will match repeated consonants.)

```
(\c)\1
```

To use a named group reference enter a backslash \ metacharacter followed by the group name enclosed in braces - { and }. The following pattern will match a consonant, store the value of the matched consonant in a group named C1, and then match the sequence stored in group C1.

```
(C1=\c)\{C1}
```

Group names are case sensitive, so in the above example \{c1} would result in an error as there is no group named c1 with a lower-case C. Another caveat is that the \{C1} back reference will *not* match syllable position information (e.g., :O) or other supplementary matchers specified in the capture group. Quantifiers may be applied to back references but supplementary matchers are not allowed.

## Comments

Comments may be inserted in phonex expression using c-style comment syntax. There are two types of comments:

1. General Comment /\* ... \*/
2. End of Line Comment // ...

### General Comments

General comments start with the /\* token and end with \*/. They can be found anywhere in the expression and may span multiple lines.

E.g.,

```
/*
 * This is a comment
 */
\c\v
```

```
\c /* This is also a comment */ \v
```

### End of Line Comment

End of line comments begin with the // token and include the remainder of the current line.

E.g.,

```
// This is a comment
```

```
\c\v
```

```
\c // Everything after the first '//' is a comment
\v
```

## Phonex Constructs

A summary of all possible phonex constructs.

**Table 20: Phone matchers**

| Construct  | Matches  |
|--|--|
| <i>x</i>   | The phone <i>x</i> . Matches regardless of diacritics.                     |
| <i>x_y</i>   | The compound phone consisting of phones matched by <i>x</i> and <i>y</i> . |
| \unnnn   | The phone with unicode value <i>nnnn</i> as a hexadecimal number.          |
| \*   | The * cover symbol.  |
| \.   | The . syllable boundary marker.  |
| \+   | The + compound word marker.  |
| \^   | The ^ intra-word pause maker.  |
| 's'  | The phone with text that matches the regular expression <i>s</i>           |
| {f <sub>0</sub> ,f <sub>1</sub> ...,f <sub>n</sub> } | The phone with features f <sub>0</sub> ... f <sub>n</sub>                  |

**Table 21: Grouping**

| Construct         | Matches   |
|-------------------|---|
| ( <i>X</i> )      | <i>X</i> , as a <i>capturing group</i>  |
| ( <i>X Y</i> )    | <i>X</i> or <i>Y</i> , as a <i>capturing group</i>  |
| (?=X)             | <i>X</i> , as a <i>non-capturing group</i>  |
| (name= <i>X</i> ) | <i>X</i> , as a <i>named, capturing group</i> . <i>name</i> may consist of letters and numbers, but must start with a letter. |
| \ <i>n</i>        | The content matched by group <i>n</i>   |
| (?< <i>X</i> )    | Look behind and match <i>X</i> as a non-capturing group   |
| (?> <i>X</i> )    | Look ahead and match <i>X</i> as a non-capturing group  |

**Table 22: Phone classes**

| Construct | Matches                               |
|-----------|---------------------------------------|
| [xyz]     | <i>x</i> , <i>y</i> , or <i>z</i>     |
| [^xyz]    | Not <i>x</i> , <i>y</i> , or <i>z</i> |

**Table 23: Predefined phone classes**

| Construct | Matches       |
|-----------|---------------|
| .         | Anything      |
| \c        | Any consonant |

| Construct | Matches   |
|-----------|---|
| \g        | Any glide   |
| \v        | Any vowel   |
| \p        | Any intra-word pause (i.e., ^)  |
| \P        | Any inter-word pause (e.g., (.), (..), ...)   |
| \w        | Any consonant or vowel.   |
| \W        | Any non-word character (i.e., any character not matched by \w, e.g., same as [^\w]) |
| \s        | Any stress marker   |

**Table 24: Boundary matchers**

| Construct | Matches   |
|-----------|---|
| ^         | Beginning of input  |
| \$        | End of input  |
| \b        | A word boundary including beginning of input, end of input, and whitespace.   |
| \S        | A syllable boundary including 'forced' syllable boundaries such as beginning of input, end of input, and whitespace; and, if syllable constituent types are available, 'soft' syllable boundaries detected at syllable edges. |

**Table 25: Plug-ins**

| Construct            | Matches  |
|----------------------|--|
| <i>x:plugin('s')</i> | <i>x</i> if, and only if, the plug-in matcher identified by <i>plugin</i> matches with expression <i>s</i>   |
| <i>x&amp;y</i>       | <i>x</i> if, and only if, a diacritic attached to <i>x</i> matches the expression <i>y</i> . (e.g., <i>h&amp;{aspirated}</i> will match all 'h's with aspirated diacritics.) |
| <i>x:</i>            | Same as <i>x&amp;{/long}</i> .   |
| <i>x!s</i>           | <i>x</i> if, and only if, the syllable stress of the phone matches <i>s</i> .  |

**Table 26: Quantifiers (greedy)**

| Construct            | Matches   |
|----------------------|---|
| <i>X?</i>            | <i>X</i> , once or not at all                                 |
| <i>X*</i>            | <i>X</i> , zero or more times                                 |
| <i>X+</i>            | <i>X</i> , one or more times                                  |
| <i>X&lt;n&gt;</i>    | <i>X</i> , exactly <i>n</i> times                             |
| <i>X&lt;,n,&gt;</i>  | <i>X</i> , at least <i>n</i> times                            |
| <i>X&lt;,n,&gt;</i>  | <i>X</i> , zero to <i>n</i> times                             |
| <i>X&lt;,n,m&gt;</i> | <i>X</i> , at least <i>n</i> but not more than <i>m</i> times |

**Table 27: Quantifiers (reluctant)**

| Construct  | Matches                       |
|------------|-------------------------------|
| <i>X??</i> | <i>X</i> , once or not at all |

| Construct    | Matches  |
|--------------|--|
| $X^?$        | $X$ , zero or more times                       |
| $X^+?$       | $X$ , one or more times                        |
| $X^{<n>}?$   | $X$ , exactly $n$ times                        |
| $X^{<n,>}?$  | $X$ , at least $n$ times                       |
| $X^{<,n>}?$  | $X$ , zero to $n$ times                        |
| $X^{<n,m>}?$ | $X$ , at least $n$ but not more than $m$ times |

**Table 28: Quantifiers (possessive)**

| Construct     | Matches  |
|---------------|--|
| $X?^+$        | $X$ , once or not at all                       |
| $X^*^+$       | $X$ , zero or more times                       |
| $X^{++}$      | $X$ , one or more times                        |
| $X^{<n>}^+$   | $X$ , exactly $n$ times                        |
| $X^{<n,>}^+$  | $X$ , at least $n$ times                       |
| $X^{<,n>}^+$  | $X$ , zero to $n$ times                        |
| $X^{<n,m>}^+$ | $X$ , at least $n$ but not more than $m$ times |

## Supplementary Matchers

### Overview

Supplementary matchers in phonex 2.0.

One or more supplementary matchers can be attached to a phone matcher, separated by a : (colon). Each supplementary matcher may take zero or more arguments, defined by the supplementary matcher. The following sections describe the supplementary matchers provided with Phon.

### stress

Description of the phonex `stress` supplementary matcher.

The `stress` supplementary matcher will query the detected syllable stress of a phone. The argument given to the plug-in must be one of the following characters:

- 1 - primary stress
- 2 - secondary stress
- A - any stress
- U - unstressed

The `stress` matcher has a short-hand withing phonex. The stress type may be specified after a ! character after a phone matcher.

### Onsets of primary stress syllables

```
.:sctype("Onset") :stress("1")
```

or

```
.:O!1
```

**sctype**

Description of the phonex `sctype` supplementary matcher.

The `sctype` supplementary matcher queries the syllable constituent type of a phone. The expression given to the matcher must be a list of syllable constituent types from the following list, separated by a `|` (pipe.)

- `LeftAppendix` or `L`
- `Onset` or `O`
- `Nucleus` or `N`
- `Coda` or `C`
- `RightAppendix` or `R`
- `Ambisyllabic` or `A`
- `OEHS` or `E`
- `SyllableStress` or `S`
- `SyllableBoundary` or `B`
- `WordBoundary` or `W`
- `Unknown` or `U`

All constituent types are case-insensitive. Constituent types can also be prefixed by a `-` (minus) to indicate the constituent type is not-allowed.

The `sctype` matcher also has a shorthand within phonex. A single constituent type may be queried on a phone matcher by specifying one of the single-character codes shown above prefixed by a `:`.

Both of these expressions will search for 'b' in the onset position:

```
b:sctype ("Onset")
```

or

```
b:O
```

**diacritic**

Description of the phonex `diacritic` supplementary matcher.

The `diacritic` supplementary matcher queries the diacritic sections of a phone. It accepts a single parameter which can be either:

- A single character
- A feature set matcher
- A phone class matcher

The matcher will match if any of the diacritics of the phone match the provide argument. This matcher also has a short-hand within phonex, the argument provided may be specified by using the `&` character after a phone matcher.

Search for any phone that has a diacritic.

```
.:diacritic ("{}")
```

or

```
. & .
```

Both of these expressions will search for any phone with the diacritics which add the `{labial}` or `{aspirated}` features.

```
.:diacritic ("[{aspirated}{labial}]")
```

or

```
. & [{aspirated}{labial}]
```

### **prefix**

Description of the `prefix` supplementary matcher.

The `prefix` supplementary matcher queries the prefix section of a phone. It accepts a single parameter which can be either:

- A single character
- A feature set matcher
- A phone class matcher

The matcher will match if any of the diacritics of the phone match the provide argument.

Search for a phone with the prefix diacritic \u02b0

```
. :prefix("\u02b0")
```

### **suffix**

Description of the `suffix` supplementary matcher.

The `prefix` supplementary matcher queries the prefix section of a phone. It accepts a single parameter which can be either:

- A single character
- A feature set matcher
- A phone class matcher

The matcher will match if any of the diacritics of the phone match the provide argument.

Search for a phone with the suffix diacritic \u02b0

```
. :suffix("\u02b0")
```

### **comb**

Description of the `comb` supplementary matcher.

The `comb` supplementary matcher queries the combining diacritic section of a phone. It accepts a single parameter which can be either:

- A single character
- A feature set matcher
- A phone class matcher

The matcher will match if any of the combining diacritics of the phone match the given argument.

Search for a phone that has the combining diacritic \u0300

```
. :comb("\u0300")
```

### **tone**

Description of the `tone` supplementary matcher.

The `tone` supplementary matcher queries the detected tone of the phone. The superscript number diacritics for tone apply to all elements of a syllable. One argument is accepted denoting the allowed tones accepted, with multiple allowed values separated by a '|'. The numbers 1-9 may be used to identify tone type with '\*' being any tone.

Search for a cluster of phones with tone 1

```
. :tone("1") +
```

## Examples

---

### Basic Phone Matching

#### Characters Matchers

Query for consonants using the base glyph.

Examples:

```
| Phonex | Meaning | --|-| b | Any consonant with 'b' as the base glyph || d | Any consonant with 'd' as the base glyph |
```

#### Feature Set Matchers

Query using feature names. Features names are placed between braces (i.e., '{}').

Examples:

```
| Phonex | Meaning | --|-| {consonant} | Any consonant || {fricative} | Any fricative |
```

Multiple feature name may be provided, separated by commas. If a particular feature is to be excluded from the query it should be prefixed by a minus sign.

Examples:

```
| Phonex | Meaning | --|-| {fricative, voiced} | Voiced fricatives || {consonant, -stop} | All consonants which are not stops |
```

Many feature names also have shorthand equivalents. A listing of all feature names supported by phone along with their synonyms can be found [here](#).

Examples:

```
| Phonex | Meaning | --|-| {c} | Any consonant || {fri} | Any fricative |
```

## Example Phones Queries

The following examples are available in Phon from the *Phones* query window as *named queries*.

#### Standalone Consonants

```
// Look-behind '(?<' and match beginning of input '^'  
// followed by an optional stress marker '\s?'  
(?<^\s?)  
// Match a consonant '(\c)' followed by end of input '$'  
(\c)$
```

#### Initial Singleton Consonants

```
// Look-behind '(?<' and match beginning of input '^'  
// followed by an optional stress marker '\s?'  
(?<^\s?)  
// Match a consonant (\c)  
(\c)  
// Look-ahead '(?>' and match a vowel  
(?>\v)
```

## Medial Singleton Consonants

```
// Look-behind '(?<' and match a vowel '\v'
// followed by an optional stress marker '\s?'
(?<\v\s?)
// Match a consonant
(\c)
// Look-ahead '(?>' and match an optional stress maker and vowel
(?:>\s?\v)
```

## Final Singleton Consonants

```
// Look-behind '(?<' and match a vowel '\v'
(?<\v)
// Match a consonant '(\c)' followed by end of input '$'
(\c)$
```

## Singleton Consonants

```
// The double pipe operator will combine results of independent expressions
// Standalone Consonants
(?<^\s?) (\c)$ ||
// Initial Consonants
(?<^\s?) (\c) (?>\v) ||
// Medial Consonants
(?<\v\s?) (\c) (?>\s?\v) ||
// Final Consonants
(?<\v) (\c)$
```

## Singleton Onsets

```
// The double pipe operator will combine results of independent expressions
// Standalone Onsets
(?<^\s?) (\c:O:E)$ ||
// All other Singleton Onsets
(?<\S) (\c:O) (?>.N)
```

## Singleton Codas

```
// The double pipe operator will combine results of independent expressions
// Medial Singleton Codas
(?<.:N) (\c:C) (?>\s? (\c:O | .:N)) ||
// Final Singleton Codas
(?<.:N) (\c:C)$
```

## Initial Consonant Clusters

```
// Look-behind '(?<' and match beginning of input '^'
// followed by an optional stress marker '\s?'
(?<^\s?)
// Match a 2 or more consonants '(\c<2,>)'
(\c<2,>)
// Look-ahead '(?>' and match an optional stress marker '\s?' and vowel '\v'
(?:>\s?\v)
```

## Medial Consonant Clusters

```
// Look-behind '(?<' and match a vowel '\v'
// followed by an optional stress marker '\s?'
```

```
(?<\v\s?)
// Match a 2 or more consonants '(\c<2,>)'
(\c<2,>
// Look-ahead '(?>' and match an optional stress marker '\s?' and vowel '\v'
(?>\s?\v)
```

## Final Consonant Clusters

```
// Look-behind '(?<' and match a vowel '\v'
// followed by an optional stress marker '\s?'
(?<\v\s?)
// Match a 2 or more consonants '(\c<2,>)'
// followed by end of input '$'
(\c<2,>) $
```

## Heterosyllabic Consonant Clusters

```
// match one or more consonants '\c+'
\c+
// followed by a syllable boundary '\S' (includes implicit boundaries)
\S
// followed by one or more consonants '\c+'
\c+
```

## Consonant Clusters

```
// The double pipe operator will combine results of independent expressions
// Initial/medial Consonant Clusters
(\c<2,>) (?>\s?\v) ||
// Final Consonant Clusters
(\c<2,>) $ ||
// Heterosyllabic Clusters
(\c+[\s\.\.])\c+)
```

## Syllable-initial Clusters

```
// Includes left appendices ':L', onsets ':O' and OEHS ':E'
(?<^\s?) (\c:L:O:E<2,>) ||
(?<\v\s?) (\c:L:O:E<2,>)
```

## Syllable-final Clusters

```
// Includes right appendices ':R' and codas ':C'
(\c:C:R<2,>) $ ||
(\c:C:R<2,>) (?>\s?\c:O)
```

## Tautosyllabic Consonant Clusters

```
^(\c:L:O:E<2,>) ||
(?<\v\s?) (\c:L:O:E<2,>) ||
(\c:C:R<2,>) $ ||
(\c:C:R<2,>) (?>\s?\c:O)
```

## Syllables (short)

```
// Query all syllables, store each section in a named group
// Stress
(S=\s)?
```

```
// Onset
(O=\c:L:O<,5>)
// Rhyme
(R=
  // Nucleus
  (N=.:D<2> | .:N)
  // Coda
  (C=\c:C:R<,5>)
)
```

## Syllables (expanded)

```
// Query all syllables, store each constituent in a named group
// Stress
(S=\s)?
// Onset
(O=
  (O1=\c:L:O) (O2=\c:L:O) (O3=\c:L:O) (O4=\c:O) (O5=\c:O)
  | (\c:L:O) (\c:L:O) (\c:O) (\c:O)
  | (\c:L:O) (\c:O) (\c:O)
  | (\c:O) (\c:O)
  | (\c:O:E)
)?
// Rhyme
(R=
  // Nucleus
  (N=
    (N1=.:D) (N2=.:D) | (.:N)
  )
  // Coda
  (C=
    (C1=\c:C) (C2=\c:C) (C3=\c:C:R) (C4=\c:C:R) (C5=\c:C:R)
    | (\c:C) (\c:C) (\c:C:R) (\c:C:R)
    | (\c:C) (\c:C) (\c:C:R)
    | (\c:C) (\c:C)
    | (\c:C)
  )?
)
```



---

# Chapter

# 4

---

## Queries

---

### Topics:

- [Query and Report Wizard](#)
- [Query: Data Tiers](#)
- [Query: Phones](#)
- [Query: Segmental Relations](#)
- [Common Query Options](#)


## Query and Report Wizard

The query and report wizard is displayed when executing any query. The wizard has three main steps:

1. [Query](#) - enter query settings and execute query.
2. [Report Composer](#) - choose and configure report sections.
3. [Report](#) - Generate and view report.


### Step 1: Query

The first step of the query wizard is to select sessions enter query parameters. Once query parameters have been entered, click the 'Run Query' button (shortcut F7) to execute the query. After a query has completed you may open individual session results or continue to [Step 2: Report Composer](#).

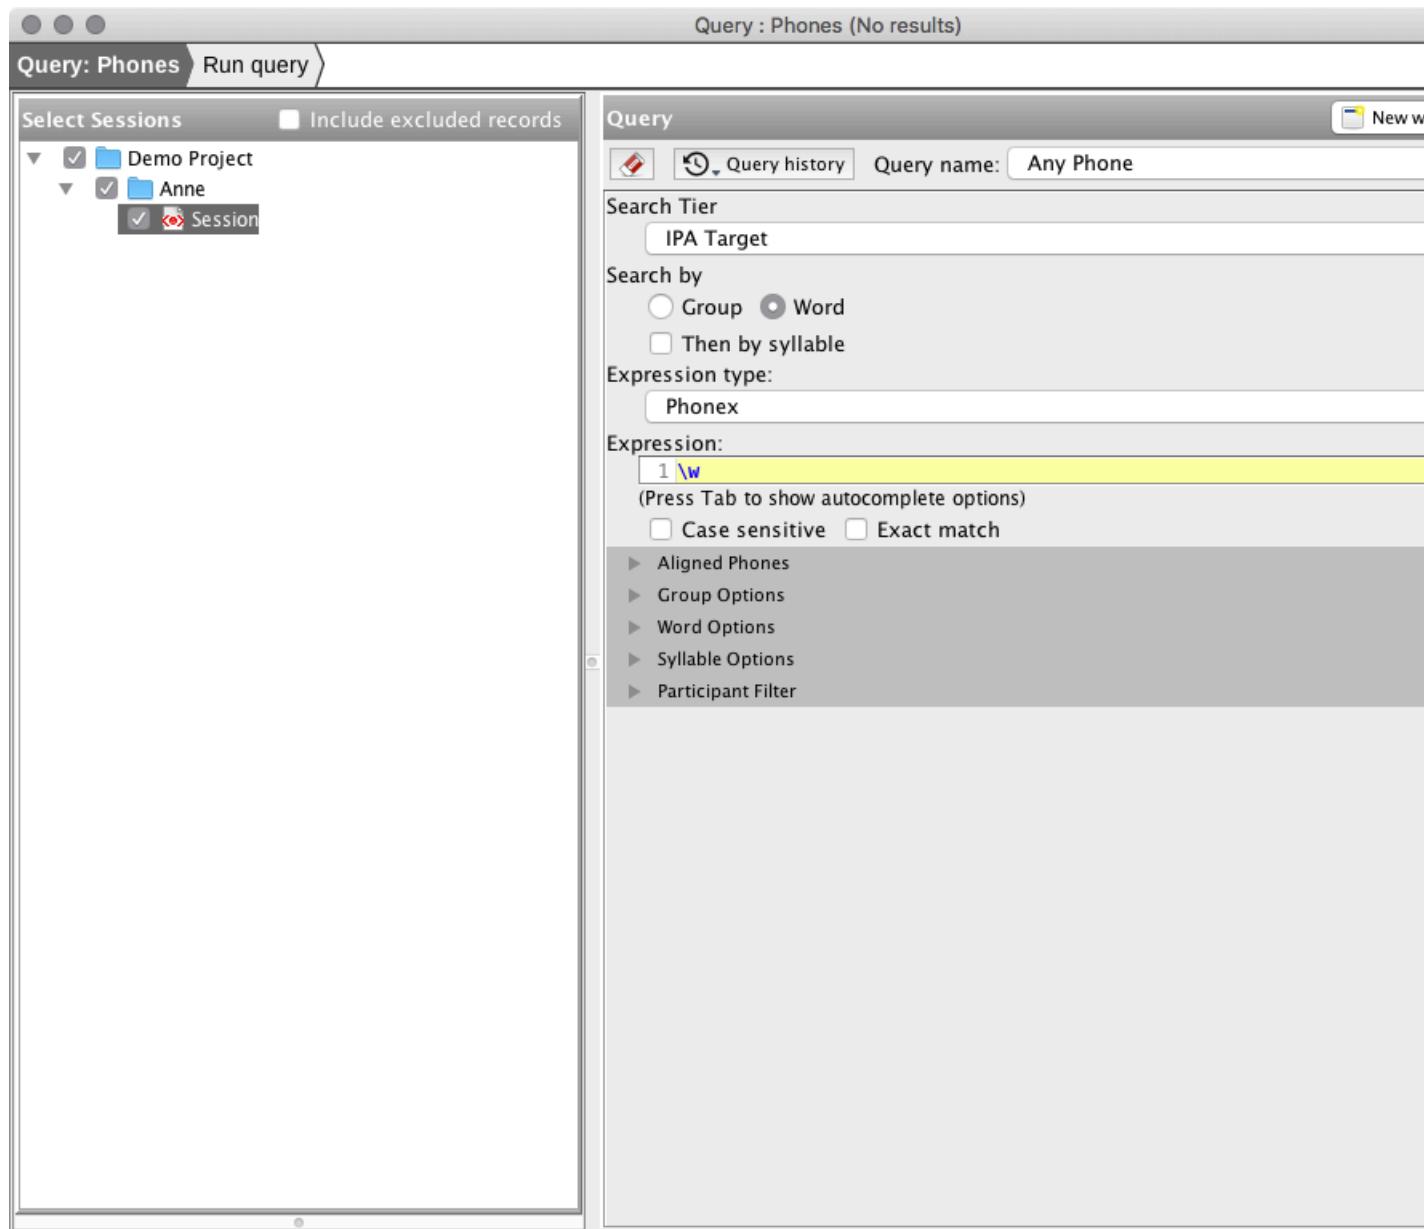


## Named Queries

Named queries are available via a combo-box menu in the top-right portion of the query parameters section. To save the current set of parameters as a new named query using the save button and the end of the toolbar and choose 'Name Query' from the drop down menu.

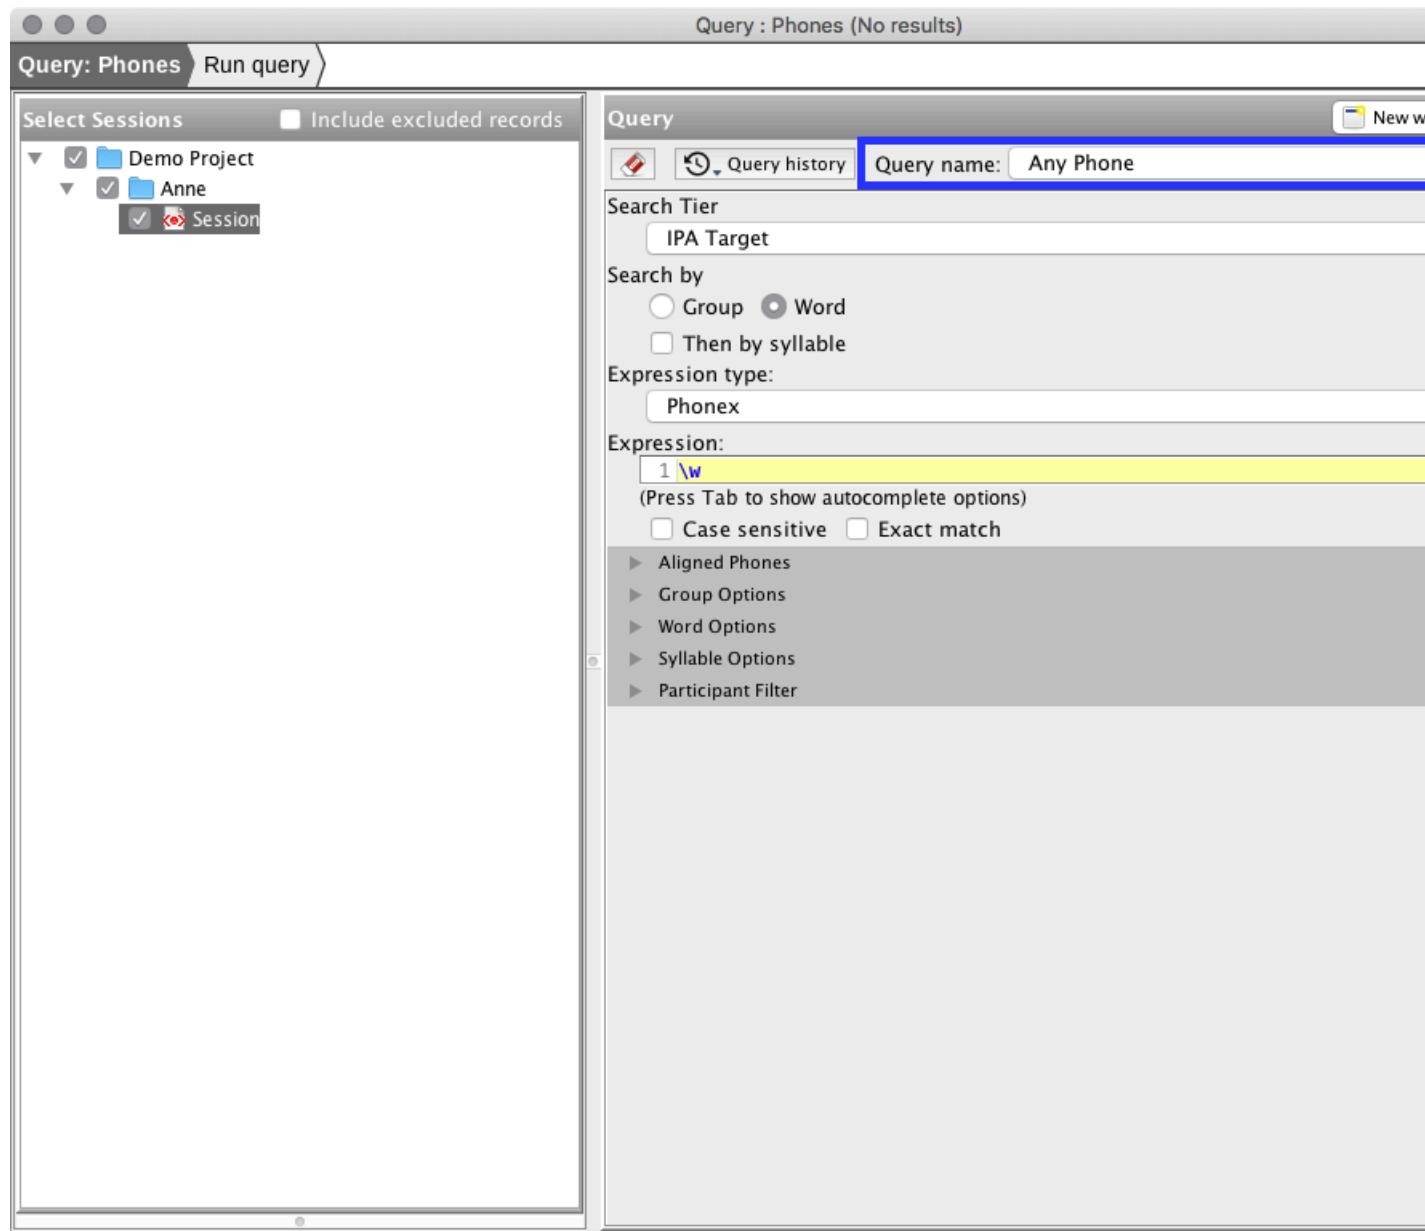

## Query History

The parameters of each executed query are saved in a query history unique to each query type (e.g., Phones, Data Tiers, etc.) When opening the Query and Report wizard the most recent entry (i.e., the previously executed query) in the query history is loaded. Query history can be viewed using the 'Query history' button in the toolbar of the query form. Double-clicking an item in the displayed popup

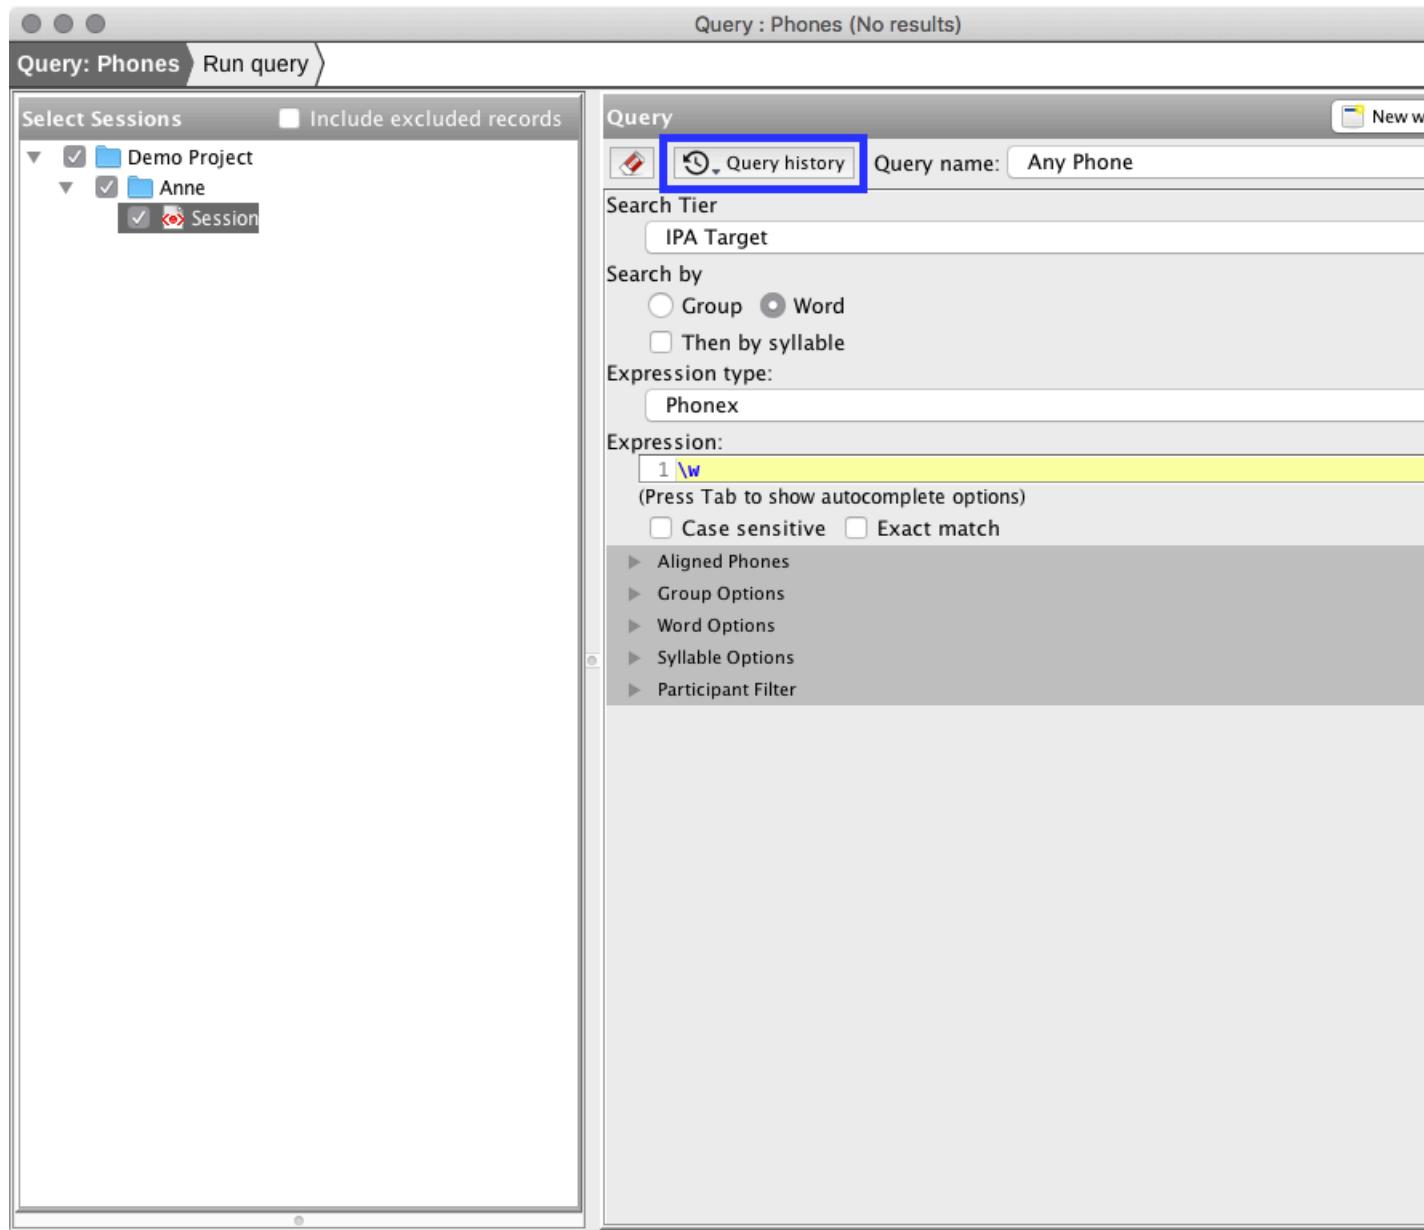

## Query Results

Queries are executed by clicking the 'Run Query' button. Result sets are displayed in a table on the bottom-left portion of the wizard (under the session selector) in a view named 'Query Results.' Queries can be executed more than once, the results of each execution will be titled 'Query 1', 'Query 2', 'etc.' You can select the active result set using the combo-box in the top-right corner of the Query Results view. Result sets may be discarded by clicking the '-' button in the top-right corner of the Query Results view (or by using the 'Query' window menu.)

The screenshot shows the 'Query : Phones (Query 3)' window. On the left, a 'Query Results' table displays 16 sessions, each with a progress bar and a status indicator (green checkmark). The table includes columns for Session, Status, Progress, and # of Res... The right side of the window contains a 'Query' configuration panel with tabs for 'IPA Target', 'Word', and 'Phonex'. The search expression '1 \w' is entered, with options for Case sensitive, Exact match, and Allow overlapping matches. Below the expression are sections for Aligned Phones, Group Options, Word Options, Syllable Options, and Participant Filter.

| Session         | Status    | Progress       | # of Res... |
|-----------------|-----------|----------------|-------------|
| Catootje.1_1... | ✓ Fini... | [Progress Bar] | 542         |
| Catootje.1_1... | ✓ Fini... | [Progress Bar] | 537         |
| Catootje.1_1... | ✓ Fini... | [Progress Bar] | 693         |
| Catootje.1_1... | ✓ Fini... | [Progress Bar] | 757         |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,424       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 592         |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 787         |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 712         |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,909       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,734       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,641       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,226       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,554       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,895       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,518       |
| Catootje.2_0... | ✓ Fini... | [Progress Bar] | 1,946       |

Only the active result set will be used in the report steps of the wizard. The active result set is indicated in the title of the window.

Results from executed queries are shown in the session selector tree to allow comparisons between executed queries for individual sessions. Result sets may be viewed by double-clicking the result set in the tree or in the Query Results view. Results will be displayed in a table along with the associated session. For more information see [View Result Set](#).

### View Result Set

View a *Result Set* from a query.

From a **Results** tab in the **Query Project** window or from the **Query History** window with a query selected:

- Double-click on a result set.

The **Results** window will open alongside the session in which the results were found. Each result will be displayed with its **Record #**, **Speaker**, **Result**, and any associated metadata.

 **Note:** To open only the **Results** window, deselect **Open session with result set** before opening a result set.

 **Note:** To arrange results by a certain column, click on its header. To reorder columns, click and drag their header to the left or right. To further change column view options, click on the icon to the right of the column headers.

- To view a result in the **Session Editor**, click on it in the **Results** window.

The record in which the result was found will be displayed, with the result highlighted in the **Record Data** view.

- To exclude an extraneous result from the list, select it and choose the **Results > Toggle result excluded** menu item or press **Delete/Backspace**. You can show or hide excluded results by selecting or deselecting **Show excluded results**.

- To save any changes to a result set, click **Save**.

### Save Table as CSV

Save the table visible in the **Results** window as a CSV file.

From the **Results** window:

- Click **Save table as CSV...**.

A browse window will appear, prompting you to choose a file name and directory in which to save the table.

- Choose a file name and directory for your table and click **Save**.

The table in the **Results** window will be saved as a CSV file in the chosen directory.

 **Note:** If excluded records are currently visible, they will be included in the CSV file.

### Edit Table Columns

Add, remove, edit, or reorder columns currently visible in the **Results** window.

From the **Results** window:

- Click the **Edit table columns...** button or choose the **Results > Edit table columns...** menu item.

This will open the **Edit Columns** dialog, which shows the current columns of the table and their options.

- To add a column to the table, click **Add field.../+** and select a field name from the list. Alternatively, you may select **Custom** from the list to create a custom field.

 **Note:** Creating a custom field may require some familiarity with Javascript.

- To remove a column from the table, select it and click **Remove selected field/-** or press **Delete/Backspace**.

- To re-order a column, select it and use the **up/down arrows** to move it higher or lower in the outline.

### Filter Results

Search within the results table.

From the **Results** window:

- Enter your search term in the **Filter results** bar.

A list of all results containing your search term will be displayed, showing their **Record #**, **Speaker**, and **Result**. If there are no results, this list will be empty.

 **Note:** To search within a specific column (or multiple columns), click the drop down arrow to the left of the search bar and select it in the list. Options are also available to allow you to **Use regular expression** or to make your search **Case sensitive**.

- To clear the **Search** bar, click **Clear field/X**.

### About Table Quick Search

In this type of search field, the following syntax is accepted:

```
[<column>(<column>)*:]<expr>(; [<column>(<column>)*:]<expr>)*
```

Possible elements:

- <column>  
The name of a column in the displayed table.
- <expr>  
Either a regular expression (regex), a phone sequence expression (phonex) or plain text.


Some example expressions:

**Table 29:**

| Expression                       | Matches  |
|----------------------------------|--|
| b                                | Any row with a column that contains 'b'  |
| Speaker:Anne; b                  | Any row where column 'Speaker' is 'Anne' and any other column contains 'b'                                 |
| IPA Target:b{v}                  | Any row where the IPA Target column contains 'b' followed by a vowel                                       |
| IPA Target,IPA Actual:k{v}       | Any row where either the IPA Target or the IPA Actual column contains 'k' followed by a vowel              |
| Orthography:c; IPA Target:{c}{g} | Any row where the Orthography column contains 'c' and IPA Target contains a consonant followed by a glide. |

## Step 2: Report Composer

The Report Composer step allows configuration of the generated report. The composer has three main views: Reports - a list of all available report sections; Report List - a list of report sections which have been added to the report configuration; and a Settings view in the bottom-right which allows configuration of report sections highlighted in the Report List view.

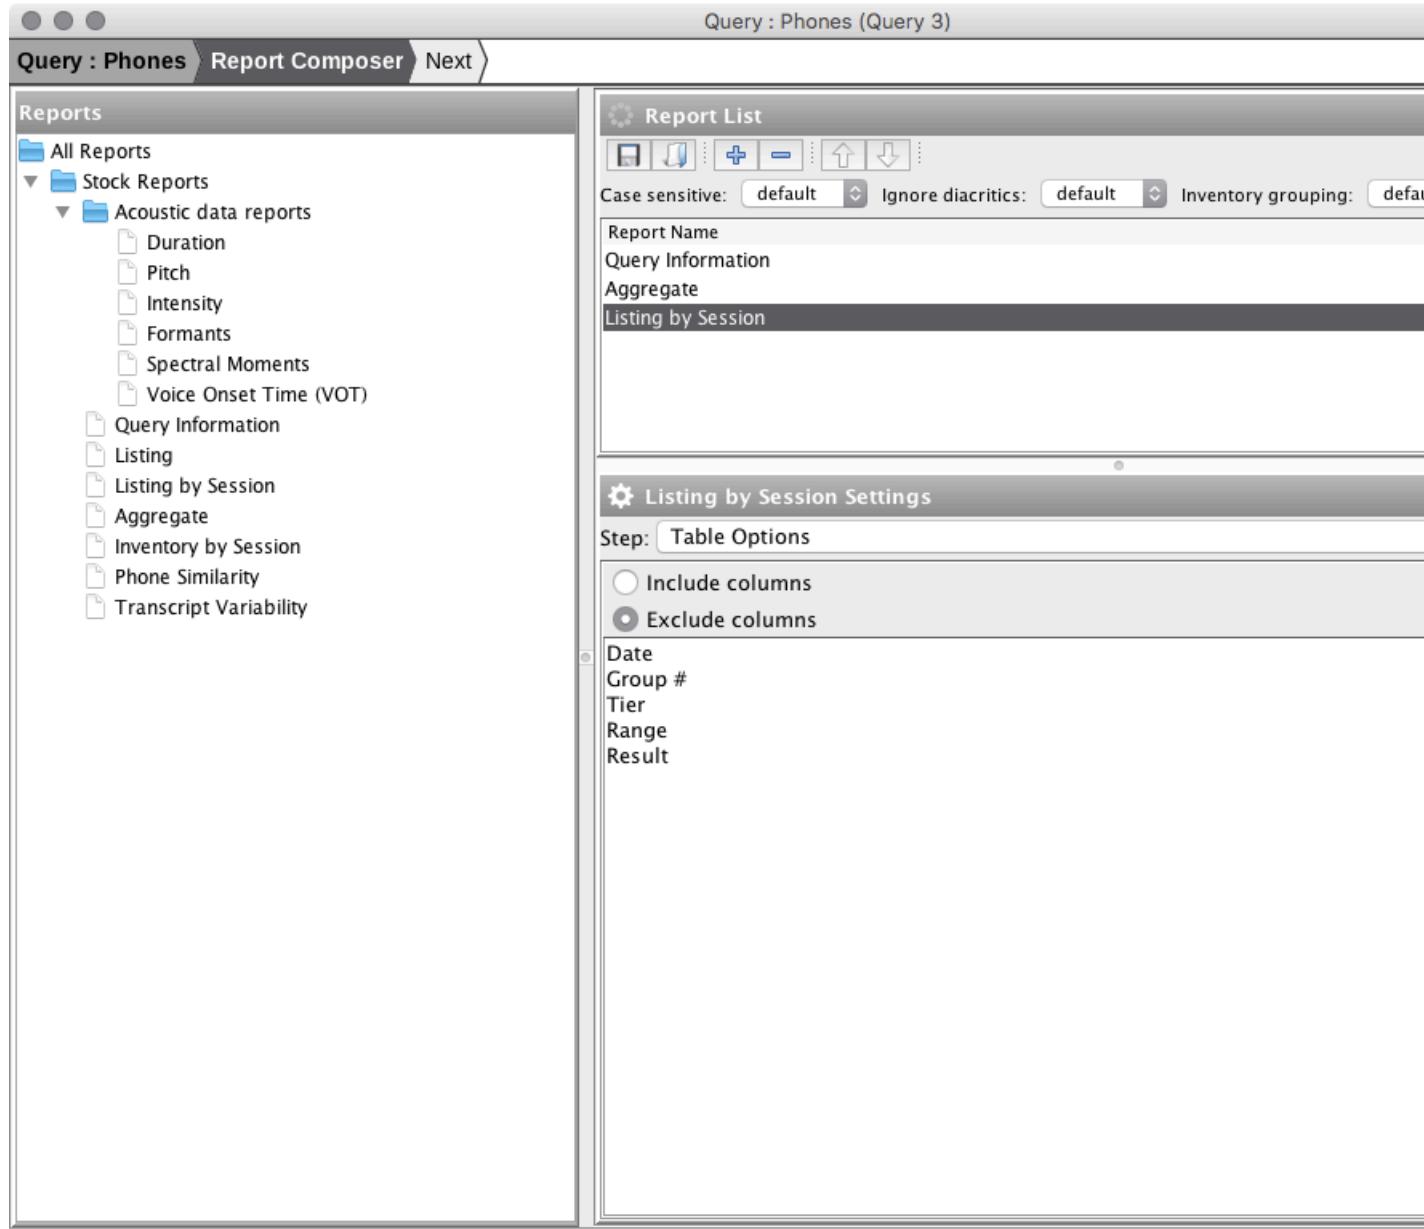

When opened, the Report Composer will load the previous report configuration for the query. If no previous configuration was found a default report consisting of the sections Query Information, Aggregate, and Listing by Session is loaded.

### Save/Load Report Configuration

Report configuration can be saved and loaded from disk using the save/browse buttons in the Report List toolbar.

The screenshot shows the 'Report Composer' application window. The title bar says 'Query : Phones (Query 3)'. The left panel is titled 'Reports' and lists several report categories: 'All Reports', 'Stock Reports', and 'Acoustic data reports'. Under 'Acoustic data reports', there are sub-options: Duration, Pitch, Intensity, Formants, Spectral Moments, Voice Onset Time (VOT), Query Information, Listing, Listing by Session, Aggregate, Inventory by Session, Phone Similarity, and Transcript Variability. The right panel is titled 'Report List' and contains a toolbar with icons for file operations. Below the toolbar are search and filter fields: 'Case sensitive: default', 'Ignore diacritics: default', and 'Inventory grouping: default'. A list of report sections is shown, with 'Listing by Session' currently selected. At the bottom of the right panel is a section titled 'Listing by Session Settings' with a 'Table Options' tab selected. It includes options for 'Include columns' (radio button) and 'Exclude columns' (radio button, which is selected). Below these are five checkboxes: Date, Group #, Tier, Range, and Result.

### Add Section to Report

To add a report section to the current report configuration do one of:

1. Highlight the report section in the 'Reports' view and click the '+' button in the 'Report List' view
2. Double click the report section in the 'Reports' view
3. Drag the report section from the 'Reports' view into the 'Report List' view

The screenshot shows the 'Report Composer' interface with the title 'Query : Phones (Query 3)' at the top. On the left, a sidebar titled 'Reports' lists categories like 'All Reports', 'Stock Reports', and 'Acoustic data reports'. Under 'Acoustic data reports', several options are listed: Duration, Pitch, Intensity, Formants, Spectral Moments, Voice Onset Time (VOT), Query Information, Listing, Listing by Session, Aggregate, Inventory by Session, Phone Similarity, and Transcript Variability. The 'Listing by Session' option is highlighted. On the right, the 'Report List' panel is open, showing a toolbar with icons for new report, delete, and other actions, where the 'new report' icon is highlighted with a blue box. Below the toolbar are search and filter fields: 'Case sensitive: default', 'Ignore diacritics: default', and 'Inventory grouping: default'. The main area displays report sections: 'Report Name', 'Query Information', 'Aggregate', and 'Listing by Session'. A sub-panel titled 'Listing by Session Settings' is open, showing 'Table Options' selected. It includes settings for 'Include columns' (radio button) and 'Exclude columns' (radio button, which is selected). Below these are five checkboxes: Date, Group #, Tier, Range, and Result.

### Remove Section from Report

To remove a report section from the current report configuration:

1. Highlight the report section in the Report List view
2. Click the '-' button in the Report List toolbar

The screenshot shows the 'Report Composer' interface with the title 'Query : Phones (Query 3)' at the top. On the left, a sidebar titled 'Reports' lists categories: 'All Reports', 'Stock Reports', and 'Acoustic data reports'. Under 'Acoustic data reports', several items are listed: Duration, Pitch, Intensity, Formants, Spectral Moments, Voice Onset Time (VOT), Query Information, Listing, Listing by Session, Aggregate, Inventory by Session, Phone Similarity, and Transcript Variability. The 'Stock Reports' category is expanded, showing 'Acoustic data reports' as a sub-item. On the right, the 'Report List' view is displayed. It includes a toolbar with icons for New, Open, Save, Print, and Delete, where the Delete icon is highlighted with a blue box. Below the toolbar are search and filter fields: 'Case sensitive: default', 'Ignore diacritics: default', and 'Inventory grouping: default'. A list of report sections is shown, starting with 'Report Name', 'Query Information', 'Aggregate', and 'Listing by Session'. At the bottom of the 'Report List' view, there is a section titled 'Listing by Session Settings' with a 'Table Options' tab selected. It contains settings for 'Include columns' (radio button) and 'Exclude columns' (radio button, which is selected). Below these are five column headers: Date, Group #, Tier, Range, and Result.

### Reorder Report Sections

To reorder report sections do one of:

1. Highlight the section in the Report List view and use the up/down buttons in the toolbar
2. Use the mouse to drag and drop report sections in the Report List view

Query : Phones (Query 3)

Query : Phones Report Composer Next

Reports

All Reports

Stock Reports

Acoustic data reports

- Duration
- Pitch
- Intensity
- Formants
- Spectral Moments
- Voice Onset Time (VOT)
- Query Information
- Listing
- Listing by Session
- Aggregate
- Inventory by Session
- Phone Similarity
- Transcript Variability

Report List

Case sensitive: default Ignore diacritics: default Inventory grouping: default

Report Name  
Query Information  
Aggregate  
Listing by Session

Listing by Session Settings

Step: Table Options

Include columns  Exclude columns


Date  
Group #  
Tier  
Range  
Result

The screenshot shows the 'Report Composer' interface for a query named 'Phones (Query 3)'. The left panel displays a tree view of available reports under 'Reports', including 'All Reports', 'Stock Reports', and 'Acoustic data reports' which is expanded to show sub-options like Duration, Pitch, Intensity, etc. The right panel is divided into two main sections: 'Report List' and 'Listing by Session Settings'. The 'Report List' section at the top includes filters for 'Case sensitive', 'Ignore diacritics', and 'Inventory grouping', along with buttons for adding (+), deleting (-), and sorting (up/down). Below these are fields for 'Report Name', 'Query Information', 'Aggregate', and 'Listing by Session'. The 'Listing by Session Settings' section below it has a 'Step' dropdown set to 'Table Options' and contains a radio button group for 'Include columns' (unchecked) and 'Exclude columns' (checked). It also lists several grouping options: Date, Group #, Tier, Range, and Result.

## Global Report Options

Three global report options are available:

1. case sensitive
2. ignore diacritics
3. inventory grouping

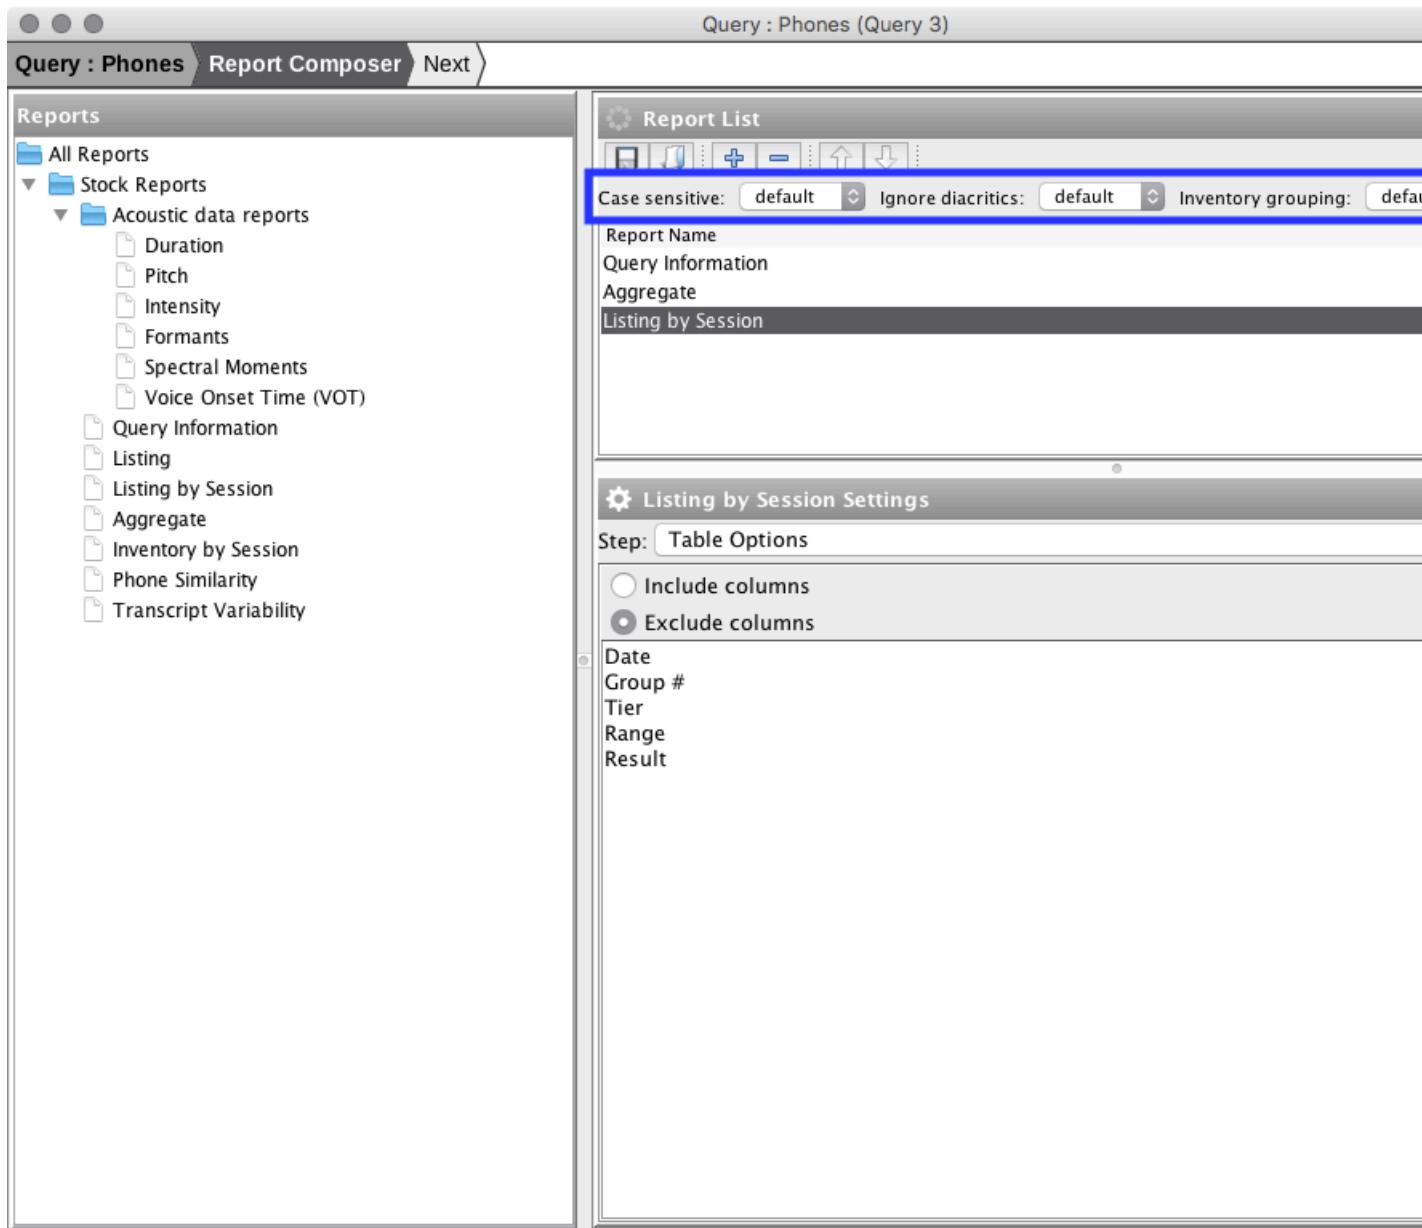

### Case sensitive

Modify case sensitivity where applicable. The options are:

1. default - use settings as defined in report section settings
2. yes - override report section settings and turn on case sensitivity where applicable
3. no - override report section settings and turn off case sensitivity where applicable

### Ignore diacritics

Modify ignore diacritics settings where applicable. The options are:

1. default - use settings as defined in report section settings
2. yes - override report section settings and turn on ignore diacritics where applicable
3. no - override report section settings and turn off ignore diacritics where applicable

### Inventory Grouping

Choose longitudinal grouping column for aggregate inventories:

1. default - use settings as defined in report section settings

2. session - use session name as longitudinal grouping column
3. age - use age as longitudinal grouping column

### **Report Section Settings**

To modify settings for a report section:

1. Highlight the report section in the Report List view
2. Use the bottom-right view to modify settings for the report section.

### **Report: Aggregate**

Create an aggregate inventory of results.

### **Example**

Each session sampled in the query will have a column in the inventory table.

| Orthography  | Catootje.1_11_09 | Catootje.2_00_19 |
|--------------|------------------|------------------|
| aan          | 0                | 1                |
| aap          | 1                | 0                |
| aardbei      | 1                | 2                |
| allebei      | 1                | 0                |
| ander        | 2                | 0                |
| andere       | 1                | 0                |
| appel        | 3                | 0                |
| auto         | 0                | 2                |
| baby         | 1                | 4                |
| bal          | 1                | 0                |
| ballon       | 1                | 0                |
| banaan       | 1                | 0                |
| bed          | 0                | 2                |
| beertje      | 1                | 0                |
| beestje      | 4                | 0                |
| beker        | 1                | 0                |
| bij          | 1                | 0                |
| billen       | 0                | 1                |
| bloem        | 0                | 1                |
| bloemen      | 1                | 0                |
| blokken      | 1                | 0                |
| boek         | 5                | 0                |
| boekje       | 1                | 0                |
| boodschappen | 0                | 1                |
| boom         | 2                | 1                |
| borstelen    | 0                | 1                |

| Orthography | Catootje.1_11_09 | Catootje.2_00_19 |
|-------------|------------------|------------------|
| boven       | 0                | 3                |
| bril        | 1                | 0                |
| brommer     | 0                | 1                |
| de          | 0                | 5                |
| deze        | 1                | 0                |
| donker      | 0                | 4                |
| doos        | 1                | 0                |
| druif       | 1                | 0                |
| een         | 2                | 12               |
| eend        | 1                | 0                |
| eens        | 2                | 0                |
| ei          | 1                | 0                |
| eieren      | 1                | 0                |
| emmer       | 2                | 0                |
| er          | 0                | 2                |
| fiets       | 1                | 1                |
| geplakt     | 0                | 1                |
| giraffe     | 2                | 0                |
| gitaar      | 1                | 0                |
| grond       | 0                | 1                |
| haan        | 1                | 1                |
| haar        | 0                | 3                |
| hand        | 1                | 1                |
| hap         | 0                | 1                |
| hert        | 1                | 0                |
| het         | 0                | 1                |
| hier        | 1                | 0                |
| hij         | 0                | 1                |
| hond        | 1                | 4                |
| hoofd       | 0                | 2                |
| huis        | 1                | 1                |
| ijskoud     | 0                | 1                |
| in          | 0                | 2                |
| is          | 0                | 12               |
| jas         | 0                | 1                |

## Report: Inventory by Session

Display an inventory of results for each sampled session. A separate table is displayed for each session.

### Example

| Orthography | Catootje.1_11_09 |
|-------------|------------------|
| aap         | 1                |
| aardbei     | 1                |
| allebei     | 1                |
| ander       | 2                |
| andere      | 1                |
| appel       | 3                |
| baby        | 1                |
| bal         | 1                |
| ballon      | 1                |
| banaan      | 1                |
| beertje     | 1                |
| beestje     | 4                |
| beker       | 1                |
| bij         | 1                |
| bloemen     | 1                |
| blokken     | 1                |
| boek        | 5                |
| boekje      | 1                |
| boom        | 2                |
| bril        | 1                |
| deze        | 1                |
| doos        | 1                |
| druif       | 1                |
| een         | 2                |
| eend        | 1                |
| eens        | 2                |
| ei          | 1                |
| eieren      | 1                |
| emmer       | 2                |
| fiets       | 1                |
| giraffe     | 2                |
| gitaar      | 1                |
| haan        | 1                |

| Orthography       | Catootje.1_11_09 |
|-------------------|------------------|
| hand              | 1                |
| hert              | 1                |
| hier              | 1                |
| hond              | 1                |
| huis              | 1                |
| jongen            | 1                |
| kaas              | 1                |
| kapot             | 1                |
| kijk              | 3                |
| kikker            | 1                |
| knijper           | 1                |
| koe               | 1                |
| konijn            | 4                |
| kopje             | 1                |
| krant             | 1                |
| laarzen           | 2                |
| leeuw             | 3                |
| lepel             | 1                |
| lezen             | 1                |
| lieveheersbeestje | 1                |
| meer              | 1                |
| melk              | 1                |
| mond              | 1                |
| mooi              | 1                |
| muis              | 2                |

### Report: Listing

This report will list each query result in a table. Results from all sampled sessions will be included in a single table. Any tiers specified in the 'Aligned Group', 'Aligned Word', 'Add aligned group', and 'Add aligned word' fields of the query will also be listed in the table.

### Example

Columns included in the output table:

- Session
- Speaker
- Record #
- Result
- Any other tiers specified in the query

| Session          | Speaker  | Record # | IPA Target | IPA Actual | Alignment                          |
|------------------|----------|----------|------------|------------|------------------------------------|
| Catootje.1_11_09 | Catootje | 1        | ən         | n:         | ə↔∅, n↔n:                          |
| Catootje.1_11_09 | Catootje | 1        | fœys       | fœis       | f↔f, œ↔æ, y↔i, s↔s                 |
| Catootje.1_11_09 | Catootje | 2        | ən         | m:         | ə↔∅, n↔m:                          |
| Catootje.1_11_09 | Catootje | 2        | befə       | beʃə       | b↔b, e↔e:, f↔ʃ, ə↔ə                |
| Catootje.1_11_09 | Catootje | 3        | befə       | beʃə       | b↔b, e↔e:, f↔ʃ, ə↔ə                |
| Catootje.1_11_09 | Catootje | 3        | buk        | buk        | b↔b, u↔u, k↔k                      |
| Catootje.1_11_09 | Catootje | 4        | buk        | puk        | b↔p, u↔u, k↔k                      |
| Catootje.1_11_09 | Catootje | 5        | pup        | pup        | p↔p, u↔u, p↔p                      |
| Catootje.1_11_09 | Catootje | 6        | fits       | fiʃ        | f↔f, i↔i, t↔t, s↔ʃ                 |
| Catootje.1_11_09 | Catootje | 7        | kεik       | keɪk       | k↔k, ε↔∅, i↔e:, k↔k                |
| Catootje.1_11_09 | Catootje | 7        | oli        | o:m        | o↔ɔ:, l↔m, i↔∅                     |
| Catootje.1_11_09 | Catootje | 61       | χi         | hi         | χ↔h, i↔i                           |
| Catootje.1_11_09 | Catootje | 61       | taɪ        | ta         | t↔t, a↔a, r↔∅                      |
| Catootje.1_11_09 | Catootje | 62       | ɛməɪ       | im:a       | ɛ↔ɪ, m↔m:, ə↔a, ɪ↔∅                |
| Catootje.1_11_09 | Catootje | 63       | kεi        | ke:        | k↔k, ε↔∅, i↔e:                     |
| Catootje.1_11_09 | Catootje | 63       | kəns       | tʃ         | k↔t, ɸ↔t, ə↔∅, n↔∅, s↔ʃ            |
| Catootje.1_11_09 | Catootje | 64       | teo        | te:o       | t↔t, e↔e:, o↔o                     |
| Catootje.1_11_09 | Catootje | 64       | papa       | pɑ:pɑ:     | p↔p, a↔a, p↔p, a↔a:                |
| Catootje.1_11_09 | Catootje | 65       | bukjə      | bukɪ       | b↔b, u↔u, k↔k, j↔∅, ə↔ɪ            |
| Catootje.1_11_09 | Catootje | 65       | lezo       | fi:sa      | l↔f, e↔e:, z↔s, ə↔ə                |
| Catootje.1_11_09 | Catootje | 66       | lepəl      | he'pðo     | l↔h, e↔e:, p↔p, ð↔ð, ə↔∅, l↔l      |
| Catootje.1_11_09 | Catootje | 67       | sχunə      | fun:ə      | s↔∅, χ↔h, u↔u, n↔n:, ə↔ə           |
| Catootje.1_11_09 | Catootje | 67       | papa       | papa       | p↔p, a↔a, p↔p, a↔a                 |
| Catootje.1_11_09 | Catootje | 68       | vetəɪ      | fi:ɪ, ta   | v↔f, e↔e:, ə↔ɪ, t↔t, ə↔a, r↔∅      |
| Catootje.1_11_09 | Catootje | 69       | dos        | dɔ:s       | d↔d, o↔o:, s↔s                     |
| Catootje.1_11_09 | Catootje | 70       | jøŋə       | jɔ:n:a     | j↔j, o↔ɔ:, ŋ↔n:, ə↔ə               |
| Catootje.1_11_09 | Catootje | 71       | sχunə      | fun'a      | s↔∅, χ↔h, u↔u, n↔n:, ə↔ə           |
| Catootje.1_11_09 | Catootje | 72       | krant      | kjɑ:nt     | k↔k, ɸ↔i, R↔∅, a↔ɑ:, n↔n, t↔t      |
| Catootje.1_11_09 | Catootje | 73       | blumə      | bum:a      | b↔b, l↔∅, u↔u, m↔m:, ə↔a           |
| Catootje.1_11_09 | Catootje | 74       | ros        | j:o:s      | r↔j:, o↔o:, s↔s                    |
| Catootje.1_11_09 | Catootje | 75       | paɪt       | pa:t       | p↔p, a↔a:, r↔∅, t↔t                |
| Catootje.1_11_09 | Catootje | 76       | fi:ɪ       | hi:        | f↔h, i↔i:, r↔∅                     |
| Catootje.1_11_09 | Catootje | 77       | sχap       | ap         | s↔∅, χ↔∅, a↔a, p↔p                 |
| Catootje.1_11_09 | Catootje | 78       | vɪndəɪ     | fin:a      | v↔f, l↔∅, ɪ↔i, n↔∅, d↔n:, ə↔a, ɪ↔ɪ |
| Catootje.1_11_09 | Catootje | 79       | befə       | beʃə       | b↔b, e↔e:, f↔ʃ, ə↔ə                |
| Catootje.1_11_09 | Catootje | 80       | peɪ        | pi:        | p↔p, e↔i:, r↔∅                     |

| Session          | Speaker  | Record # | IPA Target | IPA Actual | Alignment  |
|------------------|----------|----------|------------|------------|--|
| Catootje.1_11_09 | Catootje | 81       | oli        | on         | $\text{o} \leftrightarrow \text{o}, \text{l} \leftrightarrow \emptyset, \emptyset \leftrightarrow \text{n}, \text{i} \leftrightarrow \emptyset$  |
| Catootje.1_11_09 | Catootje | 81       | fant       | jau        | $\text{f} \leftrightarrow \text{j}, \text{a} \leftrightarrow \text{a}, \emptyset \leftrightarrow \text{u}, \text{n} \leftrightarrow \emptyset, \text{t} \leftrightarrow \emptyset$   |
| Catootje.1_11_09 | Catootje | 82       | trein      | tjeɪm      | $\text{t} \leftrightarrow \text{t}, \text{R} \leftrightarrow \check{\text{j}}, \text{e} \leftrightarrow \text{ɛ}, \text{i} \leftrightarrow \check{\text{j}}, \text{n} \leftrightarrow \text{n}$  |
| Catootje.1_11_09 | Catootje | 83       | zonə       | jənə       | $\text{z} \leftrightarrow \text{j}, \text{o} \leftrightarrow \text{o}, \text{n} \leftrightarrow \text{n}, \text{ə} \leftrightarrow \text{ə}$   |
| Catootje.1_11_09 | Catootje | 83       | blum       | pūm        | $\text{b} \leftrightarrow \text{p}, \text{l} \leftrightarrow \emptyset, \text{u} \leftrightarrow \check{\text{u}}, \text{m} \leftrightarrow \text{m}$  |
| Catootje.1_11_09 | Catootje | 84       | trein      | tr.ʃein    | $\text{t} \leftrightarrow \text{t}, \emptyset \leftrightarrow \text{I}, \text{R} \leftrightarrow \check{\text{j}}, \text{e} \leftrightarrow \text{ɛ}, \text{i} \leftrightarrow \text{i}, \text{n} \leftrightarrow \text{n}$                                |
| Catootje.2_00_19 | Catootje | 1        | oto        | oɔ̄to      | $\text{o} \leftrightarrow \text{o}, \text{t} \leftrightarrow \text{t}, \text{o} \leftrightarrow \text{o}$  |
| Catootje.2_00_19 | Catootje | 2        | meu        | miu        | $\text{m} \leftrightarrow \text{m}, \text{e} \leftrightarrow \text{i}, \text{u} \leftrightarrow \text{u}$  |
| Catootje.2_00_19 | Catootje | 3        | stautə     | nə'tautə   | $\text{s} \leftrightarrow \text{n}, \emptyset \leftrightarrow \text{ə}, \text{t} \leftrightarrow \text{t}, \text{a} \leftrightarrow \text{a}, \text{u} \leftrightarrow \text{u}, \text{t} \leftrightarrow \text{t}, \text{ə} \leftrightarrow \text{ə}$     |
| Catootje.2_00_19 | Catootje | 3        | bebi       | bebi       | $\text{b} \leftrightarrow \text{b}, \text{e} \leftrightarrow \text{e}, \text{b} \leftrightarrow \text{b}, \text{i} \leftrightarrow \text{i}$   |
| Catootje.2_00_19 | Catootje | 4        | pein       | pein       | $\text{p} \leftrightarrow \text{p}, \text{ɛ} \leftrightarrow \text{ɛ}, \text{i} \leftrightarrow \text{i}, \text{n} \leftrightarrow \text{n}$   |
| Catootje.2_00_19 | Catootje | 5        | kni        | ki:        | $\text{k} \leftrightarrow \text{k}, \text{n} \leftrightarrow \emptyset, \text{i} \leftrightarrow \text{i}:$  |
| Catootje.2_00_19 | Catootje | 6        | ok         | o:k        | $\text{o} \leftrightarrow \text{o}, \text{k} \leftrightarrow \text{k}$   |
| Catootje.2_00_19 | Catootje | 6        | ən         | ə          | $\text{ə} \leftrightarrow \text{ə}, \text{n} \leftrightarrow \emptyset$  |
| Catootje.2_00_19 | Catootje | 6        | fits       | fiṣ        | $\text{f} \leftrightarrow \text{f}, \text{i} \leftrightarrow \text{i}, \text{t} \leftrightarrow \text{t}, \text{s} \leftrightarrow \text{s}$   |
| Catootje.2_00_19 | Catootje | 7        | stautə     | tautə      | $\text{s} \leftrightarrow \emptyset, \text{t} \leftrightarrow \text{t}, \text{a} \leftrightarrow \text{a}, \text{u} \leftrightarrow \text{u}, \text{t} \leftrightarrow \text{t}, \text{ə} \leftrightarrow \text{ə}$  |
| Catootje.2_00_19 | Catootje | 7        | bebi       | bebi       | $\text{b} \leftrightarrow \text{b}, \text{e} \leftrightarrow \text{e}, \text{b} \leftrightarrow \text{b}, \text{i} \leftrightarrow \text{i}$   |
| Catootje.2_00_19 | Catootje | 8        | bovə       | bofə       | $\text{b} \leftrightarrow \text{b}, \text{o} \leftrightarrow \text{o}, \text{v} \leftrightarrow \text{f}, \text{ə} \leftrightarrow \text{ə}$   |
| Catootje.2_00_19 | Catootje | 8        | is         | z̄         | $\text{ɪ} \leftrightarrow \emptyset, \text{s} \leftrightarrow \text{z̄}$   |
| Catootje.2_00_19 | Catootje | 8        | papa       | papa       | $\text{p} \leftrightarrow \text{p}, \text{a} \leftrightarrow \text{a}, \text{p} \leftrightarrow \text{p}, \text{a} \leftrightarrow \text{a}$   |
| Catootje.2_00_19 | Catootje | 9        | dɔŋkər     | dɔŋkə      | $\text{d} \leftrightarrow \text{d}, \text{o} \leftrightarrow \text{ɔ}, \text{ŋ} \leftrightarrow \text{ŋ}, \text{k} \leftrightarrow \text{k}, \text{ə} \leftrightarrow \text{ə}, \text{r} \leftrightarrow \emptyset$  |
| Catootje.2_00_19 | Catootje | 10       | dɔŋkər     | dɔŋkə      | $\text{d} \leftrightarrow \text{d}, \text{o} \leftrightarrow \text{ɔ}, \text{ŋ} \leftrightarrow \text{ŋ}, \text{k} \leftrightarrow \text{k}, \text{ə} \leftrightarrow \text{ə}, \text{r} \leftrightarrow \emptyset$  |
| Catootje.2_00_19 | Catootje | 10       | is         | ʌz̄        | $\text{i} \leftrightarrow \text{ʌ}, \text{s} \leftrightarrow \text{z̄}$  |
| Catootje.2_00_19 | Catootje | 10       | ət         | ə          | $\text{ə} \leftrightarrow \text{ə}, \text{t} \leftrightarrow \emptyset$  |
| Catootje.2_00_19 | Catootje | 10       | bovə       | bo:fə      | $\text{b} \leftrightarrow \text{b}, \text{o} \leftrightarrow \text{o}, \text{v} \leftrightarrow \text{f}, \text{ə} \leftrightarrow \text{ə}$   |
| Catootje.2_00_19 | Catootje | 11       | bom        | bɔm        | $\text{b} \leftrightarrow \text{b}, \text{o} \leftrightarrow \text{o}, \text{m} \leftrightarrow \text{m}$  |
| Catootje.2_00_19 | Catootje | 11       | moi        | m̄oi       | $\text{m} \leftrightarrow \text{m}, \text{o} \leftrightarrow \text{o}, \text{i} \leftrightarrow \text{i}$  |
| Catootje.2_00_19 | Catootje | 12       | blum       | bβum       | $\text{b} \leftrightarrow \text{b}, \text{l} \leftrightarrow \emptyset, \text{u} \leftrightarrow \text{u}, \text{m} \leftrightarrow \text{m}$  |
| Catootje.2_00_19 | Catootje | 13       | papa       | papa       | $\text{p} \leftrightarrow \text{p}, \text{a} \leftrightarrow \text{a}, \text{p} \leftrightarrow \text{p}, \text{a} \leftrightarrow \text{a}$   |
| Catootje.2_00_19 | Catootje | 13       | is         | z̄         | $\text{ɪ} \leftrightarrow \emptyset, \text{s} \leftrightarrow \text{z̄}$   |
| Catootje.2_00_19 | Catootje | 13       | bot        | bo:        | $\text{b} \leftrightarrow \text{b}, \text{o} \leftrightarrow \text{o}, \text{t} \leftrightarrow \emptyset$   |
| Catootje.2_00_19 | Catootje | 13       | sχapə      | tana       | $\text{s} \leftrightarrow \text{t}, \text{χ} \leftrightarrow \emptyset, \text{a} \leftrightarrow \text{a}, \text{p} \leftrightarrow \text{n}, \text{ə} \leftrightarrow \text{ə}$   |
| Catootje.2_00_19 | Catootje | 14       | hai        | ħa:        | $\text{ħ} \leftrightarrow \text{ħ}, \text{a} \leftrightarrow \text{a}, \text{J} \leftrightarrow \emptyset$   |
| Catootje.2_00_19 | Catootje | 14       | bɔrstələ   | bɔʃə       | $\text{b} \leftrightarrow \text{b}, \text{o} \leftrightarrow \text{o}, \text{r} \leftrightarrow \emptyset, \text{s} \leftrightarrow \emptyset, \text{t} \leftrightarrow \emptyset, \text{ə} \leftrightarrow \emptyset, \text{l} \leftrightarrow \emptyset$ |
| Catootje.2_00_19 | Catootje | 15       | hai        | ħa:        | $\text{ħ} \leftrightarrow \text{ħ}, \text{a} \leftrightarrow \text{a}, \text{J} \leftrightarrow \emptyset$   |
| Catootje.2_00_19 | Catootje | 16       | hai        | ħa:        | $\text{ħ} \leftrightarrow \text{ħ}, \text{a} \leftrightarrow \text{a}, \text{J} \leftrightarrow \emptyset$   |

| Session          | Speaker  | Record # | IPA Target | IPA Actual | Alignment                  |
|------------------|----------|----------|------------|------------|----------------------------|
| Catootje.2_00_19 | Catootje | 17       | hoft       | hoft       | h↔h,o↔o,f↔f,t↔t            |
| Catootje.2_00_19 | Catootje | 18       | tandə      | tanə       | t↔t,a↔a,n↔∅,d↔n,ə↔ə        |
| Catootje.2_00_19 | Catootje | 18       | putse      | putə       | p↔p,u↔u,t↔∅,s↔t,ə↔ə        |
| Catootje.2_00_19 | Catootje | 19       | bovə       | bo:fə      | b↔b,o↔o:,v↔f,ə↔ə           |
| Catootje.2_00_19 | Catootje | 19       | jas        | j'as       | j↔j',a↔a,s↔s               |
| Catootje.2_00_19 | Catootje | 19       | an         | an         | a↔a,n↔n                    |
| Catootje.2_00_19 | Catootje | 20       | oto        | o:t̪o      | o↔o:,t↔t̪,o↔o              |
| Catootje.2_00_19 | Catootje | 20       | strat      | t̪'ja:t̪   | s↔∅,t↔t̪,∅↔i,R↔j,a↔a:,t↔t̪ |
| Catootje.2_00_19 | Catootje | 21       | is         | z          | I↔∅,s↔z                    |
| Catootje.2_00_19 | Catootje | 21       | vɛχ        | fiχ        | v↔f,ɛ↔ε,χ↔χ                |
| Catootje.2_00_19 | Catootje | 21       | is         | z          | I↔∅,s↔z                    |
| Catootje.2_00_19 | Catootje | 21       | də         | tə         | d↔t,ə↔ə                    |
| Catootje.2_00_19 | Catootje | 21       | strat      | t̪'ja:t̪   | s↔∅,t↔t̪,∅↔i,R↔j,a↔a:,t↔t̪ |
| Catootje.2_00_19 | Catootje | 22       | mɔnt       | mant       | m↔m,ɔ↔a,n↔n,t↔t            |
| Catootje.2_00_19 | Catootje | 22       | hap        | fiap       | h↔f,a↔a,p↔p                |
| Catootje.2_00_19 | Catootje | 23       | lətəɪ      | lətə       | l↔l,ɛ↔ɛ,t↔t,ə↔ə,r↔∅        |
| Catootje.2_00_19 | Catootje | 24       | lətəɪ      | lətə       | l↔l,ɛ↔ɛ,t↔t,ə↔ə,r↔∅        |
| Catootje.2_00_19 | Catootje | 24       | is         | iz         | i↔i,s↔z                    |
| Catootje.2_00_19 | Catootje | 24       | əe         | ə          | ə↔ə,r↔∅                    |
| Catootje.2_00_19 | Catootje | 24       | in         | in         | i↔i,n↔n                    |
| Catootje.2_00_19 | Catootje | 25       | dɔŋkəɪ     | dɔŋkə      | d↔d,ɔ↔ɔ,ŋ↔ŋ,k↔k,ə↔ə,r↔∅    |
| Catootje.2_00_19 | Catootje | 26       | is         | z          | I↔∅,s↔z                    |
| Catootje.2_00_19 | Catootje | 26       | ok         | ɔ:k        | o↔o,k↔k                    |
| Catootje.2_00_19 | Catootje | 26       | ən         | ə          | ə↔ə,n↔∅                    |
| Catootje.2_00_19 | Catootje | 26       | kleinə     | kjein      | k↔k,l↔j,ɛ↔ɛ,i↔i,n↔n,ə↔∅    |
| Catootje.2_00_19 | Catootje | 26       | lamp       | hamp       | l↔h,a↔a,m↔m,p↔p            |
| Catootje.2_00_19 | Catootje | 27       | meu        | me:u       | m↔m,e↔e:,u↔u               |
| Catootje.2_00_19 | Catootje | 28       | ok         | o:k        | o↔o:,k↔k                   |
| Catootje.2_00_19 | Catootje | 28       | vliχə      | zə'hiχə    | v↔z,∅↔ə,l↔h,j↔i,x↔χ,ə↔ə    |
| Catootje.2_00_19 | Catootje | 28       | də         | də         | d↔d,ə↔ə                    |
| Catootje.2_00_19 | Catootje | 28       | meu        | meu        | m↔m,e↔e,u↔u                |
| Catootje.2_00_19 | Catootje | 29       | fɪənt      | hun't      | f↔h,ɔ↔u,n↔n',t↔t           |
| Catootje.2_00_19 | Catootje | 30       | klɔk       | kɪ'jɔk     | k↔k,∅↔i,l↔j,ɔ↔ɔ,k↔k        |
| Catootje.2_00_19 | Catootje | 31       | oli        | ənə        | o↔ɔ,l↔n,i↔ə                |
| Catootje.2_00_19 | Catootje | 31       | fant       | hanʃ       | f↔h,a↔a,n↔n,t↔t̪           |
| Catootje.2_00_19 | Catootje | 32       | sχun       | zə'fiun    | s↔z,∅↔ə,x↔h,u↔n,n↔n        |

| Session          | Speaker  | Record # | IPA Target | IPA Actual | Alignment         |
|------------------|----------|----------|------------|------------|-------------------|
| Catootje.2_00_19 | Catootje | 33       | para       | pa:pə      | p↔p,a↔a:,r↔p,a↔a: |

### Report: Listing by Session

This report will list each query result in a table. A separate table will be displayed for each sampled session. Any tiers specified in the 'Aligned Group', 'Aligned Word', 'Add aligned group', and 'Add aligned word' fields of the query will also be listed in the table.

#### Example

Columns included in the output table:

- Speaker
- Record #
- Result
- Any other tiers specified in the query

| Session          | Speaker  | Record # | IPA Target | IPA Actual | Alignment                   |
|------------------|----------|----------|------------|------------|-----------------------------|
| Catootje.1_11_09 | Catootje | 1        | ən         | n:         | ə↔∅,n↔n:                    |
| Catootje.1_11_09 | Catootje | 1        | fɪœys      | fæis       | f↔f,æ↔æ,y↔i,s↔s             |
| Catootje.1_11_09 | Catootje | 2        | ən         | m:         | ə↔∅,n↔m:                    |
| Catootje.1_11_09 | Catootje | 2        | bɛʃə       | bɛʃə       | b↔b,e↔e:,ʃ↔ʃ,ə↔ə            |
| Catootje.1_11_09 | Catootje | 3        | bɛʃə       | bɛʃə       | b↔b,e↔e:,ʃ↔ʃ,ə↔ə            |
| Catootje.1_11_09 | Catootje | 3        | buk        | buk        | b↔b,u↔u,k↔k                 |
| Catootje.1_11_09 | Catootje | 4        | buk        | puk        | b↔p,u↔u,k↔k                 |
| Catootje.1_11_09 | Catootje | 5        | pup        | pup        | p↔p,u↔u,p↔p                 |
| Catootje.1_11_09 | Catootje | 6        | fits       | fɪtʃ       | f↔f,i↔i,t↔t,s↔ʃ             |
| Catootje.1_11_09 | Catootje | 7        | kɛik       | keɪk       | k↔k,ɛ↔∅,i↔e:,k↔k            |
| Catootje.1_11_09 | Catootje | 7        | oli        | o̞m        | o↔o̞,l↔m,i↔∅                |
| Catootje.1_11_09 | Catootje | 7        | fant       | a          | f↔∅,a↔a,n↔∅,t↔∅             |
| Catootje.1_11_09 | Catootje | 8        | œyl        | au         | œ↔a,y↔u,l↔∅                 |
| Catootje.1_11_09 | Catootje | 9        | kneipəɪ    | fɪip       | k↔∅,n↔f,ɛ↔ɛ,i↔i,p↔p,ə↔∅,r↔∅ |
| Catootje.1_11_09 | Catootje | 10       | oli        | o̞m        | o↔o̞,l↔m,i↔∅                |
| Catootje.1_11_09 | Catootje | 10       | fant       | a:         | f↔∅,a↔a:,n↔∅,t↔∅            |
| Catootje.1_11_09 | Catootje | 11       | ko         | kɔ         | k↔k,o↔ɔ                     |
| Catootje.1_11_09 | Catootje | 11       | nein       | neɪn       | n↔n,ɛ↔e,i↔i,n↔n             |
| Catootje.1_11_09 | Catootje | 12       | andəɪ      | ɑ̞ə        | ɑ↔ɑ,n↔∅,d↔n,ə↔ə,r↔∅         |
| Catootje.1_11_09 | Catootje | 12       | ko         | kɔ         | k↔k,o↔ɔ                     |
| Catootje.1_11_09 | Catootje | 12       | nein       | ne̞ɪn      | n↔n,ɛ↔e̞,i↔i,n↔n            |
| Catootje.1_11_09 | Catootje | 13       | pakə       | ba:kə      | p↔b,a↔a:,k↔k,ə↔ə            |
| Catootje.1_11_09 | Catootje | 13       | buk        | buk        | b↔b,u↔u,k↔k                 |
| Catootje.1_11_09 | Catootje | 14       | alə        | ∅          | ə↔∅,l↔∅,ə↔∅                 |
| Catootje.1_11_09 | Catootje | 14       | bei        | bæi        | b↔b,ɛ↔æ,i↔i                 |

| Session          | Speaker  | Record # | IPA Target | IPA Actual | Alignment               |
|------------------|----------|----------|------------|------------|-------------------------|
| Catootje.1_11_09 | Catootje | 15       | pa:t       | pa:t       | p↔p,a↔a:,u↔∅,t↔t        |
| Catootje.1_11_09 | Catootje | 16       | ka         | pa:        | k↔p,a↔a:                |
| Catootje.1_11_09 | Catootje | 16       | pɔt        | pʊt        | p↔p,ɔ↔u,t↔t             |
| Catootje.1_11_09 | Catootje | 17       | melk       | mauwk      | m↔m,∅↔a,ε↔u,l↔w,k↔k     |
| Catootje.1_11_09 | Catootje | 18       | kɛi        | ke:        | k↔k,ɛ↔∅,i↔e:            |
| Catootje.1_11_09 | Catootje | 18       | kəns       | tʃ:ʃ       | k↔t,ə↔ɛ:,∅↔i,n↔∅,s↔s    |
| Catootje.1_11_09 | Catootje | 19       | moi        | mɔ:oi      | m↔m,o↔ɔ,i↔i             |
| Catootje.1_11_09 | Catootje | 20       | panda      | pamɪ       | p↔p,a↔a,n↔∅,d↔m,a↔i     |
| Catootje.1_11_09 | Catootje | 20       | bebi       | pe:pi      | b↔p,e↔e:,b↔p,i↔i        |
| Catootje.1_11_09 | Catootje | 21       | leu        | le:lə      | l↔l,e↔e:,∅↔l,u↔ə        |
| Catootje.1_11_09 | Catootje | 21       | papa       | papa:      | p↔p,a↔a,p↔p,a↔a:        |
| Catootje.1_11_09 | Catootje | 22       | bebi       | bibi       | b↔b,e↔i,b↔b,i↔i         |
| Catootje.1_11_09 | Catootje | 22       | leu        | le:ləu     | l↔l,e↔e:,∅↔l,∅↔o,u↔u    |
| Catootje.1_11_09 | Catootje | 23       | panda      | pama       | p↔p,a↔a,n↔∅,d↔m,a↔a     |
| Catootje.1_11_09 | Catootje | 23       | bebi       | bibi       | b↔b,e↔i,b↔b,i↔i         |
| Catootje.1_11_09 | Catootje | 24       | panda      | pam:a      | p↔p,a↔a,n↔∅,d↔m:,a↔a    |
| Catootje.1_11_09 | Catootje | 25       | ap         | a:p        | a↔a:,p↔p                |
| Catootje.1_11_09 | Catootje | 26       | sina       | ja:pɪ      | s↔j,i↔a:,n↔p,a↔i        |
| Catootje.1_11_09 | Catootje | 26       | sapəl      | ʃɛntʃɪs    | s↔s,a↔ɛ,∅↔η,p↔t,ə↔i,l↔s |
| Catootje.1_11_09 | Catootje | 27       | ʒi         | u:         | ʒ↔∅,i↔u:                |
| Catootje.1_11_09 | Catootje | 27       | rəf        | aχ         | R↔∅,a↔q,f↔χ             |
| Catootje.1_11_09 | Catootje | 28       | ʒi         | u:         | ʒ↔∅,i↔u:                |
| Catootje.1_11_09 | Catootje | 28       | rəf        | aχ         | R↔∅,a↔a,f↔χ             |
| Catootje.1_11_09 | Catootje | 29       | nəil       | jæa:       | n↔j,ɛ↔æa:,i↔∅,l↔∅       |
| Catootje.1_11_09 | Catootje | 29       | pa:t       | pa:t       | p↔p,a↔a:,u↔∅,t↔t        |
| Catootje.1_11_09 | Catootje | 30       | ko         | kɔ:        | k↔k,o↔ɔ:                |

## Report: Phone Similarity

Phone similarity measures how similar two phones or strings of phones are within a target-actual aligned pair based on the number of descriptive phonological matchings divided by the maximal number of potential matches.

### Calculation

Given a pair of aligned phones, similarity is calculated as:

$$\frac{\# \text{ of matched features}}{\max(\# \text{ target features}, \# \text{ actual features})} * 100$$

### Parameters

The number of features considered in the calculation depends on the dimensions selected during execution of the analysis. The dimensions available for consonants are:

- Place
  - Manner
  - Voicing

and for vowels:

- Height
  - Backness
  - Tenseness
  - Rounding

## Example

The table produced by this report will have the following columns:

- Session
  - Speaker
  - Record #
  - IPA Target
  - IPA Actual
  - #Fs Place/Manner/...
  - #Sim Place/Manner/...
  - Total Fs
  - Similarity

| Session | Speaker      | Age | Region | IPA | #Fs | Sim    | Sim    | Sim   | Sim   | Sim | Sim | Sim   | Sim | Sim    | Sim  | Sim    |      |     |        |     |
|---------|--------------|-----|--------|-----|-----|--------|--------|-------|-------|-----|-----|-------|-----|--------|------|--------|------|-----|--------|-----|
|         |              |     |        |     |     | #      | Target | etutu | place | Man | Man | Voice | ici | Nigiri | High | Height | Back |     |        |     |
| Cato    | Gtd_011_1099 | ø   | ∅      | ø   | 0   | 0      | 1      | 0     | 0     | 0   | 1   | 0     | 1   | 0      | 1    | 0      | 0    | 4   | 0      |     |
| Cato    | Gtd_011_1099 | n   | n:     | n:  | 3   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 8   | 100    |     |
| Cato    | Gtd_011_1099 | f   | f̪     | f̪  | 2   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 7   | 100    |     |
| Cato    | Gtd_011_1099 | œ   | æ      | æ   | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 0     | 1   | 100    | 1    | 100    | 1    | 0   | 5      | 60  |
| Cato    | Gtd_011_1099 | y   | i      | i   | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 100   | 1   | 100    | 1    | 100    | 1    | 0   | 5      | 80  |
| Cato    | Gtd_011_1099 | s   | s      | s   | 3   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 8   | 100    |     |
| Cato    | Gtd_011_1099 | ø   | ∅      | ø   | 0   | 0      | 1      | 0     | 0     | 0   | 1   | 0     | 1   | 0      | 1    | 0      | 0    | 4   | 0      |     |
| Cato    | Gtd_011_1099 | n   | m:     | m:  | 3   | 0      | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 8   | 62.5   |     |
| Cato    | Gtd_011_1099 | b   | b      | b   | 2   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 7   | 100    |     |
| Cato    | Gtd_011_1099 | e   | e:     | e:  | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 100   | 1   | 100    | 1    | 100    | 0    | 0   | 4      | 100 |
| Cato    | Gtd_011_1099 | ʃ   | ʂ      | ʂ   | 3   | 33.333 | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 8   | 75     |     |
| Cato    | Gtd_011_1099 | ə   | a      | a   | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 0     | 1   | 100    | 1    | 100    | 0    | 0   | 4      | 75  |
| Cato    | Gtd_011_1099 | b   | b      | b   | 2   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 7   | 100    |     |
| Cato    | Gtd_011_1099 | e   | e:     | e:  | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 100   | 1   | 100    | 1    | 100    | 0    | 0   | 4      | 100 |
| Cato    | Gtd_011_1099 | ʃ   | ʂ      | ʂ   | 3   | 33.333 | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 8   | 75     |     |
| Cato    | Gtd_011_1099 | ə   | ə      | ə   | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 100   | 1   | 100    | 1    | 100    | 0    | 0   | 4      | 100 |
| Cato    | Gtd_011_1099 | b   | b      | b   | 2   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 7   | 100    |     |
| Cato    | Gtd_011_1099 | u   | u      | u   | 0   | 0      | 1      | 100   | 0     | 0   | 1   | 100   | 1   | 100    | 1    | 100    | 1    | 100 | 5      | 100 |
| Cato    | Gtd_011_1099 | k   | k      | k   | 2   | 100    | 4      | 100   | 1     | 100 | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 7   | 100    |     |
| Cato    | Gtd_011_1099 | b   | p      | p   | 2   | 100    | 4      | 100   | 1     | 0   | 0   | 0     | 0   | 0      | 0    | 0      | 0    | 7   | 85.714 |     |

| Session | Speaker | Recognition | IPA | #Fs |        | Sim #Fs |       | Sim #Fs |     | Sim #Fs |          | Sim #Fs  |        | Sim #Fs |          | Sim #Fs  |         |         |     |   |     |
|---------|---------|-------------|-----|-----|--------|---------|-------|---------|-----|---------|----------|----------|--------|---------|----------|----------|---------|---------|-----|---|-----|
|         |         |             |     | #   | Target | Actual  | Place | Place   | Man | Man     | Vicinity | Vicinity | Height | Height  | Backness | Backness | Tension | Tension |     |   |     |
| Cat0    | John    | o           | u   | 1   | 0      | 0       | 0     | 1       | 100 | 0       | 0        | 1        | 100    | 1       | 100      | 1        | 100     | 1       | 100 | 5 | 100 |
| Cat0    | John    | o           | u   | 1   | 0      | 0       | 0     | 1       | 100 | 4       | 100      | 1        | 100    | 0       | 0        | 0        | 0       | 0       | 0   | 7 | 100 |
| Cat0    | John    | o           | u   | 1   | 0      | 0       | 0     | 1       | 100 | 4       | 100      | 1        | 100    | 0       | 0        | 0        | 0       | 0       | 0   | 7 | 100 |
| Cat0    | John    | o           | u   | 1   | 0      | 0       | 1     | 1       | 100 | 0       | 0        | 1        | 100    | 1       | 100      | 1        | 100     | 1       | 100 | 5 | 100 |

## Report: Transcript Variability

## Example

| Session           | # Repeated IPA Target | # All Correct | # One or More Correct | # Same Error | # Different Errors | Avg Distance |
|-------------------|-----------------------|---------------|-----------------------|--------------|--------------------|--------------|
| Catootje.1_11_096 |                       | 2             | 5                     | 8            | 26                 | 2.11         |
| Catootje.2_00_195 |                       | 7             | 7                     | 16           | 12                 | 1.16         |

## Report: Query Information

Display query name and parameters.

## Example

## Acoustic Data Reports

Acoustic data reports print acoustic information for each query result.

All acoustic data reports require identification of one or more intervals in the audio for analysis. Intervals are selected using one of the following methods:

- The full segment for the record of the query result
  - Intervals from a specific TextGrid tier
    - When using this option, a result line will be printed for each interval of the specified TextGrid tier which is included in the full record segment
    - TextGrid intervals may be filtered by their label using a regular expression
  - Intervals from a result column in the query result (typically a tier name)
    - TextGrid mappings must exist between the specified tier and a TextGrid tier
    - This is the default option with the tier name set as IPA\_Actual

Interval for Analysis

- Use full record segment
- Use intervals from TextGrid tier
- Use interval for tier/column value

If an interval cannot be selected for a query result, no information will be printed in the report.

## Report: Duration

Print duration of each selected TextGrid interval.

### Example

Report table will have the following columns:

- Session
- Speaker
- Age
- Record #
- Result/Tier Name
- Additional tiers added to query results
- Start Time (s)
- End Time (s)
- Duration (s)

| Session      | Speaker | Age      | Record # | IPA Actual | Start Time | End Time | Duration |
|--------------|---------|----------|----------|------------|------------|----------|----------|
| Anne.Session | Anne    | 02;01.17 | 2        | iː         | 4.34       | 4.583    | 0.242    |
| Anne.Session | Anne    | 02;01.17 | 2        | æ          | 4.686      | 4.844    | 0.158    |
| Anne.Session | Anne    | 02;01.17 | 2        | iː         | 4.937      | 5.106    | 0.169    |
| Anne.Session | Anne    | 02;01.17 | 2        | ʌ          | 5.202      | 5.664    | 0.462    |
| Anne.Session | Anne    | 02;01.17 | 2        | eɪ         | 5.864      | 6.157    | 0.292    |
| Anne.Session | Anne    | 02;01.17 | 2        | uː         | 6.653      | 7.026    | 0.373    |
| Anne.Session | Anne    | 02;01.17 | 2        | ʊ          | 7.088      | 7.307    | 0.219    |
| Anne.Session | Anne    | 02;01.17 | 2        | ɔː         | 7.388      | 7.665    | 0.277    |
| Anne.Session | Anne    | 02;01.17 | 2        | iː         | 7.723      | 7.927    | 0.204    |
| Anne.Session | Anne    | 02;01.17 | 4        | ɛ          | 10.127     | 10.297   | 0.17     |
| Anne.Session | Anne    | 02;01.17 | 7        | uː         | 12.91      | 13.097   | 0.187    |
| Anne.Session | Anne    | 02;01.17 | 9        | ɛ          | 14.487     | 14.76    | 0.273    |
| Anne.Session | Anne    | 02;01.17 | 9        | ʊ          | 14.76      | 15.027   | 0.267    |
| Anne.Session | Anne    | 02;01.17 | 9        | iː         | 15.137     | 15.413   | 0.276    |
| Anne.Session | Anne    | 02;01.17 | 9        | ɪ          | 16.63      | 16.945   | 0.316    |
| Anne.Session | Anne    | 02;01.17 | 9        | ɪ          | 16.991     | 17.209   | 0.218    |
| Anne.Session | Anne    | 02;01.17 | 9        | ʌ          | 17.384     | 17.54    | 0.156    |
| Anne.Session | Anne    | 02;01.17 | 11       | æ          | 19.761     | 19.976   | 0.215    |
| Anne.Session | Anne    | 02;01.17 | 14       | æ          | 23.602     | 23.86    | 0.257    |
| Anne.Session | Anne    | 02;01.17 | 17       | ə          | 28.728     | 28.862   | 0.134    |
| Anne.Session | Anne    | 02;01.17 | 17       | ʌ          | 28.974     | 29.167   | 0.193    |
| Anne.Session | Anne    | 02;01.17 | 17       | e          | 29.242     | 29.402   | 0.16     |
| Anne.Session | Anne    | 02;01.17 | 17       | e          | 29.536     | 29.593   | 0.056    |
| Anne.Session | Anne    | 02;01.17 | 17       | ɪ          | 29.593     | 29.81    | 0.218    |
| Anne.Session | Anne    | 02;01.17 | 19       | æ          | 31.4       | 31.506   | 0.106    |
| Anne.Session | Anne    | 02;01.17 | 19       | ə          | 31.935     | 32.067   | 0.132    |
| Anne.Session | Anne    | 02;01.17 | 19       | ɜː         | 32.283     | 32.449   | 0.165    |

## Report: Intensity

Display intensity values (dB) at various positions within each selected TextGrid interval.

### Example

| Session      | Speaker | Age       | Record# | IPA | Start Time | End Time | I10(dB) | I20(dB) | I30(dB) | I40(dB) | I50(dB) | I60(dB) | I70(dB) | I80(dB) | I90(dB) | I100(dB) |
|--------------|---------|-----------|---------|-----|------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|----------|
|              |         |           |         |     | Actual     | Time     |         |         |         |         |         |         |         |         |         |          |
| Anne.Session |         | 02;01.12  |         | i:  | 4.34       | 4.583    | 60.745  | 62.156  | 62.484  | 63.695  | 63.626  | 62.393  | 60.15   | 58.353  | 56.463  |          |
| Anne.Session |         | 02;01.12  |         | æ   | 4.686      | 4.844    | 60.567  | 60.442  | 60.428  | 60.987  | 60.96   | 59.793  | 57.735  | 55.284  | 53.054  |          |
| Anne.Session |         | 02;01.12  |         | i:  | 4.937      | 5.106    | 63.364  | 63.297  | 62.637  | 61.333  | 60.283  | 60.714  | 61.54   | 60.767  | 58.045  |          |
| Anne.Session |         | 02;01.12  |         | ʌ:  | 5.202      | 5.664    | 66.393  | 70.023  | 62.748  | 64.455  | 64.446  | 62.874  | 63.091  | 63.901  | 61.823  |          |
| Anne.Session |         | 02;01.12  |         | eL  | 5.864      | 6.157    | 64.792  | 65.866  | 65.147  | 63.502  | 63.362  | 63.638  | 62.236  | 61      | 57.523  |          |
| Anne.Session |         | 02;01.12  |         | u:  | 6.653      | 7.026    | 66.454  | 67.411  | 67.364  | 66.98   | 66.952  | 67.043  | 67.722  | 67.913  | 68.082  |          |
| Anne.Session |         | 02;01.12  |         | u:  | 7.088      | 7.307    | 67.317  | 67.123  | 65.597  | 64.088  | 63.694  | 63.769  | 64.436  | 64.845  | 64.344  |          |
| Anne.Session |         | 02;01.12  |         | ɔ:  | 7.388      | 7.665    | 65.222  | 66.007  | 68.489  | 70.049  | 71.553  | 71.858  | 70.29   | 68.394  | 65.103  |          |
| Anne.Session |         | 02;01.12  |         | i:  | 7.723      | 7.927    | 65.13   | 67.242  | 66.51   | 65.112  | 64.792  | 63.773  | 61.201  | 58.318  | 55.958  |          |
| Anne.Session |         | 02;01.14  |         | ɛ   | 10.127     | 10.297   | 74.999  | 76.375  | 75.949  | 73.95   | 72.293  | 71.273  | 69.319  | 66.366  | 62.963  |          |
| Anne.Session |         | 02;01.17  |         | u:  | 12.91      | 13.097   | 76.291  | 78.069  | 78.294  | 76.964  | 74.177  | 71.324  | 69.289  | 67.371  | 65.002  |          |
| Anne.Session |         | 02;01.19  |         | ɛ   | 14.487     | 14.76    | 65.494  | 66.102  | 67.014  | 67.864  | 66.471  | 64.601  | 61.421  | 60.186  | 60.085  |          |
| Anne.Session |         | 02;01.19  |         | ʊ:  | 14.76      | 15.027   | 61.785  | 62.759  | 65.698  | 68.385  | 70.927  | 74.017  | 73.971  | 74.705  | 74.063  |          |
| Anne.Session |         | 02;01.19  |         | i:  | 15.137     | 15.413   | 67.705  | 64.305  | 63.102  | 62.286  | 62.846  | 63.514  | 63.527  | 62.969  | 61.666  |          |
| Anne.Session |         | 02;01.19  |         | i:  | 16.63      | 16.945   | 62.651  | 66.723  | 72.093  | 74.658  | 75.5    | 73.683  | 65.884  | 58.552  | 57.609  |          |
| Anne.Session |         | 02;01.19  |         | ɪ   | 16.991     | 17.209   | 71.811  | 72.619  | 72.358  | 70.862  | 68.603  | 68.409  | 68.85   | 66.217  | 62.191  |          |
| Anne.Session |         | 02;01.19  |         | ʌ   | 17.384     | 17.54    | 73.151  | 72.328  | 72.247  | 73.317  | 74.945  | 75.958  | 75.782  | 74.513  | 72.655  |          |
| Anne.Session |         | 02;01.171 |         | æ   | 19.761     | 19.976   | 64.005  | 62.914  | 61.494  | 58.945  | 56.938  | 57.797  | 58.589  | 58.281  | 55.869  |          |
| Anne.Session |         | 02;01.174 |         | æ   | 23.602     | 23.86    | 71.694  | 68.252  | 64.78   | 63.167  | 63.851  | 64.14   | 64.058  | 64.803  | 65.418  |          |
| Anne.Session |         | 02;01.177 |         | ə   | 28.728     | 28.862   | 62.919  | 62.721  | 61.951  | 60.857  | 60.261  | 60.364  | 60.846  | 60.979  | 59.805  |          |
| Anne.Session |         | 02;01.177 |         | ʌ   | 28.974     | 29.167   | 71.863  | 73.78   | 75.681  | 76.297  | 75.072  | 72.511  | 68.056  | 63.121  | 57.609  |          |
| Anne.Session |         | 02;01.177 |         | ə   | 29.242     | 29.402   | 71.697  | 74.041  | 74.045  | 72.151  | 68.74   | 64.464  | 60.999  | 58.829  | 56.939  |          |
| Anne.Session |         | 02;01.177 |         | ə   | 29.536     | 29.593   | 69.114  | 69.946  | 70.778  | 70.983  | 71.17   | 71.312  | 71.167  | 71.022  | 70.867  |          |
| Anne.Session |         | 02;01.177 |         | i   | 29.593     | 29.81    | 70.285  | 70.034  | 69.353  | 68.876  | 68.444  | 65.691  | 61.502  | 57.997  | 55.179  |          |
| Anne.Session |         | 02;01.179 |         | æ   | 31.4       | 31.506   | 71.454  | 71.97   | 71.072  | 69.41   | 67.074  | 64.132  | 61.577  | 59.391  | 58.137  |          |
| Anne.Session |         | 02;01.179 |         | ə   | 31.935     | 32.067   | 71.524  | 72.568  | 72.208  | 70.953  | 69.545  | 68.64   | 68.221  | 67.178  | 65.001  |          |
| Anne.Session |         | 02;01.179 |         | ɜ   | 32.283     | 32.449   | 63.387  | 65.234  | 64.164  | 61.07   | 59.864  | 60.753  | 61.436  | 61.311  | 60.458  |          |

## Report: Pitch

Display pitch values at various points within each selected TextGrid interval.

*Example*

| Session      | Speaker   | Age | Record# | PA     | Start #  | End Actual Time | P10(Hz)  | P20(Hz)  | P30(Hz)  | P40(Hz)  | P50(Hz)  | P60(Hz)  | P70(Hz)  | P80(Hz)  | P90(Hz)  |
|--------------|-----------|-----|---------|--------|----------|-----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Anne.Session | 02;01.12  | I:  | 4.34    | 4.583  | $\infty$ | 242.40          | 237.03   | 242.74   | 244.76   | 242.73   | 236.65   | $\infty$ | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.12  | æ   | 4.686   | 4.844  | $\infty$ | $\infty$        | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.12  | i:  | 4.937   | 5.106  | $\infty$ | 234.74          | 233.90   | 232.86   | 231.27   | 231.93   | 230.62   | $\infty$ | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.12  | ʌ:  | 5.202   | 5.664  | 286.76   | 285.60          | 281.56   | 283.84   | 280.91   | 271.00   | 263.85   | 262.56   | 271.26   | $\infty$ | $\infty$ |
| Anne.Session | 02;01.12  | eɪ  | 5.864   | 6.157  | 260.00   | 251.49          | 248.09   | 244.45   | 237.14   | 235.85   | 236.08   | 239.18   | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.12  | u:  | 6.653   | 7.026  | 300.32   | 294.55          | 294.28   | 293.55   | 296.81   | 294.12   | 293.07   | 293.27   | 294.11   | 291.12   | $\infty$ |
| Anne.Session | 02;01.12  | ʊ:  | 7.088   | 7.307  | 286.43   | 288.24          | 288.47   | 285.59   | 284.72   | 283.43   | 286.75   | 287.80   | 291.10   | 295      | $\infty$ |
| Anne.Session | 02;01.12  | ɔ:  | 7.388   | 7.665  | 306.83   | 298.10          | 297.51   | 296.13   | 295.76   | 294.30   | 292.22   | 291.09   | 296.77   | 295.55   | 296.01   |
| Anne.Session | 02;01.12  | i:  | 7.723   | 7.927  | 331.58   | 266.24          | 264.26   | 244.24   | 293.54   | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.14  | ɛ   | 10.127  | 10.297 | 424.77   | 415.51          | 416.54   | 415.91   | 415.61   | 448.93   | 4129.61  | 4104.13  | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.17  | u:  | 12.91   | 13.097 | 487.84   | 481.39          | 459.79   | 436.79   | 402.74   | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.19  | ɛ   | 14.487  | 14.76  | 316.08   | B15.30          | 280.67   | 284.01   | 251.57   | 291.68   | 278.67   | $\infty$ | $\infty$ | $\infty$ | $\infty$ |
| Anne.Session | 02;01.19  | v:  | 14.76   | 15.027 | 277.02   | 286.97          | 296.69   | 293.09   | 297.33   | 24.41    | 334.23   | 2845.2   | 351.83   | 2854.97  | 2        |
| Anne.Session | 02;01.19  | i:  | 15.137  | 15.413 | 321.23   | 288.16          | 283.38   | 217.06   | 218.80   | 22.93    | 21.17    | 21.23    | 2812.04  | 2804.23  | 4        |
| Anne.Session | 02;01.19  | r:  | 16.63   | 16.945 | $\infty$ | $\infty$        | 343.07   | 2856.51  | 361.91   | B153.11  | 28341.75 | 2835.26  | 2820.32  | 9        |          |
| Anne.Session | 02;01.19  | ɪ   | 16.991  | 17.209 | 334.05   | 2829.54         | 2825.4   | 28318.38 | B12.39   | 2808.46  | 2805.47  | 2800.77  | 282      | 280      |          |
| Anne.Session | 02;01.19  | ʌ   | 17.384  | 17.54  | 347.25   | B48.86          | B51.18   | 2851.28  | 2845.19  | 2836.92  | 2828.96  | 2818.04  | 2808.22  | 3        |          |
| Anne.Session | 02;01.171 | æ   | 19.761  | 19.976 | 278.21   | 280.01          | 280.36   | 283.30   | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ |          |
| Anne.Session | 02;01.174 | æ   | 23.602  | 23.86  | 309.80   | $\infty$        | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ | 356.51   |          |
| Anne.Session | 02;01.177 | ə   | 28.728  | 28.862 | 286.67   | 282.44          | 281.97   | 283.81   | 286.20   | 28284.14 | 281.20   | 28477.74 | 280.46   | $\infty$ |          |
| Anne.Session | 02;01.177 | ʌ   | 28.974  | 29.167 | 370.57   | 288.01          | 288.57   | 2896.85  | 406.44   | 404.32   | 401.77   | 401.15   | $\infty$ | $\infty$ |          |
| Anne.Session | 02;01.177 | e   | 29.242  | 29.402 | 334.22   | 288.69          | 321.71   | 2808.25  | B01.27   | $\infty$ | $\infty$ | $\infty$ | $\infty$ | $\infty$ |          |
| Anne.Session | 02;01.177 | e   | 29.536  | 29.593 | 377.75   | 2876.74         | 2876.45  | 2876.20  | 2875.2   | 374.46   | 2874.32  | 2874.14  | 2873.92  | 4        |          |
| Anne.Session | 02;01.177 | i   | 29.593  | 29.81  | 374.42   | 2873.85         | 2873.71  | 2874.82  | 2875.63  | 2870.94  | 2872.05  | 2873.03  | 2873.33  | 4        |          |
| Anne.Session | 02;01.179 | æ   | 31.4    | 31.506 | 316.64   | 2818.41         | 2819.24  | 2818.97  | 28319.30 | 2819.33  | 2822.54  | 2826.51  | 2829.29  | 8        |          |
| Anne.Session | 02;01.179 | ə   | 31.935  | 32.067 | 328.65   | 2830.75         | 2833.07  | 2836.06  | 2839.26  | 2843.07  | 343.85   | 2840.62  | 2837.61  | 7        |          |
| Anne.Session | 02;01.179 | ɜ   | 32.283  | 32.449 | $\infty$ | 272.58          | 269.47   | 262.49   | 261.49   | 265.88   | 272.94   | 278.32   | 288.85   | $\infty$ |          |

### Report: Formants

Display formant values at various points within each selected TextGrid interval.

*Example*

| Session      | TextGrid | # | ActualTime   |
|--------------|----------|---|--|
| Anne.Session | 02;01.12 | 1 | 17.3834583459214579284547664806                                |
| Anne.Session | 02;01.12 | 2 | 17.92988684056389419738891497713328451906928458755609160559343 |

| Session             | Speaker | Age      | Record # | IPA Actual | Start Time(s) | End Time(s) | Center of Gravity | Standard Deviation | Kurtosis | Skewness |
|---------------------|---------|----------|----------|------------|---------------|-------------|-------------------|--------------------|----------|----------|
| <b># ActiveTime</b> |         |          |          |            |               |             |                   |                    |          |          |
| Anne.Session        | Anne    | 02;01.17 | 2        | i:         | 4.34          | 4.583       | 6,426.133         | 3,724.252          | -0.677   | 0.789    |
| Anne.Session        | Anne    | 02;01.17 | 2        | æ          | 4.686         | 4.844       | 6,655.038         | 4,173.061          | -1.172   | 0.556    |
| Anne.Session        | Anne    | 02;01.17 | 2        | i:         | 4.937         | 5.106       | 8,627.853         | 3,991.902          | -1.526   | -0.027   |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʌ:         | 5.202         | 5.664       | 6,570.421         | 3,927.165          | -0.914   | 0.66     |
| Anne.Session        | Anne    | 02;01.17 | 2        | eɪ         | 5.864         | 6.157       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 5.931         | 6.178       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 6.061         | 6.302       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 6.181         | 6.425       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 6.311         | 6.554       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʌ:         | 6.441         | 6.683       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 6.571         | 6.812       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 6.701         | 6.931       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 6.831         | 7.050       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 6.961         | 7.179       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 7.091         | 7.310       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 7.221         | 7.440       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 7.351         | 7.570       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 7.481         | 7.700       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 7.611         | 7.830       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 7.741         | 7.960       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 7.871         | 8.090       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 7.991         | 8.210       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 8.121         | 8.340       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 8.251         | 8.470       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 8.381         | 8.600       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 8.511         | 8.730       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 8.641         | 8.860       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 8.771         | 9.000       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 8.901         | 9.120       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 9.031         | 9.250       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 9.161         | 9.380       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 9.291         | 9.510       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 9.421         | 9.640       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 9.551         | 9.770       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 9.681         | 9.900       | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 9.811         | 10.030      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 9.941         | 10.160      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 10.071        | 10.290      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 10.201        | 10.420      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 10.331        | 10.550      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 10.461        | 10.680      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 10.591        | 10.810      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 10.721        | 10.940      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 10.851        | 11.070      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 10.981        | 11.200      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 11.111        | 11.330      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 11.241        | 11.460      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 11.371        | 11.590      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 11.501        | 11.720      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 11.631        | 11.850      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 11.761        | 11.980      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 11.891        | 12.110      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 12.021        | 12.240      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 12.151        | 12.370      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 12.281        | 12.500      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 12.411        | 12.630      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 12.541        | 12.760      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 12.671        | 12.890      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 12.801        | 13.020      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 12.931        | 13.150      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 13.061        | 13.280      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 13.191        | 13.410      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 13.321        | 13.540      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 13.451        | 13.680      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 13.581        | 13.800      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 13.711        | 13.930      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 13.841        | 14.060      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 13.971        | 14.280      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 14.101        | 14.320      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 14.231        | 14.450      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 14.361        | 14.580      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 14.491        | 14.710      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 14.621        | 14.840      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 14.751        | 14.970      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 14.881        | 15.100      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 15.011        | 15.230      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 15.141        | 15.360      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 15.271        | 15.490      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 15.401        | 15.620      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 15.531        | 15.750      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 15.661        | 15.880      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 15.791        | 16.010      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 15.921        | 16.140      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 16.051        | 16.270      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 16.181        | 16.400      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 16.311        | 16.530      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 16.441        | 16.660      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 16.571        | 16.790      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 16.701        | 16.920      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 16.831        | 17.050      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 16.961        | 17.180      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 17.091        | 17.310      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɔ:         | 17.221        | 17.440      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɒ:         | 17.351        | 17.570      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɛ:         | 17.481        | 17.700      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ɪ:         | 17.611        | 17.830      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ʊ:         | 17.741        | 17.960      | 5,330.386         | 3,441.805          | 0.744    | 1.381    |
| Anne.Session        | Anne    | 02;01.17 | 2        | ə:         | 17.871        | 18.090      |                   |                    |          |          |

| Session      | Speaker | Age      | Record # | IPA Actual | Start Time(s) | End Time(s) | Center of Gravity | Standard Deviation | Kurtosis | Skewness |
|--------------|---------|----------|----------|------------|---------------|-------------|-------------------|--------------------|----------|----------|
| Anne.Session | Anne    | 02;01.17 | 2        | u:         | 6.653         | 7.026       | 5,164.374         | 3,390.609          | 1.211    | 1.616    |
| Anne.Session | Anne    | 02;01.17 | 2        | u:         | 7.088         | 7.307       | 5,028.66          | 3,431.747          | 1.13     | 1.51     |
| Anne.Session | Anne    | 02;01.17 | 2        | ɔ:         | 7.388         | 7.665       | 4,627.188         | 3,172.849          | 2.205    | 1.761    |
| Anne.Session | Anne    | 02;01.17 | 2        | i:         | 7.723         | 7.927       | 6,287.743         | 3,715.269          | -0.518   | 0.981    |
| Anne.Session | Anne    | 02;01.17 | 4        | ɛ          | 10.127        | 10.297      | 3,914.8           | 2,518.136          | 5.174    | 2.296    |
| Anne.Session | Anne    | 02;01.17 | 7        | u:         | 12.91         | 13.097      | 4,587.086         | 2,732.02           | 3.513    | 1.842    |
| Anne.Session | Anne    | 02;01.17 | 9        | ɛ          | 14.487        | 14.76       | 8,183.253         | 4,231.057          | -1.361   | -0.18    |
| Anne.Session | Anne    | 02;01.17 | 9        | v:         | 14.76         | 15.027      | 9,051.553         | 3,655.238          | -1.055   | -0.195   |
| Anne.Session | Anne    | 02;01.17 | 9        | i:         | 15.137        | 15.413      | 6,986.172         | 4,101.892          | -1.199   | 0.627    |
| Anne.Session | Anne    | 02;01.17 | 9        | r:         | 16.63         | 16.945      | 4,706.716         | 2,680.662          | 4.496    | 2.304    |
| Anne.Session | Anne    | 02;01.17 | 9        | ɪ          | 16.991        | 17.209      | 5,038.952         | 2,696.526          | 3.589    | 2.113    |
| Anne.Session | Anne    | 02;01.17 | 9        | ʌ          | 17.384        | 17.54       | 3,997.534         | 2,311.282          | 6.543    | 2.344    |
| Anne.Session | Anne    | 02;01.17 | 11       | æ          | 19.761        | 19.976      | 9,203.167         | 3,990.843          | -1.194   | -0.362   |
| Anne.Session | Anne    | 02;01.17 | 14       | æ          | 23.602        | 23.86       | 4,743.614         | 3,322.655          | 1.127    | 1.501    |
| Anne.Session | Anne    | 02;01.17 | 17       | ə          | 28.728        | 28.862      | 8,774.132         | 4,591.709          | -1.452   | -0.351   |
| Anne.Session | Anne    | 02;01.17 | 17       | ʌ          | 28.974        | 29.167      | 5,551.587         | 4,408.839          | -0.807   | 0.913    |
| Anne.Session | Anne    | 02;01.17 | 17       | e          | 29.242        | 29.402      | 6,865.394         | 4,248.568          | -1.325   | 0.515    |
| Anne.Session | Anne    | 02;01.17 | 17       | e          | 29.536        | 29.593      | 5,801.437         | 3,312.533          | -0.06    | 1.105    |
| Anne.Session | Anne    | 02;01.17 | 17       | ɪ          | 29.593        | 29.81       | 5,667.334         | 3,688.539          | -0.023   | 1.186    |
| Anne.Session | Anne    | 02;01.17 | 19       | æ          | 31.4          | 31.506      | 7,551.871         | 4,308.768          | -1.474   | 0.219    |
| Anne.Session | Anne    | 02;01.17 | 19       | ə          | 31.935        | 32.067      | 8,346.506         | 4,189.694          | -1.432   | -0.062   |
| Anne.Session | Anne    | 02;01.17 | 19       | ɔ          | 32.283        | 32.449      | 7,689.832         | 4,135.812          | -1.42    | 0.253    |

### Report: Voice Onset Time (VOT)

The voice onset time (VOT) report will calculate VOT for each query result.


#### Parameters

- *VOT Release Tier* TextGrid tiername for the VOT release tier. This tier must be a point tier (default 'Voicing').

#### Data preparation

A TextGrid must be assigned to the session and tier mappings setup for the Phon tier (default 'IPA Actual') used in the query. A point tier (default name 'Voicing') must exist, with a point for each interval for which VoT calculation will be performed. The point should be have the same label as the interval to which it is related not including stress markers.

Example:

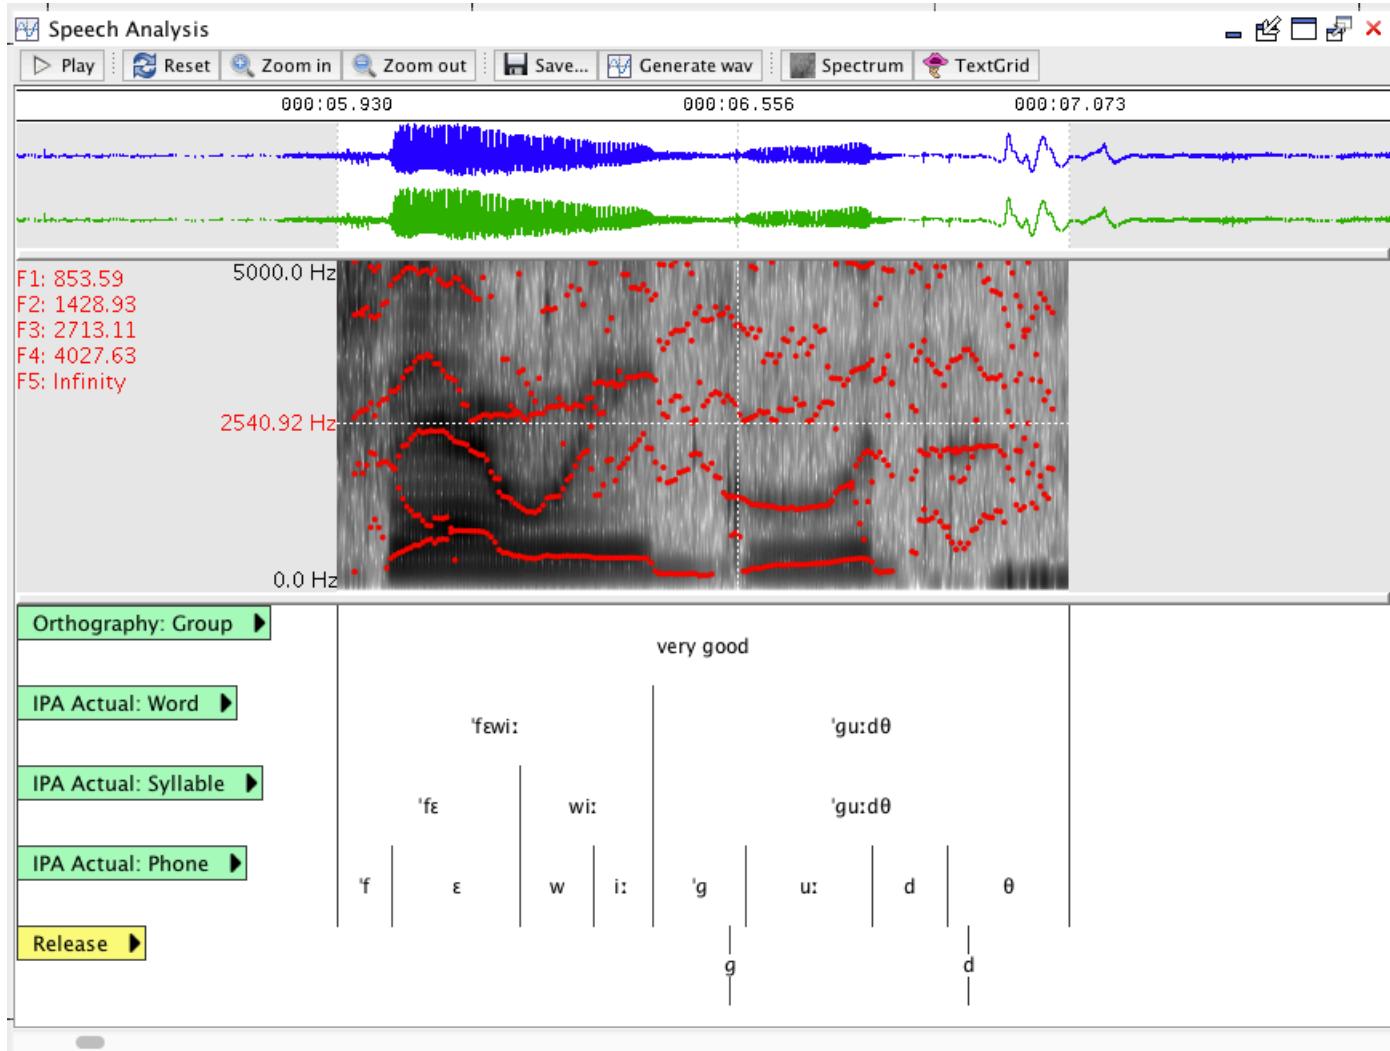

### VoT Calculation

Given a TextGrid interval, T, and a point (i.e., time), P, VoT is calculated as:

- $\text{VOT} = P - T.\text{end}$

In the example above, g has a negative VOT, while the d has a positive VOT.

### Example

The table produced will have the following columns:

- Session
- Speaker
- Age
- Record #
- Result/Tier name(s)
- Start Time(s)
- End Time(s)
- Release(s)
- Dur + VOT(s)
- VOT(s)

| Session      | Speaker | Age      | Record # | IPA Actual | Start Time(s) | End Time(s) | Release(s) | Dur + VOT(s) | VOT(s) |
|--------------|---------|----------|----------|------------|---------------|-------------|------------|--------------|--------|
| Anne.Session | Anne    | 02;01.17 | 1        | g          | 6.422         | 6.568       | 6.543      | 0.121        | -0.025 |
| Anne.Session | Anne    | 02;01.17 | 1        | d          | 6.764         | 6.882       | 6.915      | 0.151        | 0.033  |
| Anne.Session | Anne    | 02;01.17 | 2        | ŋ          | 10.752        | 10.898      | 10.925     | 0.173        | 0.027  |
| Anne.Session | Anne    | 02;01.17 | 2        | ŋ          | 10.898        | 11.057      | 10.996     | 0.098        | -0.061 |
| Anne.Session | Anne    | 02;01.17 | 3        | tʰ         | 15.2          | 15.398      | 15.272     | 0.072        | -0.126 |
| Anne.Session | Anne    | 02;01.17 | 3        | tʰ         | 15.816        | 16.067      | 15.914     | 0.099        | -0.152 |
| Anne.Session | Anne    | 02;01.17 | 4        | tʰ         | 24            | 24.22       | 24.07      | 0.071        | -0.149 |

### Step 3: Report

The HTML report is generated based on the report configuration when the Report step is initiated. Report generation may take several minutes - especially for reports with large amounts of data. Once the report is generated it will be displayed in the wizard.

Query : Phones (Query 1)

Query : Phones > Report Composer > Report > Run again >

Report (002:40)  Open after saving Buffer: Report

# Φ Report

## Query Information

**Query Name:** Phones

**General**

- **Search Tier:** IPA Target
- **Search by:** Word
- **Then by syllable:** no
- **Expression type:** Phonex
- **Expression:**

```
// Syllables (expanded)
// Query all syllables, store each constituent in a named group
// Stress
(S=\s)?
// Onset
(O=
(O1=\c:L:O) (O2=\c:L:O) (O3=\c:L:O) (O4=\c:O) (O5=\c:O)
| (\c:L:O) (\c:L:O) (\c:O) (\c:O)
| (\c:L:O) (\c:O) (\c:O)
| (\c:O) (\c:O)
| (\c:O:E)
)?
// Rhyme
(R=
(N=
(N1=.:D) (N2=.:D) | (:N)
)
// Nucleus
(N=
(N1=.:D) (N2=.:D) | (:N)
)
// Coda
(C=
(C1=\c:C) (C2=\c:C) (C3=\c:C:R) (C4=\c:C:R) (C5=\c:C:R)
| (\c:C) (\c:C) (\c:C:R) (\c:C:R)
| (\c:C) (\c:C) (\c:C:R)
| (\c:C) (\c:C)
| (\c:C)
)?
)
```

### Save HTML Report


To save a copy of the HTML report click the 'Save...' button in the toolbar.

If 'Open after saving' is selected the Report will be opened in the system default browser.

### Export tables

To export report tables to CSV/Excel formats, use the 'Export tables...' button in the toolbar. There are three options:

1. Export tables to single Excel workbook
2. Export tables to folder (XLS) - export tables one per file in Excel format to specified folder
3. Export tables to folder (CSV) - export tables one per file in CSV format to specified folder

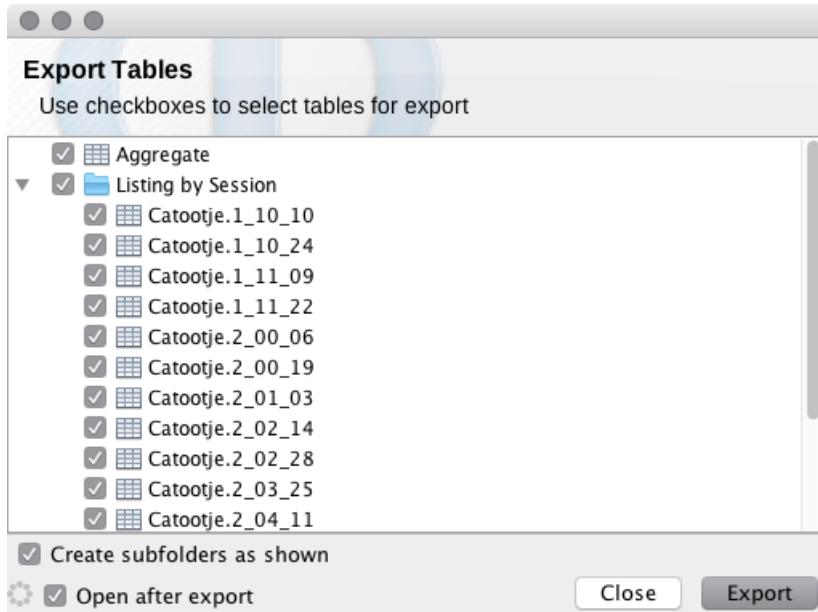


If 'Open after saving' is selected the Excel file or export folder will be displayed after export.

## Query: Data Tiers

---

The *Data Tiers* query allows searching within any record tier.

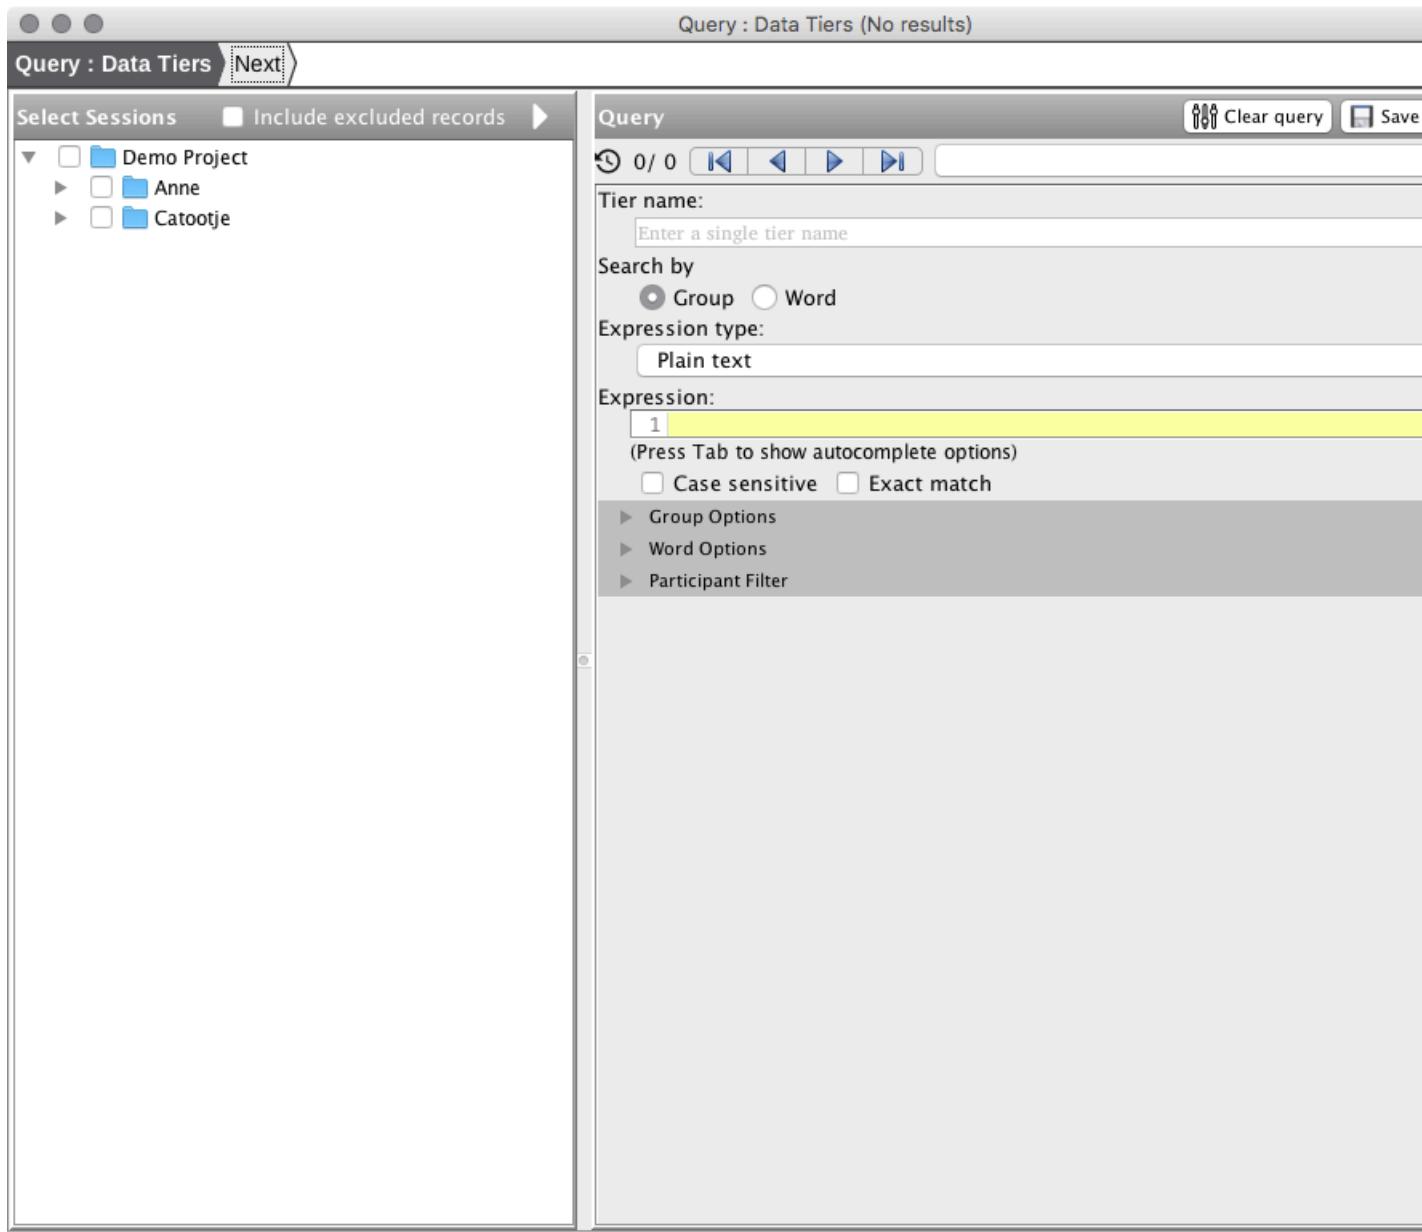

## Usage

1. Enter the name of the tier in which you would like to search in the **Tier name** field.
2. Choose an **Expression Type** using the context menu.
3. Enter the expression you would like to search for in the **Expression** field.
4. Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.



**Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

## Related tasks

[Group Options](#) on page 153

Limit the results based on position or an expression defining the word group.

[Word Options](#) on page 153


Limit the results based on position or an expression defining the word.

[Participant Filter](#) on page 155

Limit the results based on participant information.

## Query: Phones

The **Phones** query is used to query data contained within IPA Target and IPA Actual tiers.

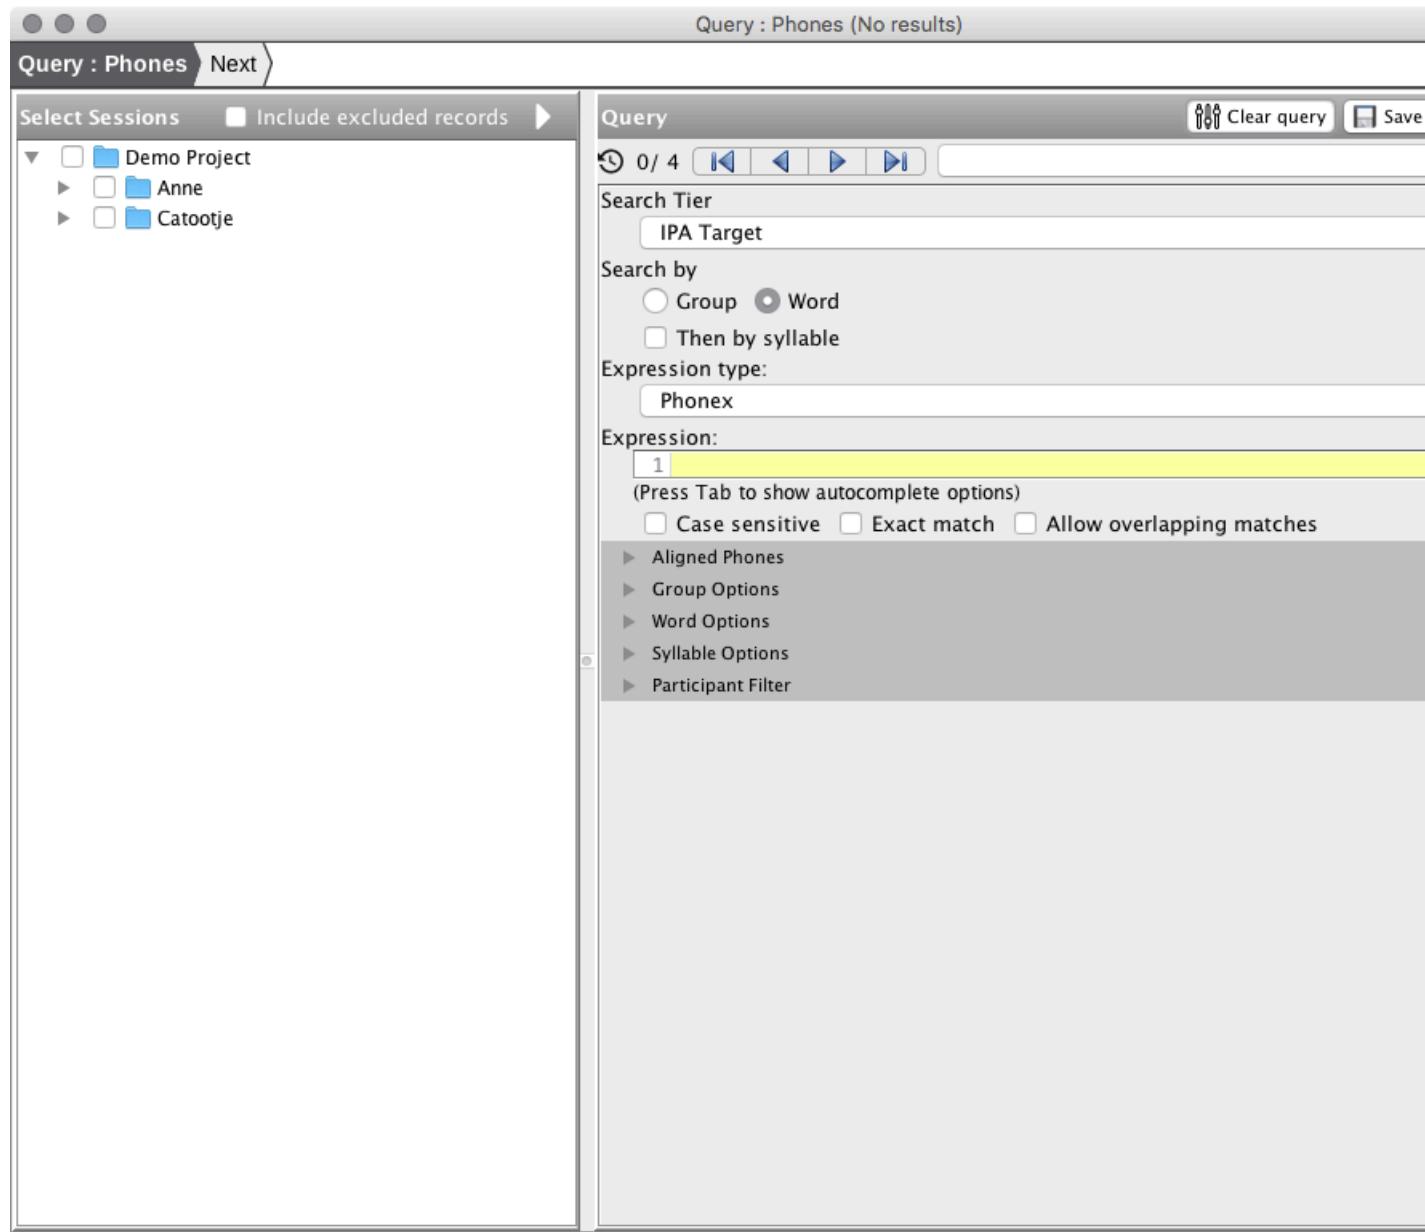

## Parameters

- Search Tier: IPA Target or IPA Actual.
- Search by: Group, Word and optionally by syllable. This option defines the search domain for the query.
- Expression type: Plain text, Regular Expression, Phonex, Stress Pattern, CGV Pattern
- Expression: query expression
  - Case sensitive (not applicable for phonex expressions)
  - Exact match
  - Allow overlapping matches (phonex only)

## Aligned Phones

The phones aligned with the queried phones can be added to query results. If 'include aligned phones' is selected the aligned results may be filtered using the **IPA Target Matcher** and **IPA Actual Matcher** expressions.

## Other Parameters

- Group Options
- Word Options
- Syllable Options
- Participant Filter

## Query: Segmental Relations

Look for segmental relations within phone alignment.

The screenshot shows the 'Query : Segmental Relations' dialog box. At the top right, it says 'Query : Segmental Relations (No results)'. Below that are buttons for 'Clear query' and 'Save'. On the left, there's a 'Select Sessions' tree view with a checkbox for 'Include excluded records'. The tree shows a 'Demo Project' folder containing 'Anne' and 'Catootje'. The main area contains various search parameters:

- Search by:** Radio buttons for 'Group' (unchecked), 'Word' (checked), and 'Then by syllable' (unchecked).
- Relations:** A list of checked checkboxes for Reduplication, Migration, Metathesis, Harmony, and Assimilation.
- Direction:** Radio buttons for 'Progressive' (checked) and 'Regressive' (checked).
- Locality:** Radio buttons for 'Local (XY)' (checked) and 'Nonlocal (X...Y)' (checked).
- Dimensions:** Radio buttons for 'Any selected dimension' (checked) and 'Require all selected dimensions' (unchecked).
- Consonants:** A checked checkbox for 'Include consonant relations'.
- Consonant Dimensions:** Checked checkboxes for 'Place' and 'Voicing', with a checked checkbox for 'Manner' to their right.
- Vowels:** An unchecked checkbox for 'Include vowel relations'.
- Vowel Dimensions:** Checked checkboxes for 'Height' and 'Tense ness', with checked checkboxes for 'Backness' and 'Rounding' to their right.
- Other Options:** Buttons for 'Group Options', 'Word Options', 'Syllable Options', and 'Participant Filter'.

## Common Query Options

---

### Group Options

Limit the results based on position or an expression defining the word group.

1. Open the **Group Filter** panel by clicking on its title bar.
2. To filter by group position, select the group positions you would like to search (i.e. singleton, initial, medial and/or final groups).
3. To filter by content, choose an **Expression Type** using the context menu.
4. Enter the expression you would like to search for in the **Expression** field.

 **Note:** A filter can be used to *exclude* results based on an expression defining the word group, depending on the filter expression. For example, you can use the following regular expression (where PATTERN is the pattern you wish to exclude):

```
^(?:(:?!PATTERN).)*$
```

5. Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.

 **Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

### Aligned Group Options

You may also limit the results based on an expression defining an aligned word group in another tier.

From the **Aligned Group** section of the **Group Filter**:

1. Enter the name of the filter tier in the **Tier name** field.
2. Choose an **Expression Type** using the context menu.
3. Enter the expression you would like to filter with in the **Expression** field.
4. Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.

 **Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

### Aligned Group Options

You may also limit the results based on an expression defining an aligned word group in another tier.

From the **Aligned Group** section of the **Group Filter**:

1. Enter the name of the filter tier in the **Tier name** field.
2. Choose an **Expression Type** using the context menu.
3. Enter the expression you would like to filter with in the **Expression** field.
4. Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.

 **Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

### Word Options

Limit the results based on position or an expression defining the word.

1. Open the **Word Filter** panel by clicking on its title bar.
2. Select the **Search by word** check box.
3. To filter by word position, select the word positions you would like to search (i.e. singleton words; or initial, medial and/or final words in groups with multiple words).
4. To filter by content, choose an **Expression Type** using the context menu.

- Enter the expression you would like to search for in the **Expression** field.



**Note:** A filter can be used to *exclude* results based on an expression defining the word group, depending on the filter expression. For example, you can use the following regular expression (where PATTERN is the pattern you wish to exclude):

```
^(?:(:?!PATTERN).)*$
```

- Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.



**Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

### Aligned Word Options

You may also limit the results based on an expression defining an aligned word in another tier.

From the **Aligned Word** section of the **Word Filter**:

- Enter the name of the filter tier in the **Tier name** field.
- Choose an **Expression Type** using the context menu.
- Enter the expression you would like to filter with in the **Expression** field.
- Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.



**Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

### Aligned Word Options

You may also limit the results based on an expression defining an aligned word in another tier.

From the **Aligned Word** section of the **Word Filter**:

- Enter the name of the filter tier in the **Tier name** field.
- Choose an **Expression Type** using the context menu.
- Enter the expression you would like to filter with in the **Expression** field.
- Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.



**Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

### Syllable Options

Limit the results based on position or an expression defining the syllable.

- Open the **Syllable Filter** panel by clicking on its title bar.
- Select the **Search by syllable** check box.
- Choose whether to **Ignore results from truncated syllables** by selecting or deselecting the check box.
- To filter by syllable position, select the syllable positions you would like to search (i.e. singleton syllables; or initial, medial and/or final syllables in words with multiple syllables).
- To filter by syllable stress type, select the stress types you would like to search (i.e. primary stress, secondary stress, or unstressed syllables).
- To filter by content, choose an **Expression Type** using the context menu.
- Enter the expression you would like to search for in the **Expression** field.



**Note:** A filter can be used to *exclude* results based on an expression defining the word group, depending on the filter expression. For example, you can use the following regular expression (where PATTERN is the pattern you wish to exclude):

```
^(?:(:?!PATTERN).)*$
```

8. Choose whether or not your query should be **Case sensitive** and/or an **Exact match** using the check boxes.



**Note:** **Case sensitive** is not applicable to **Phonex**, **Stress pattern**, or **CGV pattern** expressions.

## Participant Filter

Limit the results based on participant information.

- To filter by participant names, enter one or more names in the **Participant names** field, separated by comma if applicable.
- To filter by age, use the context menu to select equal to, less than, or greater than and enter a name in the first **Age** field (using the format yy;mm.dd).
- To filter using an age range, select an operator using the context menu, and specify the relevant options and age in the second **Age** field.



---

# Chapter

# 5

---

## Analyses

---

### Topics:

- Analysis: Consonants
- Analysis: PPC
- Analysis: Phone Inventory
- Analyses: Phonological Processes
- Analysis: Phonological Mean Length of Utterance (PMLU)
- Analysis: Word List
- Specialized
- Custom Analysis using Composer (simple)

## Analysis: Consonants

---

### Outline

- \* Aggregate \* Singletons \* Aggregate \* /b/ \* Listing \* Accuracy \* Accuracy over time \* /f/ \* ... \* ... \* Clusters \* Aggregate \* /br/ \* ...

The Aggregate table will include an Aggregate summary of results for a participant and will include the following columns:

### Singletons

### Clusters

/br/

Listing:

| Session | Record # | IPA Target | IPA Actual | ... (standard result listing) |
|---------|----------|------------|------------|-------------------------------|
|         |          |            |            |                               |

Summary:

Overall accuracy: (Total of Accurate)/(Total of Count - including epenthesis) ??? % Accurate : (Total of Accurate) / (Total of Count - excluding epenthesis) ??? % Substitutions: (Total of Substitutions) / (Total of Count - excluding epenthesis) % Deletions: (Total of Deletions) / (Total of Count - excluding epenthesis)

Accuracy:

| IPA Target | Phone | Position | Count | Accurate | Substitutions | Deletions |
|------------|-------|----------|-------|----------|---------------|-----------|
| br         | b     | O1       | 5     | 2        | 2             | 1         |
| br         | r     | O2       | 5     | 5        | 0             | 0         |

Epenthesis:

| Phone | Position | Count |
|-------|----------|-------|
| s     | O0+      | 1     |
| l     | O1+      | 1     |
| t     | O2+      | 1     |

## Analysis: PPC

---

The PPC analysis will calculate the percent phones/consonants/vowels correct in the sampled data.

### Report Outline

The report will be composed of two types of tables:

- PPC Summary
- PPC Listing

An example table of contents is displayed below. Bold level elements are section headers while italic items are one of the tables listed above. Other headings are standard Phon report elements or text blocks.

- **PPC**
  - Parameters
  - **Summary**
    - *PPC Summary* (All Participants)
    - *PPC Summary* (Participant 1)
    - ...
  - **Listing by Participant**
    - *PPC Listing* (Participant 1)
    - ...

## Data Preparation

Session data is queried by word for each IPA Target and IPA Actual tuple. Proper syllabification and phone alignment is required for accurate results. All participants should have unique names/identification numbers and a speaker should be assigned to all records.

## Parameters

The PPC report can be restricted to different sets of phones. Several pre-defined sets have been defined and are available by using the radio buttons displayed in the PPC form (see below.) The following pre-defined report types are available:

1. Percent Consonants Correct - all consonants (i.e., PCC)
2. Percent Singleton Consonants Correct - singleton consonants. There are three report sub-types available when this option is selected:
  - a. All singletone consonants
  - b. Singleton onsets
  - c. Singleton codas
3. Percent Cluster Consonants Correct - cluster consonants. There are three report sub-types available when this option is selected:
  - a. All clusters
  - b. Tautosyllabic clusters
  - c. Heterosyllabic clusters
4. Percent Vowels Correct
5. Percent Phones Correct - all phones.

When 'Percent Correct (custom)' is selected a custom [Phonex](#) expression may be entered to create a custom phone set. See [Example Phones Queries](#) for some useful examples.

Other parameters:

1. Ignore diacritics - ignore diacritics when comparing phones (default: yes.)
2. Include PPC w/o epenthesis 'PPC (NoEpen)' (see below.)
3. [Group Options](#) on page 153
4. [Word Options](#) on page 153
5. [Syllable Options](#) on page 154

## PPC Calculation

PPC is calculated using the following equation:

$$\begin{aligned}
 PPC &= \frac{\text{correct}}{(\text{correct} + \text{incorrect})} \times 100 \\
 &= \frac{\text{correct}}{(\text{correct} + \text{deletions} + \text{substitutions} + \text{epenthesis})} \times 100
 \end{aligned}$$

If requested a second PPC column which does not include epenthesis may be added to the report. The column will be named 'PPC (NoEpent)'.

$$\begin{aligned}
 PPC_{\text{NoEpent}} &= \frac{\text{correct}}{(\text{correct} + \text{incorrect})} \times 100 \\
 &= \frac{\text{correct}}{(\text{correct} + \text{deletions} + \text{substitutions})} \times 100
 \end{aligned}$$

## PPC Summary

The *PPC Summary* tables display # Target, # Correct, # Substituted, # Deleted, # Epenthesis, PPC for the sampled data. When displaying the summary for "All Participants" each row is the summary for a single speaker with a final row displaying totals for all speakers. When displaying the summary for a participant, each row shows the totals for the participant in the indicated session. The caption of the table will be "All Participants" or "Participant Name".

Example (All Participants)

| Speaker | Role         | # Target | # Correct | # Substituted | # Deleted | # Epenthesized | PPC   |
|---------|--------------|----------|-----------|---------------|-----------|----------------|-------|
| CHI     | Target Child | 1202     | 700       | 265           | 237       | 64             | 55.29 |
| Kiddo   | Target Child | 249      | 168       | 60            | 21        | 16             | 63.4  |
| Total   |              | 1451     | 868       | 325           | 258       | 80             | 56.69 |

Example (Participant)

| Session      | Role         | Age      | # Target | # Correct | # Substituted | # Deleted | # Epenthesized | PPC   |
|--------------|--------------|----------|----------|-----------|---------------|-----------|----------------|-------|
| CHI.Session1 | Target Child | 01;10.11 | 321      | 165       | 68            | 88        | 17             | 48.82 |
| CHI.Session2 | Target Child | 01;11.22 | 445      | 254       | 106           | 85        | 30             | 53.47 |
| CHI.Session3 | Target Child | 02;02.15 | 436      | 281       | 91            | 64        | 17             | 62.03 |

## PPC Listing

The *PPC Listing* table displays # Target, # Correct, # Substituted, # Deleted, # Epenthesis, PPC for each word sampled. The table will have the caption "Participant Name".

Example

| Record # | IPA Target | IPA Actual | # Target | # Actual | # Correct | # Substituted | # Deleted | # Epenthesized | PPC |
|----------|------------|------------|----------|----------|-----------|---------------|-----------|----------------|-----|
| 1        | 'eis       | '?ei       | 1        | 1        | 0         | 0             | 1         | 1              | 0.0 |

| Record # | IPA Target          | IPA Actual | # Target | # Actual | # Correct | # Substituted | # Deleted | # Epenthesized | PPC   |
|----------|---------------------|------------|----------|----------|-----------|---------------|-----------|----------------|-------|
| 1        | 'eis                | ?œys       | 1        | 2        | 1         | 0             | 0         | 1              | 50.0  |
| 2        | 'ent                | 'eɪn       | 2        | 1        | 1         | 0             | 1         | 0              | 50.0  |
| 3        | 'voχəl              | 'hoχa      | 3        | 2        | 0         | 2             | 1         | 0              | 0.0   |
| 4        | 'blumə              | 'bʊ:mɪ     | 3        | 2        | 2         | 0             | 1         | 0              | 66.67 |
| 5        | 'senfjøs            | 'tr:tæ     | 4        | 2        | 0         | 2             | 2         | 0              | 0.0   |
| 6        | 'fœys               | 'hœis      | 2        | 2        | 1         | 1             | 0         | 0              | 50.0  |
| 7        | 'fœys               | 'hœys      | 2        | 2        | 1         | 1             | 0         | 0              | 50.0  |
| 8        | 'kirkər             | 'kikä      | 3        | 2        | 2         | 0             | 1         | 0              | 66.67 |
| 9        | 'kløk               | 'kɔt       | 3        | 2        | 1         | 1             | 1         | 0              | 33.33 |
| 10       | 'sχunə              | 'u:mi      | 3        | 1        | 0         | 1             | 2         | 0              | 0.0   |
| 11       | 'sχun               | 'u'm       | 3        | 1        | 0         | 1             | 2         | 0              | 0.0   |
| 12       | 'pus                | 'pys       | 2        | 2        | 2         | 0             | 0         | 0              | 100.0 |
| 13       | 'nɔχ                | 'nɔkə      | 2        | 2        | 1         | 1             | 0         | 0              | 50.0  |
| 13       | ən                  | əm         | 1        | 1        | 0         | 1             | 0         | 0              | 0.0   |
| 13       | 'pus                | 'pys       | 2        | 2        | 2         | 0             | 0         | 0              | 100.0 |
| 14       | 'part               | 'pa:t      | 3        | 2        | 2         | 0             | 1         | 0              | 66.67 |
| 15       | 'vis                | 'his       | 2        | 2        | 1         | 1             | 0         | 0              | 50.0  |
| 16       | 'vis                | 'hɪs       | 2        | 2        | 1         | 1             | 0         | 0              | 50.0  |
| 17       | 'værm               | 'vo:, min  | 3        | 3        | 2         | 0             | 1         | 1              | 50.0  |
| 18       | 'nits               | 'n:t       | 3        | 2        | 2         | 0             | 1         | 0              | 66.67 |
| 19       | 'oto                | 'o:to      | 1        | 1        | 1         | 0             | 0         | 0              | 100.0 |
| 20       | 'bran<br>, tveɪ'oto | 'bɑ:n'tətʌ | 7        | 4        | 4         | 0             | 3         | 0              | 57.14 |
| 21       | 'aɪ, bɛi            | ?a:'bɛi    | 2        | 2        | 1         | 0             | 1         | 1              | 33.33 |
| 22       | ,indi'jan           | 'ha:nɪ     | 4        | 2        | 1         | 0             | 3         | 1              | 20.0  |

## Analysis: Phone Inventory

The Phone Inventory analysis will calculate independent phoneme inventories of the *IPA Target* and *IPA Actual* tiers in the sampled data.

### Outline

The report will be composed of the following types of tables:

- Summary
- Aggregate Inventory
- Session Inventory

## Analyses: Phonological Processes

---

### Analysis: Phonological Mean Length of Utterance (PMLU)

---

The PMLU analysis calculates

1. Phonological Mean Length of Utterance (PMLU) (Ingram 2002)
2. Expanded Phonological Mean Length of Utterance (ePMLU) (Arias & Lleó 2013)

### Outline

### Analysis: Word List

---

### Specialized

---

#### Analysis: Word Match

#### Analysis: Multisyllabic Nonlinear Analysis

This document describes the Multisyllabic Nonlinear Analysis (MNA) report in Phon.

##### Information

TODO - Information about analysis and citations which will be included at the top of the report

##### Organization

The report will consist of two types of tables:

- MNA Production - breakdown of each word sampled
- MNA Summary - summary of all words sampled

An example table of contents is displayed below. Bold level elements are section headers, italic items are one of the tables listed above. Other headings are standard Phon report elements or text blocks.

- **Multisyllabic Nonlinear Analysis**
  - Information
  - Parameters
  - **Summary**
    - *MNA Summary*
  - **Breakdown**
    - **Word /IPA Target/ (Word 1)**
      - *MNA Production* (Production 1)
      - *MNA Production* (Production 2)
      - ...
    - **Word /IPA Target/ (Word 2)**
      - ...

## Data Preparation

Session data is queried by word and a WAP Table is produced for each Orthography, IPA Target, and IPA Actual triad. Proper syllabification and phone alignment is required for accurate results. All participants should have unique names/identification numbers and a speaker should be assigned to all records.

## Parameters

Parameters for the initial *Data Tiers* query will be available. The user may modify the query parameters to adjust the set of words sampled.

## MNA Production Table

The *MNA Production* tables provide details for each word sampled. The table has four main categories: *Stress*, *Syllable*, *Phone/Timing Unit*, and *Feature*. Caption for the table will be "/IPA Actual/".

Example

/kʰæʃ'wɛʒəʃv:/

| Category          | Description  | Value | Total |
|-------------------|--|-------|-------|
| Stress            | Primary Stress mis-match                                     | 1     |       |
|                   | Secondary Stress mis-match                                   | 1     |       |
|                   | Word stress mis-match:<br>12UU ↔ 21UU                        | 1     |       |
|                   | Stress subtotal  | 3     |       |
| Syllable          | Syllable subtotal  | 0     |       |
| Phone/Timing Unit | Phone 9 deleted: t ↔ Ø                                       | 1     |       |
|                   | Phone/Timing Unit subtotal                                   | 1     |       |
| Feature           | Place substitution<br>{alveolar} ↔ {labial, - dental}: r ↔ w | 1     |       |
|                   | Manner substitution<br>{rhotic} ↔ {glide}: r ↔ w             | 1     |       |
|                   | Manner substitution<br>{affricate} ↔ {fricative}: dʒ ↔ ʒ     | 1     |       |
|                   | Height substitution {high} ↔ {mid}: i ↔ e                    | 1     |       |
|                   | Backness substitution<br>{front} ↔ {central}: i ↔ e          | 1     |       |
|                   | Place substitution<br>{alveolar} ↔ {alveopalatal}: s ↔ ʃ     | 1     |       |
|                   | Height substitution {mid} ↔ {high}: ə ↔ ʊ:                   | 1     |       |
|                   | Backness substitution<br>{central} ↔ {back}: ə ↔ ʊ:          | 1     |       |
|                   |  |       |       |

| Category | Description   | Value | Total |
|----------|---|-------|-------|
|          | ...ʃ...dʒ... → ...ʃ...ʒ...<br>Progressive Harmony<br>Manner | 1     |       |
|          | Feature subtotal  |       | 9     |
| Total    |   |       | 13    |

### Stress

The *Stress* category includes three checks, 1 point is added for each check that fails.

1. Primary Stress match
2. Secondary Stress match
3. Stress pattern match (full-word)

### Syllable

The *Syllable* category will add a point for each deleted or inserted syllable.

### Phone/Timing Unit

The *Phone/Timing Unit* category will add a point for each delete or inserted phone.

### Feature

The *Feature* category will displays substitutions found in the phone alignment. A point is added for substituted dimension found. Consonant dimensions include: place, manner, voicing. Vowel dimensions included: height, backness, tenseness (rounding is included for schwa.) Deleted/inserted phones are not included.

Any *Segmental Relations* (e.g., harmony/metathesis) detected will be also be displayed in this category. The value added for any segmental relation will be the number of dimensions (i.e., place/manner/voicing) involved in the relation.

### MNA Summary Table

The *MNA Summary* table displays totals for each word sampled.

Example

| Word         | Productions | Stress Subtotal | Syllable Subtotal | Phone/Timing Unit Subtotal | Feature Subtotal | Total |
|--------------|-------------|-----------------|-------------------|----------------------------|------------------|-------|
| alligator    | 2           | 0.0             | 0.0               | 0.5                        | 3.0              | 3.5   |
| animal       | 2           | 0.5             | 0.5               | 1.5                        | 4.5              | 7.0   |
| balloons     | 2           | 1.0             | 0.5               | 0.5                        | 3.0              | 5.0   |
| cashregister | 4           | 1.0             | 0.25              | 1.25                       | 7.0              | 9.5   |
| computer     | 2           | 0.0             | 0.0               | 0.5                        | 3.0              | 3.5   |
| electric     | 4           | 0.5             | 0.0               | 0.5                        | 4.75             | 5.75  |
| explodes     | 3           | 0.0             | 0.0               | 1.67                       | 4.33             | 6.0   |
| giraffe      | 2           | 2.0             | 1.0               | 1.5                        | 2.0              | 6.5   |
| gorilla      | 2           | 1.5             | 0.5               | 0.5                        | 3.5              | 6.0   |
| guitar       | 2           | 1.0             | 0.0               | 0.5                        | 5.0              | 6.5   |
| hippopotamus | 2           | 1.0             | 0.0               | 0.5                        | 3.5              | 5.0   |
| hospital     | 2           | 0.0             | 0.0               | 0.5                        | 7.0              | 7.5   |

| Word        | Productions | Stress Subtotal | Syllable Subtotal | Phone/Timing Unit Subtotal | Feature Subtotal | Total |
|-------------|-------------|-----------------|-------------------|----------------------------|------------------|-------|
| invitation  | 3           | 1.0             | 0.33              | 1.67                       | 5.0              | 8.0   |
| magician    | 2           | 1.0             | 0.0               | 0.5                        | 8.0              | 9.5   |
| mosquito    | 2           | 0.0             | 0.0               | 1.0                        | 4.0              | 5.0   |
| skeleton    | 2           | 0.5             | 0.5               | 0.5                        | 4.0              | 5.5   |
| thermometer | 3           | 0.33            | 0.33              | 1.33                       | 4.67             | 6.67  |
| umbrella    | 2           | 0.0             | 0.0               | 0.0                        | 1.5              | 1.5   |
| vegetable   | 3           | 0.0             | 0.0               | 1.0                        | 6.33             | 7.33  |
| watermelon  | 3           | 0.67            | 0.67              | 1.0                        | 4.33             | 6.67  |

## Analysis: Vocalization

### Analysis: Word-level Analysis of Polysyllables (WAP)

This document outlines the Word-level Analysis of Polysyllables (WAP) report in Phon.

#### Information

The WAP (Masso, 2016) was developed in 2016 and originally published as a supplementary appendix to Masso, McLeod, Baker, McCormack (2016). The published, manual version of the WAP included seven error categories: (1) Substitution of consonants or vowels, (2) Deletion of syllables, consonants or vowels, (3) Distortion of consonants or vowels, (4) Addition of consonants or vowels, (5) Alteration of phonotactics, (6) Alteration of timing and (7) Assimilation and/or alteration of sequence. Categories 1, 2, 3 and 4 were based on the SODA analysis (substitution, omission, distortion, addition) by van Riper (1939) and categories 1, 2, 5, 6 and 7 were informed by James' (2006) work on polysyllable acquisition. Through the development of the WAP within Phon, the categories have been re-defined and embedded into the WAP analysis available in Phon.

#### Citations:

- Masso, S. (2016). Word-Level Analysis of Polysyllables. Sydney, Australia: Author.
- Masso, S., McLeod, S., Baker, E., & McCormack, J. (2016). Polysyllable productions in preschool children with speech sound disorders: Error categories and the Framework of Polysyllable Maturity. International Journal of Speech-Language Pathology, 18(3), 272-287. doi:10.3109/17549507.2016.1168483

#### Outline

The report will be composed of the following tables types:

- Word Level Stress Inventory
- Word Level Accuracy
- Prosodic Level CGV Inventory
- Prosodic Level Stress Inventory
- Prosodic Level Breakdown
- Segmental Level Inventory
- Segmental Level Breakdown
- WAP Tables (Word/Prosodic/Segmental Level breakdown for each word in sample)

An example tables of contents is displayed below. Bold level elements are section headers, italic items are one of the tables listed above. Other headings are standard Phon report elements or text blocks.

- **Word-level Analysis of Polysyllables**
- Information
- *Word Level Stress Inventory* (All Participants)

- *Word Level Accuracy* (All Participants)
- *Prosodic Level CGV Inventory* (All Participants)
- *Prosodic Level Stress Inventory* (All Participants)
- *Prosodic Level Breakdown* (All Participants)
- *Segmental Level Inventory* (All Participants)
- *Segmental Level Breakdown* (All Participants)
- **Participant**
  - *Word Level Stress Inventory* (Participant)
  - *Word Level Accuracy* (Participant)
  - *Prosodic Level CGV Inventory* (Participant)
  - *Prosodic Level Stress Inventory* (Participant)
  - *Prosodic Level Breakdown* (Participant)
  - *Segmental Level Inventory* (Participant)
  - *Segmental Level Breakdown* (Participant)
- **Session 1**
  - *Word Level Stress Inventory* (Participant)
  - *Word Level Accuracy* (Participant)
  - *Prosodic Level CGV Inventory* (Participant)
  - *Prosodic Level Stress Inventory* (Participant)
  - *Prosodic Level Breakdown* (Participant)
  - *Segmental Level Inventory* (Participant)
  - *Segmental Level Breakdown* (Participant)
  - **Word 1 /IPA Target/ -> /IPA Actual/**
    - *Word Level*
    - *Prosodic Level*
    - *Segmental Level*
    - ...
    - ...
  - ...

## Data Preparation

Session data is queried by word and a WAP Table is produced for each Orthography, IPA Target, and IPA Actual triad. Proper syllabification and phone alignment is required for accurate results. All participants should have unique names/identification numbers and a speaker should be assigned to all records.

## Word Level Inventory and Accuracy Tables

The *Word Level Stress Inventory* tables displays counts of the whole word stress productions (Target→Actual) in the sample.

Example:

| IPA Target | IPA Actual | Count |
|------------|------------|-------|
| 1U2        | 1U2        | 4     |
| 1U2U       | 12U        | 1     |
| 1U2U       | 1U2U       | 4     |
| 1U2U       | U1U        | 1     |
| 1UU        | 1UU        | 5     |
| 2U1        | 2U1        | 1     |

| IPA Target | IPA Actual | Count |
|------------|------------|-------|
| 2U1U       | 2U1U       | 1     |
| 2U1UU      | 2U1UU      | 1     |
| U12        | 12         | 2     |
| U1U        | 1U         | 3     |
| U1U        | U1U        | 5     |
| U1UU       | U1UU       | 1     |
| UUU1U      | UU1U       | 1     |

The *Word Level Accuracy* table displays counts of whole word analyses in the five dimensions listed below. Caption for the table will be "Word Level Accuracy" followed by either "(Session)" or "(Participant)" or "(All Participants)".

*Word Level Accuracy* dimensions and definitions:

- **Word** (whole word accuracy). The total number of words that were produced correctly, incorrectly, and the percentage of words produced correctly.
- **# Syllables** (word length correct). The total number of words that were produced with the correct number of syllables; an incorrect number of syllables; and the percentage of words with correct length.
- **Stress** (lexical stress correct). The total number of words that were produced with the correct lexical stress (all syllables produced with the correct stress); number produced with incorrect lexical stress; and the percentage of words with the correct lexical stress.
- **CGV Shape** (target and actual CV shape with syllable stress, boundaries, and length included). The total number of words that were produced with the correct CGV shape (regardless of the accuracy of the segments); number produced with incorrect CGV shape; and the percentage of words with correct CGV shape.
- **# Transitions** (syllable transitions correct): The total number of syllable transitions produced in the sample (total number of syllables – 1 for each word produced); the total number of segregated syllable transitions (number of intra-word pauses in target and actual); and the percentage of correct syllable transitions (correct transitions / segregated transitions + correct transitions\*100).

Example:

| Category      | Correct | Incorrect | % Correct |
|---------------|---------|-----------|-----------|
| Word          | 2       | 28        | 6.67      |
| # Syllables   | 22      | 8         | 73.33     |
| Stress        | 22      | 8         | 73.33     |
| CGV Shape     | 5       | 25        | 16.67     |
| # Transitions | 63      | 9         | 87.5      |

### Prosodic Level Inventories and Breakdown Tables

The prosodic level inventories and breakdown tables display prosodic level information from the sampled words.

The *Prosodic Level Stress Inventory* and *Prosodic Level CGV Inventory* count the stress and CGV productions (Target→Actual) for each syllable in the sample. The *Prosodic Level Breakdown* table counts the accuracy and errors within stressed and unstressed syllables in 11 dimensions listed below. Captions for the tables will be "Prosodic Level Breakdown" followed by either "(Session)" or "(Participant)" or "(All Participants)".

*Prosodic Level Breakdown* dimensions and definitions:

- **Stress correct** The number of syllables produced with correct stress in each word position.
- **Stress incorrect** The number of syllables produced with incorrect stress in each word position.
- **Full syllable addition** The number of syllables that were added.

- **Full syllable deletion** The number of syllables that were deleted in entirety (nucleus and all onset and/or coda consonants associated with the nucleus).
- **Partial syllable deletion (onset)** The number of syllables in which the onset was deleted but the nucleus of the syllable is realised.
- **Partial syllable deletion (nucleus)** The number of syllables in which the nucleus vowel was deleted (but onset/coda consonants of the syllable were realised)
- **Partial syllable deletion (coda)** The number of syllables in which the coda was deleted but the nucleus of the syllable is realised.
- **Syllable expansion (onset)** The number of syllables in which an onset consonant was added to a syllable.
- **Syllable expansion (coda)** The number of syllables in which a coda consonant was added to a syllable.
- **CGV Shape correct** The number of syllables produced with correct CGV shape (regardless of accuracy).
- **CGV Shape incorrect** The number of syllables produced with incorrect CGV shape (regardless of accuracy).

Example, *Prosodic Level Stress Inventory*

| IPA Target | IPA Actual | Count |
|------------|------------|-------|
| 1          | 1          | 29    |
| 1          | ∅          | 1     |
| 2          | 1          | 1     |
| 2          | 2          | 14    |
| U          | U          | 50    |
| U          | ∅          | 7     |

Example, *Prosodic Level CGV Inventory*

| IPA Target | IPA Actual | Count |
|------------|------------|-------|
| CCV        | CV         | 2     |
| CCVV       | CVV        | 2     |
| CGV        | CV         | 4     |
| CV         | CC         | 1     |
| CV         | CVC        | 1     |
| CV         | ∅          | 7     |
| CVC        | CV         | 4     |
| CVV        | GVV        | 2     |
| GV         | V          | 1     |
| V          | V          | 4     |
| VC         | V          | 1     |
| VC         | VC         | 2     |

Example, *Prosodic Level Breakdown*

| Dimension         | Un'Str<br>Initial | Un'Str<br>Medial | Un'Str<br>Final | Un'Str<br>Total | Str<br>Initial | Str<br>Medial | Str<br>Final | Str<br>Total | Total | %     |
|-------------------|-------------------|------------------|-----------------|-----------------|----------------|---------------|--------------|--------------|-------|-------|
| Stress<br>correct | 6                 | 21               | 23              | 50              | 17             | 19            | 7            | 43           | 93    | 91.18 |

| Dimension              | Un'Str<br>Initial | Un'Str<br>Medial | Un'Str<br>Final | Un'Str<br>Total | Str<br>Initial | Str<br>Medial | Str<br>Final | Str<br>Total | Total | %     |
|------------------------|-------------------|------------------|-----------------|-----------------|----------------|---------------|--------------|--------------|-------|-------|
| Stress incorrect       | 6                 | 1                | 0               | 7               | 1              | 1             | 0            | 2            | 9     | 8.82  |
| Full syllable addition | 0                 | 0                | 0               | 0               | 0              | 0             | 0            | 0            | 0     | 0.0   |
| Full syllable deletion | 6                 | 1                | 0               | 7               | 1              | 0             | 0            | 1            | 8     | 7.84  |
| Syllable expansion (O) | 0                 | 0                | 0               | 0               | 0              | 0             | 0            | 0            | 0     | 0.0   |
| Syllable expansion (C) | 1                 | 0                | 1               | 2               | 0              | 0             | 0            | 0            | 2     | 1.96  |
| Syllable reduction (O) | 3                 | 3                | 0               | 6               | 0              | 3             | 1            | 4            | 10    | 9.8   |
| Syllable reduction (C) | 0                 | 0                | 1               | 1               | 4              | 1             | 1            | 6            | 7     | 6.86  |
| CGV shape correct      | 3                 | 15               | 17              | 35              | 13             | 13            | 1            | 27           | 62    | 60.78 |
| CGV shape incorrect    | 9                 | 7                | 6               | 22              | 5              | 7             | 6            | 18           | 40    | 39.22 |

### Segmental Level Inventory and Breakdown Tables

The Segmental Level Inventory and Breakdown table displays segmental level information from the sampled words. The Segmental Level Inventory counts the segmental productions (Target→Actual) in the sample. The Segmental Level Breakdown counts the accuracy and errors within onset, nucleus and coda word positions in six dimensions listed below. Percentage accuracy measures will also be displayed for consonants (onset (PCC-O), coda (PCC-C), and total consonants (PCC)), vowels (PVC) and total phones (PPC). Caption for the table will be “Segmental Level Breakdown” followed by either “(Session)” or “(Participant)” or “(All Participants)”.

*Segmental Level Breakdown* dimensions and definitions:

- **# Target** The number of target phones in each word position (O/N/C) as well as total target consonants and total target phones (total consonants + total vowels)
- **# Correct** The number of phones correct in each word position (O/N/C) as well as total correct consonants and total correct phones (total consonants + total vowels)
- **# Substitutions** The number of phones substituted in each word position (O/N/C) as well as total substituted consonants and total substituted phones (total consonants + total vowels)
- **# Distortions** The number of distorted phones in each word position (O/N/C) as well as total distorted consonants and total distorted phones (total consonants + total vowels)
- **# Epenthesis** The number of added phones in each word position (O/N/C) as well as total added consonants and total added phones (total consonants + total vowels)
- **# Deletions** The number of deleted phones in each word position (O/N/C) as well as total deleted consonants and total deleted phones (total consonants + total vowels)

- **% Correct** The percentage of correct consonants (onset, coda, and total), vowels, and phones.

Example, *Segmental Level Inventory*

| IPA Target | IPA Actual | Count |
|------------|------------|-------|
| p          | p          | 5     |
| p          | b          | 1     |
| p          | f          | 1     |
| p          | ∅          | 2     |
| b          | b          | 6     |
| b          | ∅          | 1     |
| t          | p          | 1     |
| t          | t          | 8     |
| t          | ∅          | 4     |
| d          | d          | 2     |
| k          | s          | 1     |
| g          | g          | 1     |
| f          | f          | 3     |
| s          | ∅          | 2     |
| h          | h          | 2     |
| ðʒ         | ∅          | 1     |
| m          | m          | 10    |
| m          | n          | 2     |
| n          | n          | 10    |
| l          | l          | 3     |
| l          | ∅          | 6     |
| ɹ          | ɹ          | 1     |
| ɹ          | w          | 3     |
| ɹ          | ∅          | 1     |
| j          | h          | 1     |
| j          | j          | 1     |
| j          | ∅          | 2     |
| i          | i          | 3     |
| u          | u          | 2     |
| ɪ          | ɪ          | 8     |
| ʊ          | ʊ          | 3     |
| v          | v̚         | 1     |
| ə          | i          | 1     |
| ə          | u          | 2     |

| IPA Target | IPA Actual | Count |
|------------|------------|-------|
| ə          | ə          | 37    |
| ə          | ʌ          | 2     |
| ə          | æ          | 1     |
| ə          | ∅          | 9     |
| ɛ          | ə          | 1     |
| ɛ          | ɛ          | 8     |
| ʌ          | ʌ          | 2     |
| ɔ          | ɔ          | 2     |
| æ          | æ          | 7     |
| æ          | æ:         | 1     |
| æ          | ∅          | 1     |
| a          | a          | 9     |
| v          | v          | 4     |
| ∅          | t          | 1     |
| ∅          | r          | 1     |
| ∅          | i          | 1     |

Example, *Segmental Level Breakdown*

|                 | Onset | Nucleus | Coda  | Total Consonants (O +C) | Total Phones |
|-----------------|-------|---------|-------|-------------------------|--------------|
| # Target        | 93    | 105     | 25    | 118                     | 223          |
| # Correct       | 57    | 92      | 17    | 74                      | 166          |
| # Substitutions | 27    | 9       | 1     | 28                      | 37           |
| # Deletions     | 9     | 4       | 7     | 16                      | 20           |
| # Distortions   | 0     | 0       | 0     | 0                       | 0            |
| # Epenthesis    | 0     | 1       | 2     | 2                       | 3            |
| % Correct       | 61.29 | 86.79   | 62.96 | 61.67                   | 73.45        |

## WAP Tables

WAP Tables are produced for each production and contains information supporting the Word, Prosodic and Segmental Level Breakdown tables. Information is printed horizontally in a table with four columns for each table level: (1) Word Level, (2) Prosodic Level, and (3) Segmental Level. Table headings for each will be: (1) Whole Word Measure, Target, Actual, Match (i.e., are Target and Actual identical according to each word level measure. If so, True; if not, False), (2) Prosodic Alignment, Target, Position, and Description, and (3) Segmental Alignment, Target, Position, and Description. Caption for the table will be “Orthography /IPA Target/ ↔ /IPA Actual/”.

### Word Level

*Word Level Breakdown* categories:

- **Word** (whole word accuracy). Did the Actual IPA match the Target IPA?
- **# Syllables** (word length correct). Did the Actual number of syllables match the Target number of syllables?

- **Stress** (lexical stress correct). Did the Actual stress pattern match the Target stress pattern?
- **CGV Shape** (target and actual CV shape with syllable stress, boundaries, and length included). Did the Actual CGV shape match the Target CGV shape?
- **# Transitions** (syllable transitions correct). Did the Actual number of transitions (total number of syllables – 1) match the target number of transitions?
- **Segregated Transitions** No syllable segregations (intra-word pauses in target and actual) should be present in the Target IPA. Does the Actual number of syllable segregations match the target number of transitions (Target = 0)? If false, syllable segregation is present.

Example:

| Category               | Target      | Actual     | Match |
|------------------------|-------------|------------|-------|
| Word                   | 'bʌtə, flai | 'bʌfə, fai | false |
| # Syllables            | 3           | 3          | true  |
| Stress                 | 1U2         | 1U2        | true  |
| CGV Shape              | 'CV.CV,CCVV | 'CV.CV,CVV | false |
| # Transitions          | 2           | 2          | true  |
| Segregated Transitions | 0           | 0          | true  |

### Prosodic Level

- **Category Stress/CGV Pattern**
- **IPA Target** IPA Target value
- **IPA Actual** IPA Actual value
- **Position** Initial/Medial/Final (syllable position within word)
- **Description**
  - **Correct** The dimension (Target stress or CGV shape) was correct.
  - **Full syllable addition** A full syllable was added.
  - **Full syllable deletion** A full syllable was deleted (including the nucleus and all onset and/or coda consonants associated with the nucleus).
  - **Syllable reduction (onset)** The onset (or at least one consonant of the onset) was deleted but the nucleus of the syllable was realised.
  - **Syllable reduction (nucleus)** The nucleus vowel was deleted (but onset/coda consonants of the syllable were realised).
  - **Syllable reduction (coda)** The coda (or at least one consonant of the coda) was deleted but the nucleus of the syllable was realised.
  - **Syllable expansion (onset)** A consonant was added to the onset of a syllable.
  - **Syllable expansion (coda)** A consonant was added to the coda of a syllable.

Example:

| Category    | IPA Target | IPA Actual | Position | Description |
|-------------|------------|------------|----------|-------------|
| Stress      | 1          | 1          | Initial  | Correct     |
|             | U          | U          | Medial   | Correct     |
|             | 2          | 2          | Final    | Correct     |
| CGV Pattern | CV         | CV         | Initial  | Correct     |
|             | CV         | CV         | Medial   | Correct     |
|             | CCVV       | CVV        | Final    | Incorrect   |

## Segmental Level

- **IPA Target** IPA Target value
- **IPA Actual** IPA Actual value
- **Position** Onset/Nucleus/Coda
- **Description**
  - **Correct** The phone was correct (IPA Target matched IPA Actual for target phone).
  - **Substitution** The phone was substituted (IPA Target did not match IPA actual; target phone was substituted for a different phone in IPA Actual).
  - **Distortion** The phone was distorted (IPA Target did not match IPA actual; diacritic/ did not match between IPA Target and IPA Actual).
  - **Epenthesis** The phone was added (IPA Target did not match IPA actual; phone in IPA Actual was added to an empty word position of IPA Target).
  - **Deletion** The phone was deleted (IPA Target did not match IPA actual; phone in IPA Target deleted in IPA Actual creating an empty segment in IPA Actual ).

Example:

| IPA Target | IPA Actual | Position | Description  |
|------------|------------|----------|--------------|
| b          | b          | ONSET    | Correct      |
| ʌ          | ʌ          | NUCLEUS  | Correct      |
| t          | r          | ONSET    | Substitution |
| ə          | ə          | NUCLEUS  | Correct      |
| f          | f          | ONSET    | Correct      |
| l          | ∅          | ONSET    | Deletion     |
| a          | a          | NUCLEUS  | Correct      |
| ɪ          | i          | NUCLEUS  | Correct      |

## Custom Analysis using Composer (simple)

---



---

# **Chapter**

# **6**

---

## **CHAT Support**

---

**Topics:**

- PhonTalk
  - CHAT Main Line
- 

# PhonTalk

---

PhonTalk is an application for converting between Phon project and the [Talkbank](#) XML format. Files processed in the application must be generated using the [chatter](#) application available at <http://www.talkbank.org/software>. CHAT corpora can be downloaded from the [CHILDES](#) website at <http://childe.s.psy.cmu.edu/data/>.

## Download

### Version 2.8 (21 Dec 2018)

- [Disk Image for macOS](#)
- [Windows 64-bit](#)

Source code can be found at <https://github.com/phon-ca/phontalk>.

To report an issue, please go to <https://github.com/phon-ca/phontalk/issues>.

## CHAT Main Line

---

The *CHAT* main line codes the basic transcription of what a speaker said. The main line includes both pronounced forms and markers. In *CHAT* the main line starts with an asterisk followed by the speaker ID, a colon and a tab; the remainder of the line is the orthographic transcription. More information about the *CHAT* main line can be found at [https://talkbank.org/manuals/CHAT.html#\\_Toc486414395](https://talkbank.org/manuals/CHAT.html#_Toc486414395).

E.g.,

```
*CHI: hello world!
```

In *Phon*, the main line is mapped to the *Orthography* tier. Each main line in a *CHAT* document cooresponds to a single record in a *Phon* session. *Phon* supports many of the same coding standards as *CHAT*. This document will outline many of the common codings as well as any differences from *CHAT*. See [https://talkbank.org/manuals/CHAT.html#\\_Toc486414395](https://talkbank.org/manuals/CHAT.html#_Toc486414395) for complete documentation.

## Special Form Markers

The following special form markers are available in *Phon*. For more information about special form markers see [https://talkbank.org/manuals/CHAT.html#\\_Toc486414397](https://talkbank.org/manuals/CHAT.html#_Toc486414397).

```
| Letters | Category | Example | Meaning | ---|---|---|---| @a | addition | xxxx@a | unintelligible | | @b | babbling | abame@b | | | @c | child-invented form | gumma@c | sticky | | @d | dialect form | younz@d | you | | @e | echolalia, repetition | want@e | more@e | want more | | @f | family-specific form | bunko@f | broken | | @fs | filled-syllable | uh@fs | | | @fp | filled-pause | xxxx@fp | | | @g | general special form | gonga@g | | | @i | interjection, interaction | uhuhuh@i | | | @k | multiple letters | ka@k | Japanese “ka” | | @l | letter | b@l | letter ‘b’ | | @n | neologism | broked@b | broken | | @si | singing | lalala@si | singing | | @s1 | signed language | apple@s1 | apple | | @sas | sign & speech | apple@sas | apple | | @t | test word | wut@t | what | | @u | unibet transcription | binga@u | | | @wp | word play | goobarumba@wp | | | @x | excluded words | stuff@x | excluded | | | @z : * | user-defined code | word@z:rtfd | any user code |
```