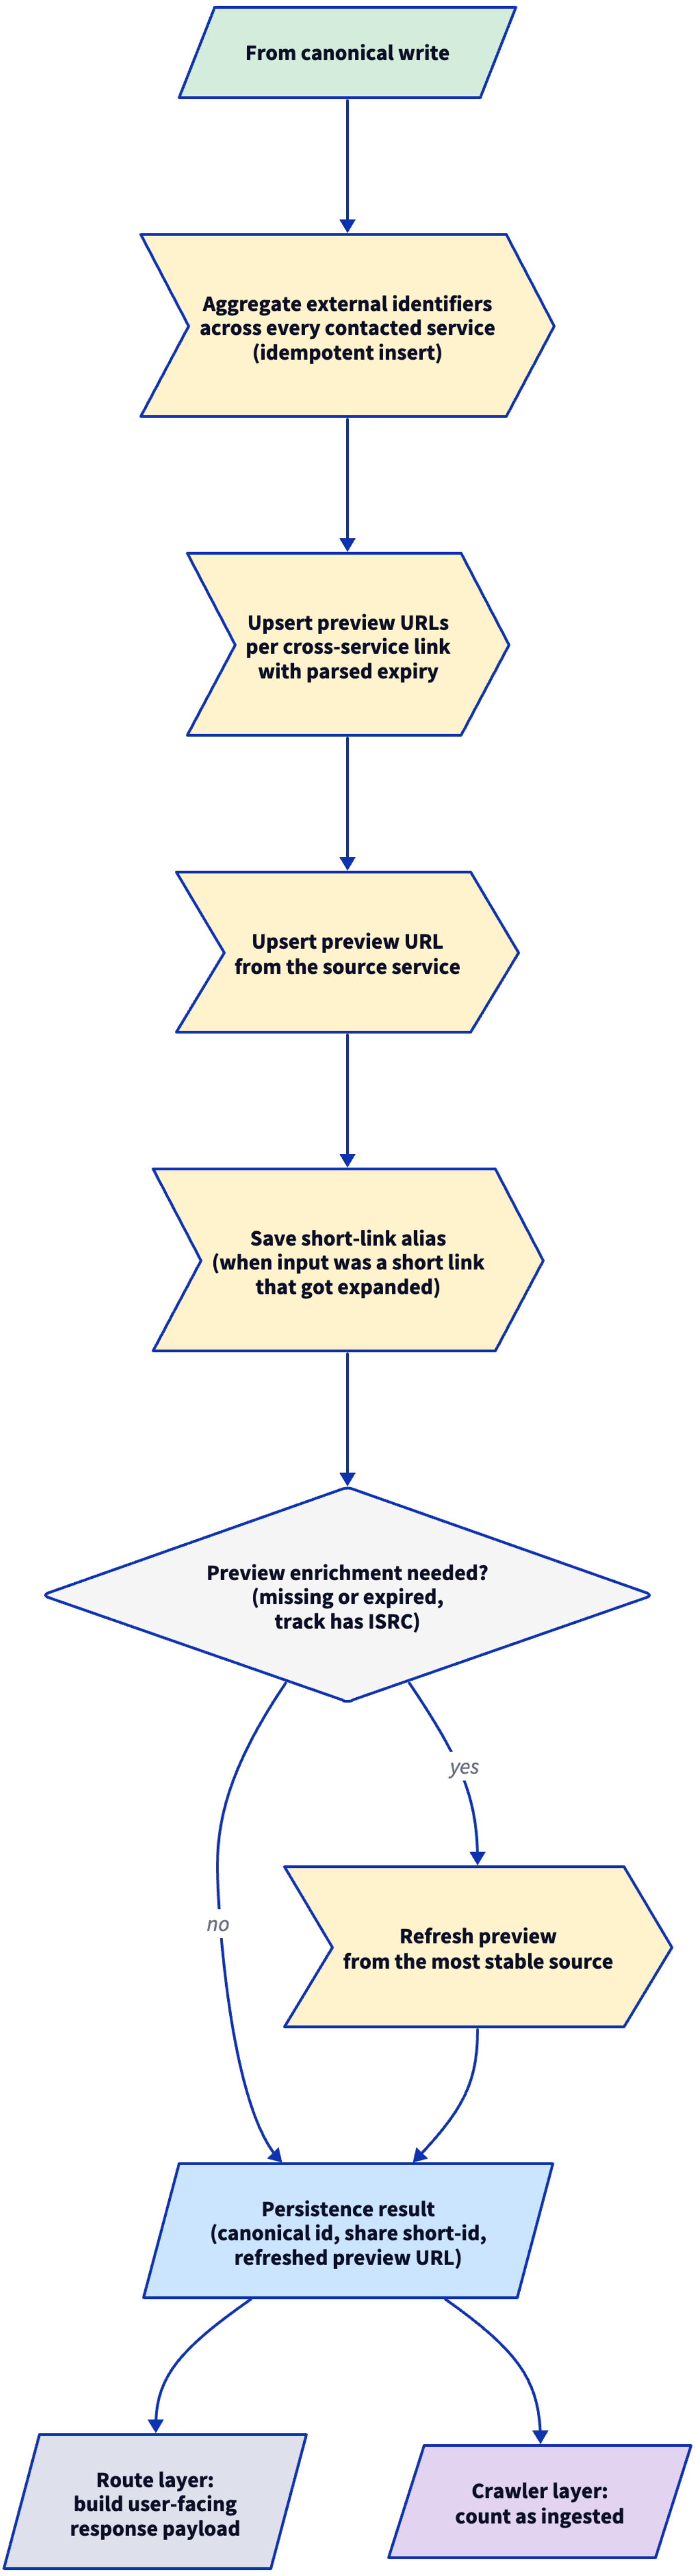
From canonical write
Aggregate external identifiers across every contacted service (idempotent insert)
Upsert preview URLs per cross-service link with parsed expiry
Upsert preview URL from the source service
Save short-link alias (when input was a short link that got expanded)
Preview enrichment needed? (missing or expired, track has ISRC)
yes
no
Refresh preview from the most stable source
Persistence result (canonical id, share short-id, refreshed preview URL)
Route layer: build user-facing response payload
Crawler layer: count as ingested