BROOMSHARING / FIRESTORE STORAGE HIERARCHY

Database > Collection > Document > Subcollection > Document | Structure overview; full fields are on detail pages

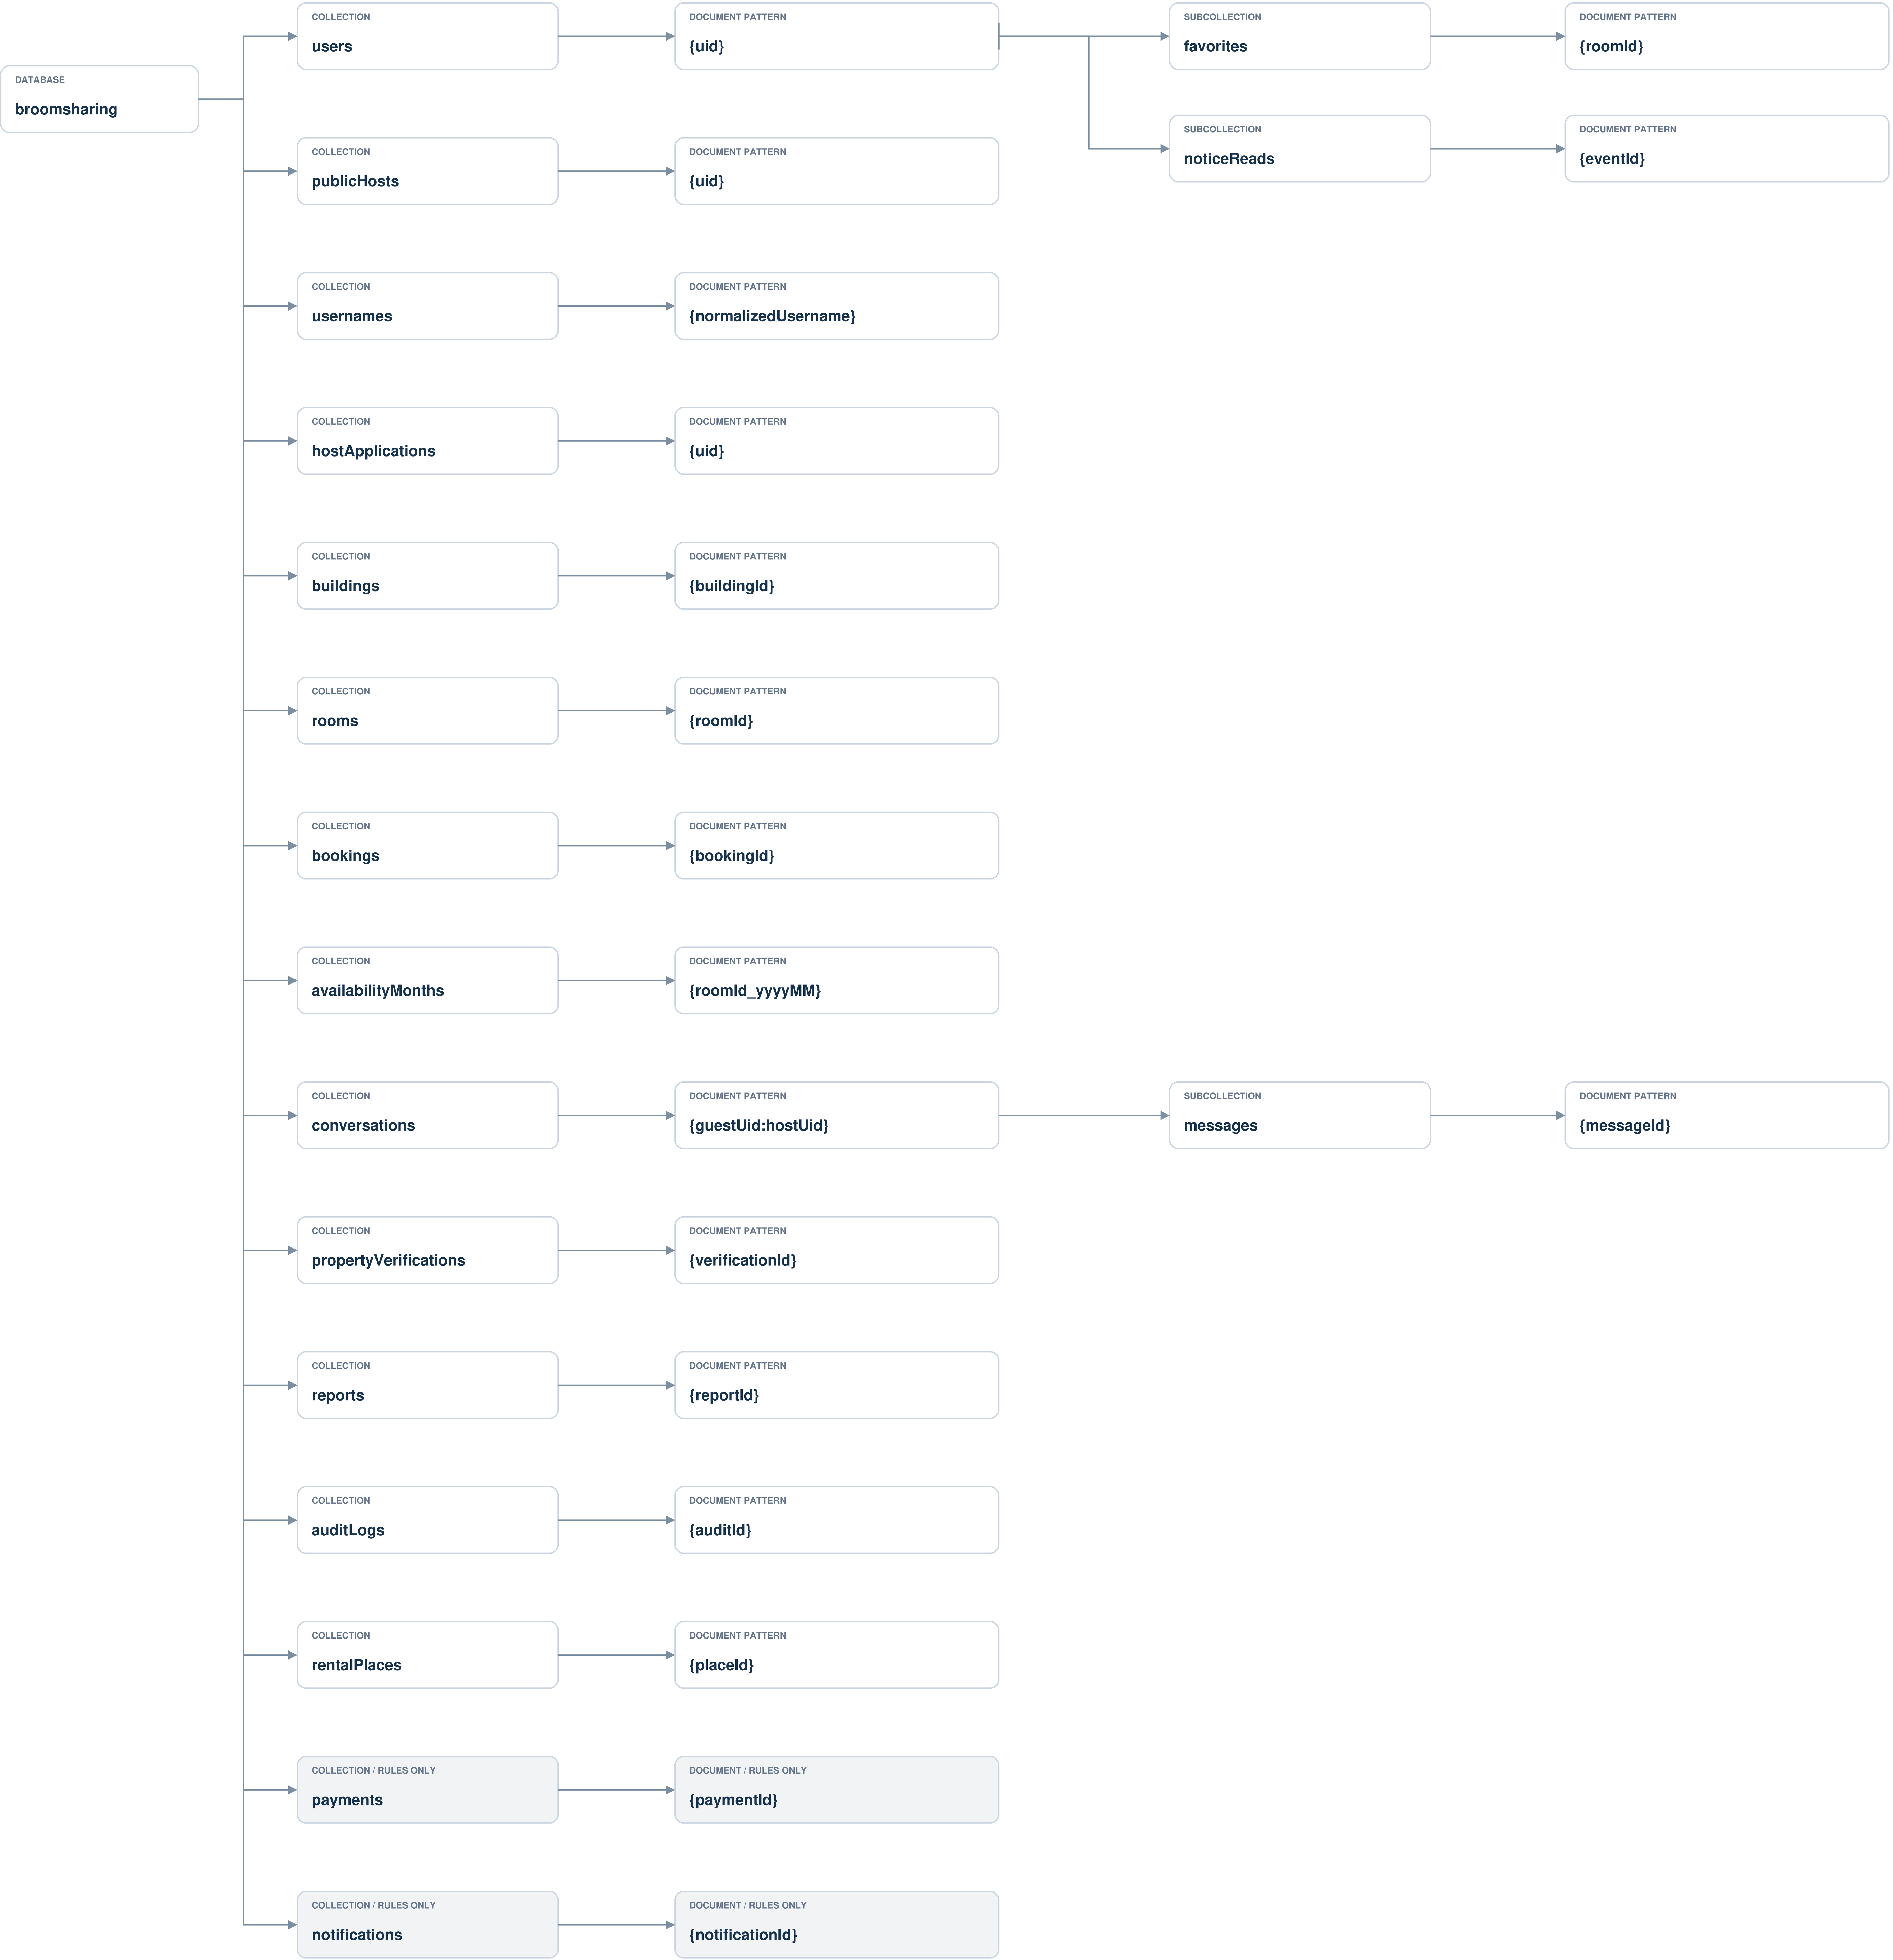

13 app-referenced root collections + 3 subcollections + 2 Rules-only contracts. No live cloud inventory.
Solid lines = storage hierarchy. String ID links do not create subcollections. Full logical relationships: R01-R46 in the companion dictionary.

BROOMSHARING / ACCOUNT DATA

Cloud Firestore: broomsharing | Collections, document schemas and subcollections

DATABASE
broomsharing

COLLECTION
users

{uid}	DOCUMENT
uid	string
schemaVersion	integer
name	string
username	string
email	string
phone	string
phoneVerified	boolean
role	string
status	string
createdAt	timestamp
updatedAt	timestamp
moderationReason	string
moderatedBy	string
photoUrl [S]	unknown

SUBCOLLECTION
favorites

{roomId}	DOCUMENT
roomId	string
roomName	string
createdAt	timestamp

SUBCOLLECTION
noticeReads

{eventId}	DOCUMENT
readAt	timestamp

COLLECTION
publicHosts

{uid}	DOCUMENT
uid	string
name	string
status	string

COLLECTION
usernames

{normalizedUsername}	DOCUMENT
uid	string
email	string

COLLECTION
hostApplications

{uid}	DOCUMENT
id	string
schemaVersion	integer
applicantUid	string
fullName	string
phone	string
email	string
organizationType	string
identityDoc	string
status	string
rejectionReason	string
createdAt	timestamp
updatedAt	timestamp
reviewedBy	string

Solid lines = storage hierarchy; [S] = Rules-only field, [D] = dataset-only observation. Fields may be absent before a workflow writes them.
name fields in favorites/chat and copied booking/building information are snapshots, not foreign keys. Full source notes and ID cardinalities: companion dictionary.

BROOMSHARING / CHAT STORAGE

Database > conversations > {guestUid:hostUid} > messages > {messageId} | Full document fields

DATABASE

broomsharing

COLLECTION

conversations

{guestUid:hostUid}

DOCUMENT

conversations/{guestUid:hostUid}

id	string
guestUid	string
hostUid	string
guestName	string
hostName	string
memberUids	array<string>
roomId	string
roomName	string
bookingId	string
lastText	string
lastSenderUid	string
lastMessageId	string
sequence	integer
guestReceived	integer
hostReceived	integer
guestRead	integer
hostRead	integer
createdAt	timestamp
updatedAt	timestamp

SUBCOLLECTION

messages

{messageId}

DOCUMENT

conversations/{guestUid:hostUid}/messages/{messageId}

id	string
senderUid	string
text	string
roomId	string
roomName	string
sequence	integer
createdAt	timestamp

RECEIPTS & CONTEXT

Unread = max(0, received - read) for each recipient.
A send transaction writes the message and counters together.
guestUid / hostUid / senderUid are string links to users.
roomId / bookingId are context links, not subcollections.
guestName / hostName / roomName are snapshots.

messages is inside one conversation document, never directly inside the conversations collection. Full logical references: R25-R34 in the companion dictionary.
One ordered renter-Host pair has one conversation. Admin does not automatically have permission to read private messages.