BROOMSHARING / BOOKING STORAGE

Four sibling root collections | Full document schemas | Indented rows are embedded map / array members, not subcollections

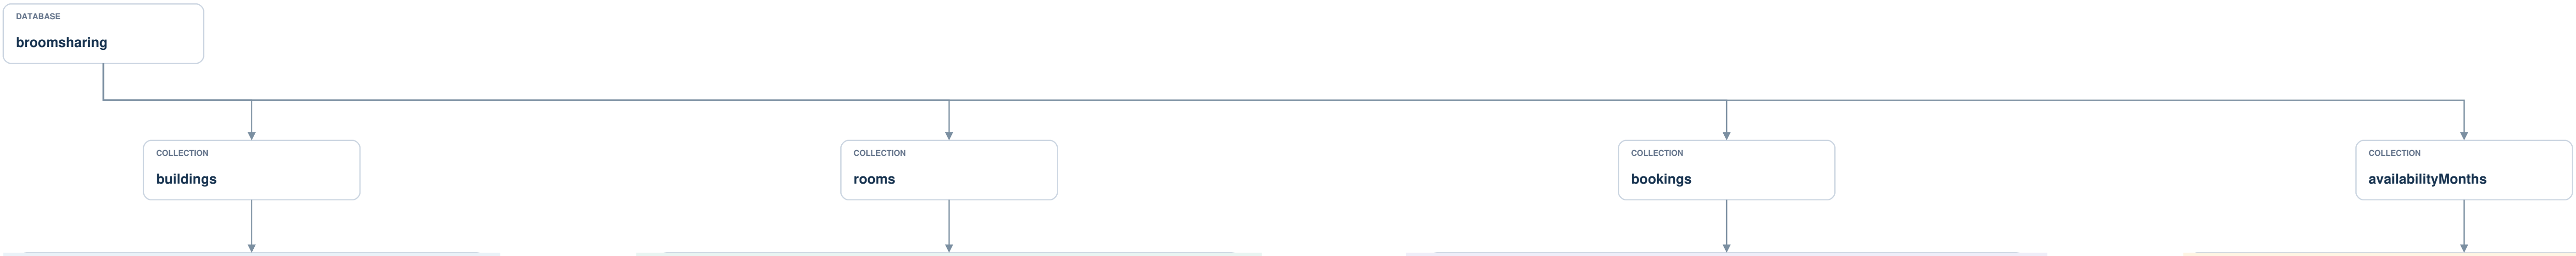

{buildingId} DOCUMENT

buildings/{buildingId}

id	string
schemaVersion	integer
ownerUid	string
name	string
address	string
district	string
contactPhone	string
contactName	string
latitude	double
longitude	double
location	geopoint/null
directionGuide	string
coverUrl	string
status	string
createdAt	timestamp
updatedAt	timestamp

{roomId} DOCUMENT

rooms/{roomId}

id	string
schemaVersion	integer
buildingId	string
buildingName	string
ownerUid	string
roomName	string
roomType	string
capacity	integer
area	double
floor	string
address	string
activeMode	string
pricePerHour	double
pricePerDay	double
pricePerMonth	double
pricePerQuarter	double
deposit	double
openTime	string
closeTime	string
amenities	array<string>
rules	string
approvalStatus	string
listingStatus	string
imageUrls	array<string>
blackoutDates	array<string>
blackoutRanges	array<map>
↳ startAt	timestamp
↳ endAt	timestamp
↳ reason	string
workingDays	array<integer>
slotMinutes	integer
minBookingMinutes	integer
fixedStartMonth	string
renewalPolicy	string
rentalPolicy	string
locationVerification	string
photosVerification	string
rejectionReason	string
bookingRevision	integer
lastBookingId	string
createdAt	timestamp
updatedAt	timestamp
reviewedBy	string
moderationReason	string
moderatedBy	string

{bookingId} DOCUMENT

bookings/{bookingId}

id	string
schemaVersion	integer
roomId	string
roomName	string
roomAddress	string
ownerUid	string
guestUid	string
guestName	string
guestPhone	string
status	string
paymentStatus	string
activeMode	string
rejectionReason	string
startAt	timestamp
endAt	timestamp
totalAmount	double
priceSnapshot	map
↳ currency	string
↳ rentalAmount	number
↳ feeAmount	integer
↳ depositAmount	number
↳ advancePercent	integer
↳ cancellationPolicyVersion	integer
↳ totalAmount	number
↳ paymentDueAmount	number
↳ rentalPolicy	string
↳ renewalPolicy	string
rentalMonths	integer
slotStart	integer
slotCount	integer
monthKeys	array<string>
slotKeys	array<integer>
requestFingerprint	string
cancelledAt	timestamp/null
cancelledByUid	string
cancellationRefundPercent	integer
refundAmount	number
refundStatus	string
createdAt	timestamp
updatedAt	timestamp

{roomId_yyyyMM} DOCUMENT

availabilityMonths/{roomId_yyyyMM}

roomId	string
monthIndex	integer
fixedBookingId	string
slotsBusy	array<integer>
hourlyBookings	map<string,array<integer>>
↳ {bookingId}	array<integer>
lastBookingId	string
updatedAt	timestamp

ID links: rooms.buildingId -> buildings; bookings.roomId -> rooms; monthKeys / calendar booking IDs link bookings and availabilityMonths. Full cardinalities: companion dictionary.
PENDING holds [startAt,endAt). New paymentStatus = UNAVAILABLE; expected advance 40%, no real payment/refund. pricePerDay/deposit are legacy; priceSnapshot and copied names/addresses are snapshots.