


E1 (C)

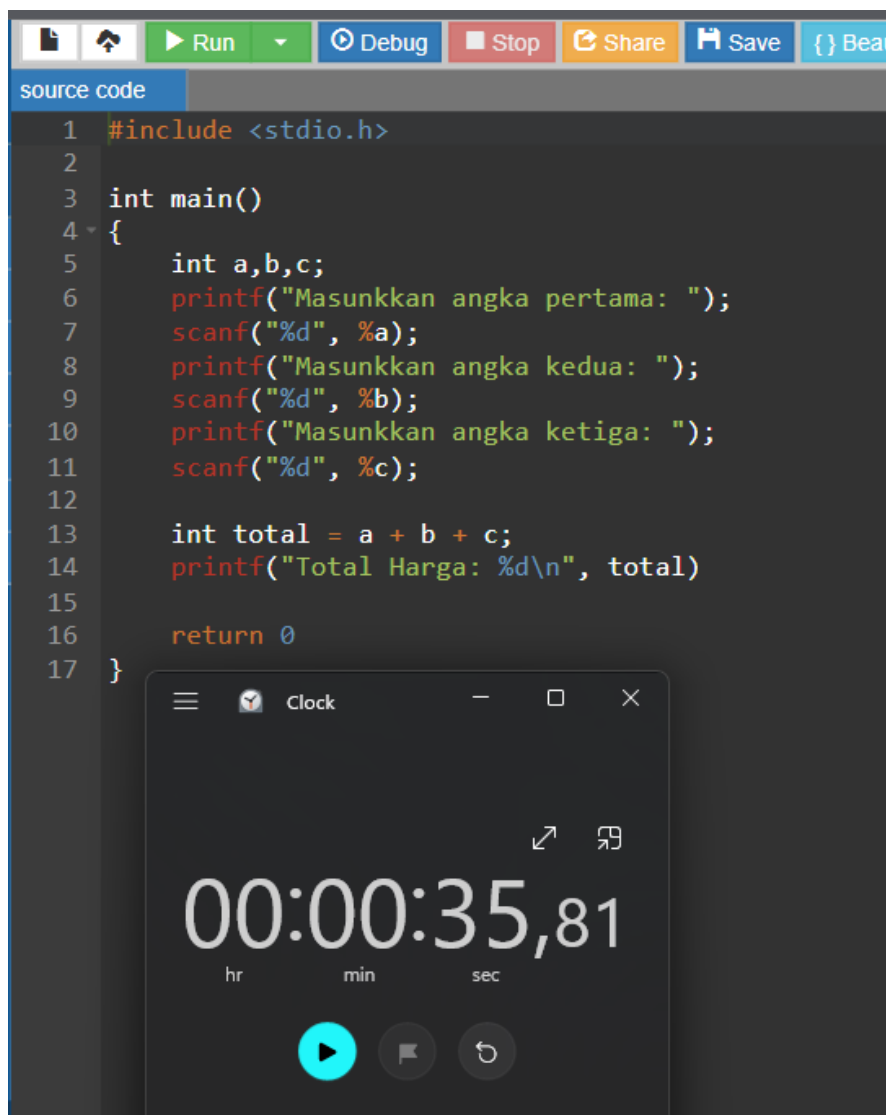


The image shows a code editor window with a dark theme. The top toolbar includes icons for file operations, a 'Run' button, a 'Debug' button, a 'Stop' button, a 'Share' button, a 'Save' button, and a 'Beautify' button. The code is written in C and is as follows:

```
1 #include <stdio.h>
2
3 int main()
4 {
5     int a,b,c;
6     printf("Masukkan angka pertama: ");
7     scanf("%d", &a);
8     printf("Masukkan angka kedua: ");
9     scanf("%d", &b);
10    printf("Masukkan angka ketiga: ");
11    scanf("%d", &c);
12
13    int total = a + b + c;
14    printf("Total Harga: %d\n", total)
15
16    return 0
17 }
```

Overlaid on the bottom right of the code editor is a 'Clock' application window. The clock displays the time '00:00:35,81' in a large digital font. Below the time, the units 'hr', 'min', and 'sec' are shown. At the bottom of the clock window are three circular buttons: a red play button, a flag button, and a refresh button. The clock window also has standard window controls (minimize, maximize, close) and a title bar that says 'Clock'.


E2 (C)

```
1  #include <stdio.h>
2
3  int main()
4  {
5      float celcius, fahrenheit;
6      printf("Masukkan suhu (Celcius): ");
7      scanf("%f", &celcius);
8
9      fahrenheit = (celcius * 9.0 / 5.0) + 32.0;
10     printf("Suhu Fahrenheit: %.2f\n", fahrenheit)
11     return 0;
12 }
```

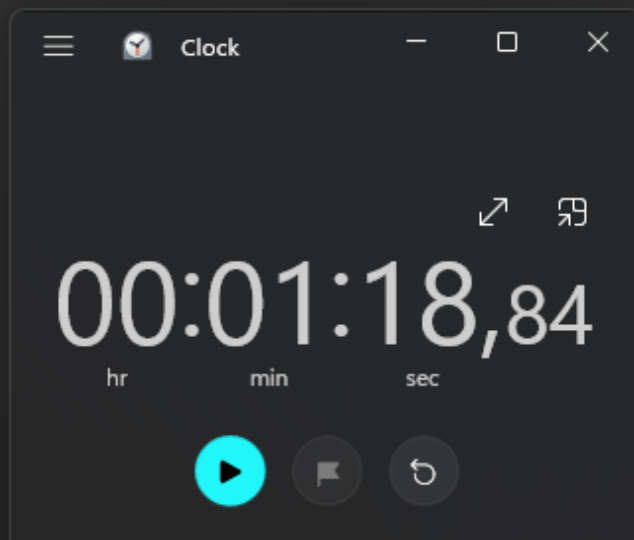


E3 (C)

```
1  #include <stdio.h>
2
3  int main()
4  {
5      int nomor;
6      printf("Masukkan nomor antrian: ");
7      scanf("%d", &nomor);
8
9      if (nomor % 2 != 0){
10         printf("Nomor %d adalah GANJIL Loker A\n", nomor);
11     } else {
12         printf("Nomor %d adalah GENAP Loker B\n", nomor);
13     }
14     return 0;
15 }
```

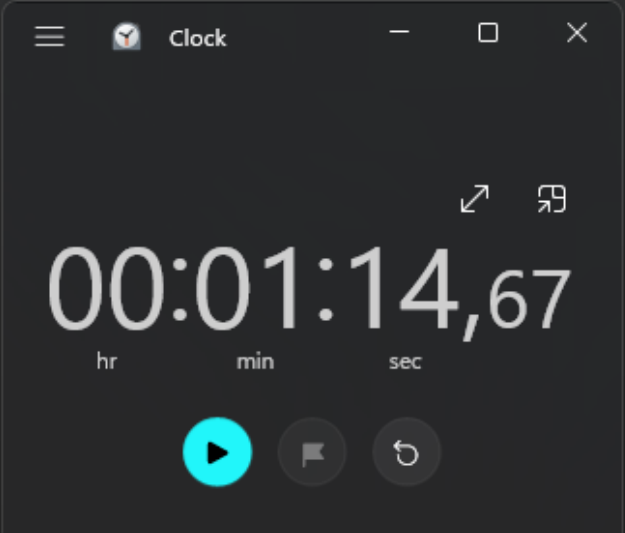A screenshot of a Windows Clock application window. The window title is "Clock". It displays a timer at 00:01:14,67, with labels "hr", "min", and "sec" below the respective digits. At the bottom, there are three circular buttons: a red play button, a grey flag button, and a grey reset button. The background of the image is a dark-themed code editor showing a C program that checks if a number is odd or even and prints the corresponding queue counter.


M1 (C)

```
1  #include <stdio.h>
2
3  int main()
4  {
5      int nilai [5];
6      int total = 0;
7      float rata_rata;
8      char grade;
9
10     printf("Masukkan 5 Nilai: ");
11     for (int i = 0; i < 5; i++){
12         scanf("%d", &nilai[i])
13         total += nilai[i]
14     }
15
16     rata_rata = (float) total / 5.0;
17     if (rata_rata >= 80){
18         grade = 'A';
19     } else if (rata_rata >= 70){
20         grade = 'B';
21     } else if (rata_rata >= 60){
22         grade = 'C';
23     } else if (rata_rata >= 50){
24         grade = 'D';
25     } else {
26         grade = 'E';
27     }
28
29     printf("Rata-rata: %.2f\n", rata_rata)
30     printf("Grade %c\n", grade);
31
32     return 0;
33 }
```

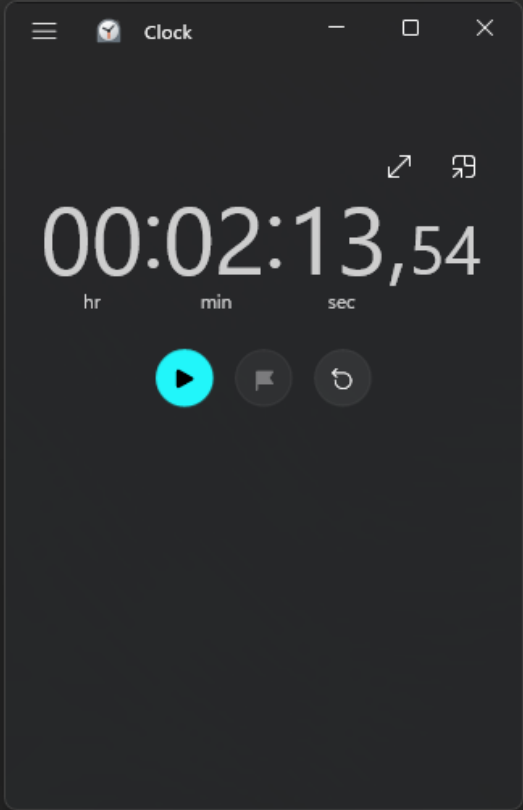


M2 (C)

```
1 #include <stdio.h>
2
3 int main()
4 {
5     int n;
6     printf("Masukkan N: ");
7     scanf("%d", &n);
8
9     int a = 0, b = 1, current = 0;
10    for (int i = 1; i <= n; i++){
11        printf("%d ", a)
12        current = a;
13        int next = a + b;
14        a = b;
15        b = next;
16    }
17
18    printf("Fibonnacci ke-%d %d\n", n, current)
19    return 0;
20 }
```

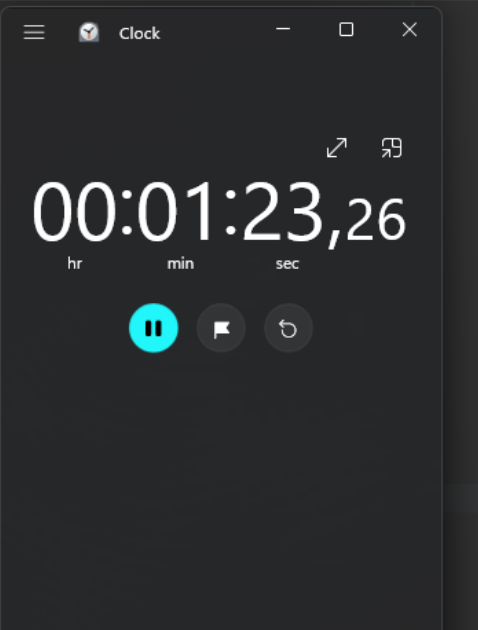


M3 (C)

```
1 #include <stdio.h>
2
3 int main()
4 {
5     int n;
6     printf("Masukkan N: ");
7     scanf("%d", &n);
8
9     for (int i = 1; i <= n; i++){
10        if (i % 3 == 0 && i % 5 == 0){
11            printf("FizzBuzz\n");
12        } else if (i % 3 == 0){
13            printf("Fizz\n");
14        } else if (i % 5 == 0){
15            printf("Buzz\n");
16        } else{
17            printf("%d\n", i);
18        }
19    }
20    return 0;
21 }
```

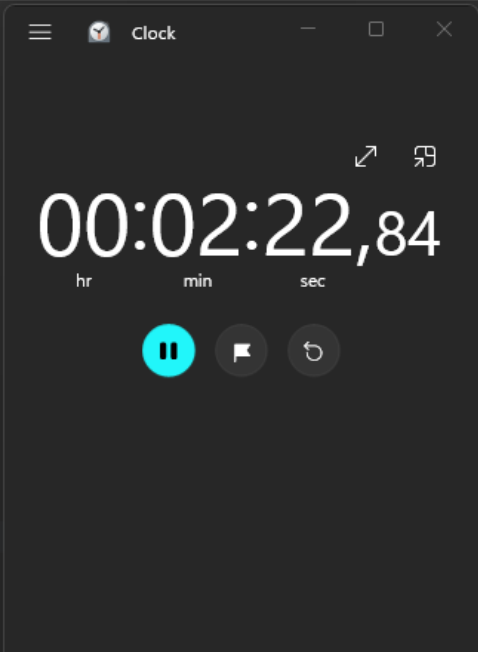


H1 (C)

```
1  #include <stdio.h>
2
3  int main()
4  {
5      int n;
6      printf("Masukkan N: ");
7      scanf("%d", &n);
8
9      int data[n];
10     int total = 0;
11
12     printf("Masukkan Data: ");
13     for (int i = 0; i < n; i++){
14         scanf("%d", &data[i]);
15         total += data[i];
16     }
17
18     for (int i = 0; i < n - 1; i++){
19         for (int j = 0; j < n - i - 1; j++){
20             if (data[j] > data[j + 1]){
21                 int temp = data[j];
22                 data[j] = data[j + 1];
23                 data[j + 1] = temp;
24             }
25         }
26     }
27
28     int min = data[0];
29     int max = data[n - 1];
30     float rata_rata = (float)total/n;
31     printf("Data terurut: ");
32     for (int i = 0; i < n; i++){
33         printf("%d ", data[i]);
34     }
35
36     printf("\nMin: %d Max: %d | Rata-rata: %.2f\n", min, max, rata_rata);
37
38     return 0;
39 }
```

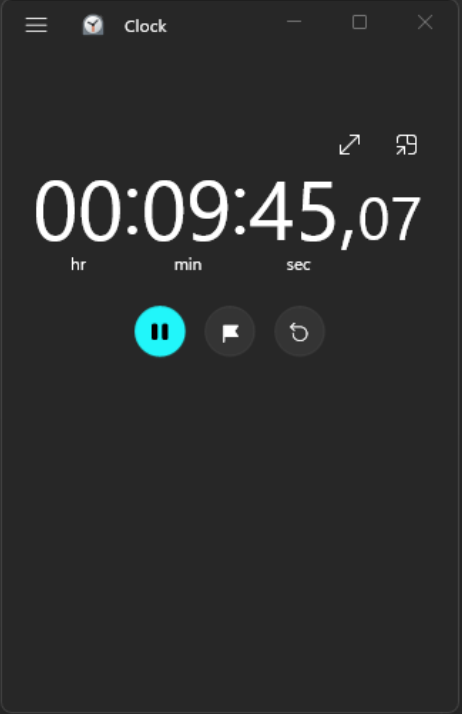


H2 (C)

```
1 #include <stdio.h>
2
3 int main()
4 {
5     int n, m;
6     printf("Baris & Kolom: ");
7     scanf ("%d %d", &n, &m);
8     int matrix[n][m];
9     for (int i = 0; i < n; i++){
10         printf("Baris %d: ", i + 1);
11         for (int j = 0; j < m; j++){
12             scanf("%d", &matrix[i][j]);
13         }
14     }
15
16     printf("Matrix (%dx%d):\n", n,m);
17     for (int i = 0; i < n; i++){
18         for (int j = 0; j < m; j++){
19             printf("%d ", matrix[i][j]);
20         }
21         printf("\n");
22     }
23
24     printf("Transpose (%dx%d):\n", m,n");
25     for (int j = 0; j < m; j++){
26         for (int i = 0; i < n; i++){
27             printf("%d ", matrix[i][j]);
28         }
29         printf("\n");
30     }
31     return 0;
32 }
```

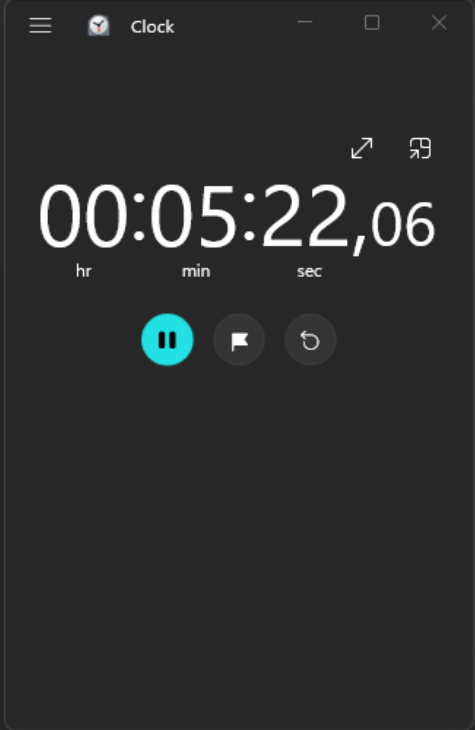


H3 (C)

```
1 #include <stdio.h>
2
3 int faktorial(int n){
4     if (n <= 1) {
5         return 1;
6     }
7     return n * faktorial(n-1);
8 }
9
10 int pangkat (int a, int b){
11     if (b == 0){
12         return a * pangkat (a, b - 1);
13     }
14 }
15
16 int main()
17 {
18     int n, a, b;
19
20     printf("Masukkan n (faktorial): ");
21     scanf("%d", &n);
22     printf("%d! = %d\n", n, faktorial(n));
23
24     printf("Masukkan a dan b: ");
25     scanf("%d %d", &a, &b);
26     printf("%d^%d = %d\n", a, b, pangkat(a,b));
27     return 0;
28 }
```

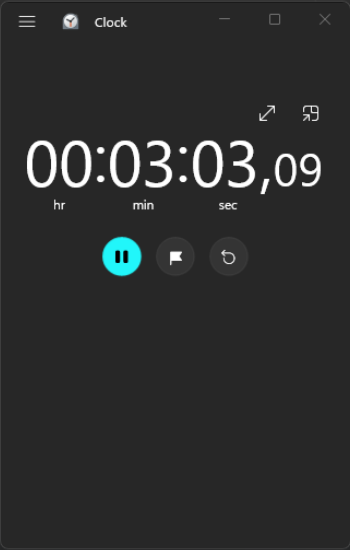


E1 (Python)


```
1 a = int(input("Masukkan angka pertama: "))
2 b = int(input("Masukkan angka kedua: "))
3 c = int (input("Masukkan angka ketiga: "))
4
5 total = a + b + c
6 print(f"Total Harga: {total}")
```

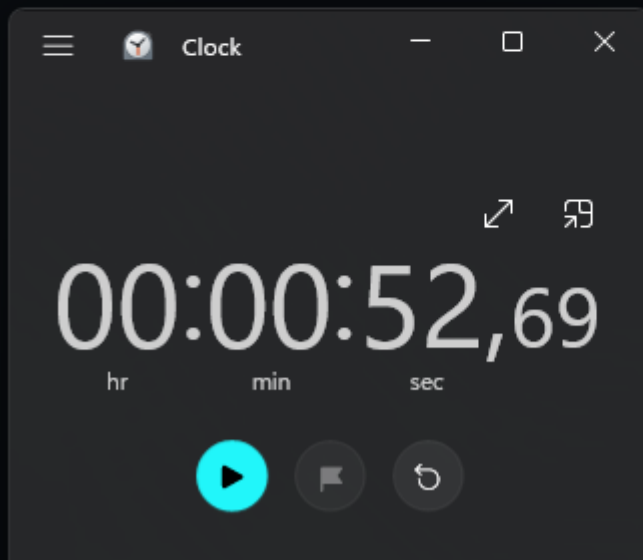


E2 (Python)

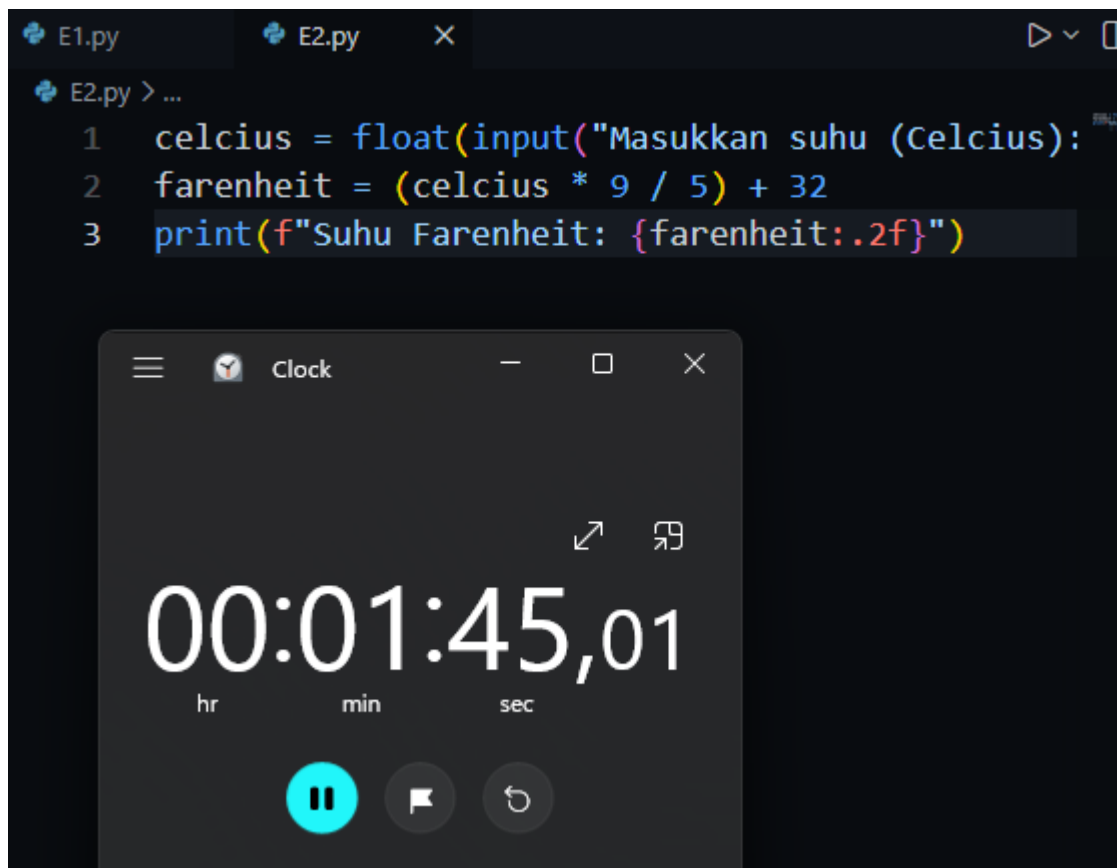


E3 (Python)

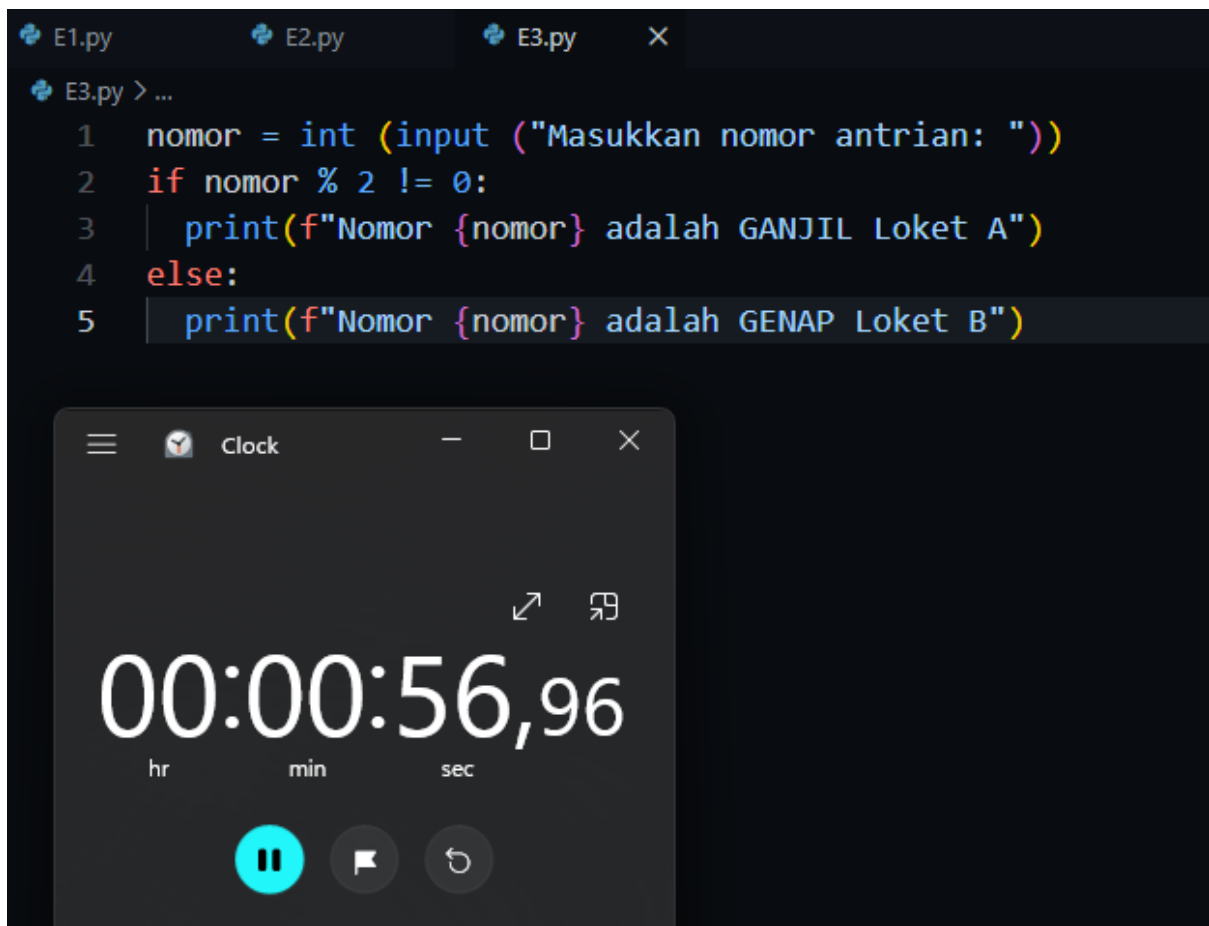


M1 (Python)

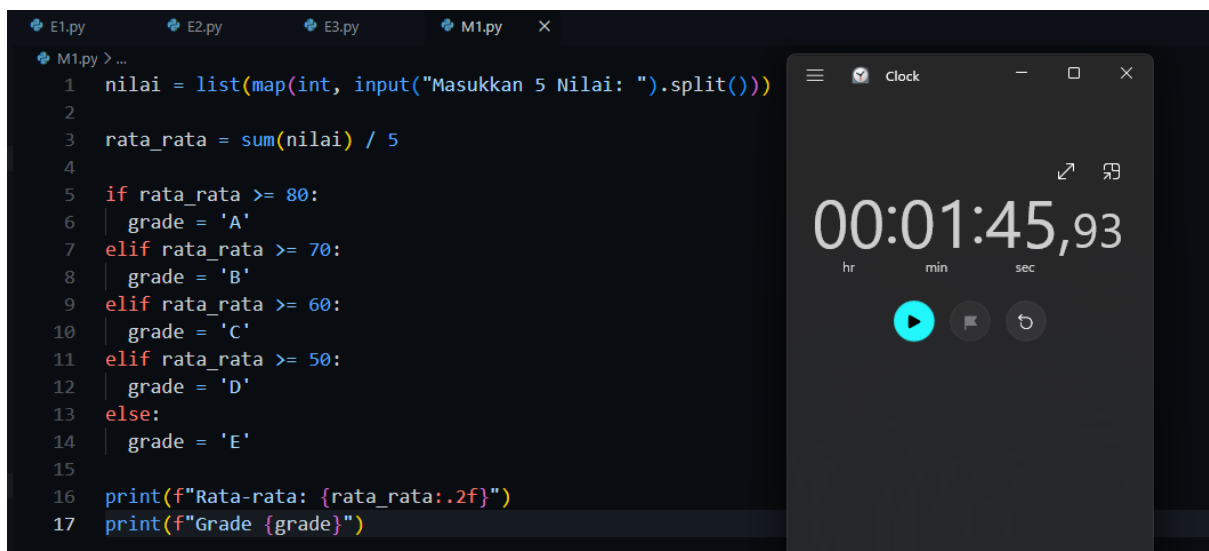

M2 (Python)

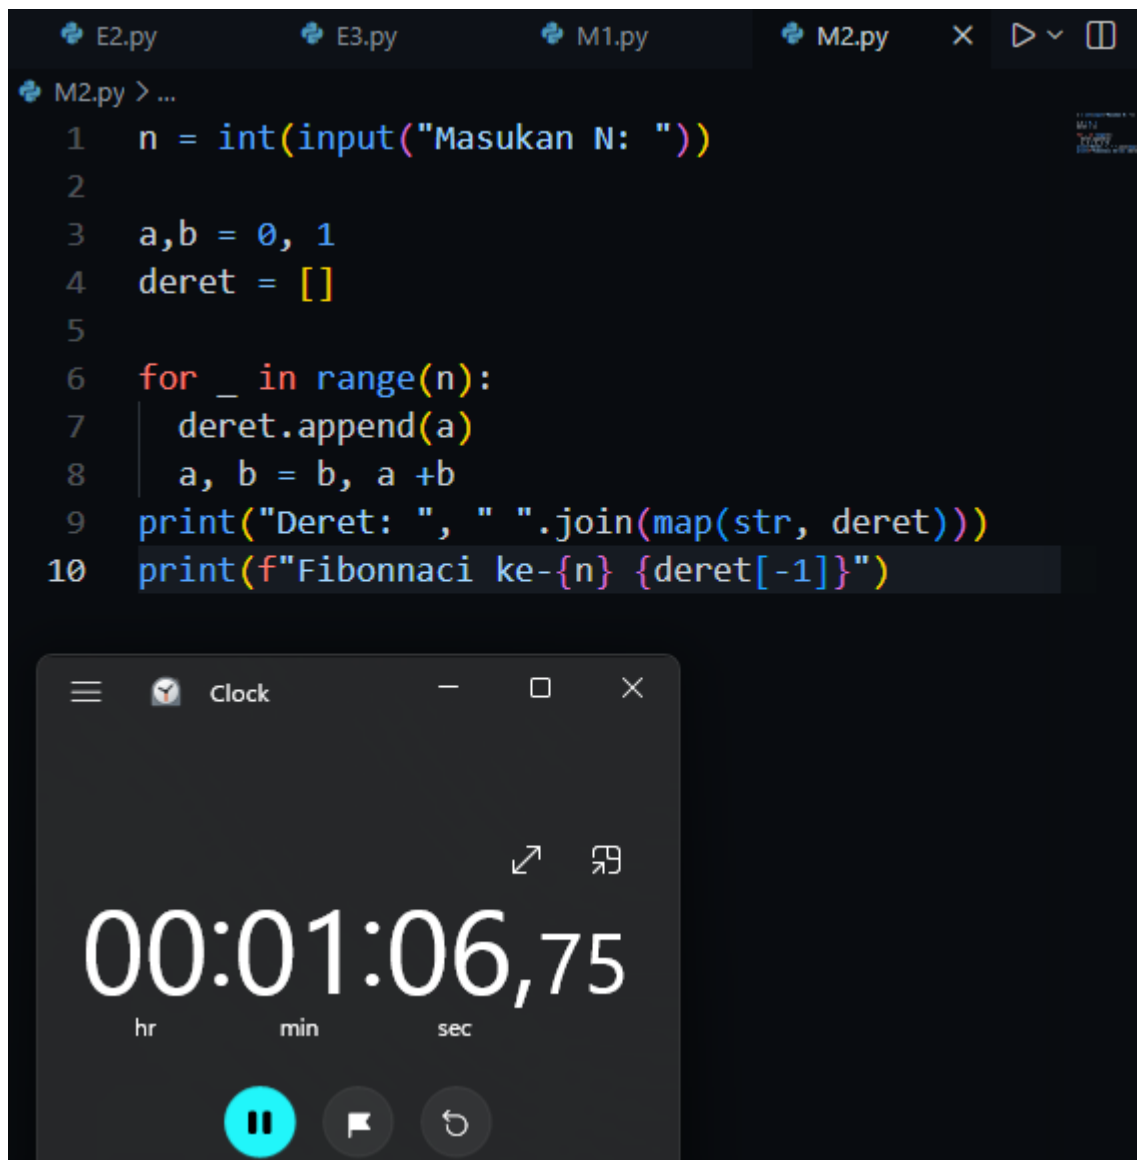

M3 (Python)

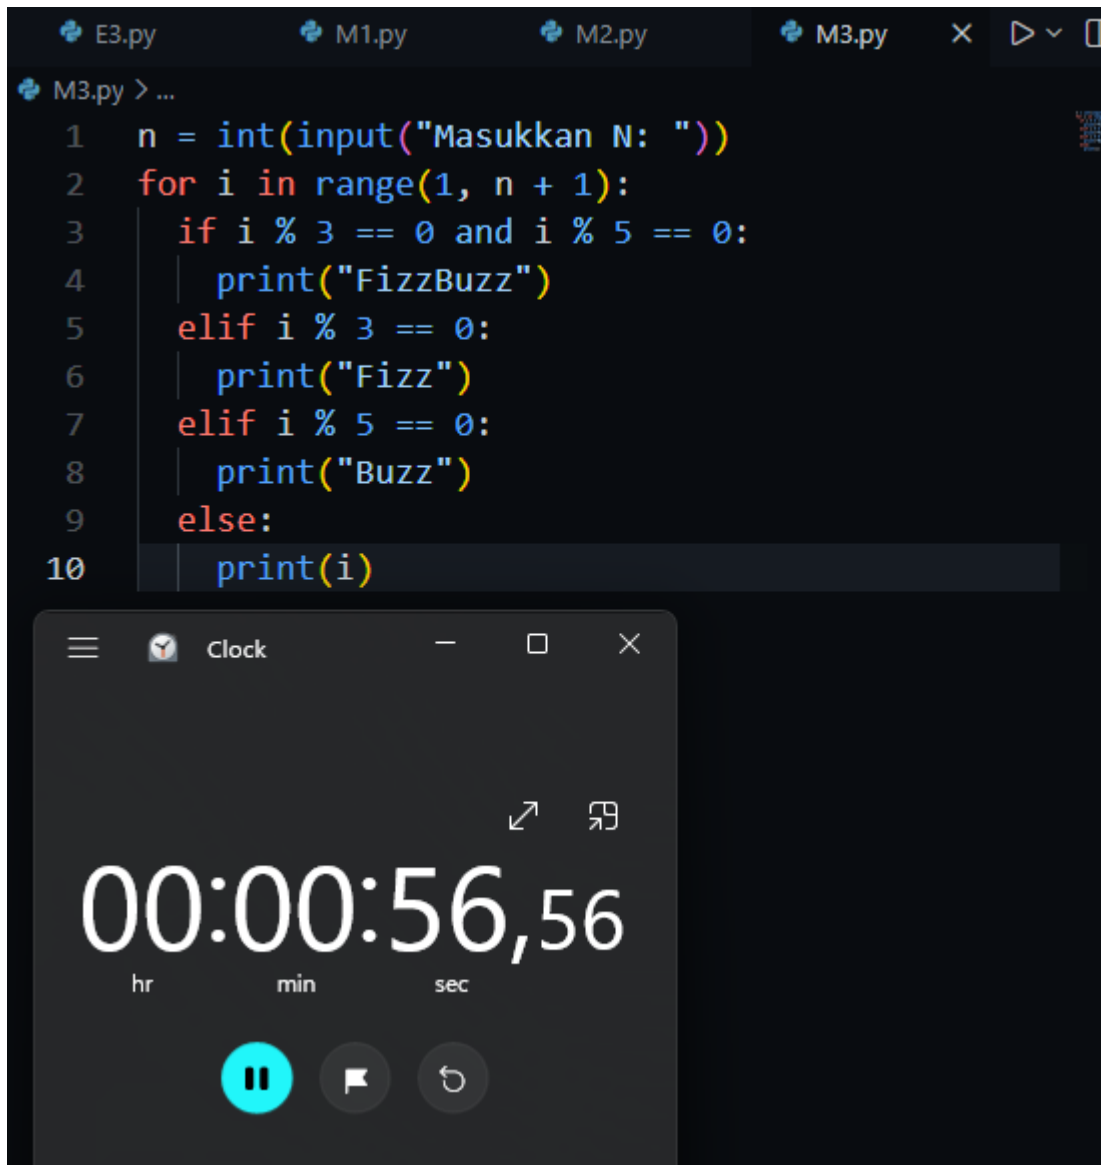

H1 (Python)



H2 (Python)



H3 (Python)

