

SMS STUDIO Main Features

SMS Studio communicates with Short Message Entities (SME) in order to exchange SMS messages.

An SME is an entity (e.g. SMS center, SMS gateway, or mobile device) capable of sending and receiving SMS messages.

SMS Studio Wildcard patterns;

- **Asterisk (*)** - Matches any or more characters (Allow ALL).
- **Number sign (#)** - Matches a single digit.
- **Dollar sign (\$)** - Matches a single letter.
- **Vertical line (|)** - Combines wildcard patterns in logical OR operation.


E.g all UG MTN MSISDNs 25677*|25678*|25676*|25679*

SMS STUDIO CONNECTIONS

To access SMEs, SMS Studio uses connections and accounts.

- SMPP Server Connection - a connection from another application through SMPP protocol.
- SMPP Client Connection - Connects to an SME through SMPP protocol.
- Email Connection - Connects to an email server through SMTP and POP3 protocols in order to send and receive email messages.
- SIM Card Connection - Uses SIM card inserted into the mobile device (phone or modem).

The two main connections...

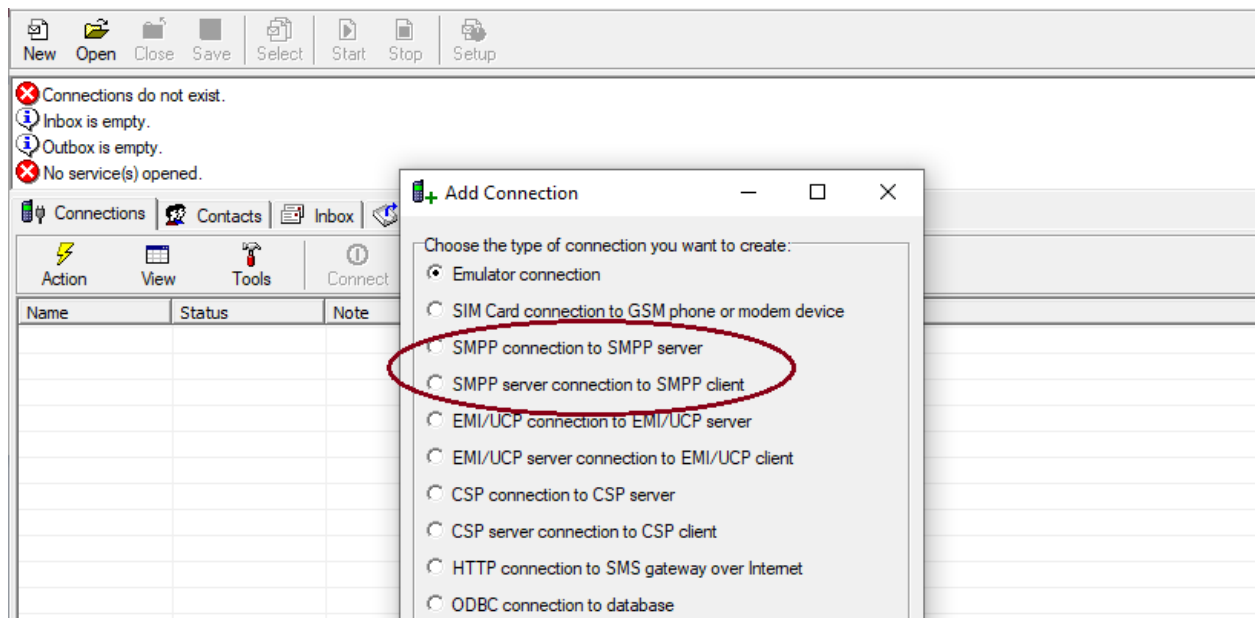

ALL connections have incomings under **INBOX** tab & forwarded to a particular service (accepted for filtering) for routing & the successfully routed ones are under **OUTBOX** tab

File Service View Tools Window Help

New Open Close Select Start Stop Setup Send Receive

140774 total messages.
 60 connections, 38 active.
 80536 messages in Inbox, 317 not processed, 79719 processed.
 8670 messages in Outbox, 221 processing, 8449 processed.

Billing module is not active.
 13 services, 13 active, 51568 messages.
 Routing service 'SMSC' is active.
 29081 messages, 12 not processed, 29069 processed 0.00 total value.

Connections | Contacts | **Inbox** | Outbox | Routing Inbox


Action View Tools Edit Delete Dispatch Copy Abort Reset

From	To	Body	Acc	Received	Part Count	Status
UBL	+25677	Excellent! Order	aSlv	8/17/2026	2	Accepted
Secur	+25678	<CashX>Your ve	aSlv	8/17/2026	1	Accepted
LendC	+25670	<CenuKa>Your i	aSlv	8/17/2026	1	Accepted
BracB	256700	Dear Phillip, Dep	Bra	8/17/2026	1	Accepted
LendC	+25673	<DoveCash>Yoi	aSlv	8/17/2026	1	Accepted
Secur	+25670	<CenuKa>Your i	aSlv	8/17/2026	1	Accepted
Secur	+25678	<CashX>Your ve	aSlv	8/17/2026	1	Aborted
Schoc	256786	SCHOOLPAY: hti	Sch	8/17/2026	1	Accepted
Schoc	256788	SCHOOLPAY: hti	Sch	8/17/2026	1	Accepted
Schoc	256783	SCHOOLPAY: hti	Sch	8/17/2026	1	Accepted
Schoc	256758	SCHOOLPAY: hti	Sch	8/17/2026	1	Accepted
Schoc	256771	SCHOOLPAY: hti	Sch	8/17/2026	1	Accepted
Schoc	256701	Schoolpay: Dear	Sch	8/17/2026	1	Accepted
Schoc	256771	SCHOOLPAY: hti	Sch	8/17/2026	1	Accepted
STAR	+25675	Dear customer, y	aSlv	8/17/2026	1	Accepted
URA	256754	Dear WAMOJA T	Ura	8/17/2026	1	Aborted
Socne	+25678	<KashBus > You	aSlv	8/17/2026	1	Accepted
Secur	+25670	<DoveCash>Ver	aSlv	8/17/2026	1	Accepted


SMS Studio Services

These are the 2 main services used below, with **separate services according to entity/institution**

Since all have different traffic, prioritization and content controls ID, whitelisting, blacklisting, replacing, mapping, overwrites, duplication control, droppings, blockings, prefix control, MSISDN routing,

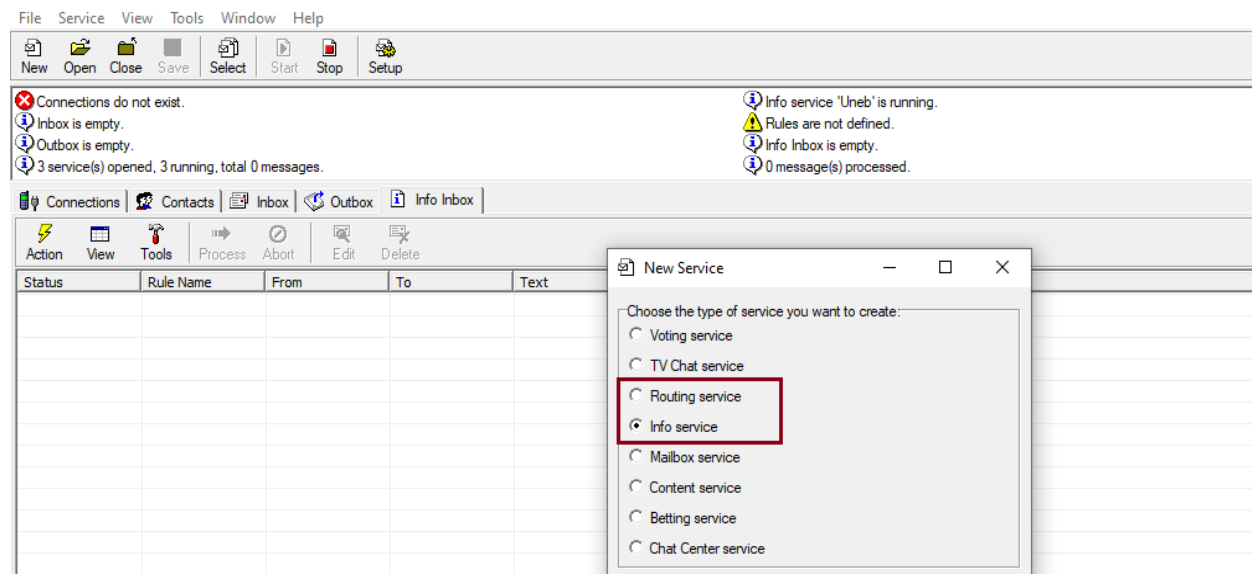

A particular service can be stop/start at any time to stop/resume the processing/routing

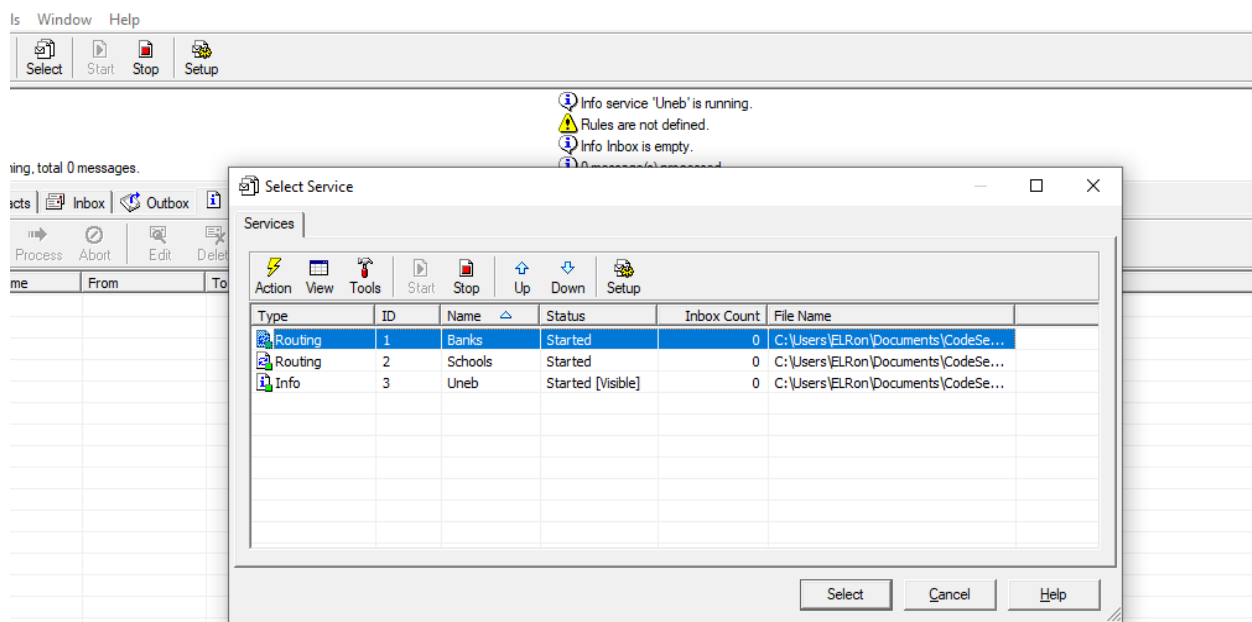

Services use filters to decide if they will accept the message.

When the message arrives, the service steps through the filters in the order of their ID values. Each filter is used to test the message against the conditions specified in the filter. If any of the filter conditions is not satisfied, the service skips to the next filter.

The filter contains the following conditions:

- Pattern/Body- Specifies the pattern used to match the text/message body.

- Account- Specifies the incoming account.
- From/Sender- Lets you specify the pattern used to match the sender.
- To/Phone- Lets you specify the pattern used to match the recipient.

ROUTING SERVICE

Routing service uses the list of predefined routing rules to route messages between accounts


Each service stores its entire corresponding / accepted messages and at any time these messages can be searched by any parameter, can be reset and can be reprocessed/re-routed. After some hours with satisfied routing- these can be deleted

the Routing Setup dialog, select **Setup** from **Service** menu of the menu bar.


Rules with Condition (each rule can also be enables or disable at any time)

- Name-- specifies the name of the rule.
- Route to-- specifies the account to which the message should be routed.
- Priority-- specifies the sending priority of the message.
- Override Text-- lets you override the text of the message.
- ***Override To-- lets you override the recipient of the message.***
- ***Override From-- lets you override the sender of the message.***

First, Under the Filters tab e.g the first two(in red) REJECT particular messages and the fourth allows ALL MESSAGES, ALL PHONES, ALL SenderIDs from Account : **UraSMS**

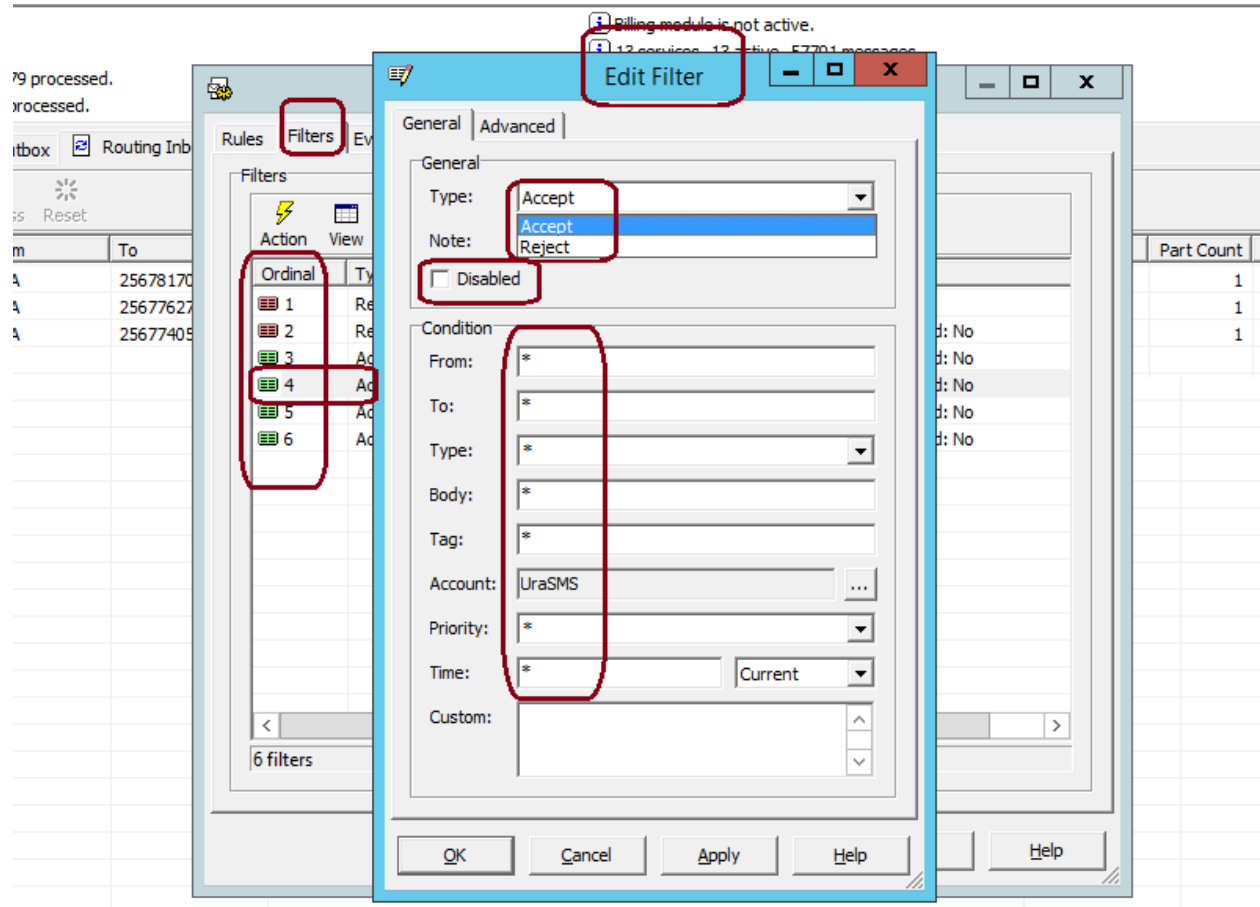

Another **Filter(Ordinal 5)** under the same Routing Service with a few conditions

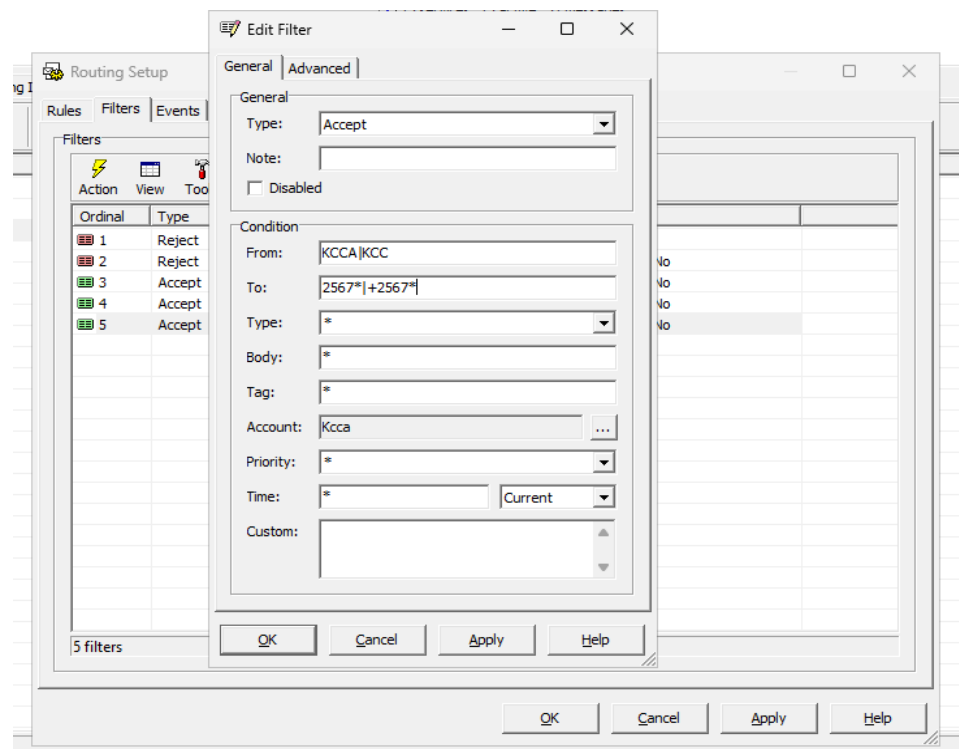

Second, under the Rules tab, this does the actual routing to a particular account/connection


Under the same routing service setup, with the filters configured, see below Rules configurations

1. Ordinal 1 : **Unknown** is dropping all traffic of unknown networks by Prefix *** from ALL accounts
2. Ordinal 2 : **Abusive** is dropping all traffic with any word of such in message body
3. Ordinal 3 : **UraOTP-mtn** is prioritizing all traffic with any word of such(*otp* | *code*) in message body from UraSMS account. Priority set to **Highest**
4. Ordinal 4 : **UraMtn** is routing the rest of Mtn traffic from UraSMS account with normal priority plus SenderID overwritten to another one(sometimes a failover)


Different rules can be set accordingly with different conditions/constraints

And each Rule can also be **ENABLED** or **DISABLED** at any time.

If any of the filter conditions is not satisfied, the service skips to the next filter in that order

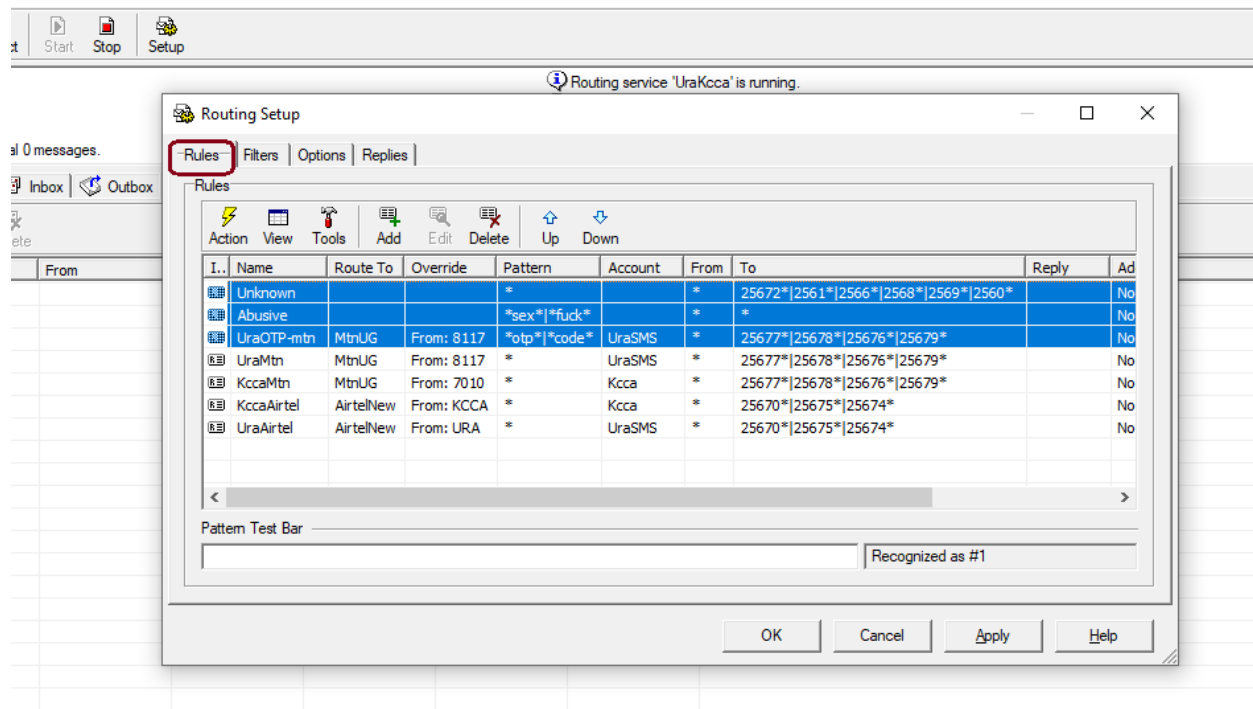

Another example here is **Ordinal 2** Rule is set and **ENABLED** to act as a failover for MTN traffic, thus it is above all MTN Rules and SenderID overwrites to 7077 for all MTN traffic

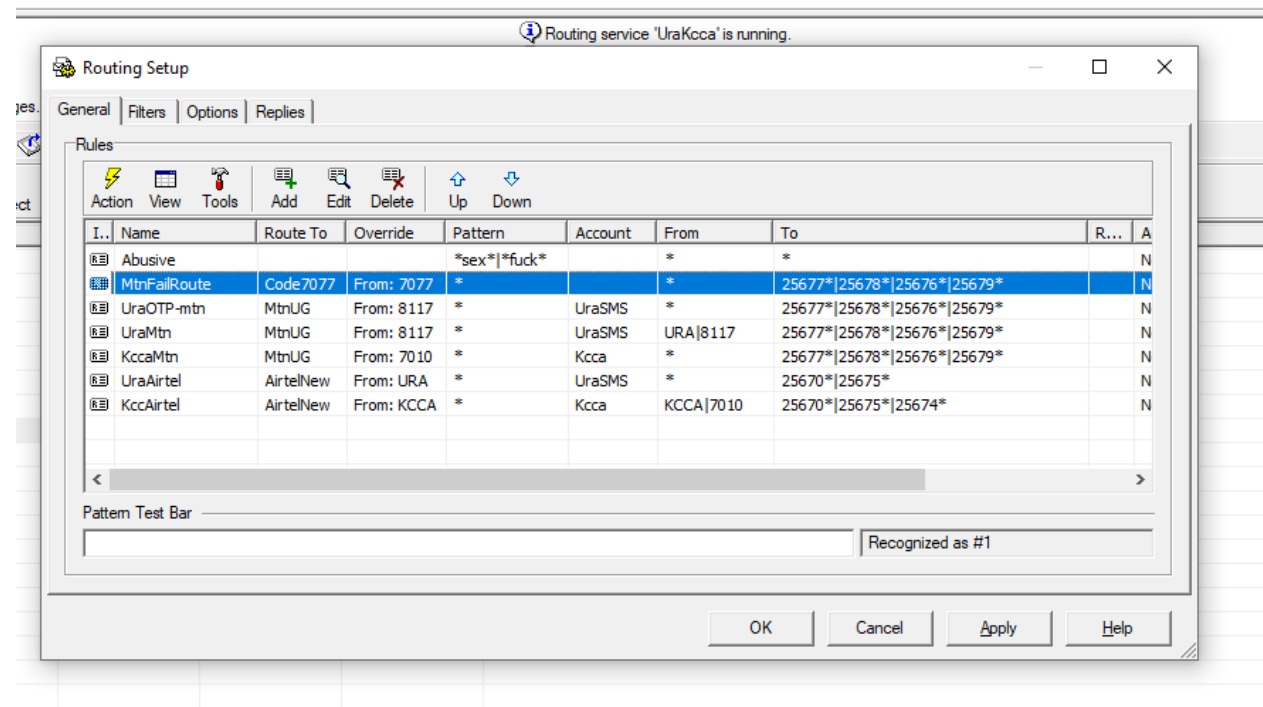

INBOX & OUTBOX WINDOWS

The **Inbox** window collects all received SMS messages from all account, thereafter each is dispatched to its respective Routing Service in real time.

Also under these windows, traffic can be **searched**-selected and exported accordingly

- **From** - the sender of the message.
- **To/Phone** - the number of the recipient of the message.
- **Text** - the text of the received message.
- **Time** - the date and the time when the message is received.
- **Account** - the name of the account from which the message is received.
- **Part Count** - the number of the message parts.
- **Status** - the status set to **Accepted**(by any Routing Service) or **Not Accepted** or **Aborted**(in case seen as duplicate)


The **Outbox** window contains the outgoing messages.

- **Status** - The current status of the message.
- **Info** - Additional information about the sending failure.
- **From** - The information about the sender of the message.

- **To/phone** - The information about the recipient of the message.
- **Text** - The text of the outgoing message.
- **Time** - The date and the time when the message is submitted or sent.
- **Account** - The name of the account used to send the message.
- **Part Count** - The number of the message parts.
- **Priority** - The sending priority of the message. The higher priority means that the sooner the message will be sent.
- **Delivery time** - The time when the message was delivered.
- **DLR Requested** - indicates whether the delivery report is requested.

Both under the **Inbox** and **Outbox** window, traffic is visibly live and can be intercepted at anytime acted on accordingly

A quick search/ trace in **Inbox** by either account/phonenummer/a word/phrase in message body can be done and re-dispatched to a particular service accordingly for processing

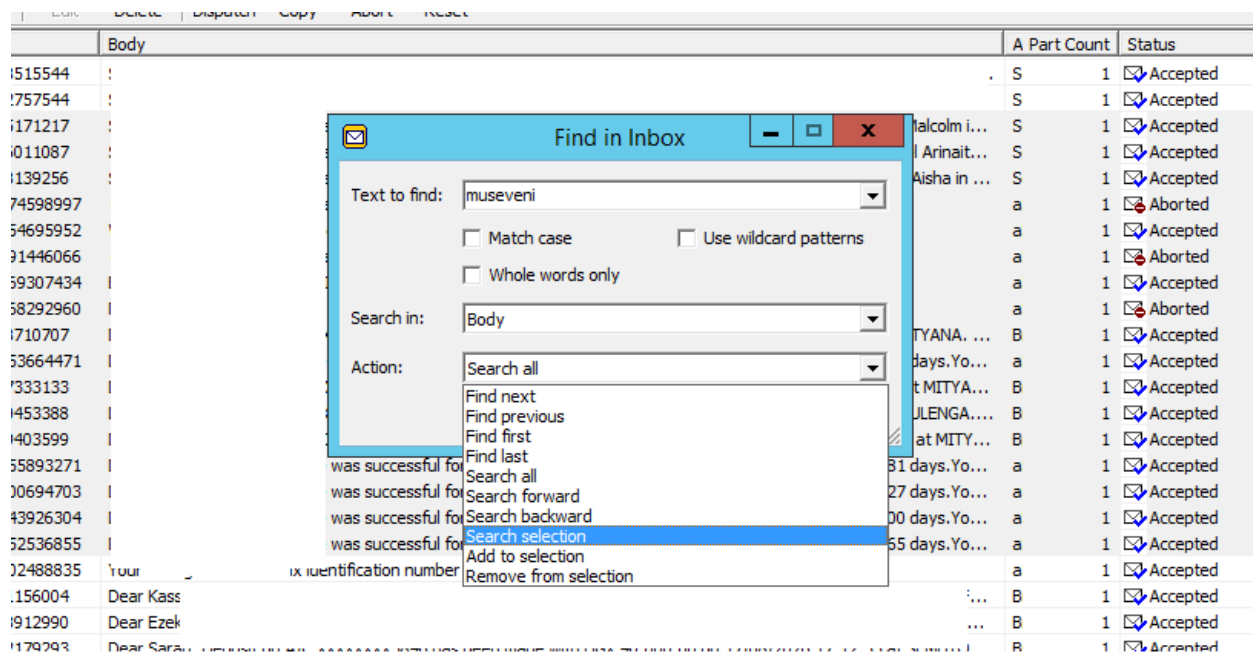

A quick search/ trace in **Outbox** by either account/phonenummer/status/a word, phrase in message body can be done accordingly for;

- aborting a particular message
- re-routing to an active working connection

[illegible]

Searched context can be **RESET** and routed via the same account or a different connection