

# Charge transfer electron-hole pair excitation and energy transport in hybrid electron-boson nano-junctions

Bing-Zhong Hu, Lei-Lei Nian, and Jing-Tao Lü\*

*School of Physics and Wuhan National High Magnetic Field Center,  
Huazhong University of Science and Technology, Wuhan 430074, P. R. China*

(Dated: October 22, 2019)

We show that a current-carrying coherent electron conductor can be treated as bosonic energy baths involving different types of electron-hole pair excitation. Hybrid energy transport between the nonequilibrium electrons and bosons can be described by a Landauer-Büttiker formula at the lowest order in their coupling. This allows for simple, unified account of a variety of heat transport problems in hybrid electron-boson systems, including non-reciprocal heat transport, thermoelectrical current from a cold-spot and radiative cooling. Our theory paves the way of designing hybrid quantum devices for efficient energy control in the nanoscale.

*Introduction.*— Understanding nonequilibrium energy transport in nanoscale junctions is of crucial importance both for the fundamental development of quantum thermodynamics and for the practical application of nanoscale thermoelectric and optoelectronic devices. For phase coherent transport, the celebrated Landauer-Büttiker formalism has been successfully applied to study quasi-particle energy transport following different statistics, including electrons[1], photons[2–5], phonons[6–15] and magnons[16]. Wherein, the two baths connected to the system are assumed to be in thermal equilibrium with certain temperature, with the quasi-particle distribution function determined by its statistics, i.e., the Fermi-Dirac distribution for fermions, and the Bose-Einstein distribution for bosons. A difference in the distribution drives an energy current flow between the two thermal baths.

However, the Landauer-Büttiker approach fails to describe energy transport between quasi-particles following different statistics, ubiquitous in thermoelectric and optoelectronic processes of nano-junctions. Examples in molecular transport junctions include electroluminescence[17–20], Joule heating[21–26], current-induced cooling[24, 27–29], radiative cooling[30] and so on. Another difficulty arising in these processes is that the quasi-particles may be in nonequilibrium state due to driving from external bias.

In this work, we show that a voltage-biased coherent electron conductor can be described effectively by different types of bosonic electron-hole pair (EHP) excitation with possibly non-zero chemical potential. This is possible since energy transport between electrons and bosons is always accompanied by the generation or annihilation of different kinds of EHPs[31, 32]. As a result, to the second order in their coupling, energy transport between steady-state nonequilibrium electrons and bosons can be well described by a Landauer-Büttiker formula between bosonic baths with non-zero chemical potentials. Our theory thus generalizes the Landauer-Büttiker formalism to hybrid energy transport between possibly nonequilibrium baths. Furthermore, it provides a unified account of a variety of different thermal, thermoelectric and thermal-optical

processes.

*Model.*— We consider a model system schematically shown in Fig. 1 (a). The *system* composed of an independent set of bosonic degrees of freedom (DOF) taken as a set of harmonic oscillators. It couples to two kinds of baths. One is an equilibrium boson bath (ph-bath), modeled by an infinite number of harmonic oscillators. The other is an electron bath (e-bath), which itself includes a central part and two electrodes (L and R). The e-bath may be driven into a nonequilibrium steady state by a voltage bias applied between the two electrodes. Without loss of generality, we assume that the system couples only to the central region of the e-bath. Energy transport between the two baths takes place through their simultaneous coupling to the system.

We limit ourselves to non-interaction electrons and weak electron-boson interaction such that a lowest order expansion is valid[33]. Extension to interacting electrons is possible[34]. The electrons couple to the ‘displacement’ of the system harmonic oscillators

$$H_{es} = \sum_{i,j,k} M_{ij}^k c_i^\dagger c_j u_k. \quad (1)$$

Here,  $M_{ij}^k$  describes the coupling of the system mode  $k$  to the electronic transition between electron states  $i$  and  $j$ , and  $u_k$  is the ‘displacement’ operator of the system mode  $k$ . For phonons, it is the displacement, while for photons it is the vector potential. The system-ph-bath coupling is linear between harmonic oscillators and can be treated exactly.

*Electron-hole pair excitation.*— Our key observation is that the energy transport between the system and the electron bath can be modeled by different kinds of reactions between EHPs in the e-bath and the bosonic modes in the system. The creation and annihilation of the bosonic mode is always accompanied by the recombination and creation of EHPs. These processes can be expressed in the form of reactions

$$e_\alpha + h_\beta \rightleftharpoons b_n, \quad (2)$$

where  $e_\alpha$ ,  $h_\beta$  and  $b_n$  represent electron in electrode  $\alpha$ , hole in electrode  $\beta$  and bosonic mode  $b_n$  in the system. Equivalently, we can write

$$e_\alpha \rightleftharpoons e_\beta + b_n, \quad (3)$$

representing inelastic electronic transition from electrode  $\alpha$  to  $\beta$ , accompanied by emission of bosonic mode  $n$  (forward process). The backward direction corresponds to absorption process.

There are four types of EHPs which we label by the spatial location of the electron ( $\alpha$ ) and hole ( $\beta$ ) states. They are schematically shown in Fig. 1 (c) and (d) for recombination and creation processes, respectively. They are denoted by EHP- $i$  ( $i = 1, 2, 3, 4$ ) and are further divided into two groups. The intra-electrode type includes 1/LL and 2/RR, and inter-electrode type includes 3/RL, 4/LR. Additional to energy transfer between e-bath and system, the generation and recombination of inter-electrode EHPs also involves charge transport across the system. We take the energy of mode  $\varepsilon_n = \hbar\omega_n$  and that of the EHPs to be positive.

A generalized detailed balance relation applies to each of reactions

$$\frac{T_{\alpha \rightarrow \beta}}{T_{\alpha \leftarrow \beta}} = \exp [\beta_B (\hbar\Omega - \mu_{\alpha\beta})]. \quad (4)$$

Here,  $T_{\alpha \rightarrow \beta}$  and  $T_{\alpha \leftarrow \beta}$  are the reaction rates for the forward (boson emission) and backward (boson absorption) processes in Eq. (2), respectively. They are obtained from the Fermi golden rule

$$T_{\alpha \rightarrow \beta} = \frac{2\pi}{\hbar} \sum_{i \in \alpha, f \in \beta} |M_{ij}^m|^2 \delta(\varepsilon_i - \varepsilon_f - \hbar\Omega) \times n_F(\varepsilon_i - \mu_\alpha) (1 - n_F(\varepsilon_f - \mu_\beta)). \quad (5)$$

Here,  $n_{F/B}(\varepsilon, T) = [\exp(\beta_B \varepsilon) \pm 1]^{-1}$  the Fermi-Dirac/Bose-Einstein distributions, with  $\beta_B = (k_B T)^{-1}$ ,  $\mu_{\alpha\beta} = \mu_\alpha - \mu_\beta$ , and  $M_{ij}^m = \langle \psi_i(\varepsilon_i) | M | \psi_j(\varepsilon_f) \rangle$  is the transition matrix element from initial state in electrode  $\alpha$  to final state in electrode  $\beta$ . The reverse rate  $T_{\alpha \leftarrow \beta}$  can be written similarly. Thus, when reaching equilibrium with the EHP bath  $\alpha\beta$ , the bosonic mode follows a Bose-Einstein distribution at temperature  $T_e$  and chemical potential  $\mu_{\alpha\beta}$ . For intra-electrode processes,  $\mu_{\alpha\beta} = 0$ , we have the normal detailed balance relation, while for inter-electrode processes  $\mu_{\alpha\beta}$  is determined by the applied voltage bias. Thus, the boson mode may acquire a non-zero chemical potential in nonequilibrium. This is consistent with the equilibrium condition for reaction 2.

The key quantity to describe the EHPs is the coupling-weighted EHP power spectrum. It can be written as

$$\Lambda_{mn}^{\alpha\beta}(\omega) = \hbar\omega \left[ n_B(\hbar\omega - \mu_{\alpha\beta}, T_e) + \frac{1}{2} \right] \Gamma_{mn}^{\alpha\beta}(\omega). \quad (6)$$

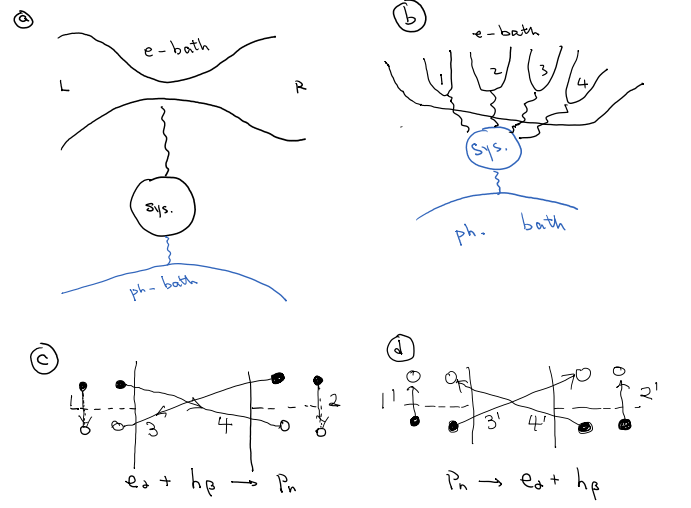


FIG. 1. (a) Schematics of the model we consider. The system consists a set of independent bosonic modes. It couples to an electron bath (e-bath), which is modeled as a conductor including a left (L) and a right (R) electrode, with temperature  $T_e$  and chemical potential  $\mu_L$  and  $\mu_R$ , respectively. The system further couples to an external thermal bath (ph-bath) at temperature  $T_{ph}$ . (b) The electron bath can be treated as four different kinds of electron-hole pair (EHP) baths (1-4), shown in (c). (c-d) Four kinds of EHP recombination (c) and excitation (d) processes. The EHPs are classified according to the spatial location of the electron ( $e_\alpha$ ) and the hole ( $h_\beta$ ). (1,1') Both are at electrode L, (2,2') Both are at electrode R, (3,3') The electron at electrode R and a hole at electrode L. (4,4') The electron at electrode L and a hole at electrode R.

We have introduced the coupling-weighted EHP density of states (DOS)

$$\Gamma_{mn}^{\alpha\beta}(\omega) = -\frac{1}{\hbar\omega} \sum_{i \in \alpha, f \in \beta} M_{if}^m M_{fi}^n \delta(\varepsilon_i - \varepsilon_f - \hbar\omega) \times (n_F(\varepsilon_\alpha - \mu_\alpha, T_\alpha) - n_F(\varepsilon_\beta - \mu_\beta, T_\beta)) \quad (7)$$

Equation (6) follows the normal form of fluctuation-dissipation relation for an equilibrium boson bath, albeit with a possibly non-zero chemical potential  $\mu_{\alpha\beta}$ . The intra-electrode EHPs ( $i=1,2$ ) are always in equilibrium with  $\mu_{\alpha\alpha} = 0$  and temperature  $T_e$ . But the two inter-electrode EHPs ( $i=3,4$ ) have opposite chemical potential  $\mu_{RL} = -\mu_{LR}$ . They are non-zero when there is a voltage bias applied. To this end, we have shown that the *nonequilibrium* e-bath can be divided into four *equilibrium* EHP baths with different chemical potentials. This effective model is shown in Fig. 1 (b).

**Energy transport.**— Within the effective EHP model in Fig. 1 (b), hybrid energy transport between the electrons and the system bosons can be treated as bosonic transport. To the lowest order approximation, we arrive at a Landauer-Büttiker formula for the energy transport from e-bath to the system as a summation of contribu-

tions from all the EHP baths

$$J = \sum_{\alpha,\beta} \int_0^{+\infty} \frac{d\omega}{2\pi} \hbar\omega \mathcal{T}^{\alpha\beta}(\omega) \times [n_B(\omega - \mu_{\alpha\beta}, T_e) - n_B(\omega, T_{ph})], \quad (8)$$

where

$$\mathcal{T}^{\alpha\beta}(\omega) = \text{Tr}[\Gamma^{\alpha\beta}(\omega) \mathcal{A}_{ph}(\omega)] \quad (9)$$

is the transmission between the EHP bath  $\alpha\beta$  and the ph-bath. Here,  $T_e$  and  $T_{ph}$  are the temperature of the e-bath and ph-bath, respectively. The trace  $\text{Tr}$  is over system DOF, with  $\mathcal{A}_{ph} = D^r \Gamma_{ph} D^a$  the spectral function of the system due to coupling to the ph-bath. The summation over  $\alpha\beta$  includes contributions from all the four types of EHPs. Each of them contributes to an energy transport channel.

In the following we show several applications of this central result. To be more specific, we consider a minimum model of the e-bath shown in Fig. 2. We have two electronic states 1 and 2 (on-site energies  $\varepsilon_1$  and  $\varepsilon_2$ ) couple to the electrodes  $L$  and  $R$  with coupling parameter  $\gamma_1$  and  $\gamma_2$ , respectively. Electron hopping between the two states is assisted by one bosonic mode, which at the same time couples to a ph-bath with coupling constant  $\gamma_{ph}$ .

*Non-reciprocal energy transport.*— Firstly, we consider the situation where the e-bath and ph-bath are in their own thermal equilibrium at two different temperature  $T_e$  and  $T_{ph}$ . This indicates that  $\mu_L = \mu_R$  and  $T_L = T_R = T_e$ . If we ignore the energy dependence of  $A$  in Eq. (7), the EHP DOS becomes a constant  $\Gamma_{mn} = \text{tr}[M^m A M^n A]$  with  $A = A_L + A_R$ . Consequently, the transmission  $\sum_{\alpha\beta} \mathcal{T}^{\alpha\beta}$  does not depend on  $T_e$ . Equation (8) reduces to the Landauer formula for heat transport between two harmonic thermal baths. Thus, the EHPs behave as linear harmonic oscillator thermal baths.

On the other hand, if we consider the energy dependence of  $A(\varepsilon)$ ,  $\Gamma(\omega)$ ,  $\mathcal{T}^{\alpha\beta}$  will depend on  $T_e$ . Energy transport becomes nonlinear. In this case, non-reciprocal energy flow is possible, i.e.,  $J(\Delta T) \neq J(-\Delta T)$ , with  $\Delta T = T_e - T_{ph}$ . We thus find a necessary condition for non-reciprocal energy transport in a hybrid electron-boson system: the electron DOS in the thermal window near the chemical potential has to be energy dependent[35, 36]. For normal metal electrode, the energy scale of electrons is much larger than the thermal energy, leading to a flat DOS. The energy dependence of  $A(\varepsilon)$  can be engineered by changing the electronic states of the central part. For example, discrete energy levels of a molecular junction or quantum dot can be used.

*Electrical current from a cold-spot.*— We can also study the thermoelectric transport of the temperature-biased electron-boson junction. When  $T_{ph} \neq T_e$ , in addition to the heat transport between system and e-bath, an

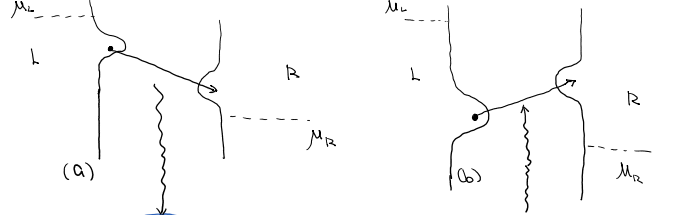


FIG. 2. Two limiting cases of electronic heating (a) and cooling (b). For the e-bath, we have a filled electronic level that couples to the left electrode with chemical potential  $\mu_L$ , and an empty level that couples to the right electrode with chemical potential  $\mu_R$ . Electron transport between the two states is mediated by the bosonic mode in the system. (a) Heating of bosonic mode due to resonant recombination of inter-electrode EHPs of type 4. (b) Cooling of bosonic mode due to resonant generation of EHPs of type 3.

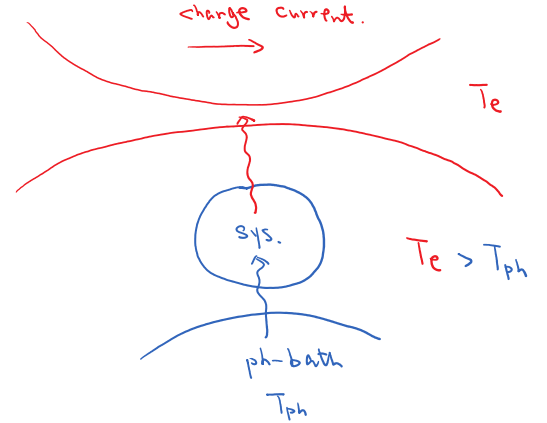


FIG. 3. Electrical current generation from a cold boson bath.

electrical current may also be induced between the two electrodes[37, 38]. In our EHP picture, this is realized through coupling of the bosonic mode with two inter-electrode EHPs. Since they contribute to two electrical current with opposite directions, in order to get a non-zero electrical current, these two channels should not get canceled. Here, we consider the case where  $T_{ph} < T_e$  and  $\mu_L = \mu_R$ . The temperature difference between e-bath and ph-bath generates a heat current flow from the e-bath to the ph-bath. At a result of the heat transport, electron transport between  $L$  and  $R$  electrode takes place. Previously, electrical current generated from a phonon hot-spot ( $T_{ph} > T_e$ ) has been considered[37]. The sit-

uation we consider here is somewhat counter-intuitive. Electricity is generated by cooling the ph-bath. This demonstrates the decoupling of heat and charge transport as an advantage of thermoelectricity in hybrid nano-junctions.

*Electronic cooling of bosonic mode.*— We now turn on the voltage bias in the e-bath. The applied voltage changes the initial and final electron states of the EHP excitation. Thus, the EHP DOS can be modified by voltage. More importantly, the inter-electrode EHPs acquire a non-zero chemical potential, given by  $\pm\mu_{RL}$  respectively. We assume  $eV = \mu_L - \mu_R > 0$  without loss of generality. The EHP-4 has a chemical potential of  $-eV$ , while EHP-3 gets a chemical potential with opposite value  $eV$ .

Change of the chemical potential breaks the equilibrium in the reaction, and drives the energy transport between e-bath and the system. Direction of energy flow depends on the relative magnitude of two fluxes. It can be engineered by tuning the electronic band structure, or more specifically, the transition probability of the two types of EHP excitation. Figure 2 shows two limiting cases. In Fig. 2 (a), process 4 is enhanced due to resonant inelastic electron tunneling when the separation between the two DOS peaks is resonant with energy of the bosonic mode. Consequently, energy flows from e-bath to the system. In Fig. 2 (b), the reverse of process 3 is resonantly enhanced, resulting in energy flow in the opposite direction. Electronic cooling becomes possible using this resonant enhancement. Very recently, experimental demonstration of near field radiative cooling using a reversely biased  $p$ - $n$  junction has been demonstrated [30]. The experimental results can be understood using this simple model.

In summary, we have shown that a normal two-probe electron conductor can be effectively viewed as EHP baths with chemical potential determined by the applied voltage bias. This is made possible by introducing the inter-electrode charge transfer EHPs. Properties of the EHP baths can be engineered through tuning the parameters of the conductor and the external voltage bias. This bath engineering provides an efficient way of controlling hybrid energy and thermoelectric transport in electron-boson junctions.

Funding support from the National Natural Science Foundation of China (Grant No. 21873033), the National Key Research and Development Program of China (Grant No. 2017YFA0403501) and the program for HUST academic frontier youth team is greatly acknowledged.

---

\* jtl@hust.edu.cn

[1] Yoseph Imry and Rolf Landauer, “Conductance viewed

- as transmission,” *Rev. Mod. Phys.* **71**, S306–S312 (1999).
- [2] Teemu Ojanen and Antti-Pekka Jauho, “Mesoscopic photon heat transistor,” *Physical review letters* **100**, 155902 (2008).
- [3] S.-A. Biehs, E. Rousseau, and J.-J. Greffet, “Mesoscopic description of radiative heat transfer at the nanoscale,” *Phys. Rev. Lett.* **105**, 234301 (2010).
- [4] Zu-Quan Zhang, Jing-Tao Lü, and Jian-Sheng Wang, “Energy transfer between two vacuum-gapped metal plates: Coulomb fluctuations and electron tunneling,” *Phys. Rev. B* **97**, 195450 (2018).
- [5] Philippe Ben-Abdallah and Svend-Age Biehs, “Near-field thermal transistor,” *Phys. Rev. Lett.* **112**, 044301 (2014).
- [6] Luis G. C. Rego and George Kirczenow, “Quantized thermal conductance of dielectric quantum wires,” *Phys. Rev. Lett.* **81**, 232–235 (1998).
- [7] N. Mingo and D. A. Broido, “Carbon nanotube ballistic thermal conductance and its limits,” *Phys. Rev. Lett.* **95**, 096105 (2005).
- [8] Takahiro Yamamoto and Kazuyuki Watanabe, “Nonequilibrium green’s function approach to phonon transport in defective carbon nanotubes,” *Phys. Rev. Lett.* **96**, 255503 (2006).
- [9] Jian-Sheng Wang, Jian Wang, and Nan Zeng, “Nonequilibrium greens function approach to mesoscopic thermal transport,” *Physical Review B* **74**, 033408 (2006).
- [10] Jian-Sheng Wang, Nan Zeng, Jian Wang, and Chee Kwan Gan, “Nonequilibrium greens function method for thermal transport in junctions,” *Physical Review E* **75**, 061128 (2007).
- [11] J-S Wang, Jian Wang, and JT Lü, “Quantum thermal transport in nanostructures,” *The European Physical Journal B* **62**, 381–404 (2008).
- [12] Tomi Ruokola, Teemu Ojanen, and Antti-Pekka Jauho, “Thermal rectification in nonlinear quantum circuits,” *Physical Review B* **79**, 144306 (2009).
- [13] Nianbei Li, Jie Ren, Lei Wang, Gang Zhang, Peter Hänggi, and Baowen Li, “Colloquium: Phononics: Manipulating heat flow with electronic analogs and beyond,” *Reviews of Modern Physics* **84**, 1045 (2012).
- [14] Edward Taylor and Dvira Segal, “Quantum bounds on heat transport through nanojunctions,” *Physical review letters* **114**, 220401 (2015).
- [15] Chiao-Hsuan Wang and Jacob M Taylor, “Landauer formulation of photon transport in driven systems,” *Physical Review B* **94**, 155437 (2016).
- [16] Baigeng Wang, Jian Wang, Jin Wang, and D. Y. Xing, “Spin current carried by magnons,” *Phys. Rev. B* **69**, 174403 (2004).
- [17] Klaus Kuhnke, Christoph Groe, Pablo Merino, and Klaus Kern, “Atomic-scale imaging and spectroscopy of electroluminescence at molecular interfaces,” *Chemical Reviews* **117**, 5174–5222 (2017).
- [18] Michael Galperin, “Photonics and spectroscopy in nano-junctions: a theoretical insight,” *Chem. Soc. Rev.* **46**, 4000–4019 (2017).
- [19] Natalia L. Schneider, Guillaume Schull, and Richard Berndt, “Optical probe of quantum shot-noise reduction at a single-atom contact,” *Phys. Rev. Lett.* **105**, 026601 (2010).
- [20] N. L. Schneider, J. T. Lü, M. Brandbyge, and R. Berndt, “Light emission probing quantum shot noise and charge fluctuations at a biased molecular junction,” *Phys. Rev. Lett.* **109**, 186601 (2012).

- [21] Zhifeng Huang, Fang Chen, Roberto D’agosta, Peter A Bennett, Massimiliano Di Ventra, and Nongjian Tao, “Local ionic and electron heating in single-molecule junctions,” *Nature nanotechnology* **2**, 698 (2007).
- [22] Zvi Ioffe, Tamar Shamaï, Ayelet Ophir, Gilad Noy, Ilan Yutsis, Kobi Kfir, Ori Cheshnovsky, and Yoram Selzer, “Detection of heating in current-carrying molecular junctions by raman scattering,” *Nature nanotechnology* **3**, 727 (2008).
- [23] Jing-Tao L, Rasmus B. Christensen, Jian-Sheng Wang, Per Hedegrd, and Mads Brandbyge, “Current-Induced Forces and Hot Spots in Biased Nanojunctions,” *Phys. Rev. Lett.* **114**, 096801 (2015).
- [24] R Härtle and M Thoss, “Resonant electron transport in single-molecule junctions: Vibrational excitation, rectification, negative differential resistance, and local cooling,” *Physical Review B* **83**, 115414 (2011).
- [25] R Härtle and M Thoss, “Vibrational instabilities in resonant electron transport through single-molecule junctions,” *Physical Review B* **83**, 125419 (2011).
- [26] R Härtle, C Schinabeck, M Kulkarni, D Gelbwaser-Klimovsky, M Thoss, and U Peskin, “Cooling by heating in nonequilibrium nanosystems,” *Physical Review B* **98**, 081404 (2018).
- [27] Michael Galperin, Keiji Saito, Alexander V Balatsky, and Abraham Nitzan, “Cooling mechanisms in molecular conduction junctions,” *Physical Review B* **80**, 115427 (2009).
- [28] Lena Simine and Dvira Segal, “Vibrational cooling, heating, and instability in molecular conducting junctions: full counting statistics analysis,” *Physical Chemistry Chemical Physics* **14**, 13820–13834 (2012).
- [29] Jacob Lykkebo, Giuseppe Romano, Alessio Gagliardi, Alessandro Pecchia, and Gemma C. Solomon, “Single-molecule electronics: Cooling individual vibrational modes by the tunneling current,” *The Journal of Chemical Physics* **144**, 114310 (2016), <https://doi.org/10.1063/1.4943578>.
- [30] Linxiao Zhu, Anthony Fiorino, Dakotah Thompson, Rohith Mittapally, Edgar Meyhofer, and Pramod Reddy, “Near-field photonic cooling through control of the chemical potential of photons,” *Nature* **566**, 239 (2019).
- [31] Martin HeadGordon and John C. Tully, “Molecular dynamics with electronic frictions,” *The Journal of Chemical Physics* **103**, 10137–10145 (1995).
- [32] Wenjie Dou and Joseph E. Subotnik, “Perspective: How to understand electronic friction,” *The Journal of Chemical Physics* **148**, 230901 (2018), <https://doi.org/10.1063/1.5035412>.
- [33] Magnus Paulsson, Thomas Frederiksen, and Mads Brandbyge, “Modeling inelastic phonon scattering in atomic- and molecular-wire junctions,” *Phys. Rev. B* **72**, 201101 (2005).
- [34] Wenjie Dou, Gaohan Miao, and Joseph E. Subotnik, “Born-Oppenheimer Dynamics, Electronic Friction, and the Inclusion of Electron-Electron Interactions,” *Phys. Rev. Lett.* **119**, 046001 (2017).
- [35] Lifa Zhang, Jing-Tao Lü, Jian-Sheng Wang, and Baowen Li, “Thermal transport across metal–insulator interface via electron–phonon interaction,” *Journal of Physics: Condensed Matter* **25**, 445801 (2013).
- [36] Jie Ren and Jian-Xin Zhu, “Heat diode effect and negative differential thermal conductance across nanoscale metal-dielectric interfaces,” *Physical Review B* **87**, 241412 (2013).
- [37] O. Entin-Wohlman, Y. Imry, and A. Aharony, “Three-terminal thermoelectric transport through a molecular junction,” *Phys. Rev. B* **82**, 115314 (2010).
- [38] Rafael Sánchez and Markus Büttiker, “Optimal energy quanta to current conversion,” *Phys. Rev. B* **83**, 085428 (2011).