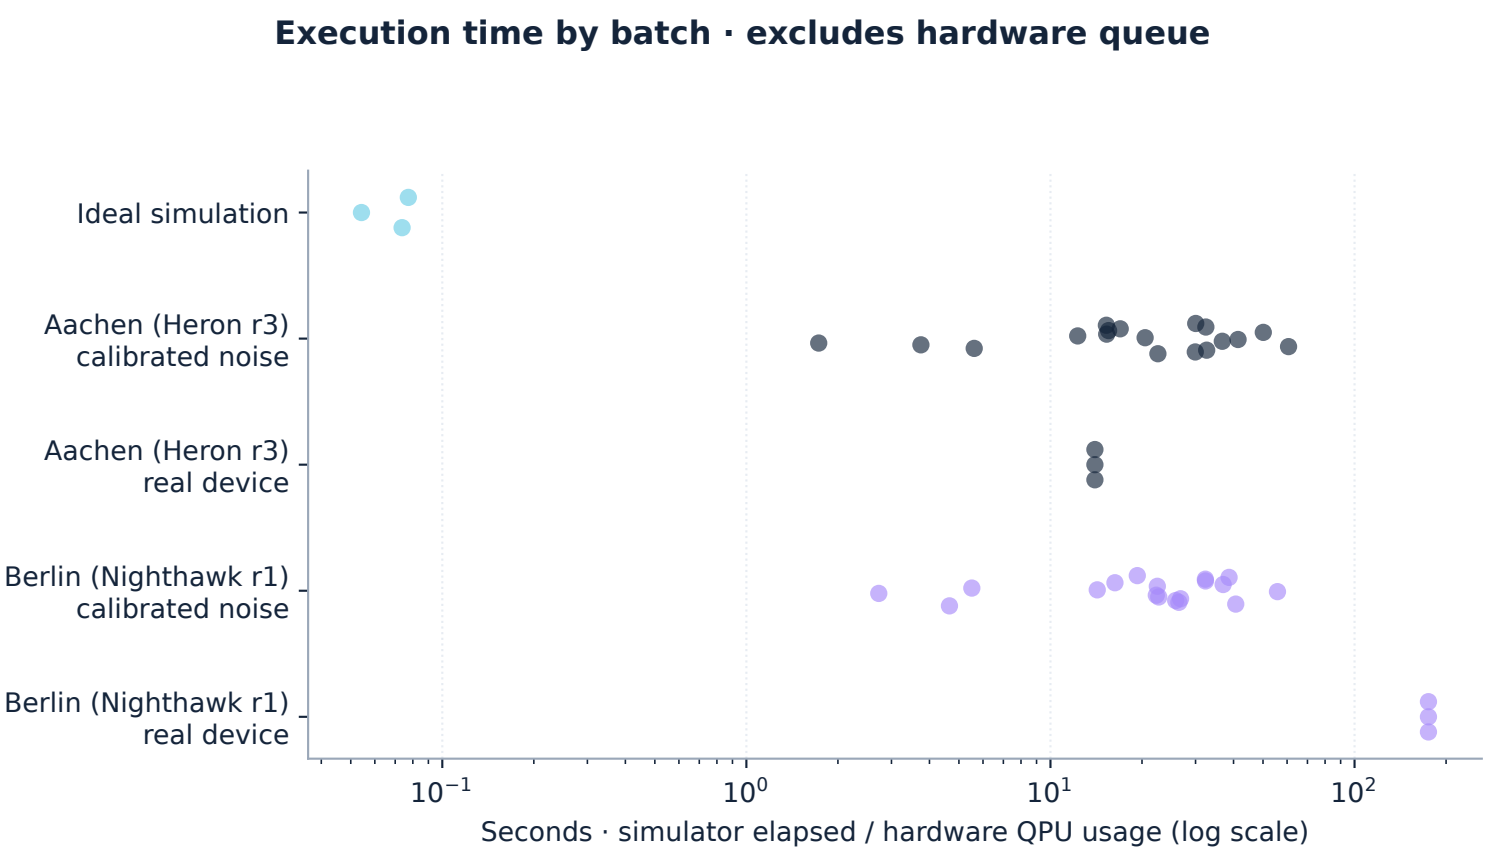
Execution time by batch · excludes hardware queue
Ideal simulation
Aachen (Heron r3)
calibrated noise
Aachen (Heron r3)
real device
Berlin (Nighthawk r1)
calibrated noise
Berlin (Nighthawk r1)
real device
10^{-1}
10^{0}
10^{1}
10^{2}
Seconds · simulator elapsed / hardware QPU usage (log scale)