


Decision variables and evaluated quantities on interval k

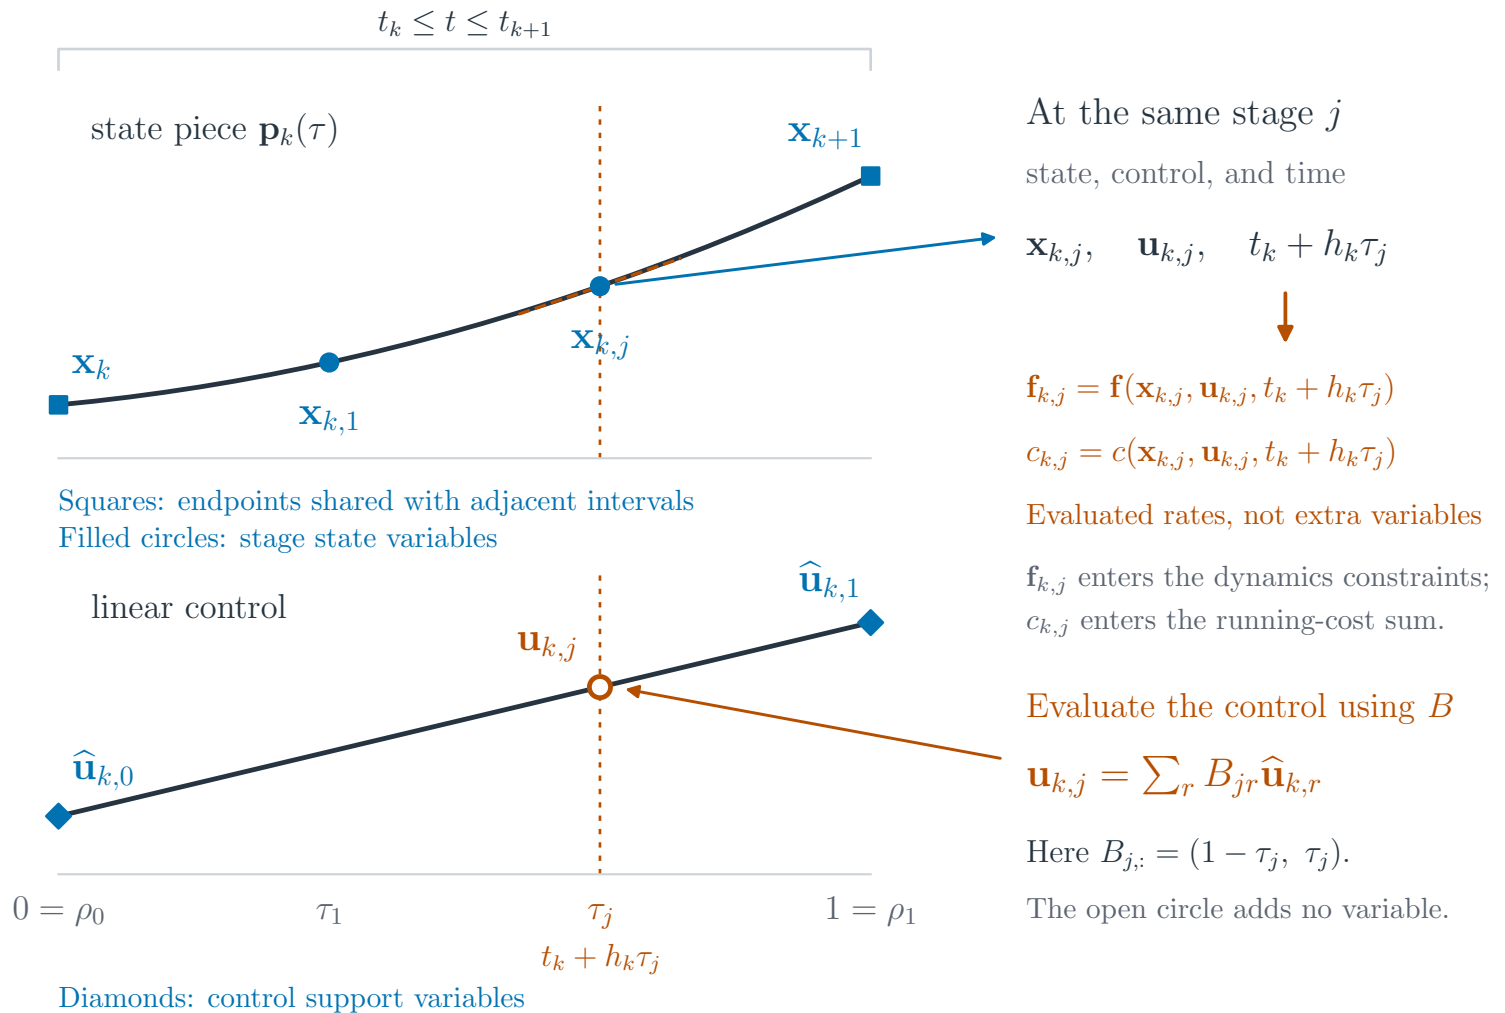

The NLP chooses $\mathbf{x}_k, \mathbf{x}_{k+1}, \mathbf{x}_{k,j}, \hat{\mathbf{u}}_{k,r}$; the constraints place the state points on $\mathbf{p}_k$.

If $\tau_j = 0$ or 1 , the stage state can share the corresponding mesh variable.