


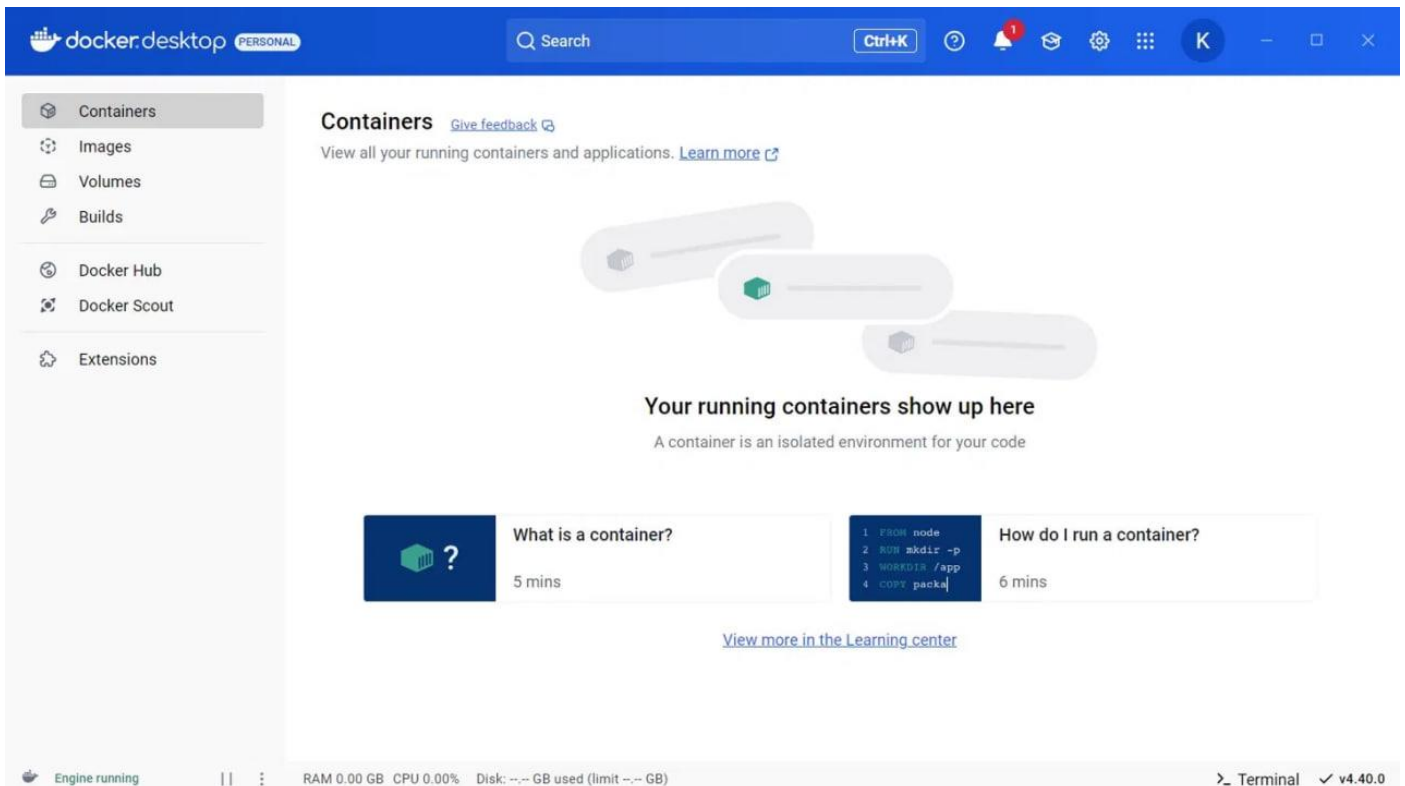

```
Администратор: Windows PowerShell

Windows PowerShell
(C) Корпорация Майкрософт (Microsoft Corporation). Все права защищены.

Попробуйте новую кроссплатформенную оболочку PowerShell (https://aka.ms/powershell)

PS C:\Users\Ксения> docker --version
>> docker ps
Docker version 28.0.4, build b8034c0
error during connect: Get "http://%2F%2F.%2Fpipe%2FdockerDesktopLinuxEngine/v1.48/containers/json": open //./pipe/dockerDesktopLinuxEngine: The system cannot find the file specified.
PS C:\Users\Ксения> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS     NAMES
PS C:\Users\Ксения>

PS C:\Users\Ксения> docker run -d --name jenkins -p 8080:8080 -p 50000:50000 -v jenkins_home:/var/jenkins_home jenkins/jenkins:lts
Unable to find image 'jenkins/jenkins:lts' locally
lts: Pulling from jenkins/jenkins
307f8152a55e: Pull complete
cebc1e77ceba: Pull complete
6b35bb76b8c8: Pull complete
801814f62c99: Pull complete
c2314d42cca1: Pull complete
76a355a69c2e: Pull complete
5834ae4b8774: Pull complete
ae218d1cfa6e: Pull complete
9014a3401c36: Pull complete
4c140080734e: Pull complete
dd00b4ea1f64: Pull complete
3bdbd616c406: Pull complete
Digest: sha256:01c992ffef29dcf41c7164e8c16285c657c2368c4943dda8d68c93fdf54447d5
Status: Downloaded newer image for jenkins/jenkins:lts
7157960f0f412c45203672714a3c584ea8a40ebedb32689d4979128d4f068501
PS C:\Users\Ксения>
```

Containers [Give feedback](#)

View all your running containers and applications. [Learn more](#)

Container CPU usage ⓘ

0.23% / 1200% (12 CPUs available)

Container memory usage ⓘ

567.2MB / 7.44GB


Show charts

Q Search

Only show running containers

☐	Name	Container ID	Image	Port(s)	CPU (%)	Last st	Actions
☐	jenkins	7157960f0f41	jenkins/jen	50000:50000 Show all ports (2)	3.33%	13 sec	

Showing 1 item

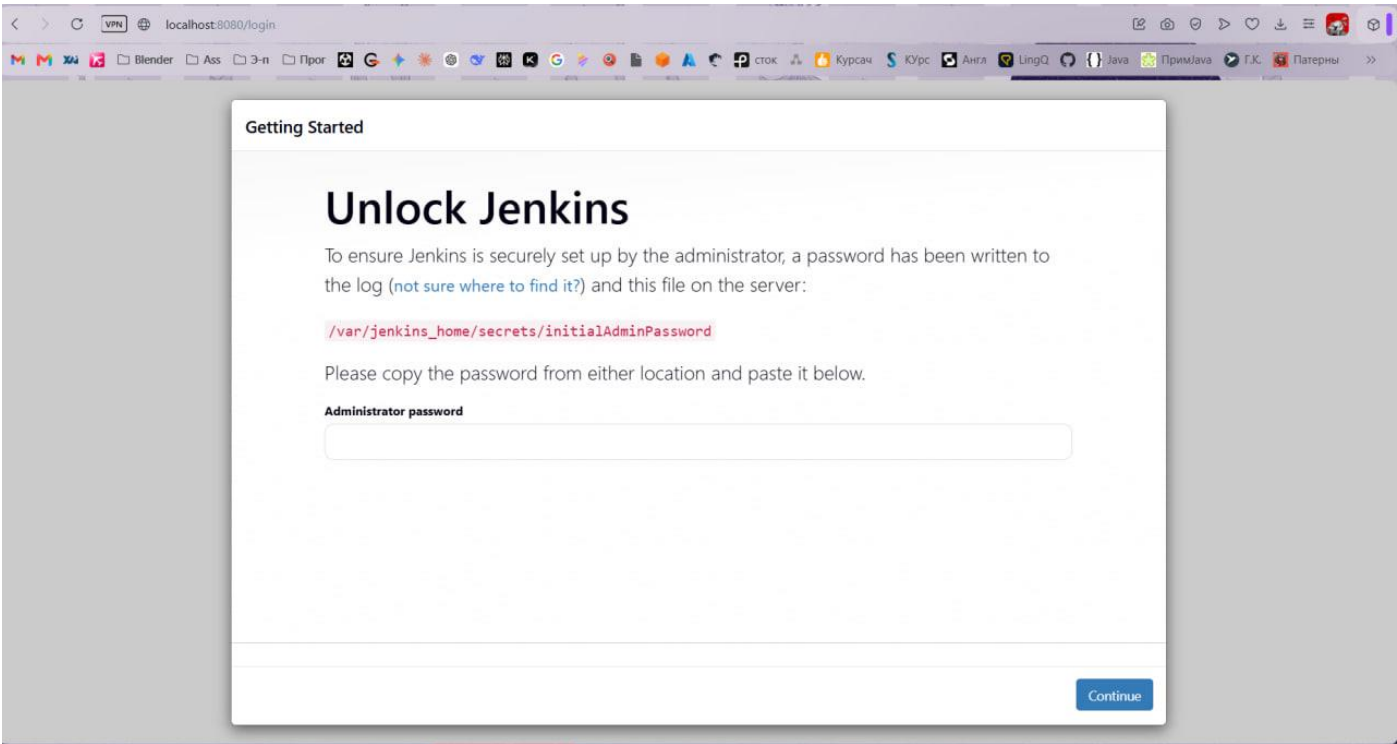

Customize Jenkins

Plugins extend Jenkins with additional features to support many different needs.

Install suggested plugins

Install plugins the Jenkins community finds most useful.

Select plugins to install

Select and install plugins most suitable for your needs.

Getting Started

Getting Started

✓ Folders	✓ OWASP Markup Formatter	⌚ Build Timeout	⌚ Credentials Binding	** commons-lang3 v3.x Jenkins API ** Ionicons API
⌚ Timestampers	⌚ Workspace Cleanup	⌚ Ant	⌚ Gradle	Folders
⌚ Pipeline	⌚ GitHub Branch Source	⌚ Pipeline: GitHub Groovy Libraries	⌚ Pipeline Graph View	OWASP Markup Formatter
⌚ Git	⌚ SSH Build Agents	⌚ Matrix Authorization Strategy	⌚ LDAP	
⌚ Email Extension	⌚ Mailer	⌚ Dark Theme		

** - required dependency

Jenkins 2.555.2

Getting Started

Create First Admin User

Имя пользователя

admin

Пароль

.....

Повторите пароль

.....

Ф.И.О.

Admin

Адрес электронной почты

admin@admin.com

Jenkins 2.555.2

[Skip and continue as admin](#)

[Save and Continue](#)

Instance Configuration

Jenkins URL:

http://localhost:8080/

The Jenkins URL is used to provide the root URL for absolute links to various Jenkins resources. That means this value is required for proper operation of many Jenkins features including email notifications, PR status updates, and the BUILD_URL environment variable provided to build steps.

The proposed default value shown is **not saved yet** and is generated from the current request, if possible. The best practice is to set this value to the URL that users are expected to use. This will avoid confusion when sharing or viewing links.

Jenkins 2.555.2

Not now

Save and Finish

 **Jenkins**

+ Создать Item

 История сборок

Очередь сборки ▼

Очередь сборки пуста

Состояние сборщиков 0/2 ▼



 добавить описание

Добро пожаловать в Jenkins!

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Start building your software project

Create a job +

Set up a distributed build

Set up an agent 

Configure a cloud 

Learn more about distributed builds 

REST API Jenkins 2.555.2

Новый Item

Введите имя Item'a

devsecops_lab

Select an item type



Pipeline

Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.



Создать задачу со свободной конфигурацией

Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.



Мультиконфигурационный проект

Подходит для проектов, требующих большое количество различных конфигураций, таких как тестирование в разнообразных средах, платформозависимые сборки и т.д.



Folder

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

OK



Jenkins / devsecops_lab / Configure



Configure

- Общие настройки
- Управление исходным кодом
- Triggers
- Environment
- Шаги сборки
- Послесборочные операции

- ☐ Inspect build log for published build scans
- ☐ Terminate a build if it's stuck
- ☐ With Ant ?

Шаги сборки

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Выполнить команды shell ?

Команда

См. список переменных окружения

```
echo "Test"
echo $BUILD_NUMBER
```

Расширенные ▾

Save

Применить

Jenkins / devsecops_lab / #1

Статус

Изменения

Вывод консоли

Редактировать информацию сборки

Delete build '#1'

Timings

#1 (24 мая 2026 г., 16:36:25)

Создана пользователем Admin

This run spent:

- 18 ms waiting;
- 39 ms build duration;
- 57 ms total from scheduled to completion.

Нет изменений.

добавить описание

Хранить эту сборку вечно

Запущена 9.5 секунд назад

Заняло: 39 ms

Jenkins / devsecops_lab / #1

Статус

Изменения

Вывод консоли

Редактировать информацию сборки

Delete build '#1'

Timings

Console

Download

Copy

View as plain text

Started by user Admin

Running as SYSTEM

Building in workspace /var/jenkins_home/workspace/devsecops_lab

[devsecops_lab] \$ /bin/sh -xe /tmp/jenkins11696255184096296798.sh

+ echo Test

Test

+ echo 1

1

Finished: SUCCESS

```
PS C:\Users\Ксения> docker run -d --name webserver `
>> -p 80:80 `
>> --network bridge `
>> rastasheep/ubuntu-sshd:18.04
Unable to find image 'rastasheep/ubuntu-sshd:18.04' locally
18.04: Pulling from rastasheep/ubuntu-sshd
a48c500ed24e: Pull complete
1e1de00ff7e1: Pull complete
0330ca45a200: Pull complete
471db38bcfbf: Pull complete
0b4aba487617: Pull complete
33aa9e7ef666: Pull complete
78a9fb7120b3: Pull complete
8fbf9969f82a: Pull complete
d2418ae2f6ad: Pull complete
f815f7ed40f8: Pull complete
39c956d3d54b: Pull complete
40462533cfca: Pull complete
2b1920b96f11: Pull complete
Digest: sha256:1df808ccf95c13b8e62548ad434829bc28ee701a65624e5c0440fc24482e4a62
Status: Downloaded newer image for rastasheep/ubuntu-sshd:18.04
26685e05e4337a6a1a12d70863ace7f2d328b8f9654bd1d66f7ca26f1eb0f91c
PS C:\Users\Ксения>
```

```
PS C:\Users\Ксения> docker exec webserver apt-get update -y
>> docker exec webserver apt-get install -y nginx
>> docker exec webserver mkdir -p /var/www/html
>> docker exec webserver service nginx start
Get:1 http://security.ubuntu.com/ubuntu bionic-security InRelease [102 kB]
Get:2 http://archive.ubuntu.com/ubuntu bionic InRelease [242 kB]
Get:3 http://security.ubuntu.com/ubuntu bionic-security/universe Sources [305 kB]
Get:4 http://security.ubuntu.com/ubuntu bionic-security/restricted amd64 Packages [1658 kB]
Get:5 http://archive.ubuntu.com/ubuntu bionic-updates InRelease [102 kB]
Get:6 http://security.ubuntu.com/ubuntu bionic-security/main amd64 Packages [3326 kB]
Get:7 http://archive.ubuntu.com/ubuntu bionic-backports InRelease [102 kB]
Get:8 http://archive.ubuntu.com/ubuntu bionic/universe Sources [11.5 MB]
Get:9 http://security.ubuntu.com/ubuntu bionic-security/universe amd64 Packages [1622 kB]
Get:10 http://security.ubuntu.com/ubuntu bionic-security/multiverse amd64 Packages [23.5 kB]
Get:11 http://archive.ubuntu.com/ubuntu bionic/restricted amd64 Packages [13.5 kB]
Get:12 http://archive.ubuntu.com/ubuntu bionic/main amd64 Packages [1344 kB]
Get:13 http://archive.ubuntu.com/ubuntu bionic/universe amd64 Packages [11.3 MB]
Get:14 http://archive.ubuntu.com/ubuntu bionic/multiverse amd64 Packages [186 kB]
Get:15 http://archive.ubuntu.com/ubuntu bionic-updates/universe Sources [488 kB]
Get:16 http://archive.ubuntu.com/ubuntu bionic-updates/main amd64 Packages [3735 kB]
Get:17 http://archive.ubuntu.com/ubuntu bionic-updates/restricted amd64 Packages [1697 kB]
Get:18 http://archive.ubuntu.com/ubuntu bionic-updates/universe amd64 Packages [2389 kB]
Get:19 http://archive.ubuntu.com/ubuntu bionic-updates/multiverse amd64 Packages [30.5 kB]
Get:20 http://archive.ubuntu.com/ubuntu bionic-backports/main amd64 Packages [63.4 kB]
Get:21 http://archive.ubuntu.com/ubuntu bionic-backports/universe amd64 Packages [20.5 kB]
Fetched 40.3 MB in 4s (9366 kB/s)
Reading package lists...
Reading package lists...
Building dependency tree...
Reading state information...
The following additional packages will be installed:
  fontconfig-config fonts-dejavu-core geoip-database iproute2 libatm1 libelf1
  libfontconfig1 libfreetype6 libgd3 libgeoip1 libjbig0 libjpeg-turbo8
  libjpeg8 libmnl0 libnginx-mod-http-geoip libnginx-mod-http-image-filter
  libnginx-mod-http-xslt-filter libnginx-mod-mail libnginx-mod-stream
  libpng16-16 libtiff5 libwebp6 libxpm4 libxslt1.1 libxtables12 nginx-common
  nginx-core
Suggested packages:
  iproute2-doc libgd-tools geoip-bin fcgiwrap nginx-doc ssl-cert
The following NEW packages will be installed:
  fontconfig-config fonts-dejavu-core geoip-database iproute2 libatm1 libelf1
  libfontconfig1 libfreetype6 libgd3 libgeoip1 libjbig0 libjpeg-turbo8
  libjpeg8 libmnl0 libnginx-mod-http-geoip libnginx-mod-http-image-filter
  libnginx-mod-http-xslt-filter libnginx-mod-mail libnginx-mod-stream
```



```

Setting up libjpeg-turbo8:amd64 (1.5.2-0ubuntu5.18.04.6) ...
Setting up libgeoip1:amd64 (1.6.12-1) ...
Setting up libfreetype6:amd64 (2.8.1-2ubuntu2.2) ...
Setting up libxslt1.1:amd64 (1.1.29-5ubuntu0.3) ...
Processing triggers for libc-bin (2.27-3ubuntu1) ...
Setting up libatm1:amd64 (1:2.5.1-2build1) ...
Setting up libxtables12:amd64 (1.6.1-2ubuntu2.1) ...
Processing triggers for systemd (237-3ubuntu10) ...
Setting up libnginx-mod-mail (1.14.0-0ubuntu1.11) ...
Setting up libxpm4:amd64 (1:3.5.12-1ubuntu0.18.04.2) ...
Setting up libnginx-mod-http-xslt-filter (1.14.0-0ubuntu1.11) ...
Setting up libmnl0:amd64 (1.0.4-2) ...
Setting up libnginx-mod-http-geoip (1.14.0-0ubuntu1.11) ...
Setting up libwebp6:amd64 (0.6.1-2ubuntu0.18.04.2) ...
Setting up libjpeg8:amd64 (8c-2ubuntu8) ...
Setting up fontconfig-config (2.12.6-0ubuntu2) ...
Setting up libnginx-mod-stream (1.14.0-0ubuntu1.11) ...
Setting up libtiff5:amd64 (4.0.9-5ubuntu0.10) ...
Setting up iproute2 (4.15.0-2ubuntu1.3) ...
Setting up libfontconfig1:amd64 (2.12.6-0ubuntu2) ...
Setting up libgd3:amd64 (2.2.5-4ubuntu0.5) ...
Setting up libnginx-mod-http-image-filter (1.14.0-0ubuntu1.11) ...
Setting up nginx-core (1.14.0-0ubuntu1.11) ...
invoke-rc.d: could not determine current runlevel
invoke-rc.d: policy-rc.d denied execution of start.
Setting up nginx (1.14.0-0ubuntu1.11) ...
Processing triggers for libc-bin (2.27-3ubuntu1) ...
 * Starting nginx nginx
    ...done.
PS C:\Users\Ксения>

```

```

PS C:\Users\Ксения> docker exec webserver chmod -R 777 /var/www/html
>> docker inspect webserver --format='{{.NetworkSettings.IPAddress}}'
172.17.0.3
PS C:\Users\Ксения>

```

```

PS C:\Users\Ксения> docker exec webserver chmod -R 777 /var/www/html
>> docker inspect webserver --format='{{.NetworkSettings.IPAddress}}'
172.17.0.3
PS C:\Users\Ксения> docker exec webserver service ssh status
 * sshd is running
PS C:\Users\Ксения>

```

```

-n namespace -s signature_file [-i key_file] [-o option]
PS C:\Users\Ксения> docker exec jenkins bash -c "ssh-keygen -t rsa -f /var/jenkins_home/.ssh/id_rsa -N ''"
Created directory '/var/jenkins_home/.ssh'.
Generating public/private rsa key pair.
Your identification has been saved in /var/jenkins_home/.ssh/id_rsa
Your public key has been saved in /var/jenkins_home/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:0qk0e1BHQsuECCxpwHj5dFEPm4/XFi0KrIELAVB/9M jenkins@7157960f0f41
The key's randomart image is:
+---[RSA 3072]-----+
|00+o=o .. |
|*=00++.. |
|*o +=+. o. |
|o.+ +00... |
|. = =oES |
| o o o* |
|.o +. |
| o.. . |
|.oo |
+---[SHA256]-----+
PS C:\Users\Ксения> docker exec jenkins cat /var/jenkins_home/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQDL9Uy8SXQAO70t4HVKrCWkxvNB/mX0MsmZybuzxdQj60riaSDd+aDT9J5sVRyxGECEok3a1T8jnps4uLKXci8j7t5N2zqY0JEivjKJEt+oBNr/T6Suet3A8noDM17VfTznVgx8sMNFjVKijjEy2/rnNrW4yHNwWoLW4F/zoapiob8RnoY4SyFykuagc/J3dBUogvSQhLCpm5aZFD2mclNar8ImoaXatg8JqIHMuxPHbv1j4qzNRG9/0Ec0C/QrXJVR2rpQZa1/cra1opLdMGHddaMcZxLnNSrm41GDtmWR/OxIv41pErUHM5VhN0nQe4COGfCac70GeuW136YrBg98E+B0CmLZzTtRA/OPVvk7Z6pSxC+SzLeTt7ZTzu0+Rq9rSQIZ99LbVsqt7/cGCouRYJBjz3o09A35ufkueN0m4msk1rhn0i+d/1U1wOIIYIJIInDbZb2kAHkuieSZNZzCa3H1kZKPUgSB+Sx64u2c6bMDHYXjG0rEgFsLJATpS4d8= jenkins@7157960f0f41
PS C:\Users\Ксения>

```

```
PS C:\Users\Ксения> docker exec webserver bash -c "mkdir -p /root/.ssh && echo 'ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQDL9Uy8SXQAO70t4HVkrCWkxvNB/mX0MsmZybuzxdQj60riaSdd+aDT9J5sVRyxGECEok3a1T8jnps4uLKXci8j7t5N2zqY0JEivjKJet+oBNr/T6SUet3A8noDM17VFTznVgx8sMNFjVKijjEy2/rnNrW4yHNwWoLW4F/zoapiob8RnoY4SyFykuagc/J3dBUogvSQhLCpm5aZFD2mcNar8ImoaXAtg8JqIHmUXPHbv1j4qzNRG9/0Ec0C/QrXJVr2rpQZa1/cra1opLdMGHddaMcZxLnNSrm41GDtmWR/OxIv41pErUHM5VhN0nQe4COGfCac70GeuW136YrBg98E+B0CmLZzTtRA/OPVvk7Z6pSxC+SzLeTt7ZTzu0+Rq9rSQIZ99LbVsq7/cGCouRYJBjz3o09A35ufkueN0m4msk1rhnOi+d/1U1w0I1YIJJInDbZb2kAHkuiESzNZzxCA3H1kZKPUGSB+Sx64u2c6bMDhYXjG0rEgFsLJATpS4d8= jenkins@7157960f0f41' >> /root/.ssh/authorized_keys && chmod 600 /root/.ssh/authorized_keys"
```

```
PS C:\Users\Ксения> docker exec webserver cat /root/.ssh/authorized_keys
```

```
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQDL9Uy8SXQAO70t4HVkrCWkxvNB/mX0MsmZybuzxdQj60riaSdd+aDT9J5sVRyxGECEok3a1T8jnps4uLKXci8j7t5N2zqY0JEivjKJet+oBNr/T6SUet3A8noDM17VFTznVgx8sMNFjVKijjEy2/rnNrW4yHNwWoLW4F/zoapiob8RnoY4SyFykuagc/J3dBUogvSQhLCpm5aZFD2mcNar8ImoaXAtg8JqIHmUXPHbv1j4qzNRG9/0Ec0C/QrXJVr2rpQZa1/cra1opLdMGHddaMcZxLnNSrm41GDtmWR/OxIv41pErUHM5VhN0nQe4COGfCac70GeuW136YrBg98E+B0CmLZzTtRA/OPVvk7Z6pSxC+SzLeTt7ZTzu0+Rq9rSQIZ99LbVsq7/cGCouRYJBjz3o09A35ufkueN0m4msk1rhnOi+d/1U1w0I1YIJJInDbZb2kAHkuiESzNZzxCA3H1kZKPUGSB+Sx64u2c6bMDhYXjG0rEgFsLJATpS4d8= jenkins@7157960f0f41
```

```
PS C:\Users\Ксения>
```

```
PS C:\Users\Ксения> docker exec jenkins bash -c "ssh -o StrictHostKeyChecking=no root@172.17.0.3 'echo SSH works!'"
```

```
Warning: Permanently added '172.17.0.3' (ED25519) to the list of known hosts.
```

```
SSH works!
```

```
PS C:\Users\Ксения>
```

The screenshot shows the Jenkins web interface. The top navigation bar includes the Jenkins logo, the text 'Jenkins', and a dropdown menu 'Настроить Jenkins' (Configure Jenkins). The main header area shows 'Plugins' and a search bar containing 'Publish Over SSH'. On the right side of the header, there are buttons for 'Install', a dropdown arrow, and a refresh icon.

On the left sidebar, there is a list of links: 'Updates', 'Available plugins' (which is highlighted), 'Installed plugins', 'Advanced settings', and 'Download progress'.

The main content area displays the 'Publish Over SSH' plugin details. It includes a table with columns 'Install', 'Name', 'Released', and 'Health'. The 'Publish Over SSH' plugin is listed with a blue checkmark in the 'Install' column, the name 'Publish Over SSH 390.vb_f56e7405751', and a health status of '96' (indicated by a green circle). Below the table, there are links for 'Artifact Uploaders' and 'Build Tools', and a description: 'Send build artifacts over SSH'.

 Jenkins

devsecops_lab / Configure

Общие настройки

Управление исходным кодом

Triggers

Environment

Шаги сборки

Послесборочные операции

Send build artifacts over SSH ?

SSH Publishers

Name ?

webserver

Расширенные

Transfers

Transfer Set

Source files ?

Either Source files, Exec command or both must be supplied

Remove prefix ?

SaveПрименить

Шаги сборки

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Выполнить команду shell ?

Команда

См. список переменных окружения

echo "<html><body><h1>Hello World</h1></body></html>" > index.html

Расширенные

Send build artifacts over SSH ?

SSH Publishers

SSH Server

Name ?

webserver

Расширенные

Transfers

Transfer Set

Source files ?

index.html

Remove prefix ?

Remote directory ?

Exec command ?

echo \$BUILD_ID

SaveПрименить

Jenkins / devsecops_lab / #2

Статус

Изменения

Вывод консоли

Редактировать информацию сборки

Delete build '#2'

Timings

← Предыдущая сборка

✓ #2 (24 мая 2026 г., 17:09:24)

Создана пользователем Admin

This run spent:

- 7 ms waiting;
- 0.39 секунд build duration;
- 0.4 секунд total from scheduled to completion.

</> Нет изменений.

добавить описание

Хранить эту сборку вечно

Запущена 10 секунд назад

Заняло: 0.39 секунд

Jenkins / devsecops_lab / #2

Статус

Изменения

Вывод консоли

Редактировать информацию сборки

Delete build '#2'

Timings

← Предыдущая сборка

Console

DownloadCopyView as plain text

Started by user Admin
Running as SYSTEM
Building in workspace /var/jenkins_home/workspace/devsecops_lab
[devsecops_lab] \$ /bin/sh -xe /tmp/jenkins13681974726312964943.sh
+ echo <html><body><h1>Hello World</h1></body></html>
SSH: Connecting from host [7157960f0f41]
SSH: Connecting with configuration [webserver] ...
SSH: EXEC: completed after 201 ms
SSH: Disconnecting configuration [webserver] ...
SSH: Transferred 1 file(s)
Finished: SUCCESS

Hello World

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner *



Repository name *

devsecops-jenkins

✔ devsecops-jenkins is available.

Great repository names are short and memorable. How about [bug-free-bassoon?](#)

Description

0 / 350 characters

2 Configuration

Choose visibility *

Choose who can see and commit to this repository

 Public ▾

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

On ☒

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore ▾

Add license

Licenses explain how others can use your code. [About licenses](#)


No license ▾

GitHub repository page for **devsecops-jenkins** (Public) by user **pil038**. The repository has 1 branch (main) and 0 tags. The commit history shows an initial commit by pil038. The README file is visible, displaying the repository name. The right sidebar contains sections for About, Releases, Packages, and Contributors.

GitHub file view for **devsecops-jenkins / index.html**. The file was created by pil038. The content of the file is shown in the Code tab:

```
1 <html><body><h1>GitHub</h1></body></html>
```

```
PS C:\Users\Ксения> docker exec jenkins cat /var/jenkins_home/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGDQJ9Uy8SXQAO70t4HVKrCwKxvnB/mX0MsmZybuzxdQj60riaSDd+aDT9J5sVRyxGECEok3a1T8jnps4uLXX
ci8j7t5N2zqY0JEivjKJet+oBNr/T6SUet3A8noDM17VfTznVgx8sMNFjVKijjEy2/rnNrW4yHnWwLW4F/zoapiob8RnoY4SyFykuagc/J3dBuogvSQhLCP
m5aZFD2mcNar8ImoaXAtg8JqIHMuxPHbv1j4qzNRG9/0Ec0C/QrXJVr2rpQZa1/cra1opLdMGHddaMcZxLnNSrm41GDtmWR/OxIv41pErUHM5VhN0nQe4COG
fCac70GeuW136YrBg98E+B0CmLZzTtRA/OPVvk7Z6pSxC+SzLeTt7ZTzu0+Rq9rSQIZ99LbVsqt7/cGCouRYJBjz3o09A35ufkueN0m4msk1rhnoI+d/1U1w
0I1YIJJnDbZb2kAHkuiESzNZzxC3H1kZKPUGSB+Sx64u2c6bMDhYXjG0rEgFsLJATpS4d8= jenkins@7157960f0f41
PS C:\Users\Ксения>
```

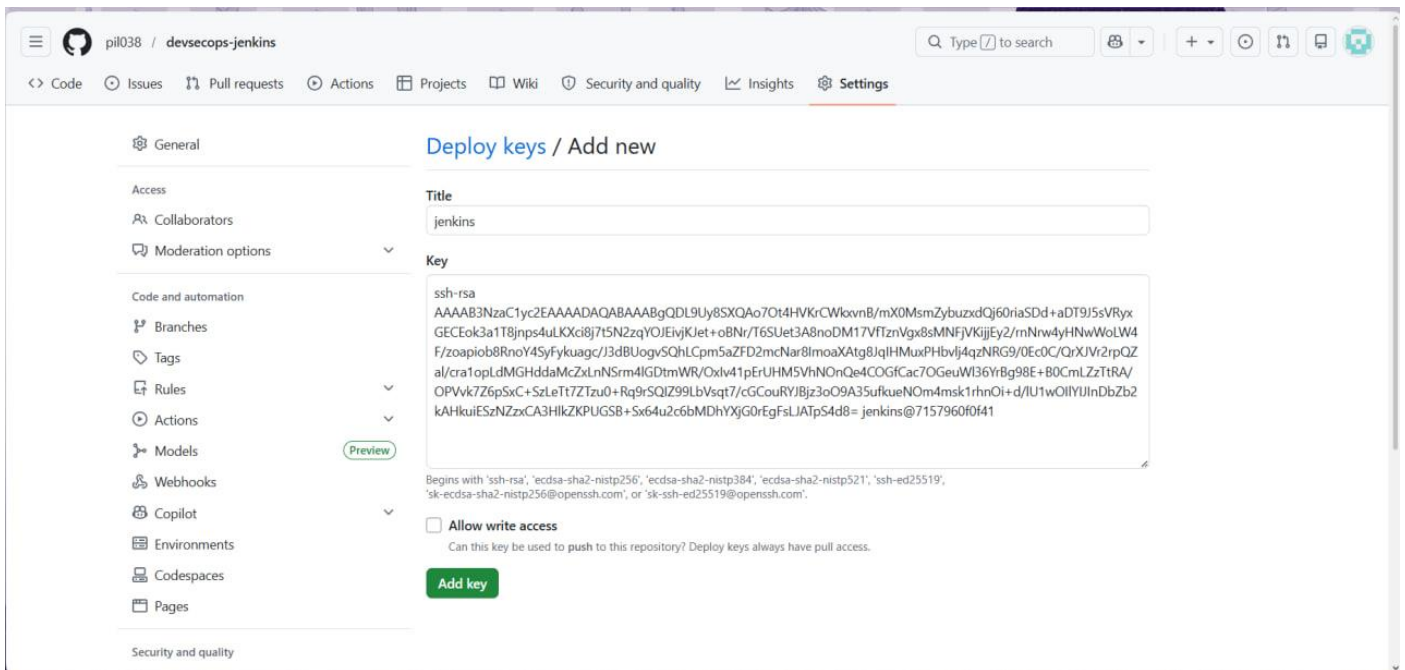

Deploy keys

Add deploy key

[Deploy keys](#) use an SSH key to grant read-only or write access to a single repository. They are not protected by a passphrase and can be a security risk if your server is compromised. If you have a complex project or want more fine-grain control over permissions, consider using [GitHub Apps](#) instead.

1 deploy key



jenkins

SHA256:0qk0e1BHQsuECCxpwaHj5dFEPm4/XFi0KrIELAVB/9M

Added on May 24, 2026 by @pil038

Never used — Read-only

Delete

SSH

Add Credentials



Select a type of credential



Username with password

Commonly used for authentication to services like Git, APIs, or registries.



GitHub App



SSH Username with private key



Secret file



Secret text



Certificate

Upload a PKCS#12 or PEM encoded certificate and private key.

Next

```
PS C:\Users\Ксения> docker exec jenkins cat /var/jenkins_home/.ssh/id_rsa
-----BEGIN OPENSSH PRIVATE KEY-----
b3B1bnNzaC1rZXktdjEAAAAAAAAAGB5vbmUAAAAAAAAAAAAAAAABAAABlwAAAAadzC2gtcn
NhAAAAAwEAAQAAAYEAy/VMvE10AK0zreB1SqwlpMb5wf519DLJmcm7s8XUI+tK4mkg3fmg
0/SebFUcsRhAhKJN2tU/I56b0LIy13IvI+7eTds6mDiRr4yiXrfqATa/0+k1HrdwPJ6Az
Ne1X0851YMfLDDRY1Soo4xMtv65za80MhzcFqC1uBf86GqYqG/EZ6G0EshcpLmoHPyd3QV
XIL0kISwqZuWmRQ9pndWq/CJqG1wLYPCaiBzLsTx275Y+KszURvf98HNAv0K1yVa9q6UGW
pf3K2taKS3TBh3XWjHgC5S5Uq5uJRg7Z1kfzsSL+NaRK1Bz0VYTTp0HuAjhnwmnOzhnr1p
d+mKwYPfBPgdApi2c07UQPzj1b502eqUsQvksy3k7e2U87tPkava0kCGffS21bKre/3Bgq
LkWCQY896DvQN+bn5LnjTpuJrJNa4Zzovnf5VNCdIJWCCSJw22W9pAB5LohEszWc8QgNx5
ZGSj1BkgfKseuLtnOmzA4WF4xtKxIBbCyQE6UuHfAAAFkD91sQ8/ZbEPAAAAB3NzaC1yc2
EAAAGBAMv1TLxJdACjs63gdUqsJaTG+cH+ZfQyyZnJu7PF1CPrSuJpIN35oNP0nmVHLEY
QISiTDvPy0emzi4spdyLyPu3k3b0pg4kSK+Mo1636GE2v9PpJR63cDyegMzXtV9PodWDH
yww0WNUqKOMTLb+uc2vDjIc3BagtbgX/OhqmKhvxGehjhLIXKS5qBz8nd0FSiC9JCEsKmb
lpkUPaZw1qvwiahpC2Dwmogcy7E8du+WPirM1Eb3/QRzQL9CtclWvau1B1qX9ytrWikt0
wYd11oxxnEuc1KubiUY0Z2ZH87Ei/jWkStQcz1WE06dB7gI4Z8Jps4Z65aXfpisGD3wT4
HOKYtnNO1ED849W+Ttnq1LEL5Lmt503t1P07T5Gr2tJAhn30ttWyq3v9wYKi5FgkGPPeg7
0Dfm5+S5406biayTWuGc6L53+VTXA4iVggkicNtlvaQAeS6IRLm1nPEIDceWRko9QZIH5L
Hr17Zzpsw0FheMbSsSAWwskB01Lh3wAAAAMBAEAAAGAF3r3KWquyktzqTirtgFnCLLILb
0FYRR4ZXDg3+q0UyTz0zXgzPKVmNZ9vI60iGYjMKx3a7zcEXo2ItAPQ2R9An/X7jz8YGo2
ueS38GA0dQ/mCb1+Atf9mokaZy7tToT7U3idDxJ8ezqGAQ/UoHx3GfzmVgqBpmAigEwBeo
yp5G6m5AeM1S3qZ68mH0JsT2M496/SfVwU/dmwezWQzY4KW24MMwFnIt5F2K5BWB4znS7V
6FQxSremTzS+fJInzX/6ZaLuzJPjJfYGGvFDX9wuZ1YiNLI6TFC2z2pTrmJ38G44gS3guB
5yA12GgvouotRRmVeUgGP1/oL9bbccyDNLVmdZ2tELCrYdIkB0jQQgECyITLYhXKogExLS
sC1RKCO7HH0Z09/XtomgcjCoFoFaNz5DaqsF4EylgFTRpKDxdLuPrvpaiJY3fHELuH88Bq
LTWCILmc3nKo1ZTuuqtFgntAVN71Gf9UE59JUokSY2hsRj0vW05v9NQo0vD308g2uRAAAA
wAbf/dYmxnPvVmek+gbA0ZQt4+p7FSFVbN1VBjNvYnift2sMZtTuBjdgcKr/R9HAHT5nN7
Mhb7H0280mediEeQlojFBkbDixjwz8Y7knpg2GKBe+VCh8H202bSXhUirAohPRhEFXPRfT
bOMGh4L7eOG4iv7ZEwGNmYhJkx0bJmqmTdI2fN9Gz+T1Uq0f1TcN6IYa/gP+oKzeLUveDU
TzzXMTfQvLosy0E9hwUp0dRcF12cJEqTZcXoKeq0KiHfPrTgAAAMEA9pM347r0nmkVK1/s
Sm7gBitLwKdCIPZcMweu7qq5a2ZJobywSkfdvyH+XmpYkBB6RGRzCqZ8Z8o6y2vsa+A4AR
3D18fRoycxiYT67xqCscNb1JXWvdIXVgUpSpSYFbL7Uev300+ZZAues7WA3VZNsWdkZPe
F53kLmx+UpDSrkBZGWxy+ackGhub/LK8UAggTAX+NUdo2tDbuc0kjt29pbAhI4AKnk6y12
jT5LpapQ4UUMUbiETkpbkQyg1qkNpvAAAAwQDTwRFRrtFFkYekjsGjMr0Ao9CWYCepgVi3
U570IbS5qj+DgIw01Lf6rkSCERp+Ae5QBrkWTheUCVMzw+eZ+A5QMNdZ+ercSYcNNBMLBdF
gmwWKhSqAKpgxXkqouy8Gz46u/aM9B9inkmdhVtNKnd3zNgsyF+isFiFTeaY7zL9daQk9/
BW+bKHPAHP+0Q3owY7nT77qk31NZxxIdXydTstyUaqMbDBhyrDqMN2P9D04gONYEJAGQF+
Gquu1HeXQj55EAAAUAumVua21uc0A3MTU30TYwZjBmNDEBAgMEBQYH
-----END OPENSSH PRIVATE KEY-----
PS C:\Users\Ксения>
```

```
PS C:\Users\Ксения> docker exec jenkins bash -c "ssh-keyscan github.com >> /var/jenkins_home/.ssh/known_hosts"
PS C:\Users\Ксения>
```



Статус

</> Изменения

Вывод консоли

✍ Редактировать информацию сборки

🗑 Delete build '#3'

🕒 Timings

🔑 Git Build Data

← Предыдущая сборка

✓ #3 (24 мая 2026 г., 17:28:09)

Создана пользователем [Admin](#)

This run spent:

- 3 ms waiting;
- 5.4 секунд build duration;
- 5.4 секунд total from scheduled to completion.

**Revision:** c23ab7ea4f99ef42d42b8f033d296d31a25aefec
Repository: git@github.com:pil038/devsecops-jenkins.git

- refs/remotes/origin/main



Нет изменений.

#3



```
Cloning the remote Git repository
Cloning repository git@github.com:pil038/devsecops-jenkins.git
> git init /var/jenkins_home/workspace/devsecops_lab # timeout=10
Fetching upstream changes from git@github.com:pil038/devsecops-jenkins.git
> git --version # timeout=10
> git --version # 'git version 2.47.3'
using GIT_SSH to set credentials
Verifying host key using known hosts file
> git fetch --tags --force --progress -- git@github.com:pil038/devsecops-jenkins.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git config remote.origin.url git@github.com:pil038/devsecops-jenkins.git # timeout=10
> git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision c23ab7ea4f99ef42d42b8f033d296d31a25aefec (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f c23ab7ea4f99ef42d42b8f033d296d31a25aefec # timeout=10
Commit message: "Create index.html"
First time build. Skipping changelog.
[devsecops_lab] $ /bin/sh -xe /tmp/jenkins8165759048143262726.sh
+ echo <html><body><h1>Hello World</h1></body></html>
SSH: Connecting from host [7157960f0f41]
SSH: Connecting with configuration [webserver] ...
SSH: EXEC: completed after 201 ms
SSH: Disconnecting configuration [webserver] ...
SSH: Transferred 1 file(s)
Finished: SUCCESS
```

Новый Item

Введите имя Item'a

devsecops_pipeline

Select an item type



Pipeline

Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.



Создать задачу со свободной конфигурацией

Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.



Мультиконфигурационный проект

Подходит для проектов, требующих большое количество различных конфигураций, таких как тестирование в разнообразных средах, платформозависимые сборки и т.д.



Folder

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

OK

Jenkins

devsecops_pipeline

Configure

Общие настройки

Triggers

Pipeline

Advanced

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script

Script ?

```
1 pipeline {
2   agent any
3
4   stages {
5     stage('Hello') {
6       steps {
7         echo 'Hello World'
8       }
9     }
10  }
11 }
12
```

Hello World

SaveПрименить

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script

Script ?

```
1 pipeline {  
2     agent any  
3     stages {  
4         stage('Build') {  
5             steps {  
6                 echo 'Building..'  
7             }  
8         }  
9         stage('Test') {  
10            steps {  
11                echo 'Testing..'  
12            }  
13        }  
14        stage('Deploy') {  
15            steps {
```

Hello World

✔️ #1 (24 мая 2026 г., 17:49:05)

📝 добавить описание

Хранить эту сборку вечно

it

mation

1'

ew

age

Создана пользователем [Admin](#)

Запущена 5.5 секунд назад

Заняло: 1.6 секунды



This run spent:

- 8 ms waiting;
- 1.6 секунды build duration;
- 1.6 секунды total from scheduled to completion.



Нет изменений.



Jenkins

/ devsecops_pipeline ▾ / #1 ▾

✓ Changes



Console Output



Edit Build Information



Delete build '#1'



Timings



Pipeline Overview



Restart from Stage



Replay



Pipeline Steps



Workspaces

Started by user [Admin](#)

[Pipeline] Start of Pipeline

[Pipeline] node

Running on [Jenkins](#) in /var/jenkins_home/workspace/devsecops_pipeline

[Pipeline] {

[Pipeline] stage

[Pipeline] { (Build)

[Pipeline] echo

Building..

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Test)

[Pipeline] echo

Testing..

[Pipeline] }

[Pipeline] // stage

[Pipeline] stage

[Pipeline] { (Deploy)

[Pipeline] echo

Deploying....

[Pipeline] }

[Pipeline] // stage

[Pipeline] }

[Pipeline] // node

[Pipeline] End of Pipeline

Finished: SUCCESS