

WCount (C++, Windows)

A simple, consistent output display, dialog utility

Display and format text, numbers, and user-defined types to message boxes,
Output to clipboard, memos, or strings using one readable << >> syntax .

```
WCount << "Pi = " << 3.14159 << PI << SHOW;  
WCount << LongMessage >> CLIPBOARD;
```

Quick Start

- Add `WCount.cpp` to your project.
- Include `WCount.h` in any file where you want to use it.
- That's it—no external libs or complex setup required.

Every number, text using <<


Every format, control using <<

Every output to Clipboard, Memo >>

Table of Contents

Message Display & Output (SHOW, Clipboard)	2
Message Formatting Text and Numbers	3
Simple Confirm Dialog	4
Custom Confirm Dialog	5
User Defined Type Display	6
Spaces in large blocks of text (touching text/data)	7

Message Display & Output (SHOW, Clipboard)

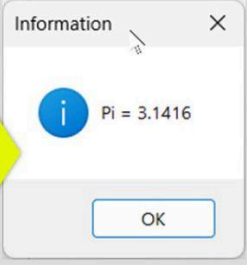Category	Function	Usage
String	Width	<pre>WCount << W-30</pre> <i>W-30 stays active until << W-OFF</i>
Float	Format	<pre>double PI = 3.1416 WCount << FF-7.2 << PI << SHOW;</pre> <i>FF 7.2 sets width=7 decimals=2 (0..9) until FF-OFF</i>
Message	Display	<pre>WCount << "Pi = " << 3.1416; WCount << SHOW; WCount << SHOW-Warning; WCount << SHOW-Error; WCount << SHOW-Info; WCount << SHOW-Confirm; WCount << SHOW-Question;</pre>  
Text	Retrieve	<pre>Memo->Lines->Add(WCount.get()); Memo->Lines->Add(WCount()); UnicodeString Text=WCount.get(); WCount >> Text;</pre>
	Clipboard	<pre>WCount >> CLIPBOARD;</pre>
Message	Confirm	<pre>bool isConfirm = WCount.DLGConfirm(L"Do you want ketchup with the fries");</pre> <i>returns true or false</i>
WCount	Status	<pre>WCount << STATUS-ON; WCount << STATUS-OFF; WCount << STATUS-RESET;</pre> <i>Status affects all output globally (handy debugging)</i> <i>STATUS-ON (Messages displayed)</i> <i>STATUS-OFF (Nothing displayed)</i> <i>STATUS-RESET (All settings default)</i>

Message Formatting Text and Numbers

Message

Format data

C++

```

void TForm2::SHOWMessage()
{
    double PI = 3.14159265;

    WCount << CLEAR;
    WCount << FF-10.4 << PI << EL //Float Format 10 wide 4 decimals
    << FF-4.3 << PI << EL
    << FF-12.1 << PI << EL
    << FF-OFF << PI << EL
    << SHOW;


    WCount << L"The following items are in your shopping cart" << EL


    << FF-2.2
    << L"=== RPAD-3   (3 Trailing spaces) ===" << EL
    << RPAD-3   //3 Trailing spaces after text;
    << L" Cauliflower " << 5.6987 << EL
    << L" BlueBerries " << 12.325 << EL
    << L" Greek Yogurt " << 12. << EL
    << L" Vega Protein Powder " << 65.92 << EL << EL
    << RPAD-OFF   //Turn Right Pad OFF
    << SHOW


    WCount << L"=== FF-NO turn off Floating point formatting ===" << EL
    << FF-OFF //Format Float Spaces OFF
    << RPAD-20 << L" PAD Cauliflower " << TAB << 5.6987 << EL
    << RPAD-OFF
    << L" BlueBerries " << TAB << 12.325 << EL
    << L" Greek Yogurt " << TAB << 12. << EL
    << L" Vega Protein Powder " << 65.92 << EL << EL
    << SHOW

    WCount << L"=== W-30 (String Width 30) FF-7.2 (Float 7 wide 2 dec.)
    ===" << EL
    << FF-7.2 //Floating Point Format 7 wide 2 decimals
    << L" W-30 impact more visible in FIXED PITCH FONT " << NL
    << W-30 //String Width = 30
    << L" ITEM " << L"THE Amount" << NL
    << L"===== " << L"===== " << NL
    << L"Cauliflower" << 5.6987 << NL
    << L" BlueBerries" << 12.325 << NL
    << L" Greek Yogurt" << 12. << NL
    << L" Vega Protein Powder" << 65.92 << EL
    >> CLIPBOARD;
        
```


WCount << SHOW;
 WCount >> CLIPBOARD;

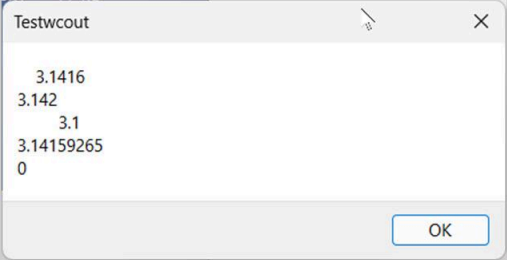

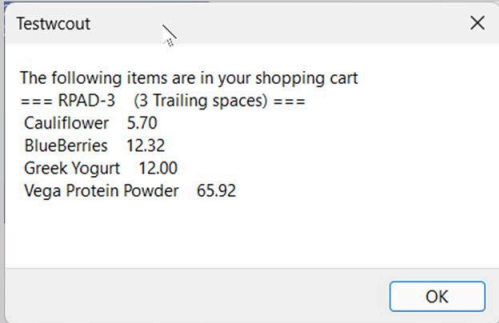

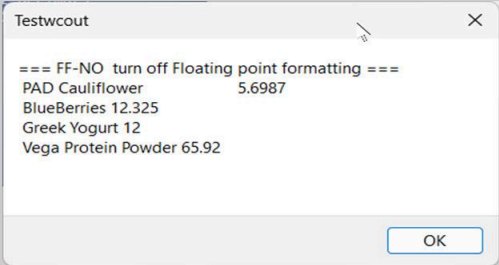

NOTEPAD | NOTEPAD++ | Courier Font
 These numbers would line up perfectly with a
 Fixed-Pitch font such as Courier

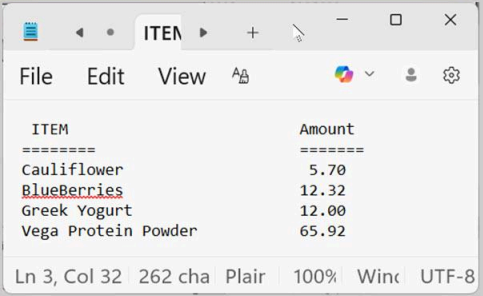

Simple Confirm Dialog

Category	Function	Usage
Message	Confirm (Simple)	<pre>bool isConfirm = Wcout.DLGConfirm(L"Do you want ketchup with the fries");</pre>


2 optional Parameters

```
bool isConfirm = Wcout.DLGConfirm(L"Do you want ketchup with the fries");
bool isConfirm = Wcout.DLGConfirm(L"Message"); [optional]
bool isConfirm = Wcout.DLGConfirm(L"Message", [L"TitleBar"]);
bool isConfirm = Wcout.DLGConfirm(L"Message", [btnYES_NO]); [optional]
bool isConfirm = Wcout.DLGConfirm(L"Message", [L"TitleBar"], [btnYES_NO]);
```

DEFAULT TitleBar="Confirm"
DEFAULT buttons=OK/Cancel


```
void __fastcall TForm2::btnTESTClick(TObject *Sender)
{
    bool isConfirm = Wcout.DLGConfirm(L"Do you want ketchup with the fries", btnYES_NO);
    .....
}
```

C++


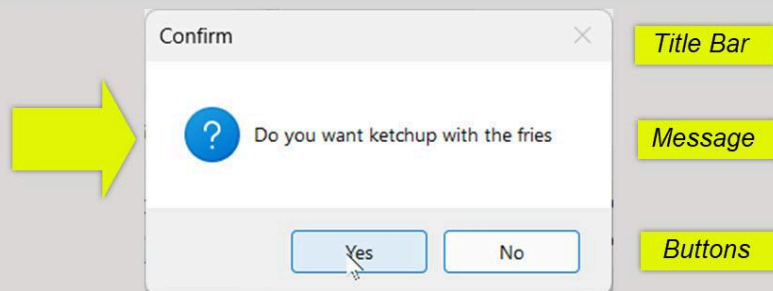


```
.....
Txt Msg = isConfirm ? L"Yes please" : L"NO thank you";
Wcout << Msg << SHOW-Confirm;
```

C++

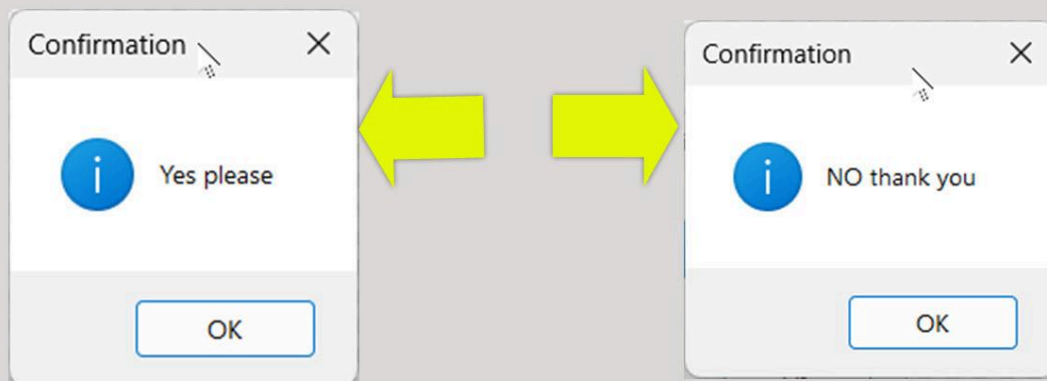

Custom Confirm Dialog

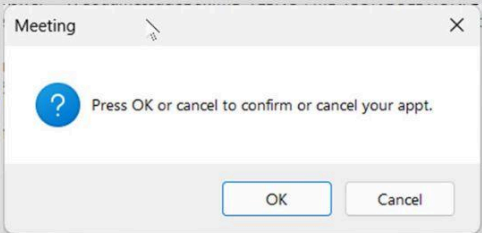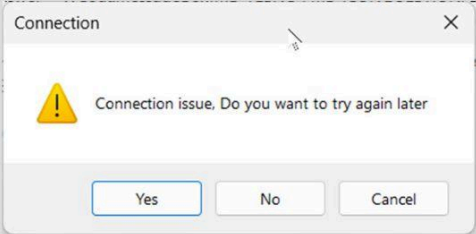Category	Function	Usage
Message	Confirm (Custom)	Interactive Dialog - Message, Title, Buttons Icon
<pre>userAnswer = WCount.MessageBox(L"Press OK or cancel to confirm or cancel your appt.", L"Meeting", MB_OKCANCEL MB_ICONQUESTION);</pre> Windows Parameter order (Calls MessageBoxW) ... OR ... <pre>userAnswer = WCount.MessageBox(MB_OKCANCEL, MB_ICONQUESTION, L"Meeting", L"Press Ok or Cancel to confirm your appt.");</pre> returns IDOK or IDCANCEL		
Message	Confirm (Custom)	- MB_ICONWARNING - MB_ICONERROR - MB_ICONINFORMATION - MB_ICONQUESTION
<pre>userAnswer = WCount.MessageBox(MB_ICONWARNING MB_YESNOCANCEL, // Icon to be displayed Buttons to be displayed L"Connection", L" Connection issue, Do you want to try again returns IDYES or IDNO or IDCANCEL</pre> <pre>switch(userAnswer) { case IDYES: MSG=L"Yes"; break; case IDNO: MSG=L"No"; break; case IDCANCEL: MSG=L"Cancel"; break; default: MSG=L"??"; } WCount << L"user picked " << MSG << SHOW;</pre>		 

User Defined Type Display

Category	Function	Usage
Type	USER Defined	

C++

```

struct Point2D {
    int x, y;
};

TWOut& operator<<(TWOut& wc, const Point2D& p) {
    wc << L"(x=" << p.x << L", " << L"y=" << p.y << L")";
    return wc;
} Specify how to display your type

void __fastcall TForm2::btnTESTMeClick(TObject *Sender)
{
    Point2D p1 {3, 5};
    Point2D p2 {10, 20};

    WOut << L"The Coordinates of the line are: " << FF-7.2 << EL
        << L"Start " << p1 << EL
        << L"End " << p2 << SHOW-Info;
} Simplified display

```

The advantage of operator << overloading is that you write this function once to display a type of your own -

You can then display your type like any other type (see simplified display)

Information

The Coordinates of the line are:
Start (x =3, y = 5)
End (x =10, y = 20)

OK

C++

```

class Complex {
public:
    Complex(int Real, int Imaginary) {
        this->Real = Real;
        this->Imaginary = Imaginary;
    }
    int Real;
    int Imaginary;
};

Any user type
(TWOut& << UserType) defined)

TWOut& operator<<(TWOut& wc, Complex C)
{
    wc << C.Real << L" + " << C.Imaginary << L"i";
    return wc;
}

void TForm2::ShowComlex() {
    Complex C {3, 4};
    WOut << L"Complex = " << C << SHOW;
} Simplified display

```

Testwcout

Complex = 3 + 4i

OK

Spaces in large blocks of text (touching text/data)

Text

SPACING

WCout << AUTOSPACE-ON;
Spacing will automatically be inserted between touching text\data

WCout

Use WCout Text Modes, Formats Show Message types

TWCout
☒ ON
☐ OFF

WCout << AUTOSPACE-OFF;
☒ OFF
☐ ON

☐ Set Width
30

Floating point
☐ Format
Width Decimals
7 2

Letter Formatting

Hello Michel Welcome to our forum Mr. Pinard.
It is a pleasure to have you join us Michel to discuss vintage stereo chat group

Note that the price of a90day subscription to manufacturer discounts will increase from6to about7.25per month
IN the 70s equipment designed by engineers and not bean counters we agree Michel Pinard that these were vastly superior to today's hardware.

WCout << L"Note that the price of a" << 90 << "day subscription to manufacturer discounts will increase from" << 6.00 << "to about" << 7.25 << "per month" << "IN the 70s equipment designed by engineers and not bean counters" << "we agree Michel Pinard that these were vastly superior to today's hardware." << EL << EL;
C++
AUTOSPACE-OFF
Spacing was not adjusted

Once again thank you for joining our forum Michel

WCout

Use WCout Text Modes, Formats Show Message types

TWCout
☒ ON
☐ OFF

AUTO Insert space
☐ OFF
☒ ON

☐ Set Width
30

Floating point
☐ Format
Width Decimals
7 2

Letter Formatting

Hello Michel Welcome to our forum Mr. Pinard.
It is a pleasure to have you join us Michel to discuss vintage stereo chat group

Note that the price of a 90 day subscription to manufacturer discounts will increase from 6 to about 7.25 per month
IN the 70s equipment designed by engineers and not bean counters we agree Michel Pinard that these were vastly superior to today's hardware.

WCout << L"Note that the price of a" << 90 << "day subscription to manufacturer discounts will increase from" << 6.00 << "to about" << 7.25 << "per month" << "IN the 70s equipment designed by engineers and not bean counters" << "we agree Michel Pinard that these were vastly superior to today's hardware." << EL << EL;
C++
AUTOSPACE-ON
Spacing was automatically inserted between touching text\data