

# Homework 3

---

Patrick Indri

May 14, 2019

## 1 INTRODUCTION

The aim of this assignment is to implement an array-based representation of a binary heap. An iterative version of the **Heapify** version should be implemented as well. The `code/` folder contains such implementation.

## COMPILE AND RUN

The `makefile` provided can be used to compile the code. Using `make` or `make all` the code gets compiled in a verbose version `main.x`, useful to test the implemented functions and see their output. Running `make benchmark` results in the compilation of `benchmark.x` which benchmarks the code and provides a cleaner output, ready to be plotted.


## 2 IMPLEMENTATION

The code implements all the basic functions to deal with heaps and revolves around the **Heapify** function, implemented as a recursive function. Functions get the root element, remove it and verify the heap property have been implemented as well. It should be noted that, as presented, the code implements a min-heap. **Update the code to deal with both.** The **BuildHeap** function takes a randomly ordered array and heapifies it. Its performance will be evaluated in the following section.

### 3 BENCHMARK

Running `benchmark.x` tests the performance (and the correct behaviour) of the `BuildHeap` and `RemoveMinimum` functions, timing their execution.

**Fig. 3.1**

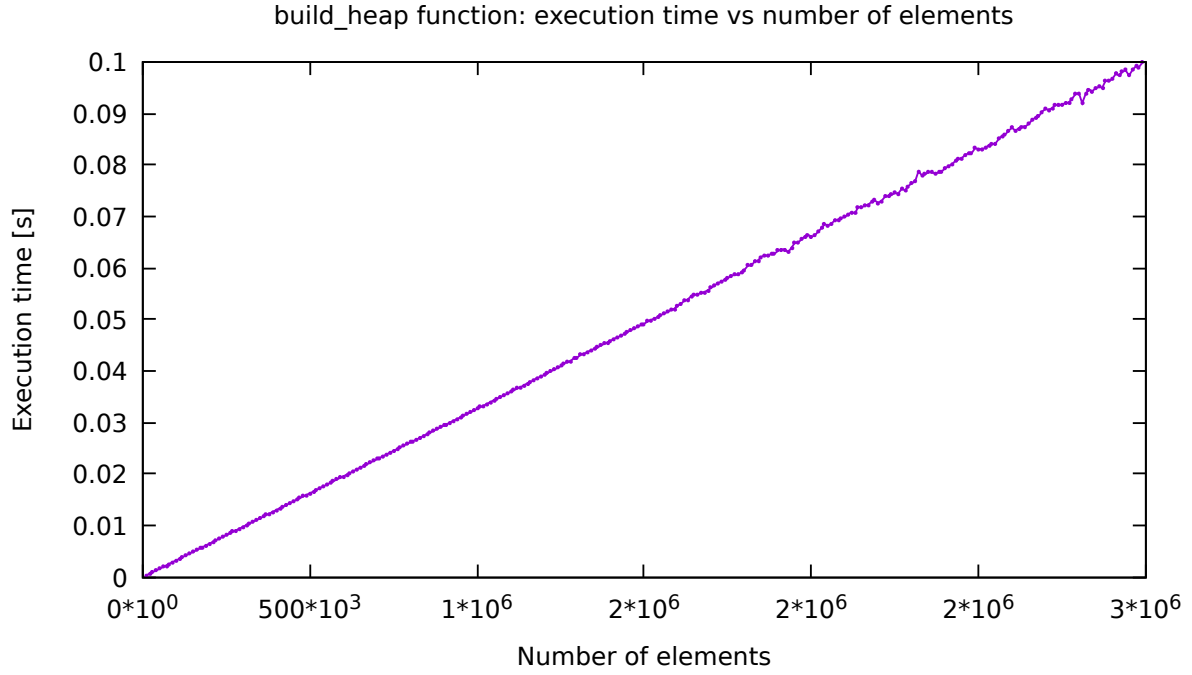

**Fig. 3.1** shows the results of the benchmark. As expected, the computational cost of the execution of the `BuildHeap` function is  $O(n)$ , where  $n$  is the number of nodes of the heap.