

Key concepts on Deep Neural Networks

Submit your assignment

DUE DATE Jan 11, 1:59 AM CST ATTEMPTS 1 every 8 hours

Try again

Receive grade

To PASS 80% or higher

Grade

100%

View Feedback

We keep your highest score



Congratulations! You passed!

To PASS 80% or higher

Keep Learning

GRADE

100%

Key concepts on Deep Neural Networks

LATEST SUBMISSION GRADE
100%

1. What is the "cache" used for in our implementation of forward propagation and backward propagation? 1 / 1 point
- ☒ We use it to pass variables computed during forward propagation to the corresponding backward propagation step. It contains useful values for backward propagation to compute derivatives.
 - ☐ We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.
 - ☐ It is used to cache the intermediate values of the cost function during training.
 - ☐ It is used to keep track of the hyperparameters that we are searching over, to speed up computation.

Correct
Correct, the "cache" records values from the forward propagation units and sends it to the backward propagation units because it is needed to compute the chain rule derivatives.

2. Among the following, which ones are "hyperparameters"? (Check all that apply.) 1 / 1 point

- ☒ learning rate α
- ☒ Correct
- ☐ weight matrices $W^{(l)}$
- ☒ number of layers L in the neural network

Correct

- ☐ bias vectors $b^{(l)}$
- ☒ size of the hidden layers $n^{(l)}$
- ☒ Correct
- ☐ activation values $a^{(l)}$
- ☒ number of iterations

Correct

3. Which of the following statements is true? 1 / 1 point
- ☒ The deeper layers of a neural network are typically computing more complex features of the input than the earlier layers.
 - ☐ The earlier layers of a neural network are typically computing more complex features of the input than the deeper layers.

Correct

4. Vectorization allows you to compute forward propagation in an L -layer neural network without an explicit for loop for any other explicit iterative loop over the layers $i=1, 2, \dots, L$. True/False? 1 / 1 point
- ☐ True
 - ☒ False

Correct
Forward propagation propagates the input through the layers, although for shallow networks we may just write all the lines $a^{(l)} = g^{(l)}(z^{(l)})$, $z^{(l)} = W^{(l)}a^{(l-1)} + b^{(l)}$. In a deeper network, we cannot avoid a for loop iterating over the layers: $a^{(l)} = g^{(l)}(z^{(l)})$, $z^{(l)} = W^{(l)}a^{(l-1)} + b^{(l)}$, ...

5. Assume we store the values for $a^{(l)}$ in an array called `layer_dims`, as follows: `layer_dims = [nin, 4, 3, 2, 1]`. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model? 1 / 1 point

- ☐

```
1 for i in range(1, len(layer_dims)/2):
2     parameter['w'] = str(i+1) = np.random.randn(layer_dims[i], layer_dims[i-1]) * 0.01
3     parameter['b'] = str(i+1) = np.random.randn(layer_dims[i], 1) * 0.01
```
- ☐


```
1 for i in range(1, len(layer_dims)/2):
2     parameter['w'] = str(i+1) = np.random.randn(layer_dims[i], layer_dims[i-1]) * 0.01
3     parameter['b'] = str(i+1) = np.random.randn(layer_dims[i-1], 1) * 0.01
```
- ☐

```
1 for i in range(1, len(layer_dims)):
2     parameter['w'] = str(i+1) = np.random.randn(layer_dims[i-1], layer_dims[i]) * 0.01
3     parameter['b'] = str(i+1) = np.random.randn(layer_dims[i], 1) * 0.01
```
- ☒

```
1 for i in range(1, len(layer_dims)):
2     parameter['w'] = str(i+1) = np.random.randn(layer_dims[i], layer_dims[i-1]) * 0.01
3     parameter['b'] = str(i+1) = np.random.randn(layer_dims[i-1], 1) * 0.01
```

Correct

6. Consider the following neural network. 1 / 1 point

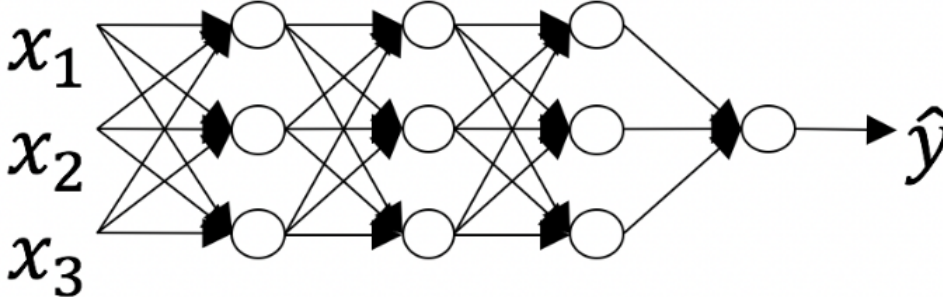

How many layers does this network have?

- ☒ The number of layers L is 4. The number of hidden layers is 3.
- ☐ The number of layers L is 3. The number of hidden layers is 3.
- ☐ The number of layers L is 4. The number of hidden layers is 4.
- ☐ The number of layers L is 5. The number of hidden layers is 4.

Correct
Yes. As seen in lecture, the number of layers is counted as the number of hidden layers + 1. The input and output layers are not counted as hidden layers.


7. During forward propagation, in the forward function for a layer l you need to know what is the activation function in a layer (Sigmoid, tanh, ReLU, etc.). During backpropagation, the corresponding backward function also needs to know what is the activation function for layer l , since the gradient depends on it. True/False? 1 / 1 point
- ☒ True
 - ☐ False

Correct
Yes, as you've seen in the week 3 each activation has a different derivative. Thus, during backpropagation you need to know which activation was used in the forward propagation to be able to compute the correct derivative.

8. There are certain functions with the following properties: 1 / 1 point
- (i) To compute the function using a shallow network circuit, you will need a large network (where we measure size by the number of logic gates in the network), but (ii) To compute it using a deep network circuit, you need only an exponentially smaller network. True/False?
- ☒ True
 - ☐ False

Correct

9. Consider the following 2 hidden layer neural network: 1 / 1 point

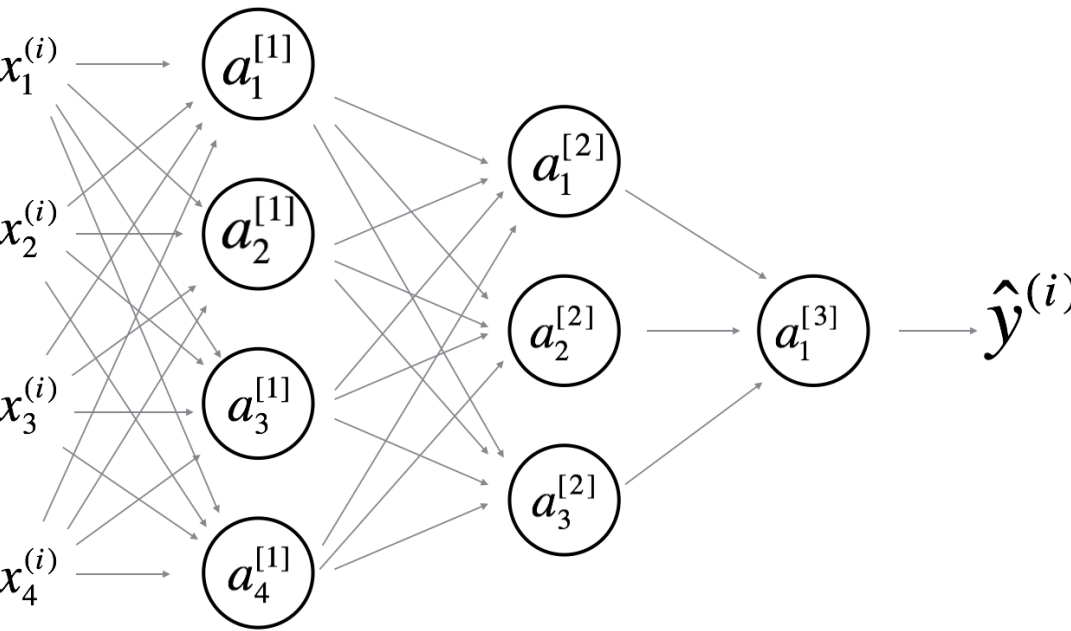

Which of the following statements are True? (Check all that apply.)

☒ $W^{(2)}$ will have shape (4, 4)

Correct
Yes. More generally, the shape of $W^{(l)}$ is $(n^{(l)}, n^{(l-1)})$.

☒ $b^{(1)}$ will have shape (4, 1)

Correct
Yes. More generally, the shape of $b^{(l)}$ is $(n^{(l)}, 1)$.

☐ $W^{(1)}$ will have shape (3, 4)

☐ $b^{(1)}$ will have shape (3, 1)

☒ $W^{(2)}$ will have shape (3, 4)

Correct
Yes. More generally, the shape of $W^{(l)}$ is $(n^{(l)}, n^{(l-1)})$.

☐ $b^{(2)}$ will have shape (1, 1)

☐ $W^{(2)}$ will have shape (3, 1)

☒ $b^{(2)}$ will have shape (3, 1)

Correct
Yes. More generally, the shape of $b^{(l)}$ is $(n^{(l)}, 1)$.

☐ $W^{(2)}$ will have shape (3, 1)

☒ $b^{(2)}$ will have shape (1, 1)

Correct
Yes. More generally, the shape of $b^{(l)}$ is $(n^{(l)}, 1)$.

☒ $W^{(1)}$ will have shape (1, 3)

Correct
Yes. More generally, the shape of $W^{(l)}$ is $(n^{(l)}, n^{(l-1)})$.

☐ $b^{(1)}$ will have shape (3, 1)

10. Whereas the previous question used a specific network, in the general case what is the dimension of $W^{(l)}$, the weight matrix associated with layer l ? 1 / 1 point

- ☒ $W^{(l)}$ has shape $(n^{(l)}, n^{(l-1)})$
- ☐ $W^{(l)}$ has shape $(n^{(l-1)}, n^{(l)})$
- ☐ $W^{(l)}$ has shape $(n^{(l-1)}, n^{(l)})$
- ☐ $W^{(l)}$ has shape $(n^{(l)}, n^{(l+1)})$

Correct
True