

```
In [12]: %pylab inline
import sys
import numpy as np
import matplotlib.pyplot as plt
import scipy.io as sio
from scipy import stats

import mne
from mne.decoding import GeneralizationAcrossTime

sys.path.append('/neurospin/meg/meg_tmp/Calculation_Pedro_2014/scripts/decoding')

#from jr.plot import pretty_gat, pretty_decod
from jr.tweaked_plot import pretty_gat, pretty_decod

Populating the interactive namespace from numpy and matplotlib

WARNING: pylab import has clobbered these variables: ['diagonal', 'cond']
`%matplotlib` prevents importing * from pylab and numpy
```

```
In [13]: #Paths
from calc_decoding_cfg import (data_path, result_path)
result_path = result_path + '/individual_results/'
figures_path = result_path + '/group_results/figures/'
group_result_path = result_path + '/group_results/'

#List of parameters
subjects = ['s01', 's02', 's03', 's04', 's05', 's06', 's07', 's08', 's09', 's10',
            's11', 's12', 's13', 's14', 's15', 's16', 's17', 's18', 's19', 's21', 's22']
subjects = ['s01', 's02', 's04', 's05', 's06', 's07', 's08', 's09', 's10',
            's11', 's12', 's14', 's15', 's16', 's17', 's18', 's19', 's21', 's22']

#subjects = ['s02', 's03', 's04', 's05', 's06', 's07', 's08', 's09',
            #'s11', 's12', 's13', 's14', 's15', 's16', 's17', 's18', 's19', 's21', 's22']

#subjects = ['s01', 's02', 's04', 's05', 's06', 's08', 's09', 's10',
            #'s11', 's12', 's13', 's14', 's15', 's16', 's17', 's18', 's19', 's21', 's22']

#subjects = ['s01', 's02']

conditions = [['cbhides', 'cbhides']]
```

```
In [21]: #Combine results from all conditions
all_scores = []
all_diagonals = []

for c, cond in enumerate(conditions):
    for s, subject in enumerate(subjects):
        fname = result_path + subject + '_' + cond[0] + '_' + cond[1] + '_results.mat'
        results = np.load(fname)
        #Convert to list
        results = results.tolist()
        all_scores.append(results['score'])
        all_diagonals.append(results['diagonal'])
score = results['score']
diagonal = results['diagonal']
time_calc = results['times_calc']
params = results['params']
all_scores = np.array(all_scores) #shape: subjects*n_cond, training_times, test_times
all_diagonals = np.array(all_diagonals)
```

```
In [22]: #Average data
#Reshape
all_scores = np.reshape(all_scores, (len(conditions), len(subjects), score.shape[2]))
all_diagonals = np.reshape(all_diagonals, (len(conditions), len(subjects), all_diagonals.shape[2]))

group_scores = np.zeros((len(conditions), all_scores.shape[2], all_scores.shape[3]))
sem_group_scores = np.zeros((len(conditions), all_scores.shape[2], all_scores.shape[3]))
group_diagonal = np.zeros((len(conditions), all_diagonals.shape[2]))
sem_group_diagonal = np.zeros((len(conditions), all_diagonals.shape[2]))

for c, cond in enumerate(conditions):
    group_scores[c, :, :] = np.mean(all_scores[c, :, :, :], 0)
    sem_group_scores[c, :, :] = stats.sem(all_scores[c, :, :, :], 0)

    group_diagonal[c, :] = np.mean(all_diagonals[c, :, :], 0)
    sem_group_diagonal[c, :] = stats.sem(all_diagonals[c, :, :], 0)
```

```
In [23]: %pylab inline
# Plot individual data
for c, cond in enumerate(conditions):
    for s, subject in enumerate(subjects):
        print(cond)
        print(subject)
        pretty_gat(all_scores[c, s, :, :], chance=.0)

plt.show()
```


Populating the interactive namespace from numpy and matplotlib

['opbigdec', 'opbigdec']

s01


WARNING: pylab import has clobbered these variables: ['diagonal', 'cond']

`%matplotlib` prevents importing * from pylab and numpy

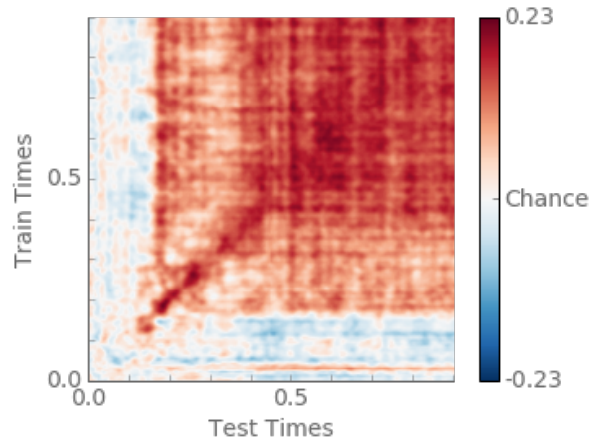


['opbigdec', 'opbigdec']

s02

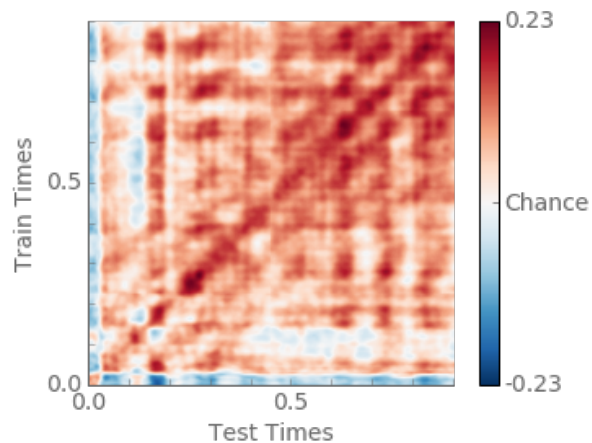

['opbigdec', 'opbigdec']

s04

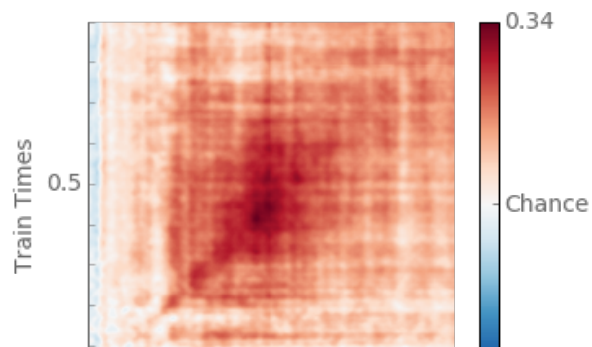


```
In [ ]: data1 = group_scores[0, :, :]
```

```
In [ ]: times_calc
```

```
In [ ]: times_calc = np.arange(1.2,3.2004,0.004)
```


```
In [24]: #pretty_gat(group_scores[c, :, :], chance=.5, times=times_calc, smoothWindow=10)
pretty_gat(group_scores[c, :, :], chance=.0, smoothWindow=5)
ax = plt.gca()
```

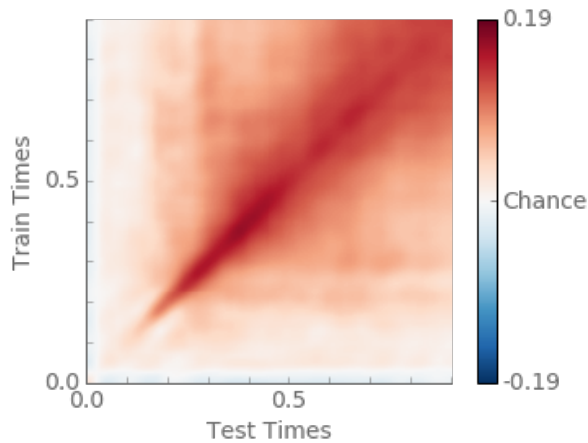

```
In [ ]: ax.axhline(.1, color='k',linestyle='dashed')
ax.axhline(.3, color='k',linestyle='dotted')
ax.axhline(.75, color='k',linestyle='dashed')
ax.axhline(.8, color='k',linestyle='dotted')
ax.axhline(.85, color='k',linestyle='dashed')
ax.axhline(1.016, color='k',linestyle='dotted')


ax.axvline(.1, color='k',linestyle='dashed')
ax.axvline(.5, color='k',linestyle='dotted')
ax.axvline(.9, color='k',linestyle='dashed')
ax.axvline(1.3, color='k',linestyle='dotted')
ax.axvline(1.7, color='k',linestyle='dashed')
ax.axvline(2.1, color='k',linestyle='dotted')
```

```
In [25]: pretty_decod(all_diagonals[c, :, :], chance=.0, alpha=4, smoothWindow=5, color=
#pretty_decod(all_diagonals[c, :, :], chance=.5, alpha=4, smoothWindow=10, colo
fig = matplotlib.pyplot.gcf()
#fig.set_size_inches(18.5, 10.5)
```

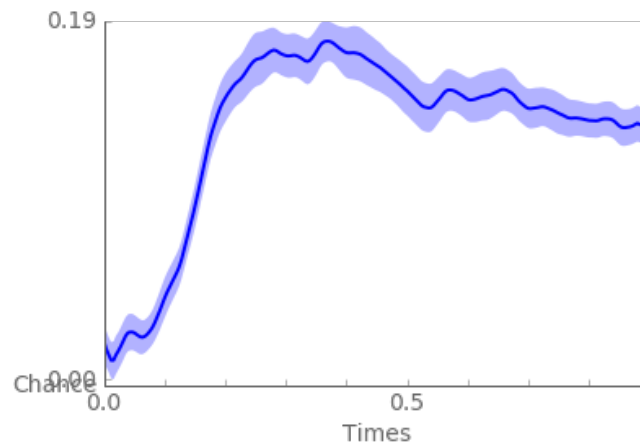


```
In [109]: pretty_gat(group_scores[c, :, :], chance=.25, smoothWindow=10)
```

```
Out[109]: <matplotlib.axes._subplots.AxesSubplot at 0x7f4695f9c910>
```

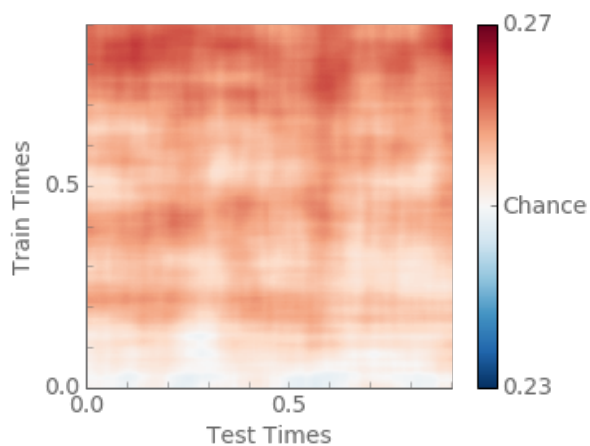

```
In [103]: pretty_decod(all_diagonals[c, :, :], chance=.25, alpha=4, smoothWindow=10, colo
```

```
Out[103]: <matplotlib.axes._subplots.AxesSubplot at 0x7f46962dc050>
```

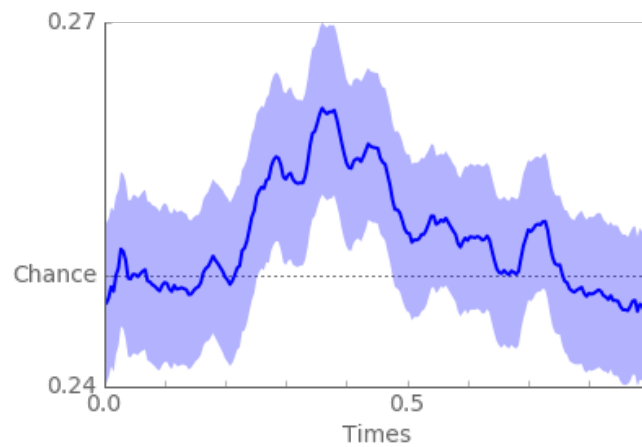

```
In [ ]: time_calc = arange(-0.1, 0.8, 0.012)
```

```
In [ ]: group_scores_shape[2]
```

```
In [ ]: times_calc_shape[0]
```

```
In [ ]:
```