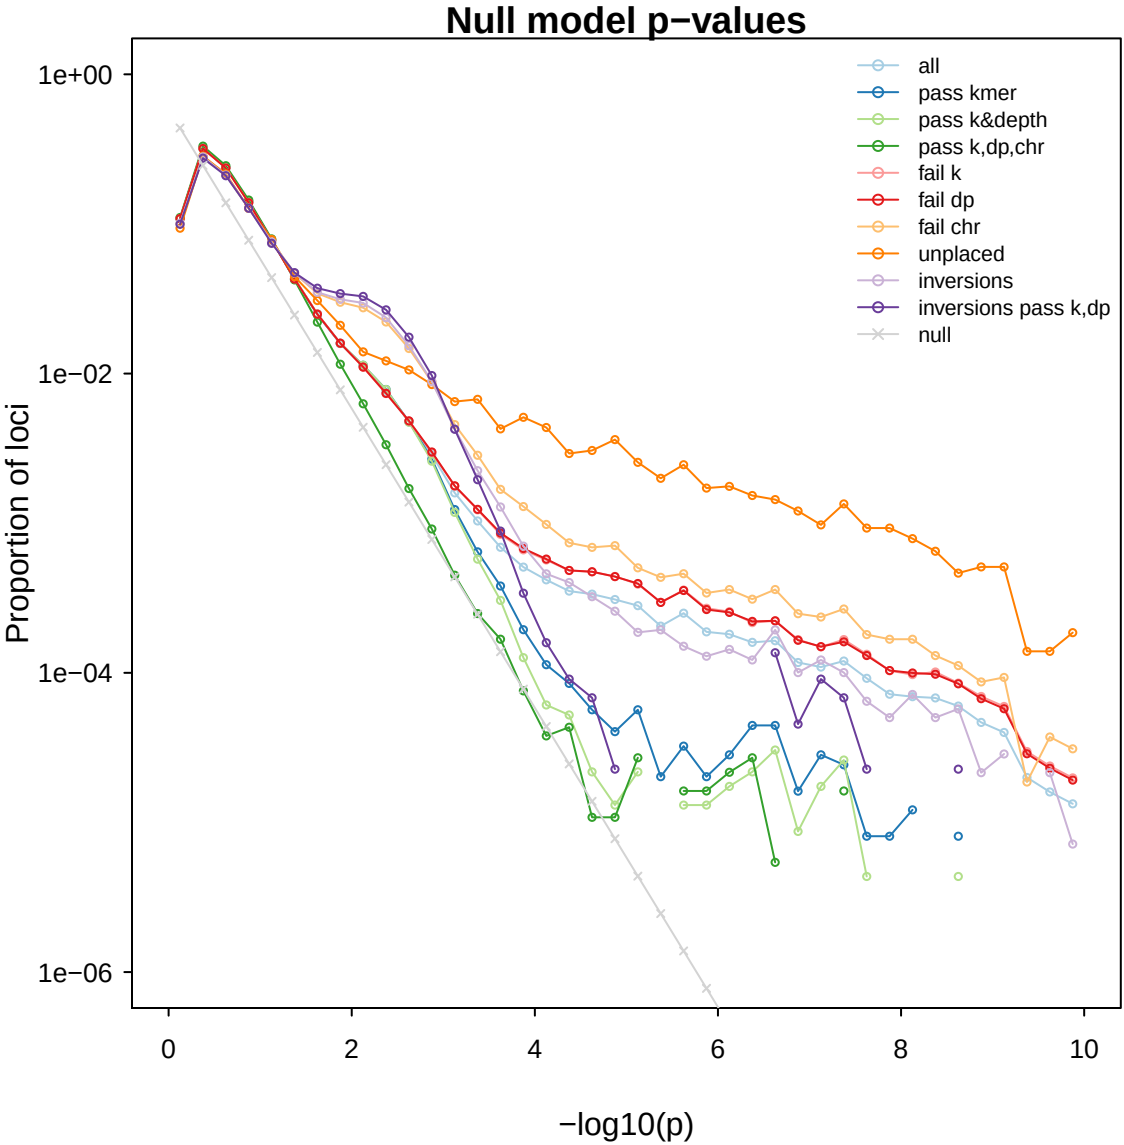
Null model p−values
1e+00
1e−02
1e−04
1e−06
Proportion of loci
0
2
4
6
8
10
−log10(p)
all
pass kmer
pass k&depth
pass k,dp,chr
fail k
fail dp
fail chr
unplaced
inversions
inversions pass k,dp
null