COMPUTER ENGINEERING

QUEZON CITY

COURSE CODE/TITLE:	CPE 212	**SECTION:**	CPE31S3
DATE PERFORMED:	09/24/2026	**DATE SUBMITTED:**	09/24/2026
NAME:	Pios, Joshua Paul B.	**INSTRUCTOR:**	Engr. Jimlord Quejado

Exam	**Midterm Skills Exam**

1. PROCEDURE OUTPUT

1. Create a playbook that installs Prometheus in both Ubuntu and CentOS. Apply the concept of creating roles.
2. Describe how you did step 1. (Provide screenshots and explanations in your report. Make your report detailed such that it will look like a manual.)
3. Show an output of the installed Prometheus for both Ubuntu and CentOS.
4. Make sure to create a new repository in GitHub for this activity.

Task 1: Prepare the Server

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible-inventory
-i inventory.yaml --graph
@all:
  |--@ungrouped:
  |--@web_servers:
  |  |--server1
  |  |--server3
  |--@db_servers:
  |  |--server2
  |--@file_servers:
  |  |--server3
  |--@workstations:
  |  |--server1
  |--@ubuntu_servers:
  |  |--server1
  |  |--server2
  |--@centos_servers:
  |  |--server3
```

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inv
entory.yaml -m ping
[WARNING]: Platform linux on host server2 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.10"
    },
    "changed": false,
    "ping": "pong"
}
[WARNING]: Platform linux on host server1 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.10"
    },
    "changed": false,
```

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inv
entory.yaml -m setup -a "filter=ansible_distribution"
[WARNING]: Platform linux on host server2 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | SUCCESS => {
    "ansible_facts": {
        "ansible_distribution": "Ubuntu",
        "discovered_interpreter_python": "/usr/bin/python3.10"
    },
    "changed": false
}
[WARNING]: Platform linux on host server1 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | SUCCESS => {
    "ansible_facts": {
        "ansible_distribution": "Ubuntu",
        "discovered_interpreter_python": "/usr/bin/python3.10"
    },
```

Task 2: Create the Prometheus User

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inv
entory.yaml -m command -a "id prometheus"
[WARNING]: Platform linux on host server2 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=1 >>
id: ‘prometheus’: no such usernon-zero return code
[WARNING]: Platform linux on host server1 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
uid=1002(prometheus) gid=1002(prometheus) groups=1002(prometheus)
[WARNING]: Platform linux on host server3 is using the discovered Python
interpreter at /usr/bin/python3.12, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | CHANGED | rc=0 >>
uid=980(prometheus) gid=1002(prometheus) groups=1002(prometheus)
```

Task 3: Create Prometheus Directories

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inv
entory.yaml -m shell -a "ls -ld /etc/prometheus /var/lib/prometheus" --become --
ask-become-pass
BECOME password:
[WARNING]: Platform linux on host server1 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
drwxr-xr-x 2 prometheus prometheus 4096 Sep 22 23:38 /etc/prometheus
drwxr-xr-x 5 prometheus prometheus 4096 Sep 24 09:42 /var/lib/prometheus
[WARNING]: Platform linux on host server2 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=2 >>
ls: cannot access '/etc/prometheus': No such file or directory
ls: cannot access '/var/lib/prometheus': No such file or directorynon-zero retur
n code
[WARNING]: Platform linux on host server3 is using the discovered Python
interpreter at /usr/bin/python3.12, but future installation of another Python
interpreter could change the meaning of that path. See
```

```
[WARNING]: Platform linux on host server3 is using the discovered Python
interpreter at /usr/bin/python3.12, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | CHANGED | rc=0 >>
drwxr-xr-x. 2 prometheus prometheus 6 Sep 24 09:35 /etc/prometheus
drwxr-xr-x. 2 prometheus prometheus 6 Sep 24 09:35 /var/lib/prometheus
```

Task 4: Download Prometheus

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inv
entory.yaml -m shell -a "ls -lh /tmp/prometheus-*.tar.gz"
[WARNING]: Platform linux on host server2 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=2 >>
ls: cannot access '/tmp/prometheus-*.tar.gz': No such file or directorynon-zero
return code
[WARNING]: Platform linux on host server1 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | FAILED | rc=2 >>
ls: cannot access '/tmp/prometheus-*.tar.gz': No such file or directorynon-zero
return code
[WARNING]: Platform linux on host server3 is using the discovered Python
interpreter at /usr/bin/python3.12, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | CHANGED | rc=0 >>
```

```
[WARNING]: Platform linux on host server3 is using the discovered Python
interpreter at /usr/bin/python3.12, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | CHANGED | rc=0 >>
-rw-r--r--. 1 root root 100M Sep 24 09:37 /tmp/prometheus-3.13.3.linux-amd64.tar
.gz
```

Task 5: Install the Prometheus Binaries

```
(base) jbbpios@workstation:~/Desktop/CPE212_Plos/ansible-lab$ ansible all -i inventory.yaml -m shell
-a "/usr/local/bin/prometheus --version && /usr/local/bin/promtool --version"
[WARNING]: Platform linux on host server2 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=127 >>
/bin/sh: 1: /usr/local/bin/prometheus: not foundnon-zero return code
[WARNING]: Platform linux on host server1 is using the discovered Python
interpreter at /usr/bin/python3.10, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
prometheus, version 3.14.0 (branch: HEAD, revision: d7598b7141418fa35be2b5ec5d0fefb634199610)
  build user:       root@f423027f4410
  build date:       20260817-16:49:19
  go version:       go1.26.6
  platform:         linux/amd64
  tags:             netgo,builtinassets
promtool, version 3.14.0 (branch: HEAD, revision: d7598b7141418fa35be2b5ec5d0fefb634199610)
  build user:       root@f423027f4410
  build date:       20260817-16:49:19
  go version:       go1.26.6
  platform:         linux/amd64
  tags:             netgo,builtinassets
[WARNING]: Platform linux on host server3 is using the discovered Python
interpreter at /usr/bin/python3.12, but future installation of another Python
interpreter could change the meaning of that path. See
https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=127 >>
/bin/sh: line 1: /usr/local/bin/prometheus: No such file or directorynon-zero return code
```

Task 6: Install the Prometheus Configuration Files

```
(base) jbbpios@workstation:~/Desktop/CPE212_Plos/ansible-lab$ ansible all -i inventory.yaml -m shell
-a "cat /etc/prometheus/prometheus.yml"
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
# my global config
global:
  scrape_interval: 15s # Set the scrape interval to every 15 seconds. Default is every 1 minute.
  evaluation_interval: 15s # Evaluate rules every 15 seconds. The default is every 1 minute.
  # scrape_timeout is set to the global default (10s).

# Alertmanager configuration
alerting:
  alertmanagers:
    - static_configs:
        - targets:
          # - alertmanager:9093

# Load rules once and periodically evaluate them according to the global 'evaluation_interval'.
rule_files:
  # - "first_rules.yml"
  # - "second_rules.yml"

# A scrape configuration containing exactly one endpoint to scrape:
# Here it's Prometheus itself.
scrape_configs:
  # The job name is added as a label `job=<job_name>` to any timeseries scraped from this config.
  - job_name: "prometheus"

    # metrics_path defaults to '/metrics'
    # scheme defaults to 'http'.
```

```
         # - alertmanager:9093

# Load rules once and periodically evaluate them according to the global 'evaluation_interval'.
rule_files:
  # - "first_rules.yml"
  # - "second_rules.yml"

# A scrape configuration containing exactly one endpoint to scrape:
# Here it's Prometheus itself.
scrape_configs:
  # The job name is added as a label `job=<job_name>` to any timeseries scraped from this config.
  - job_name: "prometheus"

    # metrics_path defaults to '/metrics'
    # scheme defaults to 'http'.

    static_configs:
      - targets: ["localhost:9090"]
       # The label name is added as a label `label_name=<label_value>` to any timeseries scraped from
 this config.
        labels:
          app: "prometheus"
    scrape_native_histograms: true
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=1 >>
cat: /etc/prometheus/prometheus.yml: No such file or directorynon-zero return code
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=1 >>
cat: /etc/prometheus/prometheus.yml: No such file or directorynon-zero return code
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$
```

Task 7: Validate the Configuration

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inventory.yaml -m comman
d -a "/usr/local/bin/promtool check config /etc/prometheus/prometheus.yml"
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=2 >>
[Errno 2] No such file or directory: b'/usr/local/bin/promtool'
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
Checking /etc/prometheus/prometheus.yml
 SUCCESS: /etc/prometheus/prometheus.yml is valid prometheus config file syntax
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=2 >>
[Errno 2] No such file or directory: b'/usr/local/bin/promtool'
```

Task 8: Create the systemd Service

```
-a "cat /etc/systemd/system/prometheus.service" --become --ask-become-pass
BECOME password:
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
[Unit]
Description=Prometheus Monitoring
Wants=network-online.target
After=network-online.target

[Service]
User=prometheus
Group=prometheus
Type=simple
ExecStart=/usr/local/bin/prometheus \
    --config.file=/etc/prometheus/prometheus.yml \
    --storage.tsdb.path=/var/lib/prometheus
Restart=on-failure

[Install]
WantedBy=multi-user.target
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=1 >>
cat: /etc/systemd/system/prometheus.service: No such file or directorynon-zero return code
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=1 >>
cat: /etc/systemd/system/prometheus.service: No such file or directorynon-zero return code
```

Task 9: Start and Enable Prometheus

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inventory.yaml -m comman
d -a "systemctl is-active prometheus" --become --ask-become-pass
BECOME password:
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
active
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=3 >>
inactivenon-zero return code
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=4 >>
inactivenon-zero return code
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$
```

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inventory.yaml -m comman
d -a "systemctl is-enabled prometheus" --become --ask-become-pass
BECOME password:
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
enabled
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=1 >>
Failed to get unit file state for prometheus.service: No such file or directorynon-zero return code
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=4 >>
not-foundnon-zero return code
```

Task 10: Verify Prometheus


```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inventory.yaml -m shell
-a "systemctl status prometheus --no-pager" --become --ask-become-pass
BECOME password:
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
● prometheus.service - Prometheus Monitoring
     Loaded: loaded (/etc/systemd/system/prometheus.service; enabled; vendor preset: enabled)
     Active: active (running) since Thu 2026-09-24 09:42:11 PST; 33min ago
   Main PID: 909 (prometheus)
      Tasks: 8 (limit: 4598)
     Memory: 98.1M
        CPU: 45.053s
     CGroup: /system.slice/prometheus.service
             └─909 /usr/local/bin/prometheus --config.file=/etc/prometheus/prometheus.yml --storage.t
sdb.path=/var/lib/prometheus


Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.273+08:00 level=INFO source=main.go
:1492 msg="TSDB started"
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.273+08:00 level=INFO source=main.go
:1690 msg="Loading configuration file" filename=/etc/prometheus/prometheus.yml
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.274+08:00 level=INFO source=main.go
:1106 msg="TSDB retention updated" duration=15d size=0B percentage=0
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.275+08:00 level=INFO source=main.go
:1729 msg="Completed loading of configuration file" db_storage=194.412µs remote_storage=1.541µs web_h
andler=457ns query_engine=1.379µs scrape=625.328µs scrape_sd=18.324µs notify=63.902µs notify_sd=6.922
µs rules=1.28µs tracing=2.447µs filename=/etc/prometheus/prometheus.yml totalDuration=1.310781ms
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.275+08:00 level=INFO source=main.go
:1453 msg="Server is ready to receive web requests."
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.276+08:00 level=INFO source=manager
.go:211 msg="Starting rule manager..." component="rule manager"
Sep 24 09:42:21 server1 prometheus[909]: time=2026-09-24T09:42:21.494+08:00 level=INFO source=compact
.go:689 msg="write block started" component=tsdb mint=1790091591447 maxt=1790092800000 ulid=01M38H7XH
PXM1KMADSKDQ7BJ8P
```


```
:1492 msg="TSDB started"
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.273+08:00 level=INFO source=main.go
:1690 msg="Loading configuration file" filename=/etc/prometheus/prometheus.yml
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.274+08:00 level=INFO source=main.go
:1106 msg="TSDB retention updated" duration=15d size=0B percentage=0
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.275+08:00 level=INFO source=main.go
:1729 msg="Completed loading of configuration file" db_storage=194.412µs remote_storage=1.541µs web_h
andler=457ns query_engine=1.379µs scrape=625.328µs scrape_sd=18.324µs notify=63.902µs notify_sd=6.922
µs rules=1.28µs tracing=2.447µs filename=/etc/prometheus/prometheus.yml totalDuration=1.310781ms
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.275+08:00 level=INFO source=main.go
:1453 msg="Server is ready to receive web requests."
Sep 24 09:42:13 server1 prometheus[909]: time=2026-09-24T09:42:13.276+08:00 level=INFO source=manager
.go:211 msg="Starting rule manager..." component="rule manager"
Sep 24 09:42:21 server1 prometheus[909]: time=2026-09-24T09:42:21.494+08:00 level=INFO source=compact
.go:689 msg="write block started" component=tsdb mint=1790091591447 maxt=1790092800000 ulid=01M38H7XH
PXM1KMADSKDQ7BJ8P
Sep 24 09:42:21 server1 prometheus[909]: time=2026-09-24T09:42:21.593+08:00 level=INFO source=compact
.go:729 msg="write block completed" component=tsdb mint=1790091591447 maxt=1790092800000 ulid=01M38H7
XHPXM1KMADSKDQ7BJ8P duration=99.155469ms ooo=false
Sep 24 09:42:21 server1 prometheus[909]: time=2026-09-24T09:42:21.594+08:00 level=INFO source=head.go
:1623 msg="Head GC started" component=tsdb caller=truncateMemory
Sep 24 09:42:21 server1 prometheus[909]: time=2026-09-24T09:42:21.595+08:00 level=INFO source=head.go
:1627 msg="Head GC completed" component=tsdb caller=truncateMemory duration=1.188487ms
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=4 >>
Unit prometheus.service could not be found.non-zero return code
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | FAILED | rc=4 >>
Unit prometheus.service could not be found.non-zero return code
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$
```

```
(base) jbbpios@workstation:~/Desktop/CPE212_Pios/ansible-lab$ ansible all -i inventory.yaml -m shell
-a "ss -tulpn | grep 9090"
[WARNING]: Platform linux on host server1 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server1 | CHANGED | rc=0 >>
tcp   LISTEN 0      4096               *:9090             *:*
[WARNING]: Platform linux on host server2 is using the discovered Python interpreter at
/usr/bin/python3.10, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server2 | FAILED | rc=1 >>
non-zero return code
[WARNING]: Platform linux on host server3 is using the discovered Python interpreter at
/usr/bin/python3.12, but future installation of another Python interpreter could change the meaning
of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
server3 | CHANGED | rc=0 >>
tcp   LISTEN 0      4096               *:9090             *:*
```

Task 11: Access Prometheus Through a Browser

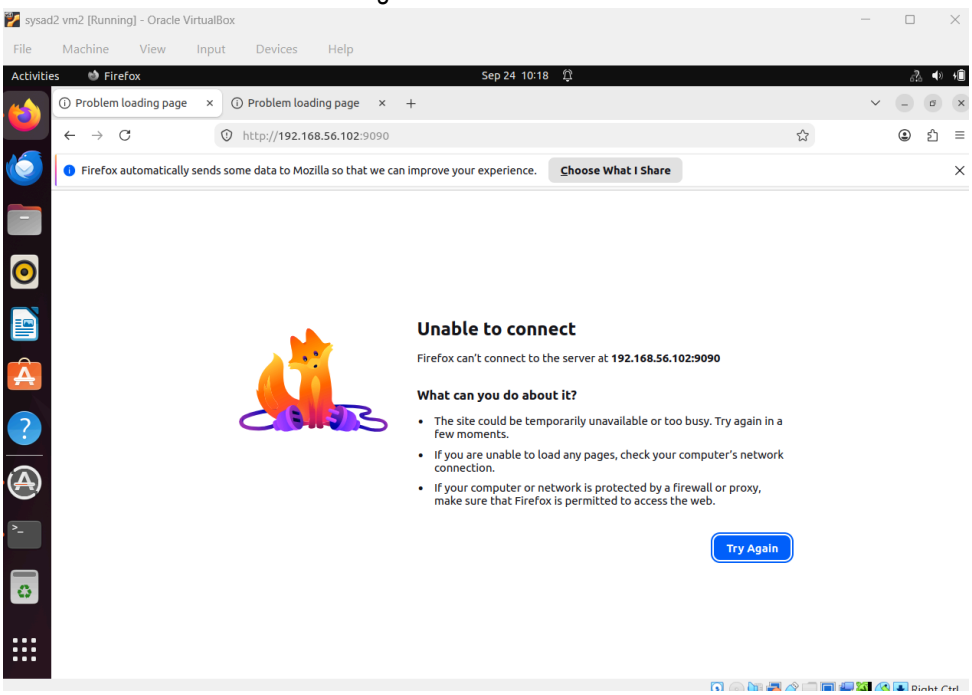

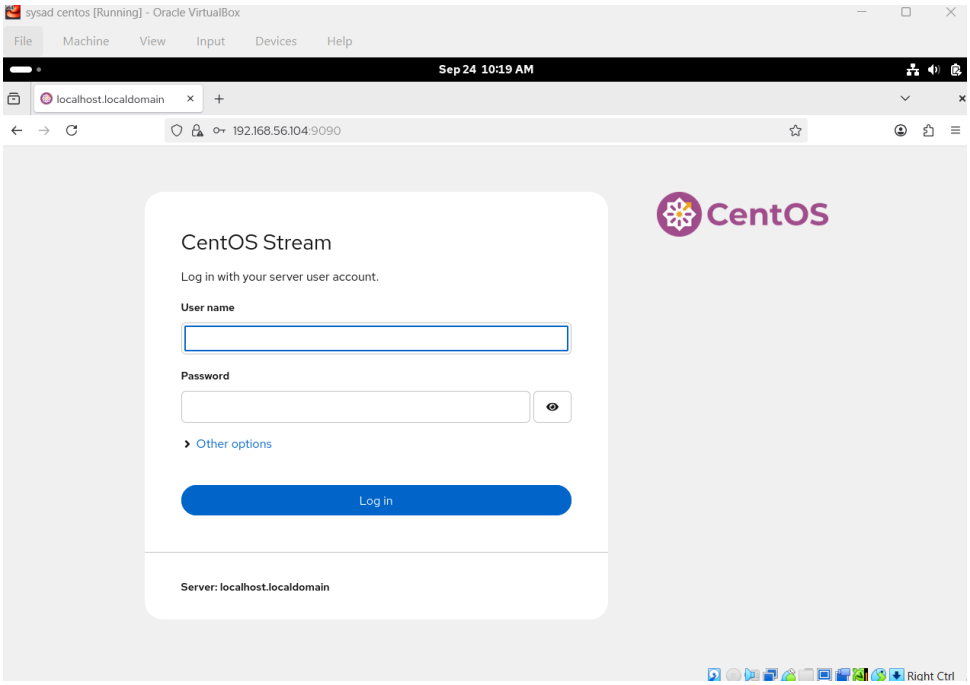

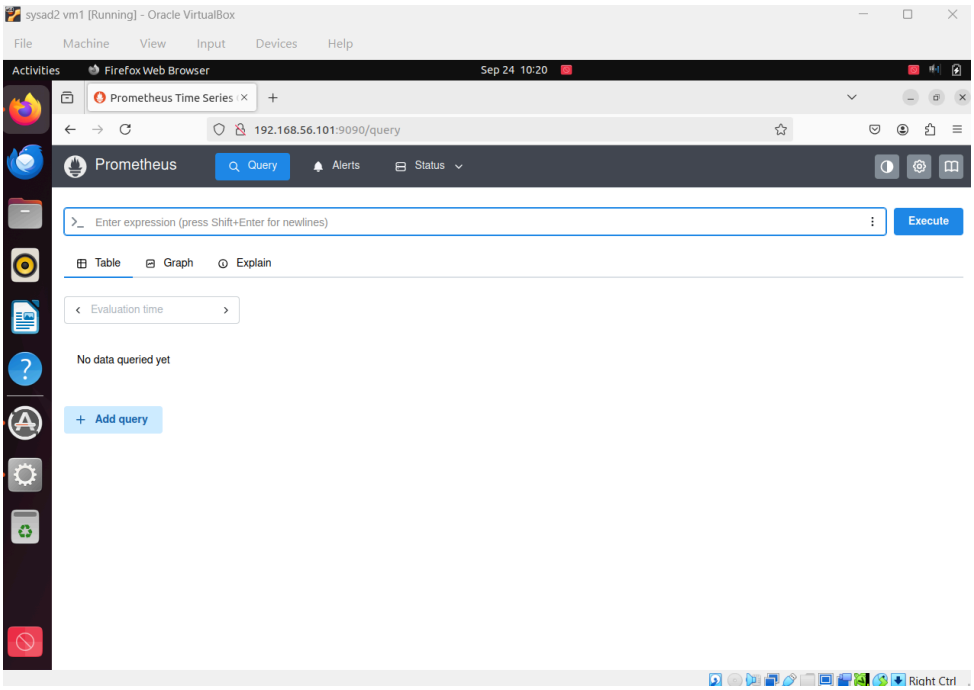

2. ANSWERS TO SUPPLEMENTAL ACTIVITY

3. ARTIFICIAL INTELLIGENCE (AI) USE DISCLOSURE STATEMENT

I hereby declare that artificial intelligence (AI) tools were used, if applicable, in the preparation of this academic

work. The following indicates the nature and extent of AI assistance:

Tools Used: N/A

Examples: ChatGPT, Microsoft Copilot, Grammarly, QuillBot, etc.

Purpose of Use: N/A

Examples: grammar correction, idea generation, formatting, summarization, code assistance, explanation of concepts, etc.

Extent of Use: N/A

Explain how AI was used and confirm that it did not replace original thinking, analysis, authorship, or completion of the required work.

By submitting this activity, I affirm that my use of AI complies with T.I.P.'s AI usage policy and does not exceed the permitted limits for similarity, automated content generation, or academic assistance.

I understand that any false, incomplete, or misleading disclosure may be subject to investigation in accordance with due process and may result in sanctions for violation of existing T.I.P. policies.

Lab activities, templates, and related instructional materials shall not be reuploaded, reproduced, distributed, or shared with external organizations or third parties without the prior express written permission of the Technological Institute of the Philippines.