


Every source - DB, API, SFTP, event bus, vendor feed - registers as one declarative entry and flows through a single bus-agnostic pipeline that lands raw, normalizes, validates, and resolves to a canonical consumer_id.

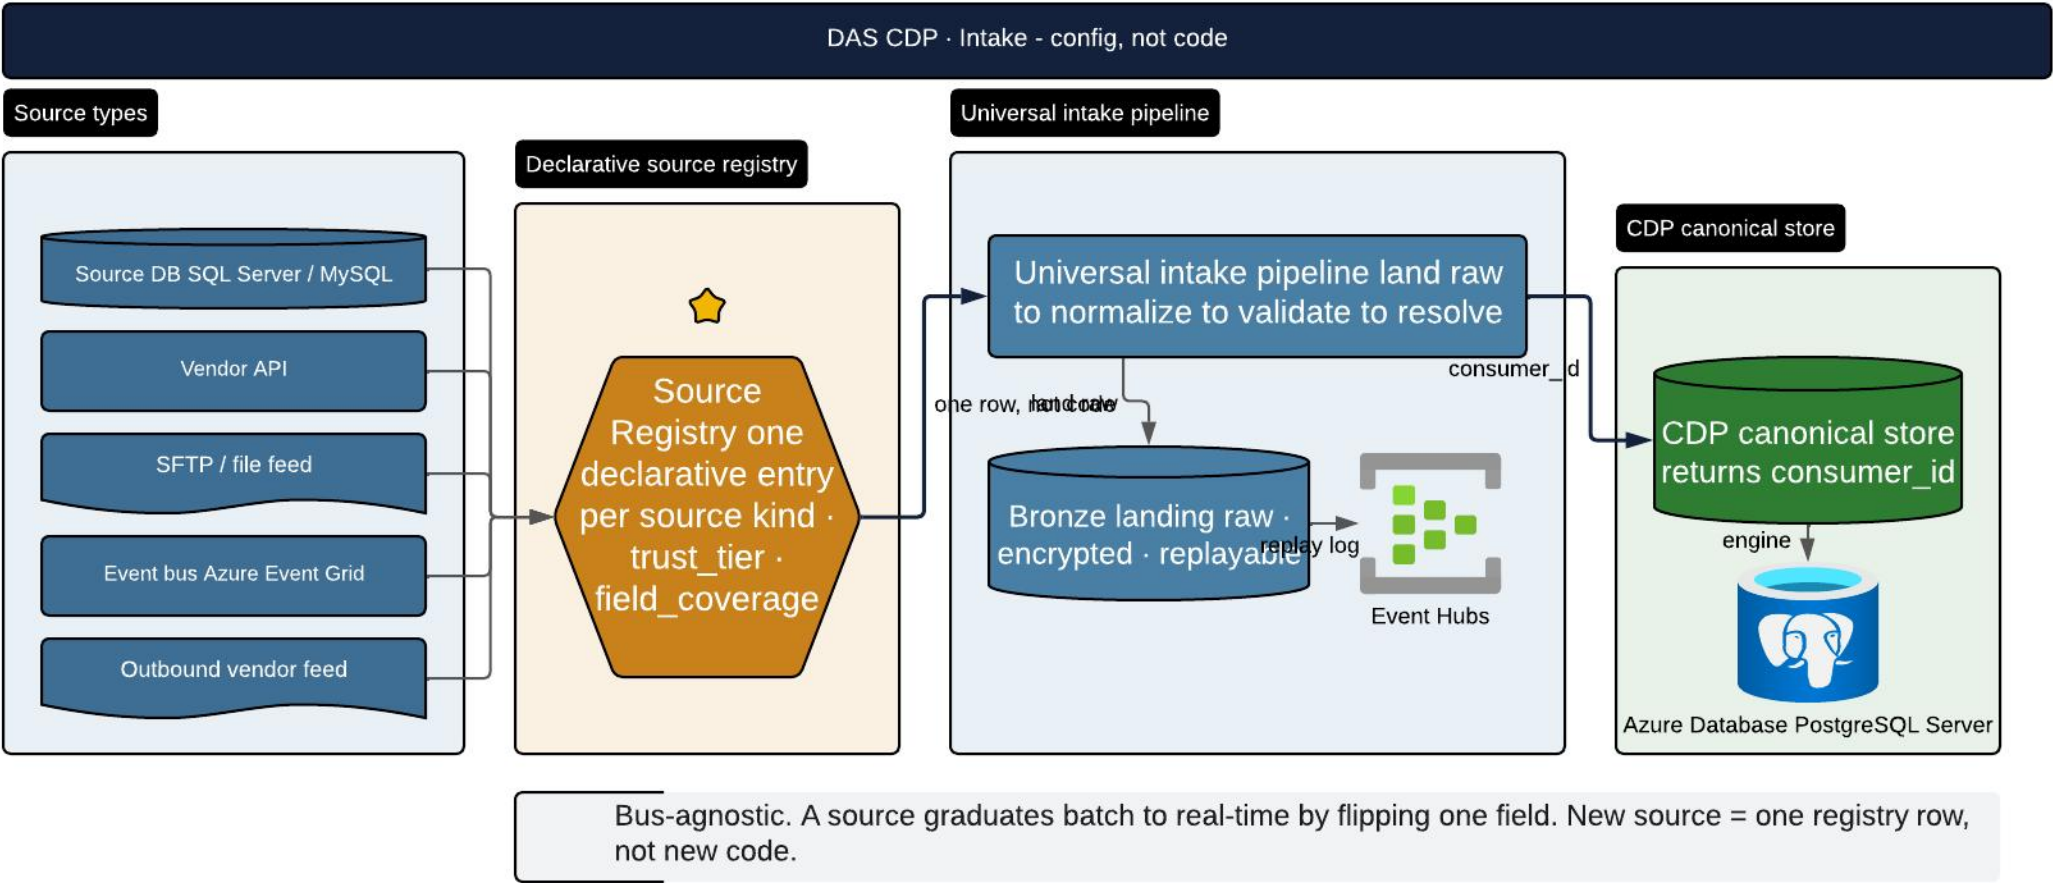

Provenance: docs/diagrams - supersedes the prior intake sketch. Bus-agnostic core (Event Hubs or NATS). Adding a source is a registry row, not a code change.