



Sensitivity analysis: the published ranking is an identity of the equation, not a property of the bacteria


A method as published: OAT on the printed Eq. 4
M. tuberculosis, log₁₀ drop at 240 h

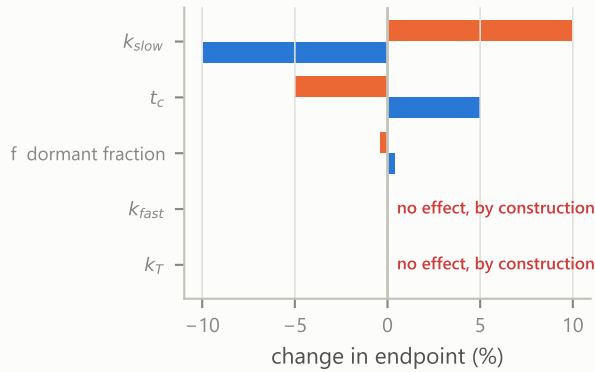


B the same OAT on the mechanistic model
M. tuberculosis, time to LOD

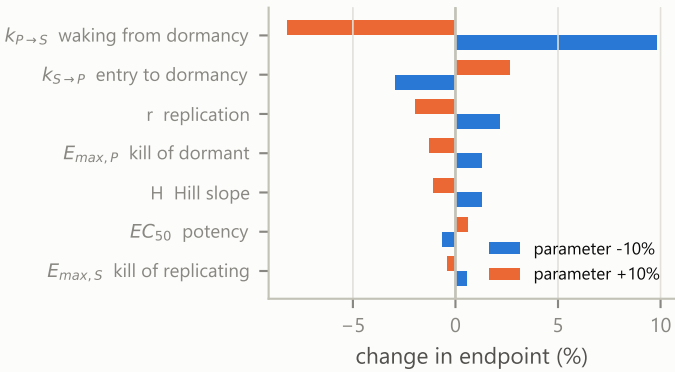


C M. tuberculosis, time to LOD

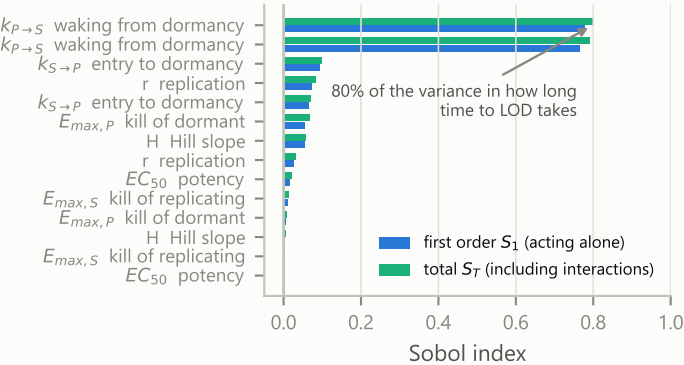

D S. aureus, time to LOD

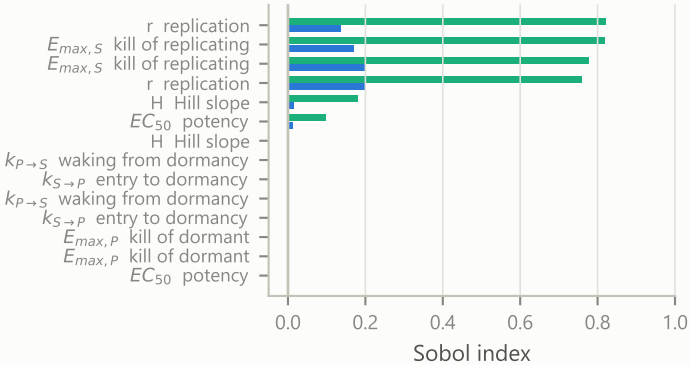

E what one-at-a-time analysis cannot see

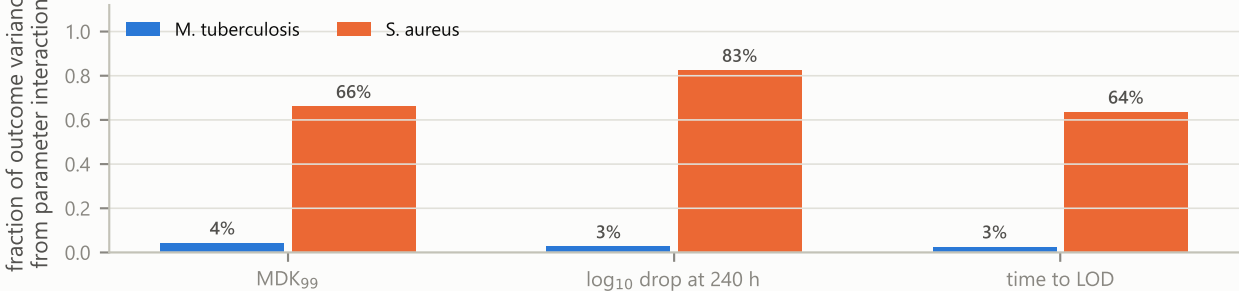

A and B vary one parameter at a time by +/-10%. C and D use 36,864 model evaluations per parameter set (Saltelli estimator, 4,096 base samples, parameters log-uniform over +/-50%, exposure at four times each set's own MIC). Where the bars in E are tall, no one-at-a-time analysis can be trusted, however carefully it is run.