


Wireless Attack Vectors - Overview

Hacking-zone community — Creator: Pirmaxmatov Og'abek

Attention: ONLY ACADEMIC PURPOSES. Use tools and examples in isolated lab environments with permission.

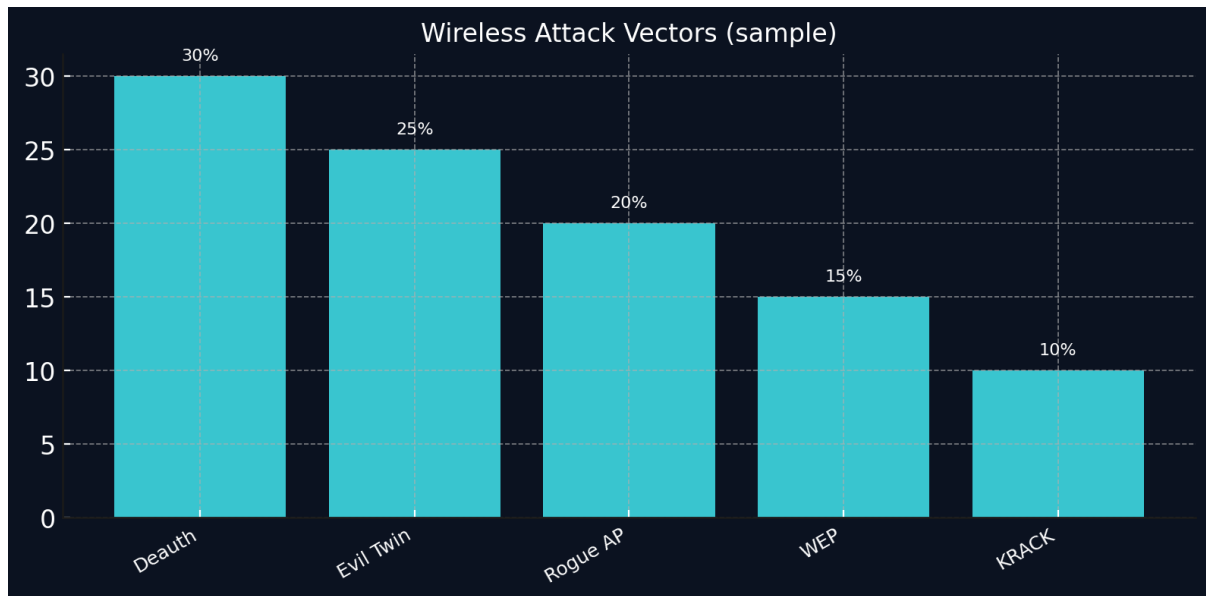

Common Wireless Attack Vectors

Wireless networks face a variety of attacks from deauthentication to rogue access points. Understanding these vectors helps defenders prioritize controls.

Attack Examples

- Deauthentication attacks to force clients off networks.
- Evil Twin / Rogue AP to intercept credentials.
- WEP weaknesses and replay attacks.
- KRACK-style handshake manipulation.

Defensive Controls

Deploy WIDS/WIPS, monitor for rogue APs, enforce 802.11w where possible, and use strong authentication methods.