



Platform Architecture

📁 Platform	Island Tours
🌟 Status	Done

Platform: Island Tours

Status: Production-ready briefing

URL: www.island.tours


[Island-Tours-platform-architecture-v2.md](#)

To Do:

- ☐ 7. Attributes → I still need to research and work on this section.

ISLAND TOURS 2.0

PLATFORM ARCHITECTURE

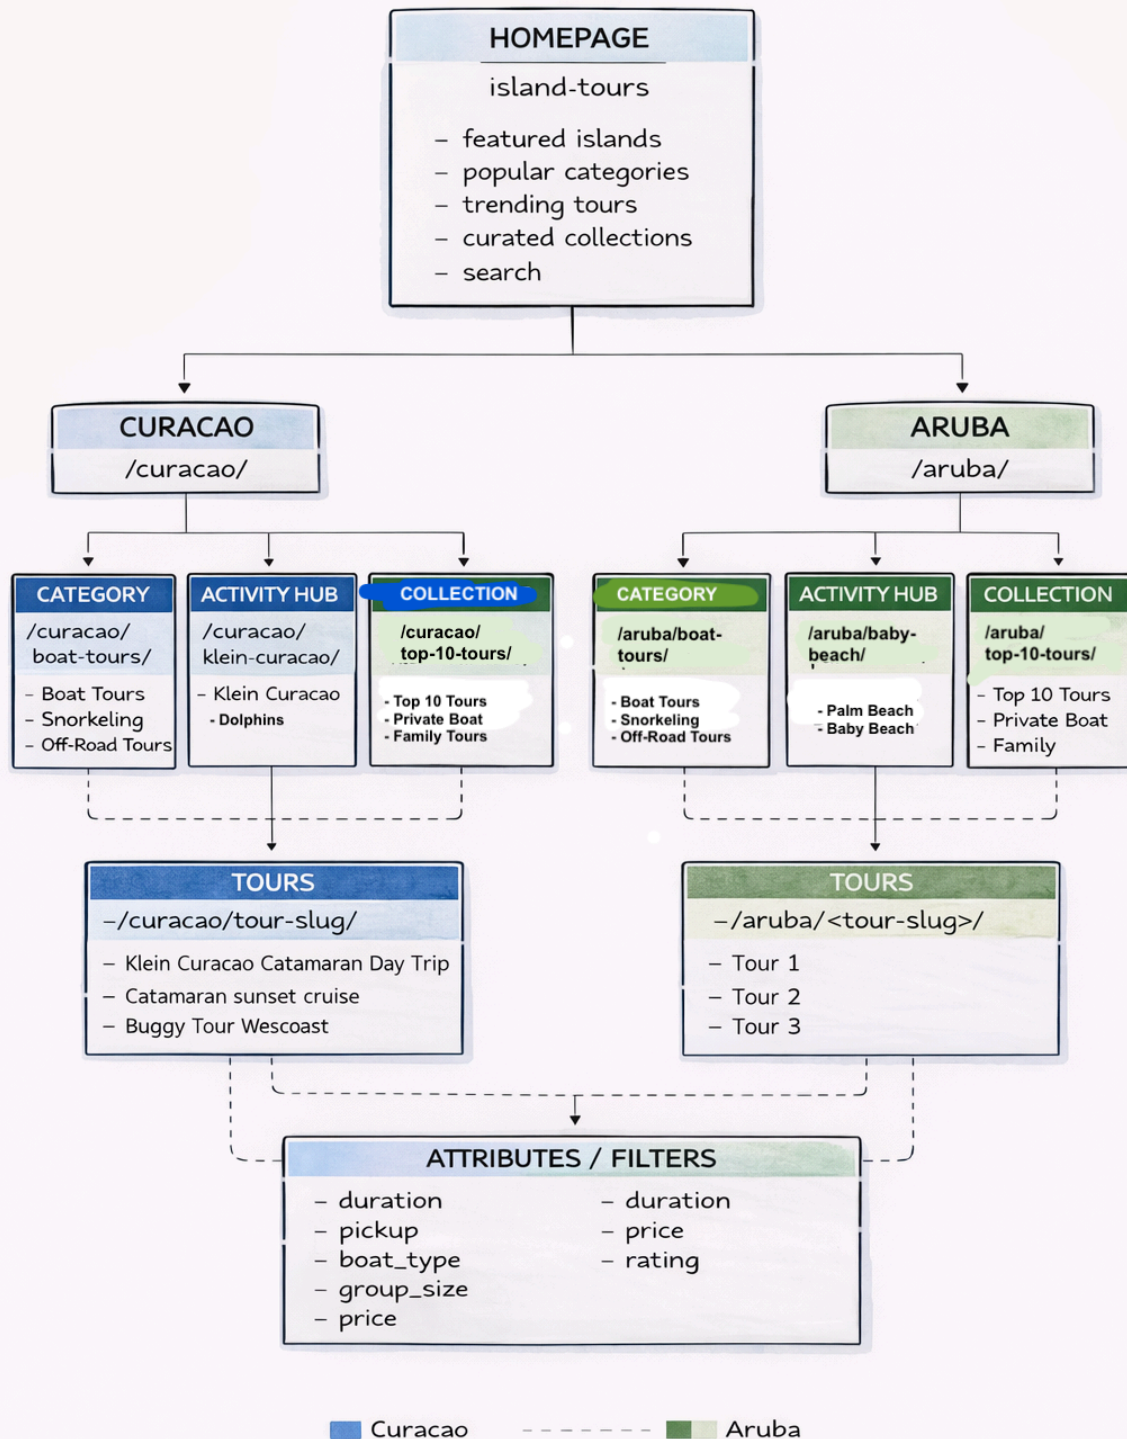

1 Island Tours – Platform Architecture

Island Tours is a **tour marketplace platform** where travelers can discover and book tours and activities across multiple island destinations.


Business model: Reseller — commission on tours from local operators.


The platform architecture is designed to be:

- **Highly scalable** (100+ destinations, 10,000+ tours)
- **SEO optimized** (structured for organic discovery)
- **Filterable and searchable** (faceted filters + full-text search)
- **Structured for discovery** (browse + search driven)
- **Conversion optimized** (architecture decisions that directly support CRO)

Core Hierarchy

Homepage
↓
Destinations
↓
Discovery Layer
Categories | Activity Hubs | Collections
↓
Tours
↓
Attributes & Filters

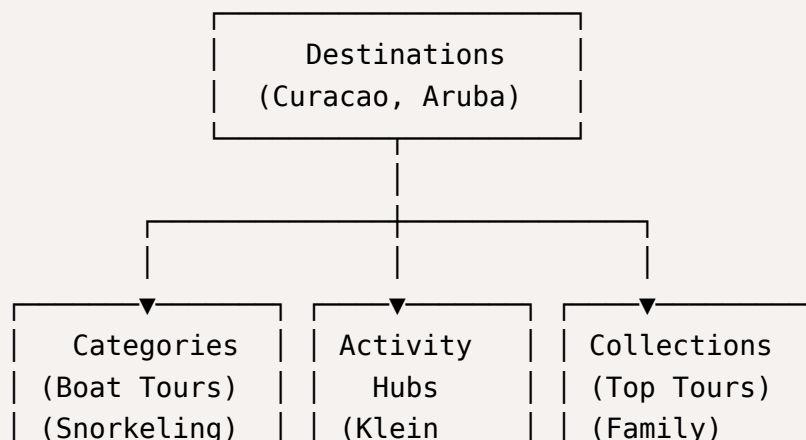

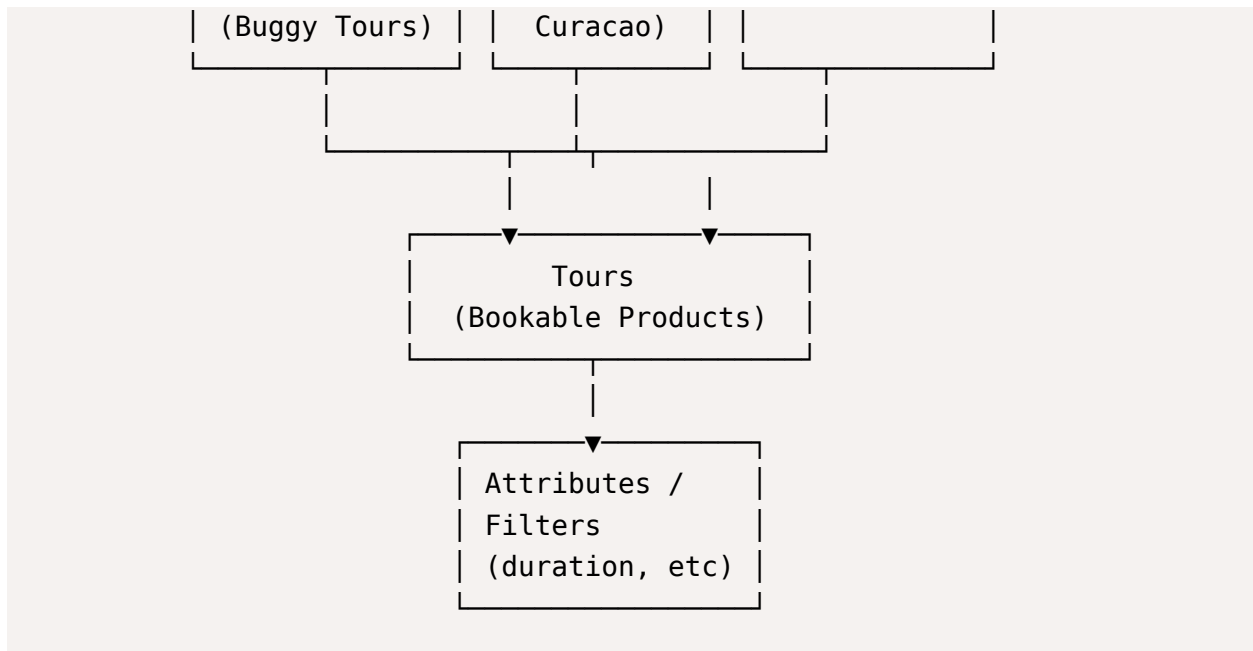

Each destination has exactly the same structure. Categories are global. Destinations scale infinitely.

Discovery Layers

Within each destination there are **three parallel discovery layers** that help users explore tours.

Category	→ type of activity (taxonomy)
Activity Hub	→ location or attraction (SEO + content)
Collection	→ curated or filtered list (editorial)

All three lead to **tour pages**.

Example flow:

```

Destination
↓
Category | Activity Hub | Collection
↓
Tours
↓
Attributes / Filters
  
```

Definitions

Entity	Definition	Example
Destination	Island or geographic location where tours take place	Curaçao, Aruba
Region	Geographic grouping of destinations	Caribbean, Mediterranean
Category	Global type of activity	Boat Tours, Snorkeling
Activity Hub	Location, attraction, or theme-based SEO page within a destination	Klein Curaçao, Dolphins
Collection	Curated or filter-based editorial page	Top 10 Tours, Family-Friendly Tours
Tour	Bookable product	Klein Curaçao Catamaran Day Trip
Attributes	Structured properties of tours, used for filtering and sorting	duration, boat_type, price

Decision Matrix: Activity Hub vs Collection

Use this to determine the correct entity type when creating a new discovery page.

If the page is about...	Entity type	Example
A physical location or area	Activity Hub	Klein Curaçao, West Coast
A specific attraction or animal	Activity Hub	Dolphins, Lighthouse
A theme that deserves its own SEO content	Activity Hub	Snorkeling Spots, Shipwrecks
A curated list based on popularity or editorial choice	Collection	Top 10 Tours, Best Tours
A filtered selection based on attributes	Collection	Private Boat Tours, Family-Friendly Tours
A seasonal or promotional grouping	Collection	Summer Deals, Holiday Specials

Rule of thumb: If the page needs rich informational content (what is it, how to get there, best time to visit) → Activity Hub. If the page is primarily a tour listing with a short intro → Collection.

Scaling Principle

This architecture is designed to scale to:

100+ destinations

20+ categories

10,000+ tours

Unlimited activity hubs and collections per destination

Categories remain global, destinations scale infinitely.
Regions group destinations for navigation at scale.

2 Destinations

A **destination** represents a geographic location (typically an island).

Each destination acts as the **root URL and main hub** for all tours, categories, activity hubs, and collections within that island.

Region Layer

Destinations are grouped by **region** for navigation and filtering. Regions are a data attribute on destinations — they do not have their own URL layer.

Region	Destinations
Caribbean	Curaçao, Aruba, Bonaire, Sint Maarten, Bahamas, Saint Lucia, Barbados, Cayman Islands, Antigua & Barbuda, Grenada
Atlantic	Cabo Verde, Madeira, Azores
Mediterranean	Mallorca, Ibiza, Santorini, Mykonos
Asia	Bali
Africa	Zanzibar, Mauritius

The region field is required on every destination. It is used for:

- Homepage navigation (browse by region)
- Search filtering
- Internal linking and related destinations
- Future potential for region landing pages

Destination Data Model

Field	Type	Required	Description
<code>id</code>	UUID	Yes	Primary key
<code>name</code>	String	Yes	Display name (e.g. "Curaçao")
<code>slug</code>	String	Yes	URL slug (e.g. "curacao")
<code>region</code>	ENUM	Yes	Geographic region

Field	Type	Required	Description
<code>country</code>	String	Yes	Country name
<code>description</code>	Text	Yes	Short description for SEO and display
<code>long_description</code>	Text	No	Extended destination content
<code>hero_image</code>	URL	Yes	Primary image
<code>gallery_images</code>	URL[]	No	Additional images
<code>latitude</code>	Float	Yes	Geo coordinates
<code>longitude</code>	Float	Yes	Geo coordinates
<code>timezone</code>	String	Yes	IANA timezone
<code>currency</code>	String	Yes	Default currency code (USD, EUR)
<code>language</code>	String	Yes	Primary language
<code>meta_title</code>	String	Yes	SEO meta title
<code>meta_description</code>	String	Yes	SEO meta description
<code>og_image</code>	URL	Yes	Open Graph image
<code>parent_destination_id</code>	UUID / FK	No	Optional parent for sub-destinations
<code>status</code>	ENUM	Yes	<code>draft</code> , <code>published</code> , <code>archived</code>
<code>created_at</code>	Timestamp	Yes	
<code>updated_at</code>	Timestamp	Yes	

Note on `parent_destination_id` : This field supports future sub-destination structures. The Bahamas consists of 700+ islands — eventually you may want `/bahamas/` as a hub with `/bahamas/nassau/` and `/bahamas/exumas/` as sub-destinations. The field is nullable and not used at launch, but the schema must support it.

Destination URL Structure

Each destination follows this slug structure:

```
Curacao    → /curacao/
Aruba       → /aruba/
Sint Maarten → /sint-maarten/
Saint Lucia → /saint-lucia/
Bahamas     → /bahamas/
```

Slug normalization rules:

- Lowercase only
- ASCII characters only (ç → c, ü → u, é → e)

- Spaces and underscores → hyphens
- No special characters, no double hyphens
- No trailing or leading hyphens

Launch Destinations

For launch, create destination pages and the full base structure for these five islands:

#	Destination	Slug	Region
1	Curaçao	/curacao/	Caribbean
2	Aruba	/aruba/	Caribbean
3	Sint Maarten	/sint-maarten/	Caribbean
4	Saint Lucia	/saint-lucia/	Caribbean
5	Bahamas	/bahamas/	Caribbean

Destination Structure

/destination/	→ Destination page
/destination/{category}/	→ Category page
/destination/{activity-hub}/	→ Activity hub page
/destination/{collection}/	→ Collection page
/destination/{tour-slug}/	→ Tour page

Example (Curaçao):

/en/curacao/	→ Destination (English)
/es/curacao/boat-tours/	→ Category (Spanish)
/nl/curacao/snorkeling/	→ Category (Dutch)
/en/curacao/klein-curacao/	→ Activity Hub
/en/curacao/top-10-tours/	→ Collection
/en/curacao/klein-curacao-catamaran-day-trip/	→ Tour

Potential Future Destinations

Island	Region	Annual Tourists (≈)	Tour Revenue Potential	Premium Market	Platform Opportunity
Curaçao	Caribbean	~700k	★★★★	Partly	★★★★
Aruba	Caribbean	~1.4M	★★★★★★	Yes	★★★★

Island	Region	Annual Tourists (=)	Tour Revenue Potential	Premium Market	Platform Opportunity
Bonaire	Caribbean	~180k	★★★★	Yes	★★★★
Sint Maarten	Caribbean	~550k	★★★★★	Yes	★★★★★★
Bahamas	Caribbean	~1.8M	★★★★★★	Yes	★★★★★
Cayman Islands	Caribbean	~450k	★★★★★	Yes	★★★★★
Saint Lucia	Caribbean	~430k	★★★★★	Yes	★★★★★
Barbados	Caribbean	~480k	★★★★	Yes	★★★★★
Antigua & Barbuda	Caribbean	~330k	★★★★	Yes	★★★★★
Grenada	Caribbean	~200k	★★★★	Partly	★★★★
Cabo Verde	Atlantic	~1M	★★★★	Partly	★★★★
Madeira	Atlantic	~2M	★★★★★	Partly	★★★★★
Azores	Atlantic	~1M	★★★★★	Partly	★★★★★
Mallorca	Mediterranean	~12M	★★★★★	Partly	★★★★
Ibiza	Mediterranean	~3.6M	★★★★★	Yes	★★★★
Santorini	Mediterranean	~2M	★★★★★	Yes	★★★★
Mykonos	Mediterranean	~2M	★★★★★	Yes	★★★★
Bali	Asia	~5.3M intl	★★★★★★	Partly	★★★
Zanzibar	Africa	~600k	★★★★★	Partly	★★★★★
Mauritius	Africa	~1.3M	★★★★★	Yes	★★★★★

Bold = launch destinations.

3 Categories (Global)

Categories represent **types of activities**.

Categories are defined **globally** and reused across destinations.

Category pages are generated **per destination**.

Each category has a **single global slug**.

Critical rule: Category pages must only be generated when there is **at least 1 published tour** in that category + destination combination. Empty category pages must not exist — they are harmful for SEO and user experience.

Island Tours Categories

#	Category	Category SEO Slug	Examples
1	Boat Tours & Cruises	boat-tours	catamaran, sailing
2	Snorkeling Tours	snorkeling	reef snorkel
3	Scuba Diving	scuba-diving	dive trips
4	Sunset Cruises	sunset-cruises	sunset sailing
5	Sightseeing Tours	sightseeing-tours	island highlights, city tours
6	Day Trips	day-trips	remote island trips
7	Off-Road Tours	off-road-tours	buggy, ATV, Quad, Jeep safaris, 4×4, UTV
8	Jet Ski Tours	jet-ski	jetski trips
9	Parasailing	parasailing	parasail flights
10	Water Sports	water-sports	kayaking, paddleboard, SUP
11	Fishing Trips	fishing-trips	deep sea fishing, sport fishing
12	Nature & Wildlife Tours	nature-wildlife-tours	dolphins, whales, parks, jungles
13	Hiking Tours	hiking-tours	volcano hikes
14	Adventure Tours	adventure-tours	adrenaline tours, zipline, bungee, skydiving
15	Cultural & Historical Tours	cultural-tours	heritage tours, art tours
16	Food & Drink Tours	food-tours	street food, rum tours
17	Attraction Tickets	attraction-tickets	museums, parks
18	Luxury Experiences	luxury-experiences	yacht experiences
19	Workshops & Classes	workshops-classes	cooking class

Category Overlap & Tagging Guidelines

Some categories intentionally overlap. A tour can belong to **multiple categories**. Apply these rules consistently:

Scenario	Categories to assign
Sunset catamaran cruise	boat-tours + sunset-cruises
Klein Curaçao day trip by boat	boat-tours + day-trips
Snorkeling from a boat	boat-tours + snorkeling
Jet ski + snorkeling combo	jet-ski + snorkeling + water-sports
ATV tour to beach with snorkeling	off-road-tours + if snorkeling is significant: snorkeling

Note on Day Trips: "Day Trips" is the only category that is based on **duration and commitment level** rather than activity type. It groups tours that take up a significant portion of the day (typically 6+ hours), regardless of what the activity is — a full-day boat trip to Klein Curaçao, an 8-hour Fishing Trip, or an all-day island sightseeing tour all qualify. This intentional overlap with other categories is by design: a Day Trip is almost always also tagged with its activity category (`boat-tours` , `fishing-trips` , etc.).

Category Data Model

Field	Type	Required	Description
<code>id</code>	UUID	Yes	Primary key
<code>name</code>	String	Yes	Display name
<code>slug</code>	String	Yes	Global SEO slug
<code>description</code>	Text	Yes	Category description
<code>icon</code>	String	No	Icon identifier for UI
<code>sort_order</code>	Integer	Yes	Display order
<code>parent_category_id</code>	UUID / FK	No	For future sub-category support
<code>meta_title_template</code>	String	Yes	e.g. "{category} in {destination}"
<code>meta_description_template</code>	String	Yes	SEO template per destination

Note on `parent_category_id`: Not used at launch. Prepares for potential future grouping (e.g. "Water Sports" as parent of "Jet Ski", "Parasailing", "Kayaking"). No URL impact — purely for navigation and UI grouping.

Category URL Structure

Category pages exist **only within destinations**.

Pattern:

```
{destination}/{category}/
```

Examples:

```
/curacao/boat-tours/  
/curacao/snorkeling/  
/curacao/day-trips/  
  
/aruba/boat-tours/
```

```
/aruba/snorkeling/  
/aruba/day-trips/
```

Each category page lists tours within that category for that destination.

4 Tours

Tours represent **bookable products** on the platform.

Each tour:

- Belongs to **exactly 1 destination**
- Belongs to **1+ categories** (global categories)
- May belong to **0–n activity hubs** (many-to-many)
- Has **exactly 1 canonical URL**

Tour Data Model

Field	Type	Required	Description
<code>id</code>	UUID	Yes	Primary key
<code>title</code>	String	Yes	Tour name
<code>slug</code>	String	Yes	URL slug (unique per destination)
<code>destination_id</code>	UUID / FK	Yes	Single destination
<code>short_description</code>	String (160 chars)	Yes	Card/preview text
<code>description</code>	Text	Yes	Full tour description
<code>highlights</code>	String[]	Yes	Key selling points
<code>includes</code>	String[]	Yes	What's included
<code>excludes</code>	String[]	No	What's not included
<code>hero_image</code>	URL	Yes	Primary image
<code>gallery_images</code>	URL[]	Yes	Additional images (min 3)
<code>operator_id</code>	UUID / FK	Yes	Tour operator/supplier
<code>categories</code>	UUID[] / FK	Yes	1+ category references
<code>activity_hubs</code>	UUID[] / FK	No	0–n activity hub references
<code>price_type</code>	ENUM	Yes	<code>per_person</code> , <code>per_group</code>
<code>price_adult</code>	Decimal	Yes	Base adult price
<code>price_child</code>	Decimal	No	Child price

Field	Type	Required	Description
<code>price_infant</code>	Decimal	No	Infant price
<code>currency</code>	String	Yes	ISO currency code
<code>duration_minutes</code>	Integer	Yes	Tour duration
<code>start_times</code>	String[]	No	Available departure times
<code>meeting_point</code>	Text	No	Meeting location description
<code>meeting_point_lat</code>	Float	No	Meeting point coordinates
<code>meeting_point_lng</code>	Float	No	Meeting point coordinates
<code>minimum_age</code>	Integer	No	Minimum participant age
<code>maximum_travelers</code>	Integer	No	Max group size
<code>booking_type</code>	ENUM	Yes	<code>private</code> , <code>shared</code>
<code>instant_confirmation</code>	Boolean	Yes	Instant or manual confirmation
<code>free_cancellation</code>	Boolean	Yes	Free cancellation offered
<code>cancellation_window_hours</code>	Integer	No	Hours before start for free cancel
<code>pickup_available</code>	Boolean	Yes	Hotel pickup offered
<code>guide_languages</code>	String[]	No	Available languages
<code>wheelchair_accessible</code>	Boolean	No	Accessibility
<code>family_friendly</code>	Boolean	No	Suitable for families
<code>suitable_for_beginners</code>	Boolean	No	No prior experience needed
<code>rating</code>	Decimal	No	Average rating (1.0–5.0)
<code>review_count</code>	Integer	No	Number of reviews
<code>booking_count</code>	Integer	No	Total bookings (for sorting)
<code>booking_count_today</code>	Integer	No	Bookings today (social proof)
<code>spots_remaining</code>	Integer	No	Available spots (urgency)
<code>last_booked_at</code>	Timestamp	No	Last booking time (social proof)
<code>meta_title</code>	String	Yes	SEO meta title
<code>meta_description</code>	String	Yes	SEO meta description
<code>og_image</code>	URL	Yes	Open Graph image
<code>status</code>	ENUM	Yes	<code>draft</code> , <code>published</code> , <code>archived</code>
<code>created_at</code>	Timestamp	Yes	
<code>updated_at</code>	Timestamp	Yes	

Category-specific attributes are stored in a separate `tour_attributes` table (see section 7).

Tour Example

Tour: Klein Curaçao Catamaran Trip

destination: curacao

categories:

- boat-tours
- day-trips

activity_hubs:

- klein-curacao

attributes:

booking_type: shared
duration_minutes: 480
boat_type: catamaran
pickup_available: true
wildlife_type: [turtles]
food_included: true
drinks_included: true
snorkeling_included: true

Tour Visibility

Because tours belong to categories and optionally activity hubs, a tour may appear on **multiple discovery pages**.

/curacao/boat-tours/	→ category page
/curacao/day-trips/	→ category page
/curacao/klein-curacao/	→ activity hub page
/curacao/top-10-tours/	→ collection page

All of these pages link to the **same canonical tour URL**.

Tour URL Structure

Each tour has **one canonical URL**. All discovery pages reference this canonical URL.

Tour URLs are **independent** of categories and activity hubs.

Tour URLs must **not** be nested under categories.

Canonical tour URL format:

```
{destination}/{tour-slug}/
```

Examples:

✓ /curacao/klein-curacao-catamaran-day-trip/
✗ /curacao/boat-tours/klein-curacao-catamaran/

Tour Slug Uniqueness

Tour slugs must be unique per destination. The slug registry (section 9) enforces this.

When two operators offer similar tours:

- Auto-generate slug from title?
- On collision, append operator name: `klein-curacao-catamaran-trip-bluefin`
- Never append numbers (`-2` , `-3`) — this is confusing for users and bad for SEO

5 Activity Hubs

Activity hubs represent **specific locations, highlights, or themes** within a destination.

They group tours related to that topic and also serve as **SEO content pages** with helpful information for travelers.

Activity Hub Relations

- An activity hub belongs to **exactly 1 destination**
- Tours may belong to **0–n activity hubs** (many-to-many)
- Activity hubs list all tours assigned to that hub
- Each activity hub should have **at least 3 related tours** to justify its existence

Types of Activity Hubs

Location	→ Klein Curaçao
Highlight / theme	→ Dolphins
Area	→ West Coast

Activity Hub Data Model

Field	Type	Required	Description
<code>id</code>	UUID	Yes	Primary key
<code>name</code>	String	Yes	Display name
<code>slug</code>	String	Yes	URL slug (unique per destination)
<code>destination_id</code>	UUID / FK	Yes	Parent destination
<code>hub_type</code>	ENUM	Yes	<code>location</code> , <code>highlight</code> , <code>area</code>
<code>short_description</code>	String	Yes	Preview text
<code>hero_image</code>	URL	Yes	Primary image
<code>content_sections</code>	JSON[]	Yes	Array of {heading, body} content blocks
<code>faq</code>	JSON[]	No	Array of {question, answer} for FAQ schema
<code>latitude</code>	Float	No	Geo coordinates (for location type)
<code>longitude</code>	Float	No	Geo coordinates (for location type)
<code>meta_title</code>	String	Yes	SEO meta title
<code>meta_description</code>	String	Yes	SEO meta description
<code>og_image</code>	URL	Yes	Open Graph image
<code>status</code>	ENUM	Yes	<code>draft</code> , <code>published</code> , <code>archived</code>
<code>created_at</code>	Timestamp	Yes	
<code>updated_at</code>	Timestamp	Yes	

Activity Hub URL Structure

Pattern:

```
{destination}/{activity-hub}/
```

Examples:

```
/curacao/klein-curacao/  
/curacao/dolphins/  
/curacao/west-coast/
```

Activity Hub Page Structure

Each activity hub page contains two sections:

1. Tours (dynamic listing)

Klein Curacao Catamaran Trip
Klein Curacao Speedboat Tour
Klein Curacao Private Yacht Tour

2. Content (SEO content blocks)

What is Klein Curacao
Best time to visit
Snorkeling at Klein Curacao
History and lighthouse
Travel tips
Comparison tables
FAQ

Activity Hub Content Template

When creating a new activity hub, use these standard content sections as a starting point:

Section	Required	Description
Introduction	Yes	What is this place / topic
Best time to visit	Recommended	When to go, seasonal tips
What to expect	Recommended	Practical info for visitors
How to get there	If location type	Directions, transport options
Tips	Recommended	Insider advice
FAQ	Yes	Structured Q&A for schema markup

Guideline: **5–10 activity hubs per destination** at launch, based on search volume data. Each hub must have at least 3 related tours.

Key Principle

Tours have **one canonical URL**, but may appear on **multiple discovery pages**.

Example tour:

/curacao/klein-curacao-catamaran-day-trip/ ← canonical URL

Can be discovered via:

/curacao/boat-tours/	→ category page
/curacao/day-trips/	→ category page
/curacao/klein-curacao/	→ activity hub page

6 Collections

Collections are **editorial or curated lists of tours** within a destination.

They are used for **SEO landing pages and discovery**, grouping tours based on filters, popularity, or manual curation.

Collections are **not** part of the core taxonomy.

Tours are **not structurally assigned** to collections like they are to categories.

Collection Types

Type	Description	How tours are selected	Example
manual	Handpicked tour IDs	Editor manually selects tours	Top 10 Tours
dynamic	Saved filter query	Tours auto-populate based on attribute filters	Private Boat Tours

Dynamic collections store a filter query (e.g. `{booking_type: "private", categories: ["boat-tours"]}`) and resolve matching tours at render time.

Collection Data Model

Field	Type	Required	Description
id	UUID	Yes	Primary key
name	String	Yes	Display name
slug	String	Yes	URL slug (unique per destination)
destination_id	UUID / FK	Yes	Parent destination
collection_type	ENUM	Yes	manual , dynamic
tour_ids	UUID[]	If manual	Ordered list of tour IDs
filter_query	JSON	If dynamic	Attribute filter query
description	Text	Yes	Intro text / SEO content
hero_image	URL	No	Optional hero image
sort_order	String	Yes	How tours are sorted (popularity, price_asc,

Field	Type	Required	Description
			price_desc, rating)
meta_title	String	Yes	SEO meta title
meta_description	String	Yes	SEO meta description
status	ENUM	Yes	draft , published , archived
created_at	Timestamp	Yes	
updated_at	Timestamp	Yes	

Collection URL Structure

Collections always exist inside a destination.

Pattern:

```
{destination}/{collection}/
```

Examples:

```
/curacao/top-10-tours/
/curacao/private-boat-tours/
/curacao/best-snorkeling-tours/
/curacao/family-friendly-tours/
/curacao/luxury-tours/
```

Collection Naming — Avoiding Keyword Cannibalization

Collection slugs must be **semantically distinct** from category slugs to prevent SEO cannibalization.

✓ Good collection slug	✗ Bad collection slug (too close to category)
top-10-tours	best-tours (too generic)
private-boat-tours	boat-tours-private (cannibalizes boat-tours)
family-friendly-tours	snorkeling-best (cannibalizes snorkeling)
luxury-yacht-experiences	luxury-experiences (exact category slug)

Rule: If a collection is essentially a filtered version of a category (e.g. “private boat tours” = boat-tours filtered by booking_type=private), consider using filter URL parameters on the category page (/curacao/boat-tours/?booking_type=private) with a canonical pointing to the category — instead of creating a separate collection page.

Architecture Rules

Collections are **not core objects**.

Core architecture:

Destination

Category

Tour

Collections exist in a separate discovery layer.

7 Attributes / Filters

Attributes define **structured properties of tours** and are used to **filter, sort, and power discovery** across the platform.

The platform maintains a **central attribute dictionary** to ensure consistency across all tours.

Attributes are **global** and can be applied to tours in any destination.

Attribute Architecture

Attributes are split into two groups:

1. **Global attributes** — apply to any tour regardless of category
2. **Category-specific attributes** — only relevant for tours in specific categories

Both are stored in the same system but category-specific attributes are only shown as filters on the relevant category pages.

▼ Global Attributes - - I still need to work on this section

Global Attributes

These attributes can apply to **any tour**, regardless of category.

Attribute	Type	Values / Format	Filterable	Sortable
<code>booking_type</code>	enum	<code>private</code> , <code>shared</code>	Yes	No
<code>duration_minutes</code>	integer	30, 60, 120, 240, 480	Yes (ranges)	Yes
<code>start_times</code>	string[]	<code>"08:00"</code> , <code>"09:30"</code> , <code>"13:00"</code>	Yes	No

Attribute	Type	Values / Format	Filterable	Sortable
<code>pickup_available</code>	boolean	true, false	Yes	No
<code>meeting_point</code>	text	free text	No	No
<code>instant_confirmation</code>	boolean	true, false	Yes	No
<code>free_cancellation</code>	boolean	true, false	Yes	No
<code>cancellation_window_hours</code>	integer	24, 48	No	No
<code>minimum_age</code>	integer	4, 12, 18	Yes	No
<code>maximum_travelers</code>	integer	8, 12, 20	No	No
<code>guide_languages</code>	string[]	<code>["english", "spanish", "dutch"]</code>	Yes	No
<code>wheelchair_accessible</code>	boolean	true, false	Yes	No
<code>family_friendly</code>	boolean	true, false	Yes	No
<code>suitable_for_beginners</code>	boolean	true, false	Yes	No
<code>food_included</code>	boolean	true, false	Yes	No
<code>drinks_included</code>	boolean	true, false	Yes	No
<code>equipment_included</code>	boolean	true, false	Yes	No
<code>snorkeling_included</code>	boolean	true, false	Yes	No
<code>sunset_tour</code>	boolean	true, false	Yes	No

Price and rating attributes (on the tour entity itself, not in the attributes table):

Attribute	Type	Filterable	Sortable
<code>price_adult</code>	decimal	Yes (ranges)	Yes
<code>rating</code>	decimal	Yes (minimum)	Yes
<code>review_count</code>	integer	No	Yes

Category-Specific Attributes

These attributes only apply to tours within certain categories.

Boat Tours (`boat-tours`)

Attribute	Type	Values
<code>boat_type</code>	enum	<code>catamaran</code> , <code>yacht</code> , <code>speedboat</code> , <code>sailboat</code> , <code>glass_bottom</code>
<code>snorkeling_stop_count</code>	integer	1, 2, 3
<code>sunset_cruise</code>	boolean	true, false

Attribute	Type	Values
<code>onboard_toilet</code>	boolean	true, false
<code>open_bar_included</code>	boolean	true, false

Snorkeling Tours (`snorkeling`)

Attribute	Type	Values
<code>snorkeling_equipment_included</code>	boolean	true, false
<code>wildlife_type</code>	enum[]	<code>turtles</code> , <code>coral</code> , <code>tropical_fish</code> , <code>rays</code>
<code>guide_included</code>	boolean	true, false
<code>swimming_required</code>	boolean	true, false

Scuba Diving (`scuba-diving`)

Attribute	Type	Values
<code>dive_type</code>	enum	<code>discover_scuba</code> , <code>certified</code> , <code>night_dive</code>
<code>certification_required</code>	boolean	true, false
<code>max_depth</code>	string	<code>12m</code> , <code>18m</code> , <code>30m</code>

Off-Road Tours (`off-road-tours`)

Attribute	Type	Values
<code>vehicle_type</code>	enum	<code>buggy</code> , <code>atv</code> , <code>utv</code> , <code>jeep</code>
<code>driver_license_required</code>	boolean	true, false
<code>offroad_difficulty</code>	enum	<code>easy</code> , <code>moderate</code> , <code>extreme</code>

Water Sports (`water-sports` , `jet-ski` , `parasailing`)

Attribute	Type	Values
<code>water_sport_type</code>	enum	<code>jet_ski</code> , <code>kayak</code> , <code>sup</code> , <code>surf</code> , <code>parasail</code>
<code>instructor_included</code>	boolean	true, false
<code>passenger_allowed</code>	boolean	true, false

Nature & Wildlife Tours (`nature-wildlife-tours`)

Attribute	Type	Values
<code>wildlife_type</code>	enum[]	<code>dolphins</code> , <code>turtles</code> , <code>whales</code> , <code>flamingos</code>
<code>animal_guarantee</code>	boolean	true, false

Food & Drink Tours (`food-tours`)

Attribute	Type	Values
<code>tasting_type</code>	enum	<code>food</code> , <code>wine</code> , <code>rum</code> , <code>cocktail</code>
<code>meal_included</code>	boolean	true, false

Adventure Tours (`adventure-tours`)

Attribute	Type	Values
<code>adventure_type</code>	enum	<code>zipline</code> , <code>bungee</code> , <code>skydiving</code> , <code>cliff_jumping</code>
<code>height_requirement</code>	integer	minimum height in cm

Hiking Tours (`hiking-tours`)

Attribute	Type	Values
<code>fitness_level</code>	enum	<code>easy</code> , <code>moderate</code> , <code>hard</code>
<code>trail_distance_km</code>	decimal	distance in km

Attraction Tickets (`attraction-tickets`)

Attribute	Type	Values
<code>ticket_type</code>	enum	<code>museum</code> , <code>park</code> , <code>attraction</code> , <code>show</code>

Luxury Experiences (`luxury-experiences`)

Attribute	Type	Values
<code>tier</code>	enum	<code>premium</code> , <code>luxury</code> , <code>ultra_luxury</code>

Workshops & Classes (`workshops-classes`)

Attribute	Type	Values
<code>class_type</code>	enum	<code>cooking</code> , <code>surf_lesson</code> , <code>art</code> , <code>craft</code>

Attribute Data Model

Attributes are stored as key-value pairs in a `tour_attributes` table.

Table: `tour_attributes`

Column	Type	Description
<code>id</code>	UUID	Primary key

Column	Type	Description
<code>tour_id</code>	UUID / FK	Reference to tour
<code>attribute_key</code>	VARCHAR(100)	Attribute name (from dictionary)
<code>attribute_value</code>	VARCHAR(500)	Value (string, number, or JSON array)

Index: `(tour_id, attribute_key)` — unique, one value per attribute per tour.

Index: `(attribute_key, attribute_value)` — for efficient filter queries.

Example rows for a single tour:

tour_id	attribute_key	attribute_value
abc-123	booking_type	shared
abc-123	boat_type	catamaran
abc-123	duration_minutes	480
abc-123	wildlife_type	["turtles"]
abc-123	food_included	true

Attribute Dictionary Table

The system maintains a **central attribute dictionary** that defines all valid attributes and their allowed values.

Table: `attribute_definitions`

Column	Type	Description
<code>id</code>	UUID	Primary key
<code>key</code>	VARCHAR(100)	Attribute key (e.g. <code>boat_type</code>)
<code>display_name</code>	VARCHAR(100)	UI label (e.g. "Boat Type")
<code>data_type</code>	ENUM	<code>boolean</code> , <code>enum</code> , <code>enum_multi</code> , <code>integer</code> , <code>decimal</code> , <code>text</code>
<code>allowed_values</code>	JSON	For enums: array of valid values
<code>applies_to_categories</code>	UUID[]	NULL = global, otherwise specific category IDs
<code>is_filterable</code>	boolean	Show as filter in UI
<code>is_sortable</code>	boolean	Allow sorting by this attribute
<code>filter_display_type</code>	ENUM	<code>checkbox</code> , <code>range_slider</code> , <code>radio</code> , <code>dropdown</code>
<code>sort_order</code>	integer	Display order in filter panel

This dictionary ensures filters remain consistent across all tours and destinations.

Filter Logic Per Page Type

Page type	Which filters to show
Destination page	Global filters only: <code>duration_minutes</code> , <code>booking_type</code> , <code>price</code> , <code>rating</code> , <code>free_cancellation</code> , <code>family_friendly</code>
Category page	Global filters + category-specific filters for that category
Activity Hub page	Global filters only (tours may span multiple categories)
Collection page	Global filters only (tours may span multiple categories)
Search results	Global filters + category filter (as a facet to narrow by category)

Filters Per Category

#	Category	Filters shown
1	Boat Tours	<code>booking_type</code> , <code>boat_type</code> , <code>duration_minutes</code> , <code>food_included</code> , <code>drinks_included</code> , <code>pickup_available</code> , <code>snorkeling_included</code>
2	Snorkeling	<code>booking_type</code> , <code>duration_minutes</code> , <code>wildlife_type</code> , <code>pickup_available</code> , <code>equipment_included</code>
3	Scuba Diving	<code>dive_type</code> , <code>certification_required</code> , <code>duration_minutes</code>
4	Sunset Cruises	<code>booking_type</code> , <code>boat_type</code> , <code>duration_minutes</code> , <code>food_included</code> , <code>drinks_included</code>
5	Sightseeing	<code>duration_minutes</code> , <code>guide_languages</code> , <code>pickup_available</code>
6	Day Trips	<code>duration_minutes</code> , <code>pickup_available</code> , <code>food_included</code>
7	Off-Road Tours	<code>vehicle_type</code> , <code>duration_minutes</code> , <code>driver_license_required</code> , <code>offroad_difficulty</code>
8	Jet Ski	<code>duration_minutes</code> , <code>booking_type</code>
9	Parasailing	<code>duration_minutes</code> , <code>minimum_age</code>
10	Water Sports	<code>water_sport_type</code> , <code>duration_minutes</code> , <code>instructor_included</code>
11	Fishing Trips	<code>duration_minutes</code> , <code>boat_type</code> , <code>booking_type</code>
12	Nature & Wildlife	<code>wildlife_type</code> , <code>duration_minutes</code> , <code>animal_guarantee</code>
13	Hiking	<code>fitness_level</code> , <code>duration_minutes</code> , <code>guide_languages</code>
14	Adventure	<code>adventure_type</code> , <code>duration_minutes</code> , <code>minimum_age</code>
15	Cultural & Historical	<code>guide_languages</code> , <code>duration_minutes</code>
16	Food & Drink	<code>duration_minutes</code> , <code>tasting_type</code> , <code>meal_included</code>
17	Attraction Tickets	<code>ticket_type</code> , <code>instant_confirmation</code>
18	Luxury Experiences	<code>booking_type</code> , <code>tier</code> , <code>duration_minutes</code>

#	Category	Filters shown
19	Workshops & Classes	<code>class_type</code> , <code>duration_minutes</code>

All category pages also always show: `price` (range slider), `rating` (minimum), `free_cancellation` (checkbox).

Filter UX Specification

Filter panel position: Left sidebar on desktop, bottom sheet / modal on mobile.

Filter rendering types:

Filter type	UI component	Example
Boolean (true/false)	Checkbox	☒ Free cancellation
Enum (single)	Radio buttons or pills	☐ Private ☐ Shared
Enum (multiple)	Checkboxes	☒ Catamaran ☒ Yacht ☐ Speedboat
Numeric range	Range slider	Price: \$25 — \$200
Rating minimum	Star selector	★★★★★+

Filter behavior:

- Filters are applied client-side with URL query parameters: `/curacao/boat-tours/?boat_type=catamaran&booking_type=private`
- Multiple values for the same filter use comma separation: `?boat_type=catamaran,yacht`
- Filter state is preserved in the URL for shareability and SEO
- Filter changes trigger a re-fetch of the tour listing (no full page reload)
- Filters with zero matching results are grayed out but still visible (not hidden)
- Show active filter count on mobile filter button: "Filters (3)"
- "Clear all filters" button always visible when filters are active

Canonical URL rule for filters: Filtered URLs (`?boat_type=catamaran`) use a canonical tag pointing to the base category page (`/curacao/boat-tours/`). This prevents duplicate content issues.

Filter Priority (CRO Impact)

Build these filters first — they have the highest impact on conversion:

Priority	Filter	Why
1	<code>price</code> (range)	#1 decision factor for travelers

Priority	Filter	Why
2	<code>duration_minutes</code>	Users filter by time available
3	<code>booking_type</code> (private/shared)	Strong preference-based filter
4	<code>free_cancellation</code>	Trust signal, reduces booking friction
5	<code>rating</code>	Social proof, high trust impact
6	Category-specific type filter (e.g. <code>boat_type</code>)	Helps users narrow within a category

Sorting

Every tour listing page (category, hub, collection, search) supports sorting.

Sort option	Logic	Default
Recommended	Weighted score: bookings × 0.4 + rating × 0.3 + recency × 0.2 + review_count × 0.1	✓ Default
Price: Low to High	<code>price_adult ASC</code>	
Price: High to Low	<code>price_adult DESC</code>	
Rating	<code>rating DESC</code> , then <code>review_count DESC</code>	
Newest	<code>created_at DESC</code>	

Handling Missing or Inconsistent Attribute Data

Not all tours will have all attributes filled in. Handle edge cases as follows:

Scenario	Behavior
Tour is missing a filterable attribute	Tour is excluded from filter results for that attribute (not shown when filter is active)
Tour has no price	Show "Price on request" — do not exclude from listings
Tour has no rating	Show "New" badge instead of stars — sort to bottom when sorted by rating
Attribute value not in dictionary	Reject on save — admin must use valid values from the dictionary
Attribute applies to wrong category	Allow save (tour may be in multiple categories) but only show as filter on relevant category pages

Backend: Per Tour Attribute Assignment

In the admin interface, each tour is assigned attributes:

1. Select **destination**
2. Select **1+ categories**
3. Admin UI shows **global attributes + all relevant category-specific attributes**
4. Content editor fills in applicable attributes
5. On save: validate all values against the attribute dictionary
6. Store as key-value pairs in `tour_attributes` table

8 Complete URL Structure

Note: All URLs are prefixed with a locale code (`/en/` , `/es/` , `/nl/` , etc.). The patterns below show the path structure after the locale prefix. For example, `/destination/` means the full URL is `/locale/destination/` → `/en/curacao/` .

Note: Regions do not have their own URL layer. They exist as a data attribute on destinations and are used for navigation and filtering only. There is no `/region/` URL pattern (no `/caribbean/` or `/mediterranean/`). → See section 2 (Destinations)

Destination

Pattern: `/destination/`
Examples: `/curacao/` `/aruba/` `/sint-maarten/`

Each destination acts as the **root URL** for all content within that island.

Category (activity type)

Pattern: `/destination/category/`
Examples: `/curacao/boat-tours/` `/curacao/snorkeling/` `/curacao/off-road-tours/`

Category pages list tours belonging to that category within that destination.

Activity Hub (location / highlight)

Pattern: `/ {destination} / {activity-hub} /`

Examples: `/curacao/klein-curacao/` `/curacao/dolphins/` `/curacao/west-coast/`

Activity hubs list tours related to that location or highlight.

Tour (bookable product)

Pattern: `/ {destination} / {tour-slug} /`

Examples: `/curacao/klein-curacao-catamaran-day-trip/`
`/curacao/west-coast-buggy-adventure/`
`/curacao/swim-with-dolphins-experience/`

Rules:

- Each tour has **one canonical URL**
- Tours are **not** nested under categories
- Tours are **not** nested under activity hubs

Collection (curated / SEO pages)

Pattern: `/ {destination} / {collection} /`

Examples: `/curacao/top-10-tours/` `/curacao/best-tours/` `/curacao/private-boat-tours/`

Collections do not define taxonomy. Tours are not structurally assigned to collections.

Visual Structure

Destination

|

├ Categories `/ {destination} / {category} /`

|

├ Activity Hubs `/ {destination} / {activity-hub} /`

|

├ Collections `/ {destination} / {collection} /`

|
└─ Tours /{destination}/{tour-slug}/

Canonical URL Rule

Each tour has **one canonical URL**:

```
/{destination}/{tour-slug}/
```

Tours can appear on multiple discovery pages:

/curacao/boat-tours/	→ links to canonical tour URL
/curacao/klein-curacao/	→ links to canonical tour URL
/curacao/top-10-tours/	→ links to canonical tour URL

But all links point to the **same canonical tour page**.

9 Slug Registry — URL Routing & Uniqueness

[Slug Registry — URL Routing & Uniqueness.pdf](#)

The Problem

Categories, activity hubs, collections, and tours all live at the same URL level:

```
/{destination}/{slug}/
```

Without a central system, the router cannot determine whether `/curacao/dolphins/` is an activity hub, a tour, a collection, or a category. There is also no protection against slug collisions.

The Solution

The platform maintains a **central slugs table** in the database that acts as the single source of truth for all URL routing.

Every slug that is created is registered in this table. Per destination, a slug can only exist **once**.

Database Table: `slugs`

Column	Type	Description
<code>id</code>	UUID	Primary key
<code>destination_id</code>	UUID / FK	Reference to destination
<code>slug</code>	VARCHAR(255)	The URL slug
<code>entity_type</code>	ENUM	<code>category</code> , <code>tour</code> , <code>activity_hub</code> , <code>collection</code>
<code>entity_id</code>	UUID	Reference to the corresponding entity
<code>is_reserved</code>	BOOLEAN	If true, slug cannot be overwritten
<code>created_at</code>	TIMESTAMP	Creation date

Unique constraint: `(destination_id, slug)` — one slug per destination.

Validation Rules

1. **Uniqueness check** — Before saving any entity, check if the slug already exists within that destination. If taken → block save, return error.
2. **Slug normalization** — All slugs: lowercase, ASCII-only, hyphens as separators, no special characters, no double hyphens.
3. **Reserved slug protection** — The 19 global category slugs are automatically reserved when a new destination is created.
4. **Redirect on slug change** — When a slug changes, create a 301 redirect from old to new.
5. **Soft delete cooldown** — When content is deleted, keep slug reserved for 90 days.

Pre-Seeding

When a new destination is created, automatically reserve all 19 category slugs:

```
boat-tours, snorkeling, scuba-diving, sunset-cruises,
sightseeing-tours, day-trips, off-road-tours, jet-ski,
parasailing, water-sports, fishing-trips, nature-wildlife-tours,
hiking-tours, adventure-tours, cultural-tours, food-tours,
attraction-tickets, luxury-experiences, workshops-classes
```

Routing Logic (Next.js)

Route: `pages/[locale]/[destination]/[slug].tsx`

1. Extract destination and slug from URL
2. Validate destination exists

3. Query: `SELECT entity_type, entity_id FROM slugs WHERE destination_id = :dest AND slug = :slug`
4. Based on `entity_type` → render correct page component
5. No result → check redirect table for 301
6. No redirect → render 404

Resolution examples:

```
/curacao/boat-tours/  
→ entity_type: category → CategoryPage  
  
/curacao/klein-curacao-catamaran-day-trip/  
→ entity_type: tour → TourPage  
  
/curacao/klein-curacao/  
→ entity_type: activity_hub → ActivityHubPage  
  
/curacao/top-10-tours/  
→ entity_type: collection → CollectionPage
```

Redirect Table: `slug_redirects`

Column	Type	Description
<code>id</code>	UUID	Primary key
<code>destination_id</code>	UUID / FK	Reference to destination
<code>old_slug</code>	VARCHAR(255)	Previous slug
<code>new_slug</code>	VARCHAR(255)	Current slug
<code>redirect_type</code>	INT	301 or 302
<code>created_at</code>	TIMESTAMP	

Admin Interface Requirements

- Auto-generate slug from title
- Live URL preview: `island.tours/curacao/your-slug-here/`
- Real-time validation against slug registry
- On collision → show error: *"This slug is already in use by [entity_type]: [entity_name]"*
- On delete → offer redirect creation option

10 Technical Implementation

Rendering Strategy (Next.js)

Page Type	Rendering	Revalidation	Reason
Homepage	ISR	60 seconds	Dynamic content, not per-request
Destination page	ISR	60 seconds	Tour listings change gradually
Category page	ISR	60 seconds	Tour listings change gradually
Activity Hub page	ISR	300 seconds	More static SEO content
Collection page	ISR	60 seconds	Dynamic tour selection
Tour page	ISR	30 seconds	Availability and pricing must be current
Search results	SSR	—	Fully dynamic, not cacheable

API Endpoints

All content endpoints accept a `locale` query parameter (e.g. `?locale=es`). If omitted, defaults to `en`. The API returns translated content for the requested locale, falling back to English for missing translations.

Method	Endpoint	Description
GET	<code>/api/destinations?locale=xx</code>	List all destinations
GET	<code>/api/destinations/:slug?locale=xx</code>	Destination detail
GET	<code>/api/destinations/:dest/tours?locale=xx</code>	Tour listing with filters and sorting
GET	<code>/api/destinations/:dest/categories?locale=xx</code>	Categories with tour count (non-zero only)
GET	<code>/api/tours/:slug?locale=xx</code>	Tour detail with all attributes
GET	<code>/api/slug-lookup/:dest/:slug</code>	Slug type resolver for routing (locale-independent)
GET	<code>/api/hubs/:dest/:slug?locale=xx</code>	Activity hub content + tours
GET	<code>/api/collections/:dest/:slug?locale=xx</code>	Collection content + tours
GET	<code>/api/search?locale=xx</code>	Full-text search across tours
GET	<code>/api/filters/:dest/:category</code>	Available filters + value counts (locale-independent)

Tour listing query parameters:

```
GET /api/destinations/curacao/tours
  ?category=boat-tours
  &booking_type=private
  &boat_type=catamaran,yacht
  &duration_min=60
  &duration_max=480
  &price_min=25
  &price_max=200
  &rating_min=4.0
  &free_cancellation=true
  &sort=recommended
  &page=1
  &limit=20
```

Search Architecture

Search is a primary conversion driver. Implement full-text search across tours.

Search scope: Tour title + description + highlights + category names + activity hub names

Search features:

- Autocomplete with destination + category suggestions
- Results scoped to a destination or global
- Filter and sort search results using the same filters as category pages
- Search URL: `/search?q=catamaran&destination=curacao`

Recommended implementation: Algolia or Elasticsearch for full-text search with faceted filtering. Fallback: PostgreSQL full-text search with `tsvector`.

Structured Data (Schema.org)

Implement JSON-LD structured data on every page for Google rich results.

Page Type	Schema Types
Tour page	<code>TouristTrip</code> + <code>AggregateOffer</code> + <code>AggregateRating</code> + <code>BreadcrumbList</code>
Category page	<code>CollectionPage</code> + <code>ItemList</code> + <code>BreadcrumbList</code>
Destination page	<code>Place</code> + <code>ItemList</code> + <code>BreadcrumbList</code>
Activity Hub page	<code>Place</code> + <code>ItemList</code> + <code>Article</code> + <code>FAQPage</code> + <code>BreadcrumbList</code>
Collection page	<code>CollectionPage</code> + <code>ItemList</code> + <code>BreadcrumbList</code>

Breadcrumbs

Every page displays breadcrumbs. Breadcrumb structure per page type:

Page Type	Breadcrumb Path
Destination	Home → Destination
Category	Home → Destination → Category
Activity Hub	Home → Destination → Activity Hub
Collection	Home → Destination → Collection
Tour	Home → Destination → Primary Category → Tour

The tour breadcrumb uses the **first category** assigned to the tour as the intermediate breadcrumb.

Breadcrumbs are rendered as both visible UI and `BreadcrumbList` JSON-LD.

Sitemap Strategy

Generate dynamic XML sitemaps segmented by type and locale:

```
/sitemap.xml → sitemap index
/sitemaps/sitemap-en-destinations.xml → all destinations (English)
/sitemaps/sitemap-es-destinations.xml → all destinations (Spanish)
/sitemaps/sitemap-en-curacao-categories.xml → categories for curacao (English)
/sitemaps/sitemap-en-curacao-tours.xml → tours for curacao (English)
/sitemaps/sitemap-en-curacao-hubs.xml → activity hubs for curacao (English)
/sitemaps/sitemap-en-curacao-collections.xml → collections for curacao (English)
... (repeated per locale)
```

Rules:

- Generate a separate sitemap file per locale per content type
- Only include published pages with `status = published`
- Only include category pages with at least 1 published tour
- Update `lastmod` when content changes

- Each URL in the sitemap includes the full locale-prefixed path (e.g. `/en/curacao/boat-tours/`)
- Submit sitemap index to Google Search Console

Internal Linking Strategy

From	To	Logic
Destination page	All categories with tours, top activity hubs, featured collections	Navigation + discovery
Category page	Related categories (e.g. boat-tours → sunset-cruises)	Cross-category discovery
Tour page	Related tours (same category + destination, sorted by rating)	Cross-sell
Tour page	Activity hub (if assigned)	Contextual link
Activity Hub page	Related hubs in same destination	Exploration
All pages	Destination page via breadcrumbs	Navigation

CRO Elements

Build these into the tour card and tour detail page:

Element	Data source	Display
Social proof	<code>booking_count_today</code>	"Booked 12 times today"
Urgency	<code>spots_remaining</code>	"Only 3 spots left"
Recency	<code>last_booked_at</code>	"Last booked 2 hours ago"
Trust signals	<code>free_cancellation</code> , <code>instant_confirmation</code>	Badges on tour cards
Rating	<code>rating</code> + <code>review_count</code>	★ 4.8 (124 reviews)
Price anchor	<code>price_adult</code>	"From \$45 per person"

Internationalization (Multi-Language)

The platform is **multi-language from launch**. English is the primary language; all other languages are fully supported.

Supported languages:

Language	Locale code	Priority
English	<code>en</code>	Primary (default)
Spanish	<code>es</code>	Launch

Language	Locale code	Priority
Dutch	<code>nl</code>	Launch
Portuguese	<code>pt</code>	Launch
French	<code>fr</code>	Launch
German	<code>de</code>	Launch

URL Strategy: Locale Prefix + English Slugs

Slugs remain in English across all locales. Only the locale prefix and page content change per language. This is the same approach Viator uses at scale.

<code>/en/curacao/boat-tours/</code>	→ English
<code>/es/curacao/boat-tours/</code>	→ Spanish (content translated, slug English)
<code>/nl/curacao/boat-tours/</code>	→ Dutch (content translated, slug English)
<code>/pt/curacao/boat-tours/</code>	→ Portuguese
<code>/fr/curacao/boat-tours/</code>	→ French
<code>/de/curacao/boat-tours/</code>	→ German
<code>/zh/curacao/boat-tours/</code>	→ Chinese

Why English slugs (not translated slugs):

- Translated slugs would require managing a separate slug per language for every tour, category, activity hub, and collection — multiplying the slug registry by 7x
- The target audience (international tourists planning island vacations) predominantly searches in English, even when they are German, Spanish, or Dutch speakers
- The real SEO value of multi-language sits in translated page titles, meta descriptions, H1 headings, and body content — not in the slug itself
- English slugs keep the slug registry simple: one slug per entity per destination, resolved the same way regardless of locale

URL routing rules:

- Every URL has a locale prefix (`/en/`, `/es/`, `/nl/`, etc.)
- `/curacao/boat-tours/` (no prefix) → 302 redirect to the user's preferred language based on browser `Accept-Language` header, defaulting to `/en/curacao/boat-tours/`
- Each locale version has its own canonical URL (`/es/curacao/boat-tours/` is canonical for the Spanish version)

- The slug registry resolves identically across all locales — the locale prefix only determines which translation of the content to render

Data Model Requirements

- All content fields (title, description, highlights, short_description, meta_title, meta_description) must support **per-locale storage**
- Use a `translations` table with structure: `(entity_type, entity_id, locale, field, value)`
- English is the **fallback**: if a translation is missing for a field, display the English version
- Slugs are **not translated** — they are stored once on the entity itself

Translations table:

Column	Type	Description
<code>id</code>	UUID	Primary key
<code>entity_type</code>	ENUM	<code>tour</code> , <code>destination</code> , <code>category</code> , <code>activity_hub</code> , <code>collection</code>
<code>entity_id</code>	UUID	Reference to the entity
<code>locale</code>	VARCHAR(5)	Language code (<code>en</code> , <code>es</code> , <code>nl</code> , <code>pt</code> , <code>fr</code> , <code>de</code> , <code>zh</code>)
<code>field</code>	VARCHAR(100)	Field name (<code>title</code> , <code>description</code> , <code>meta_title</code> , etc.)
<code>value</code>	TEXT	Translated value

Index: `(entity_type, entity_id, locale, field)` — unique.

Example rows for a tour:

entity_type	entity_id	locale	field	value
tour	abc-123	en	title	Klein Curaçao Catamaran Day Trip
tour	abc-123	es	title	Excursión en Catamarán a Klein Curaçao
tour	abc-123	nl	title	Klein Curaçao Catamaran Dagtocht
tour	abc-123	de	title	Klein Curaçao Katamaran-Tagesausflug

Frontend Requirements

- Use `next-intl` or `react-i18next` for all UI strings — **no hardcoded English anywhere**
- All static UI text (buttons, labels, filter names, error messages, sort options) must be in the translation system

- Language switcher visible on every page
- `<html lang="xx">` set correctly per locale
- Language preference stored in cookie for return visits
- Next.js routing: `pages/[locale]/[destination]/[slug].tsx`

SEO Requirements

- `hreflang` tags on **every page** linking all language versions:

```
html
<link rel="alternate" hreflang="en" href="https://island.tours/en/curacao/boat-tours/" />
<link rel="alternate" hreflang="es" href="https://island.tours/es/curacao/boat-tours/" />
<link rel="alternate" hreflang="nl" href="https://island.tours/nl/curacao/boat-tours/" />
<link rel="alternate" hreflang="pt" href="https://island.tours/pt/curacao/boat-tours/" />
<link rel="alternate" hreflang="fr" href="https://island.tours/fr/curacao/boat-tours/" />
<link rel="alternate" hreflang="de" href="https://island.tours/de/curacao/boat-tours/" />
<link rel="alternate" hreflang="zh" href="https://island.tours/zh/curacao/boat-tours/" />
<link rel="alternate" hreflang="x-default" href="https://island.tours/en/curacao/boat-tours/" />
```

- `x-default` hreflang pointing to the English version
- Separate XML sitemap per locale (e.g. `sitemap-en-curacao-tours.xml`, `sitemap-es-curacao-tours.xml`)
- Meta titles and meta descriptions **translated per locale** — this is where the SEO value lives
- Open Graph tags set per locale (`og:locale`, translated `og:title` and `og:description`)

What Gets Translated (Priority Order)

Priority	Content	Impact
1	UI strings (buttons, labels, filters, navigation)	Usability

Priority	Content	Impact
2	Meta titles and meta descriptions	SEO (highest impact)
3	Tour titles and short descriptions	Discovery + conversion
4	Category and destination names/descriptions	SEO + navigation
5	Full tour descriptions and highlights	Conversion
6	Activity hub content sections	SEO (long-tail)
7	Collection descriptions	Lower priority

1 1 Architecture Rules Summary

Core entities (required):

Destination → Category → Tour → Attributes

Discovery layers (optional, parallel):

Activity Hubs (SEO content + tours)
Collections (curated/filtered tour lists)

URL rules:

- All URLs are prefixed with a locale code: `/{{locale}}/{{destination}}/{{slug}}/`
- All pages within a destination live at `/{{locale}}/{{destination}}/{{slug}}/`
- Every slug is unique per destination (enforced by slug registry)
- Slugs are in English across all locales (not translated)
- Every tour has exactly one canonical URL per locale
- Tours are never nested under categories or hubs
- Filtered URLs use query parameters with canonical pointing to base page
- Slug changes create 301 redirects

Data rules:

- Categories are global, instantiated per destination
- Category pages only exist when they have ≥1 published tour
- Tours belong to 1 destination, 1+ categories, 0–n activity hubs
- Attributes are validated against the central dictionary
- All slugs are normalized: lowercase, ASCII, hyphenated

- All content fields support per-locale translations with English as fallback

Technical rules:

- Slug registry resolves all `/{{destination}}/{{slug}}/` routes (locale-independent)
- ISR for all content pages, SSR for search only
- Structured data (JSON-LD) on every page
- Breadcrumbs on every page
- hreflang tags on every page linking all 7 locale versions
- Dynamic XML sitemaps per content type per locale
- `next-intl` or `react-i18next` for all UI strings — no hardcoded English