


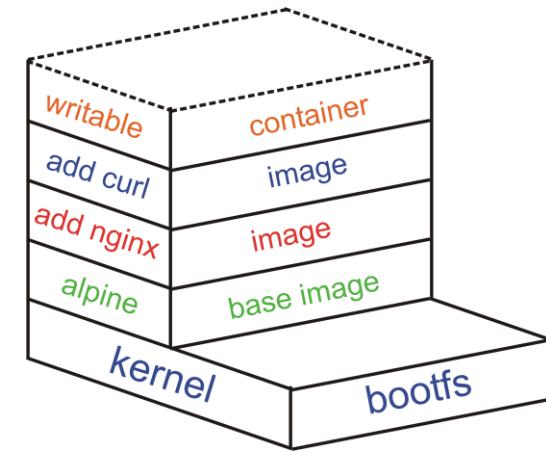

How to Create Docker Containers

Create Container

docker container run -i -t --name c1 alpine ash

cli ↓

context ↓

command ↓

interactive mode ↓

allocate pseudo tty ↓

container name ↓

image ↓

program to run ↓

docker container run -i -t --name c1 alpine ash

(It will create container “c1” in interactive mode and allocate pseudo tty)

Docker Image vs Container

Image: A static template that contains everything to create a container.

Container: A running instance of a Docker image.

List Containers

docker container ls

(run this command in other terminal. It will show running containers)

docker container ls -a

(run this command in other terminal. It will show all including stopped containers)

Old Commands for Creating and Listing Containers

`docker run -i -t --name c1 alpine ash`

cli ↓
command ↓
interactive mode ↓
allocate pseudo tty ↓
container name ↓
image ↓
program to run ↓

`docker run -i -t --name c1 alpine ash`

(It will create container “c1” in interactive mode and allocate pseudo tty)

`docker ps`

(run this command in other terminal. It will show running containers)

`docker ps -a`

(run this command in other terminal. It will show all including stopped containers)