



121.196.62.22

Report generated by Nessus™

Tue, 05 Sep 2023 17:47:52 China Standard Time

TABLE OF CONTENTS


Vulnerabilities by Host

- 121.196.62.22.....4

Nessus Essentials

Vulnerabilities by Host

121.196.62.22

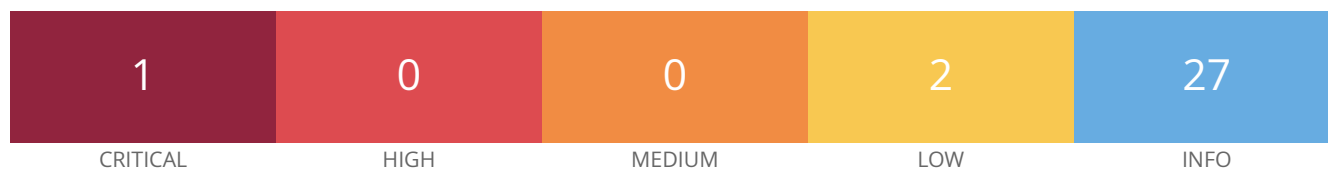

Scan Information

Start time: Tue Sep 5 17:47:52 2023

End time: Tue Sep 5 18:00:01 2023

Host Information

IP: 121.196.62.22

OS: Linux Kernel 3.16 on Debian 8.0 (jessie)

Vulnerabilities

33850 - Unix Operating System Unsupported Version Detection

Synopsis

The operating system running on the remote host is no longer supported.

Description

According to its self-reported version number, the Unix operating system running on the remote host is no longer supported.

Lack of support implies that no new security patches for the product will be released by the vendor. As a result, it is likely to contain security vulnerabilities.

Solution

Upgrade to a version of the Unix operating system that is currently supported.

Risk Factor

Critical

CVSS v3.0 Base Score

10.0 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:C/C:H/I:H/A:H)

CVSS v2.0 Base Score

121.196.62.22

10.0 (CVSS2#AV:N/AC:L/Au:N/C:C/I:C/A:C)

References

XREF	IAVA:0001-A-0502
XREF	IAVA:0001-A-0648

Plugin Information

Published: 2008/08/08, Modified: 2023/07/07

Plugin Output

tcp/0

```
Debian 8.0 support ended on 2018-06-17 (end of regular support) / 2020-06-30 (end of long-term
support for Jessie-LTS).
Upgrade to Debian Linux 11.x ("Bullseye").

For more information, see : http://www.debian.org/releases/
```

70658 - SSH Server CBC Mode Ciphers Enabled

Synopsis

The SSH server is configured to use Cipher Block Chaining.

Description

The SSH server is configured to support Cipher Block Chaining (CBC) encryption. This may allow an attacker to recover the plaintext message from the ciphertext.

Note that this plugin only checks for the options of the SSH server and does not check for vulnerable software versions.

Solution

Contact the vendor or consult product documentation to disable CBC mode cipher encryption, and enable CTR or GCM cipher mode encryption.

Risk Factor

Low

VPR Score

2.5

CVSS v2.0 Base Score

2.6 (CVSS2#AV:N/AC:H/Au:N/C:P/I:N/A:N)

CVSS v2.0 Temporal Score

1.9 (CVSS2#E:U/RL:OF/RC:C)

References

BID	32319
CVE	CVE-2008-5161
XREF	CERT:958563
XREF	CWE:200

Plugin Information

Published: 2013/10/28, Modified: 2018/07/30

Plugin Output

tcp/22/ssh

121.196.62.22

The following client-to-server Cipher Block Chaining (CBC) algorithms are supported :

- 3des-cbc
- aes128-cbc
- aes192-cbc
- aes256-cbc
- blowfish-cbc
- cast128-cbc

The following server-to-client Cipher Block Chaining (CBC) algorithms are supported :

- 3des-cbc
- aes128-cbc
- aes192-cbc
- aes256-cbc
- blowfish-cbc
- cast128-cbc

153953 - SSH Weak Key Exchange Algorithms Enabled

Synopsis

The remote SSH server is configured to allow weak key exchange algorithms.

Description

The remote SSH server is configured to allow key exchange algorithms which are considered weak.

This is based on the IETF draft document Key Exchange (KEX) Method Updates and Recommendations for Secure Shell (SSH) draft-ietf-curdle-ssh-kex-sha2-20. Section 4 lists guidance on key exchange algorithms that SHOULD NOT and MUST NOT be enabled. This includes:

diffie-hellman-group-exchange-sha1

diffie-hellman-group1-sha1

gss-gex-sha1-*

gss-group1-sha1-*

gss-group14-sha1-*

rsa1024-sha1

Note that this plugin only checks for the options of the SSH server, and it does not check for vulnerable software versions.

See Also

<http://www.nessus.org/u?b02d91cd>

<https://datatracker.ietf.org/doc/html/rfc8732>

Solution

Contact the vendor or consult product documentation to disable the weak algorithms.

Risk Factor

Low

CVSS v3.0 Base Score

3.7 (CVSS:3.0/AV:N/AC:H/PR:N/UI:N/S:U/C:L/I:N/A:N)

CVSS v2.0 Base Score

2.6 (CVSS2#AV:N/AC:H/Au:N/C:P/I:N/A:N)

Plugin Information

Plugin Output

tcp/22/ssh

```
The following weak key exchange algorithms are enabled :
```

```
diffie-hellman-group-exchange-sha1  
diffie-hellman-group1-sha1
```

18261 - Apache Banner Linux Distribution Disclosure

Synopsis

The name of the Linux distribution running on the remote host was found in the banner of the web server.

Description

Nessus was able to extract the banner of the Apache web server and determine which Linux distribution the remote host is running.

Solution

If you do not wish to display this information, edit 'httpd.conf' and set the directive 'ServerTokens Prod' and restart Apache.

Risk Factor

None

Plugin Information

Published: 2005/05/15, Modified: 2022/03/21

Plugin Output

tcp/0

```
The Linux distribution detected was :  
- Debian 8.0 (jessie)
```

48204 - Apache HTTP Server Version

Synopsis

It is possible to obtain the version number of the remote Apache HTTP server.

Description

The remote host is running the Apache HTTP Server, an open source web server. It was possible to read the version number from the banner.

See Also

<https://httpd.apache.org/>

Solution

n/a

Risk Factor

None

References

XREF	IAVT:0001-T-0030
XREF	IAVT:0001-T-0530

Plugin Information

Published: 2010/07/30, Modified: 2023/08/17

Plugin Output

tcp/8082/www

```
URL      : http://121.196.62.22:8082/
Version  : 2.4.99
Source   : Server: Apache/2.4.10 (Debian)
backported : 1
os       : ConvertedDebian
```

39520 - Backported Security Patch Detection (SSH)

Synopsis

Security patches are backported.

Description

Security patches may have been 'backported' to the remote SSH server without changing its version number.

Banner-based checks have been disabled to avoid false positives.

Note that this test is informational only and does not denote any security problem.

See Also

https://access.redhat.com/security/updates/backporting/?sc_cid=3093

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/06/25, Modified: 2015/07/07

Plugin Output

tcp/22/ssh

```
Give Nessus credentials to perform local checks.
```

39521 - Backported Security Patch Detection (WWW)

Synopsis

Security patches are backported.

Description

Security patches may have been 'backported' to the remote HTTP server without changing its version number.

Banner-based checks have been disabled to avoid false positives.

Note that this test is informational only and does not denote any security problem.

See Also

https://access.redhat.com/security/updates/backporting/?sc_cid=3093

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/06/25, Modified: 2015/07/07

Plugin Output

tcp/8082/www

```
Give Nessus credentials to perform local checks.
```

45590 - Common Platform Enumeration (CPE)

Synopsis

It was possible to enumerate CPE names that matched on the remote system.

Description

By using information obtained from a Nessus scan, this plugin reports CPE (Common Platform Enumeration) matches for various hardware and software products found on a host.

Note that if an official CPE is not available for the product, this plugin computes the best possible CPE based on the information available from the scan.

See Also

<http://cpe.mitre.org/>

<https://nvd.nist.gov/products/cpe>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2010/04/21, Modified: 2023/07/27

Plugin Output

tcp/0

```
The remote operating system matched the following CPE :
```

```
cpe:/o:debian:debian_linux:8.0 -> Debian Linux
```

```
Following application CPE's matched on the remote system :
```

```
cpe:/a:apache:http_server:2.4.10 -> Apache Software Foundation Apache HTTP Server
```

```
cpe:/a:apache:http_server:2.4.99 -> Apache Software Foundation Apache HTTP Server
```

```
cpe:/a:mysql:mysql -> MySQL MySQL
```

```
cpe:/a:openbsd:openssh:7.4 -> OpenBSD OpenSSH
```

54615 - Device Type

Synopsis

It is possible to guess the remote device type.

Description

Based on the remote operating system, it is possible to determine what the remote system type is (eg: a printer, router, general-purpose computer, etc).

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2011/05/23, Modified: 2022/09/09

Plugin Output

tcp/0

```
Remote device type : general-purpose  
Confidence level : 95
```

10107 - HTTP Server Type and Version

Synopsis

A web server is running on the remote host.

Description

This plugin attempts to determine the type and the version of the remote web server.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0931

Plugin Information

Published: 2000/01/04, Modified: 2020/10/30

Plugin Output

tcp/8082/www

```
The remote web server type is :  
Apache/2.4.10 (Debian)
```


24260 - HyperText Transfer Protocol (HTTP) Information

Synopsis

Some information about the remote HTTP configuration can be extracted.

Description

This test gives some information about the remote HTTP protocol - the version used, whether HTTP Keep-Alive and HTTP pipelining are enabled, etc...

This test is informational only and does not denote any security problem.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/01/30, Modified: 2019/11/22

Plugin Output

tcp/8082/www

```
Response Code : HTTP/1.1 302 Found
```

```
Protocol version : HTTP/1.1
```

```
SSL : no
```

```
Keep-Alive : yes
```

```
Options allowed : (Not implemented)
```

```
Headers :
```

```
    Date: Tue, 05 Sep 2023 09:54:06 GMT
```

```
    Server: Apache/2.4.10 (Debian)
```

```
    Expires: Thu, 19 Nov 1981 08:52:00 GMT
```

```
    Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0
```

```
    Pragma: no-cache
```

```
    Location: login.php
```

```
    Content-Length: 0
```

```
    Keep-Alive: timeout=5, max=100
```

```
    Connection: Keep-Alive
```

```
    Content-Type: text/html; charset=UTF-8
```

```
Response Body :
```

10114 - ICMP Timestamp Request Remote Date Disclosure

Synopsis

It is possible to determine the exact time set on the remote host.

Description

The remote host answers to an ICMP timestamp request. This allows an attacker to know the date that is set on the targeted machine, which may assist an unauthenticated, remote attacker in defeating time-based authentication protocols.

Timestamps returned from machines running Windows Vista / 7 / 2008 / 2008 R2 are deliberately incorrect, but usually within 1000 seconds of the actual system time.

Solution

Filter out the ICMP timestamp requests (13), and the outgoing ICMP timestamp replies (14).

Risk Factor

None

CVSS v3.0 Base Score

0.0 (CVSS:3.0/AV:L/AC:L/PR:N/UI:N/S:U/C:N/I:N/A:N)

CVSS v2.0 Base Score

0.0 (CVSS2#AV:L/AC:L/Au:N/C:N/I:N/A:N)

References

CVE CVE-1999-0524

XREF CWE:200

Plugin Information

Published: 1999/08/01, Modified: 2023/04/27

Plugin Output

icmp/0

```
The remote clock is synchronized with the local clock.
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2023/06/20

Plugin Output

tcp/22/ssh

```
Port 22/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2023/06/20

Plugin Output

tcp/8082/www

```
Port 8082/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2023/06/20

Plugin Output

tcp/33060/mysql

```
Port 33060/tcp was found to be open
```

19506 - Nessus Scan Information

Synopsis

This plugin displays information about the Nessus scan.

Description

This plugin displays, for each tested host, information about the scan itself :

- The version of the plugin set.
- The type of scanner (Nessus or Nessus Home).
- The version of the Nessus Engine.
- The port scanner(s) used.
- The port range scanned.
- The ping round trip time
- Whether credentialed or third-party patch management checks are possible.
- Whether the display of superseded patches is enabled
- The date of the scan.
- The duration of the scan.
- The number of hosts scanned in parallel.
- The number of checks done in parallel.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2005/08/26, Modified: 2023/07/31

Plugin Output

tcp/0

Information about this scan :

```
Nessus version : 10.6.0
Nessus build : 20103
Plugin feed version : 202309050602
Scanner edition used : Nessus Home
Scanner OS : WINDOWS
Scanner distribution : win-x86-64
Scan type : Normal
Scan name : 121.196.62.22
```

```
Scan policy used : Advanced Scan
Scanner IP : 192.168.1.12
Port scanner(s) : nessus_syn_scanner
Port range : 1-65535
Ping RTT : 69.320 ms
Thorough tests : no
Experimental tests : no
Plugin debugging enabled : no
Paranoia level : 1
Report verbosity : 1
Safe checks : yes
Optimize the test : yes
Credentialed checks : no
Patch management checks : None
Display superseded patches : yes (supersedence plugin launched)
CGI scanning : disabled
Web application tests : disabled
Max hosts : 5
Max checks : 5
Recv timeout : 5
Backports : Detected
Allow post-scan editing : Yes
Nessus Plugin Signature Checking : Enabled
Audit File Signature Checking : Disabled
Scan Start Date : 2023/9/5 17:47 China Standard Time
Scan duration : 726 sec
Scan for malware : no
```

11936 - OS Identification

Synopsis

It is possible to guess the remote operating system.

Description

Using a combination of remote probes (e.g., TCP/IP, SMB, HTTP, NTP, SNMP, etc.), it is possible to guess the name of the remote operating system in use. It is also possible sometimes to guess the version of the operating system.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2003/12/09, Modified: 2022/03/09

Plugin Output

tcp/0

```
Remote operating system : Linux Kernel 3.16 on Debian 8.0 (jessie)
Confidence level : 95
Method : HTTP
```

```
The remote host is running Linux Kernel 3.16 on Debian 8.0 (jessie)
```


117886 - OS Security Patch Assessment Not Available

Synopsis

OS Security Patch Assessment is not available.

Description

OS Security Patch Assessment is not available on the remote host.

This does not necessarily indicate a problem with the scan.

Credentials may not have been provided, OS security patch assessment may not be supported for the target, the target may not have been identified, or another issue may have occurred that prevented OS security patch assessment from being available. See plugin output for details.

This plugin reports non-failure information impacting the availability of OS Security Patch Assessment. Failure information is reported by plugin 21745 : 'OS Security Patch Assessment failed'. If a target host is not supported for OS Security Patch Assessment, plugin 110695 : 'OS Security Patch Assessment Checks Not Supported' will report concurrently with this plugin.

Solution

n/a

Risk Factor

None

References

XREF IAVB:0001-B-0515

Plugin Information

Published: 2018/10/02, Modified: 2021/07/12

Plugin Output

tcp/0

The following issues were reported :

```
- Plugin      : no_local_checks_credentials.nasl
  Plugin ID   : 110723
  Plugin Name : Target Credential Status by Authentication Protocol - No Credentials Provided
  Message     :
  Credentials were not provided for detected SSH service.
```

70657 - SSH Algorithms and Languages Supported

Synopsis

An SSH server is listening on this port.

Description

This script detects which algorithms and languages are supported by the remote service for encrypting communications.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2013/10/28, Modified: 2017/08/28

Plugin Output

tcp/22/ssh

```
Nessus negotiated the following encryption algorithm with the server :
```

```
The server supports the following options for kex_algorithms :
```

```
curve25519-sha256
curve25519-sha256@libssh.org
diffie-hellman-group-exchange-sha1
diffie-hellman-group-exchange-sha256
diffie-hellman-group1-sha1
diffie-hellman-group14-sha1
diffie-hellman-group14-sha256
diffie-hellman-group16-sha512
diffie-hellman-group18-sha512
ecdh-sha2-nistp256
ecdh-sha2-nistp384
ecdh-sha2-nistp521
```

```
The server supports the following options for server_host_key_algorithms :
```

```
ecdsa-sha2-nistp256
rsa-sha2-256
rsa-sha2-512
ssh-ed25519
ssh-rsa
```

```
The server supports the following options for encryption_algorithms_client_to_server :
```

```
3des-cbc
aes128-cbc
```

```
aes128-ctr
aes128-gcm@openssh.com
aes192-cbc
aes192-ctr
aes256-cbc
aes256-ctr
aes256-gcm@openssh.com
blowfish-cbc
cast128-cbc
chacha20-poly1305@openssh.com
```

The server supports the following options for `encryption_algorithms_server_to_client` :

```
3des-cbc
aes128-cbc
aes128-ctr
aes128-gcm@openssh.com
aes192-cbc
aes192-ctr
aes256-cbc
aes256-ctr
aes256-gcm@openssh.com
blowfish-cbc
cast128-cbc
chacha20-poly1305@openssh.com
```

The server supports the following options for `mac_algorithms_client_to_server` :

```
hmac-sha1
hmac-sha1-etm@openssh.com
hmac-sha2-256
hmac-sha2-256-etm@openssh.com
hmac-sha2-512
hmac-sha2-512-etm@openssh.com
umac-128-etm@openssh.com
umac-128@openssh.com
umac-64-etm@openssh.com
umac-64@openssh.com
```

The server supports the following options for `mac_algorithms_server_to_client` :

```
hmac-sha1
hmac-sha1-etm@openssh.com
hmac-sha2-256
hmac-sha2-256-etm@openssh.com
hmac-sha2-512
hmac-sha2-512-etm@openssh.com
umac-128-etm@openssh.com
umac-128@openssh.com
umac-64-etm@openssh.com
umac-64@openssh.com
```

The server supports the following options for `compression_algorithms_client_to_server` :

```
none
zlib@openssh.com
```

The server supports the following options for `compression_algorithms_server_to_ [...]`

149334 - SSH Password Authentication Accepted

Synopsis

The SSH server on the remote host accepts password authentication.

Description

The SSH server on the remote host accepts password authentication.

See Also

<https://tools.ietf.org/html/rfc4252#section-8>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2021/05/07, Modified: 2021/05/07

Plugin Output

tcp/22/ssh

10881 - SSH Protocol Versions Supported

Synopsis

A SSH server is running on the remote host.

Description

This plugin determines the versions of the SSH protocol supported by the remote SSH daemon.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2002/03/06, Modified: 2021/01/19

Plugin Output

tcp/22/ssh

```
The remote SSH daemon supports the following versions of the  
SSH protocol :
```

- 1.99
- 2.0

153588 - SSH SHA-1 HMAC Algorithms Enabled

Synopsis

The remote SSH server is configured to enable SHA-1 HMAC algorithms.

Description

The remote SSH server is configured to enable SHA-1 HMAC algorithms.

Although NIST has formally deprecated use of SHA-1 for digital signatures, SHA-1 is still considered secure for HMAC as the security of HMAC does not rely on the underlying hash function being resistant to collisions.

Note that this plugin only checks for the options of the remote SSH server.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2021/09/23, Modified: 2022/04/05

Plugin Output

tcp/22/ssh

```
The following client-to-server SHA-1 Hash-based Message Authentication Code (HMAC) algorithms are supported :
```

```
hmac-sha1
hmac-sha1-etm@openssh.com
```

```
The following server-to-client SHA-1 Hash-based Message Authentication Code (HMAC) algorithms are supported :
```

```
hmac-sha1
hmac-sha1-etm@openssh.com
```

10267 - SSH Server Type and Version Information

Synopsis

An SSH server is listening on this port.

Description

It is possible to obtain information about the remote SSH server by sending an empty authentication request.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0933

Plugin Information

Published: 1999/10/12, Modified: 2020/09/22

Plugin Output

tcp/22/ssh

```
SSH version : SSH-2.0-OpenSSH_7.4
SSH supported authentication : publickey,gssapi-keyex,gssapi-with-mic,password
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2023/07/10

Plugin Output

tcp/22/ssh

```
An SSH server is running on this port.
```


22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2023/07/10

Plugin Output

tcp/8082/www

```
A web server is running on this port.
```

17975 - Service Detection (GET request)

Synopsis

The remote service could be identified.

Description

It was possible to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0935

Plugin Information

Published: 2005/04/06, Modified: 2021/10/27

Plugin Output

tcp/33060/mysql

```
A MySQL server seems to be running on this port but the Nessus scanner
IP has been blacklisted. Run 'mysqladmin flush-hosts' if you want
complete tests.
```

25220 - TCP/IP Timestamps Supported

Synopsis

The remote service implements TCP timestamps.

Description

The remote host implements TCP timestamps, as defined by RFC1323. A side effect of this feature is that the uptime of the remote host can sometimes be computed.

See Also

<http://www.ietf.org/rfc/rfc1323.txt>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/05/16, Modified: 2019/03/06

Plugin Output

tcp/0

110723 - Target Credential Status by Authentication Protocol - No Credentials Provided

Synopsis

Nessus was able to find common ports used for local checks, however, no credentials were provided in the scan policy.

Description

Nessus was not able to successfully authenticate directly to the remote target on an available authentication protocol. Nessus was able to connect to the remote port and identify that the service running on the port supports an authentication protocol, but Nessus failed to authenticate to the remote service using the provided credentials. There may have been a protocol failure that prevented authentication from being attempted or all of the provided credentials for the authentication protocol may be invalid. See plugin output for error details.

Please note the following :

- This plugin reports per protocol, so it is possible for valid credentials to be provided for one protocol and not another. For example, authentication may succeed via SSH but fail via SMB, while no credentials were provided for an available SNMP service.
- Providing valid credentials for all available authentication protocols may improve scan coverage, but the value of successful authentication for a given protocol may vary from target to target depending upon what data (if any) is gathered from the target via that protocol. For example, successful authentication via SSH is more valuable for Linux targets than for Windows targets, and likewise successful authentication via SMB is more valuable for Windows targets than for Linux targets.

Solution

n/a

Risk Factor

None

References

XREF IAVB:0001-B-0504

Plugin Information

Published: 2018/06/27, Modified: 2023/02/13

Plugin Output

tcp/0

```
SSH was detected on port 22 but no credentials were provided.  
SSH local checks were not enabled.
```


10287 - Traceroute Information

Synopsis

It was possible to obtain traceroute information.

Description

Makes a traceroute to the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/11/27, Modified: 2023/06/26

Plugin Output

udp/0

```
For your information, here is the traceroute from 192.168.1.12 to 121.196.62.22 :
192.168.1.12
```

```
An error was detected along the way.
```

```
An error was detected along the way.
```

```
An error was detected along the way.
```

```
An error was detected along the way.
```

```
An error was detected along the way.
```

```
An error was detected along the way.
```

```
An error was detected along the way.
```

```
192.168.1.1
114.253.80.1
61.51.101.33
?
219.158.123.202
?
121.196.62.22
```

```
Hop Count: 9
```

10302 - Web Server robots.txt Information Disclosure

Synopsis

The remote web server contains a 'robots.txt' file.

Description

The remote host contains a file named 'robots.txt' that is intended to prevent web 'robots' from visiting certain directories in a website for maintenance or indexing purposes. A malicious user may also be able to use the contents of this file to learn of sensitive documents or directories on the affected site and either retrieve them directly or target them for other attacks.

See Also

<http://www.robotstxt.org/orig.html>

Solution

Review the contents of the site's robots.txt file, use Robots META tags instead of entries in the robots.txt file, and/or adjust the web server's access controls to limit access to sensitive material.

Risk Factor

None

Plugin Information

Published: 1999/10/12, Modified: 2018/11/15

Plugin Output

tcp/8082/www

```
Contents of robots.txt :
```

```
User-agent: *  
Disallow: /
```