EX: 12 Live host discovery using Nmap.

AIM:


To discover live host using Nmap scanning techniques.

Procedure:

1. Log in to tryHackMe.
2. Open the required Nmap room.
3. Start the target machine.
4. Launch the AttackBox.
5. Open the terminal.
6. Perform ARP, ICMP, TCP and UDP scans.
7. Observe and records the scan results.

Result:

Thus, live host were discovered successfully using Nmap.

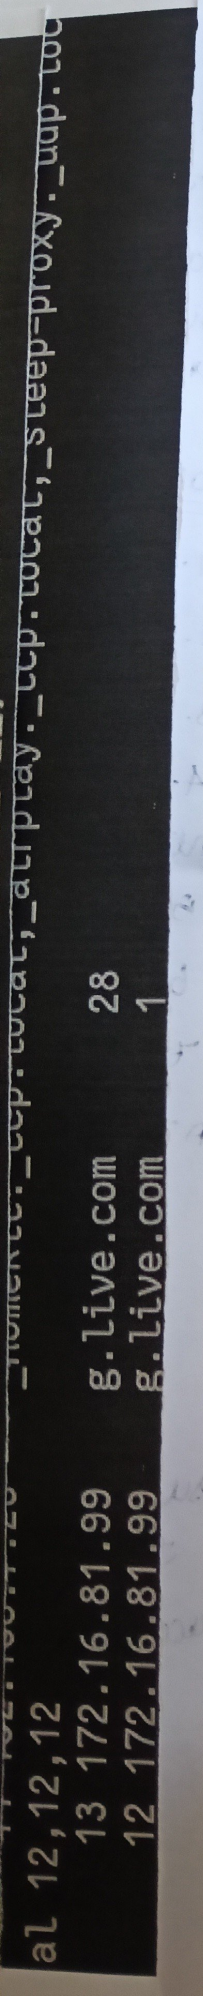

```
$ sudo nmap -sn -PU53,161 10.10.210.15

Starting Nmap
Host 10.10.210.15 is up.
Nmap done: 1 IP address (1 host up) scanned.
```

```
Misses: 0
```

```
$ sudo nmap -sn -PR 10.10.210.15

Starting Nmap
Host 10.10.210.15 is up.
Nmap done: 1 IP address (1 host up) scanned.
```

```
$ nmap -sn -PE 10.10.210.15

Starting Nmap
Host 10.10.210.15 is up.
Nmap done: 1 IP address (1 host up) scanned.
```

```
Reply from 200.1.1.2: bytes=32 time<1ms TTL=127
al 12,12,12
    13 172.16.81.99    g.live.com      28
    12 172.16.81.99    g.live.com      1
```

Ex: 12

Aim:

To

Procedure

1. Log

2. Open

3. Sta

4. Laun

5. Ope

6. Re

7. O

Result:

Thus,

using