Exercise No. 2 Communication Networks I Summer Term 2015





Prof. Dr.-Ing. Ralf Steinmetz

Multimedia Communications Lab
Institut für Datentechnik
Fachbereich Elektrotechnik und Informationstechnik
Fachbereich Informatik (Zweitmitglied)

Published at:	04.05.2015
Tutorial date:	07.05.2015

General Remarks

Welcome to the exercise for Communication Networks I. Please adhere to the following general remarks regarding the organization of the exercise during this summer term.

- One week before the tutorial, a new exercise will be published at the Exercise area of the KN1 Moodle (https://moodle.tu-darmstadt.de/course/view.php?id=5268)
- The exercise serves as your hands-on experience in addition to the lecture and as a preparation for the exam
- The questions in the exercise can be discussed at the tutorial date
- The sample solution for the exercise is available at the Exercise area of KN1 Moodle in addition to the corresponding tutorial. Nevertheless, we encourage students to try to solve the exercise themselves before the tutorial date without looking into the solution as a good practice to understand the subject of the lecture

Problem 1 - Multiple Choice

a) What is the purpose of a checksum, such as CRC (Cyclic Redundancy Code)?

- A) Add redundancy to a frame for error detection.
- B) Flow control protocol.
- C) Extension of HDLC (High-Level Data Link Control).
- D) Find redundant code in cyclic routers.
- E) Determine the routes in cyclic networks with redundant codepoints.

b) In which layer is CRC used for error detection?

- A) Physical Layer
- B) Correction Layer
- C) Data Link Layer
- D) Network Layer
- E) Transport Layer

c) Which is an extension to the original sliding window algorithm?

- A) Driving
- B) Sequence number
- C) Acknowledgment
- D) Window size
- E) Negative Acknowledgment

Problem 2 - Sliding Window


The Sliding-Window Protocol with window size 3, sequence numbers 0-5, **including Acknowledgement**, (Ack1 = Acknowledgement of Frame 1 and all previous not yet acknowledged Frames) and for error treatment Selective-repeat is used.

a) Complete the entries for the Sender and Receiver Windows in the following table (B = free Buffer space, L/U = Lower/Upper Bound) and the sequence numbers used for the transmitted Frames and Acknowledgements. Hint: The column Action shows the last action the Sender/Receiver has done. For example the Sender has sent the Frame 0 (F0) at Time 1 and the Receiver has received Frame 0 at Time 2. Thus the values of the Upper/Lower bound and the Window must match with the Action column. At Time 3 the Sender/Receiver sends a Frame/ACK at the same time. What happens if ACK 2 is lost (Time 8)?

Time	Sender Window			Action		Receiver Window		
	В	L	U	Sender	Receiver	L	U	В
0	3	0	0			0	2	3
1		0	1	F 0		0	2	3
2					F 0	1		
3				F	ACK			
4					F			
5				ACK				
6				F				
7					F			
8					ACK			
					(lost)			
9				F				
10				timeout	F			
11				F (retransmit)				
12					F			
13					ACK			
14				ACK				
15				F				
16					F			
17					ACK			
18				ACK				

Problem 3 - Sliding Window

a) The Sliding-Window Protocol with window size 3, sequence numbers 0-5, **separate Acknowledgement** and error treatment Selective-Repeat is used. The clock like circles are used to indicate the Sender and Receiver Windows (LB = Lower Bound and UB = Upper Bound). Complete the following diagram.

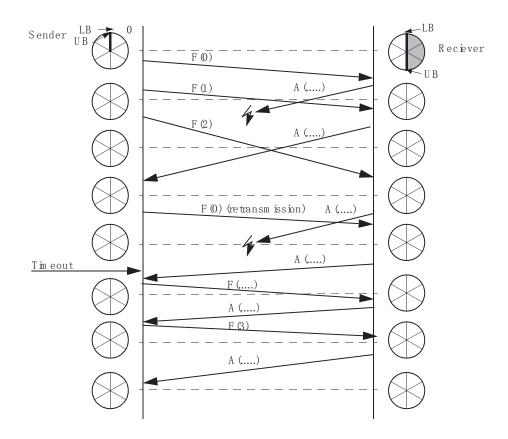

- b) Compare the error treatment methods "Go-Back-N" and "Selective-Repeat"? What does the decision, which one is to be used, depend upon?
- c) What does the start_ack_timer do?