

Paper Title in Title Case

Author One^{*11}, Author Two^{*1,2}, Author Three³

¹Institution One, City, Country
²Institution Two, City, Country
³Institution Three, City, Country
author1@example.com, author2@example.com

Abstract

Your abstract here. Do not include references in the abstract. Summarize the problem, method, and key results in one concise paragraph.

Introduction

Body text is 10pt Times with 12pt leading, justified, 10pt first-line indent.

Inline math: $x \in \mathbb{R}^d$. Display math:

$$h_t = \sigma(Wx_t + Uh_{t-1} + b)$$

Inline code / verbatim: `x = f(h)`. Italic: *text*. Bold: **bold**. Typewriter: `code`. URL: `example.com`. Footnote.²

Related Work

Long quotation / extract (10pt indent on each side, begin{quote} equivalent):

This is an example of an extract or quotation. Quotation marks are not necessary when the text is offset in a block like this, and the source is cited in the text.

Itemize list (begin{itemize}):

- First item
- Second item
- Third item

Enumerate list (begin{enumerate}):

1. First item
2. Second item
3. Third item

Method

Subsection Heading

Text under a subsection. Reference a figure: Figure 1.

Subsubsection Heading.

Paragraph Heading.. Text continues on the same line after the bold run-in heading, just like paragraph{} in LaTeX.

Experiments

As shown in Figure 1, single-column figures float to the top of the column. Reference tables with Table 1.

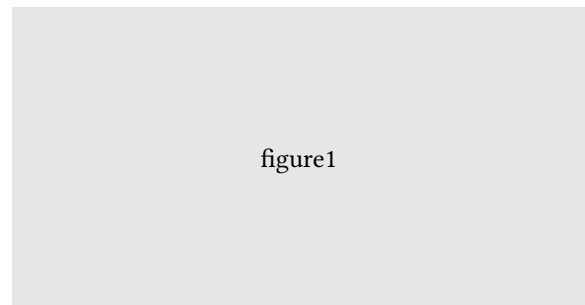


Figure 1: Single-column figure. Caption is 10pt roman, placed below. Crop figures in a graphics program before including them.

Algorithm 1: Example algorithm

Input: Algorithm's input
Parameter: Optional list of parameters
Output: Algorithm's output
Let $t = 0$.
while $t < T$ **do**
 Do some action. // inline comment
 if condition **then**
 Perform task A.
 else
 Perform task B.
 end if
 $t \leftarrow t + 1$
end while
return solution

See Algorithm 1. For a for-loop: `#algo-for[each $x in cal(D)$][...]`.

¹Equal contribution.

²Footnotes appear at column bottom, separated by a thin rule.

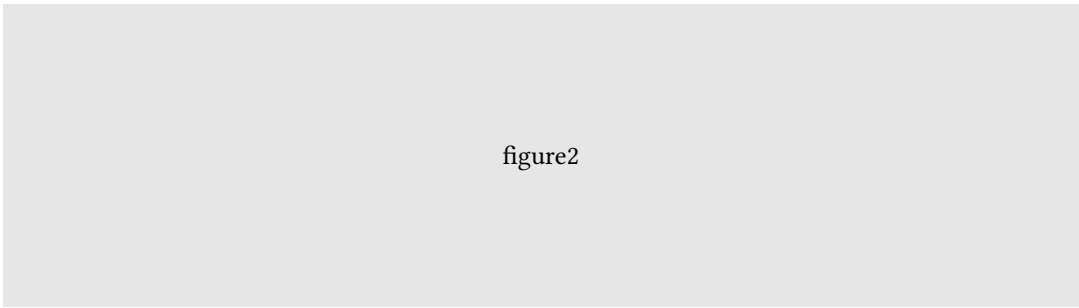


figure2

Figure 2: Full-width figure spanning both columns (`\begin{figure*}` equivalent). Use scope: "parent" in Typst to escape the columns block.

Col A	Col B	Col C	Col D	Col E	Col F
val	val	val	val	val	val

Table 2: Wide table spanning both columns.

Method	Acc	F1	AUC
Baseline	82.3	81.1	0.89
Ours	85.7	84.2	0.92

Table 1: Single-column table. Caption is 10pt roman, placed below the table. Use `column-gutter: 1mm` to compress columns if too wide.

Listing 1: Example listing `quicksort.hs`

```
quicksort :: Ord a => [a] -> [a]
quicksort [] = []
quicksort (p:xs) = quicksort lesser ++ [p] ++
quicksort greater
  where
    lesser = filter (< p) xs
    greater = filter (>= p) xs
```

See Listing 1.

Conclusion

Your conclusion here.