




Architectural section drawing of a building, showing internal structure, rooms, and a staircase. A large arrow points to a specific area labeled "Detail".

Keynote legend	
Key Value	Keynote Text
100	150mm Prebabricated concrete element (Inner leaf), 250mm Mineral wool, 70mm Prefabricated concrete element (Outer leaf)
230	2mm Linoleum, 12mm Plywood, 12mm Density fiberboard, 180mm Insulation, 10mm Free, 220mm Hollow core deck element
250	30mm Concrete tiles, 15mm Free space/ceiling battens, 10mm Roofing felt, 200mm Hard insulation, 180mm Soft insulation, 220mm Hollowcore deck element

K01_H5_N18

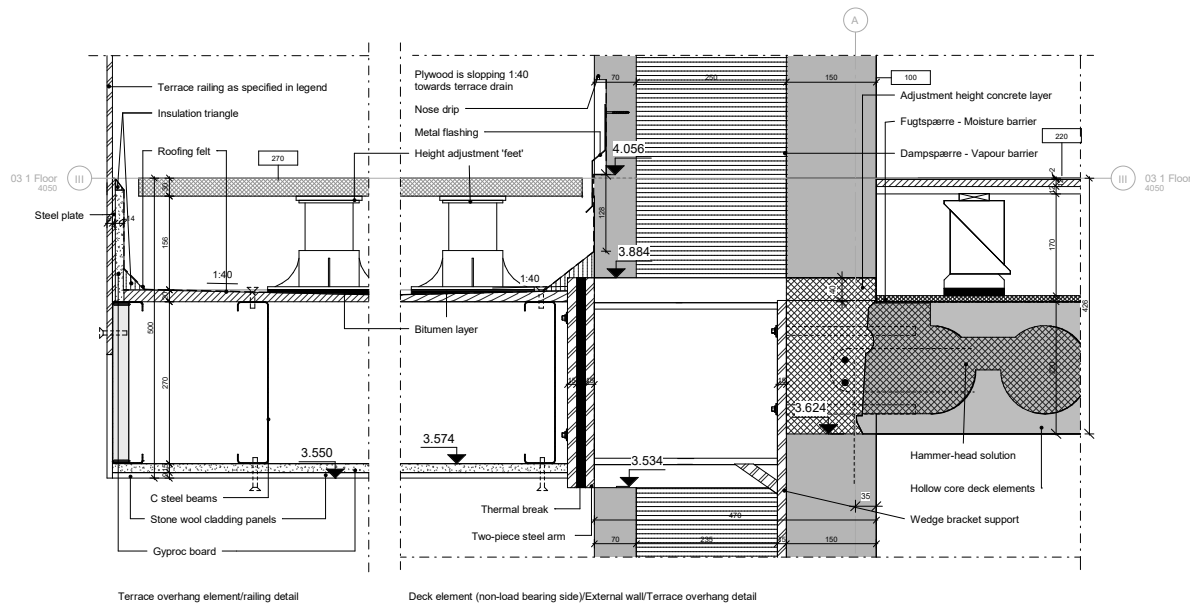

Materials legend


- Prefabricated concrete
- Concrete cast-in-situ
- Mortar/ Screed
- Steel
- Hard insulation
- Soft insulation
- Ceramic tiles
- Hollowcore deck elements

Reference:

Refer to the sheet named "Deck element plan" for dimensions and placement of decks in the building
Refer to sheet named "Terrace Plan" for further information on drainage of terrace

Stairs/terrace railing

Ø9mm round steel wire with pipe
80mm distance in openings
1100mm height

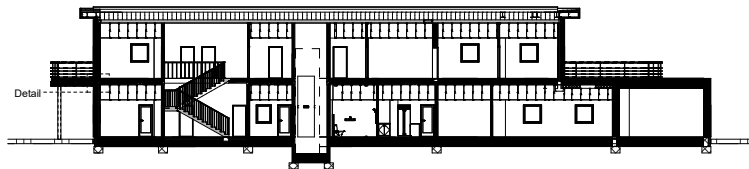


Keynote legend	
Key Value	Keynote Text
100	150mm Prefabricated concrete element (Inner leaf), 250mm Mineral wool, 70mm Prefabricated concrete element (Outer leaf)
220	2mm Linoleum, 12mm Plywood, 12mm Density fiberboard, 170mm Free space, 10mm Screed, 220mm Hollow core deck element
270	30mm Concrete tiles, 156mm Free space/levelling battens, 20mm Plywood, 270mm Steel I-beam/C-beams, 20mm Plywood, 15mm Glasroc F GFF



Bring ideas to life
VIA University College

VIA Byggeri & Engineering
Campus Horsens

BYGGESAG: LÖGTENGARDEN	DATO: 05/22/24	K01_H5_N19
EMNE: Terrace details B	MÅL: As indicated	
UDFØRT AF: Ana Araújo	KLASSE:	

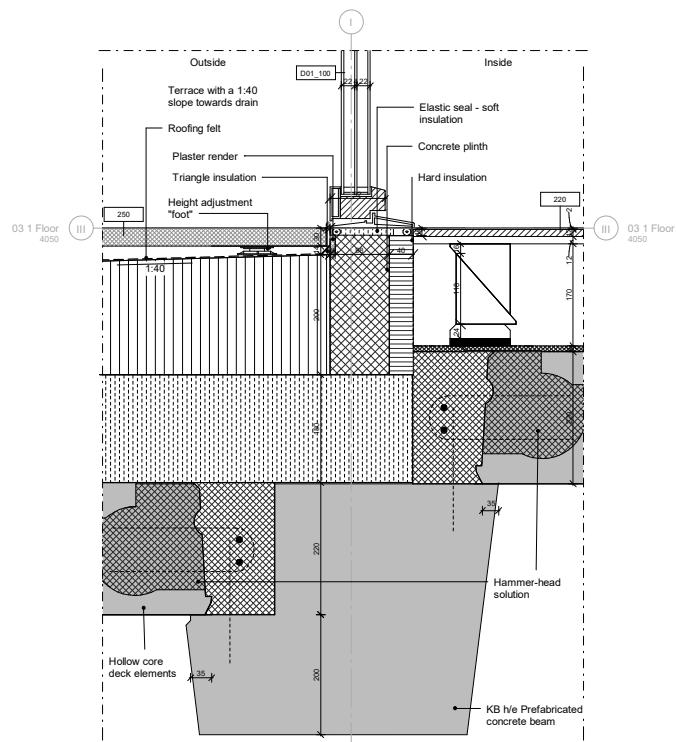

Terrace level access detail
1 : 5


Materials legend

- Prefabricated concrete
- Concrete cast-in-situ
- Mortar/ Screed
- Steel
- Hard insulation
- Soft insulation
- Ceramic tiles
- Hollowcore deck elements

Reference:
Refer to the sheet named "Deck element plan" for dimensions and placement of decks in the building
Refer to sheet named "Terrace Plan" for further information on drainage of terrace

K01_H5_N13




Keynote legend	
Key Value	Keynote Text
220	2mm Linoleum, 12mm Plywood, 12mm Density fiberboard, 170mm Free space, 10mm Screed, 220mm Hollow core deck element
250	30mm Concrete tiles, 15mm Free space/leveling battens, 10mm Roofing felt, 200mm Hard insulation, 180mm Soft insulation, 220mm Hollowcore deck element
D01_100	Main entrance door, Wooden frame, glass, 1512x2145mm

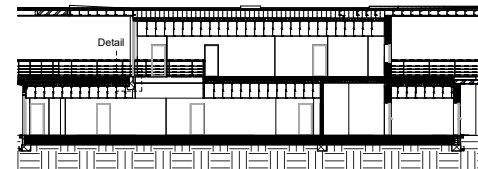

Bring ideas to life
VIA University College

VIA Byggeri & Engineering
Campus Horsens

BYGGESAG: LÖGTENGARDEN	DATO: 05/06/24	K01_H5_N13
EMNE: Level access terrace detail	MÅL: As indicated	
UDFØRT AF: Ana Araújo	KLASSE:	

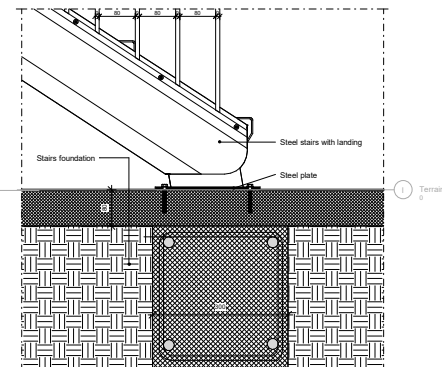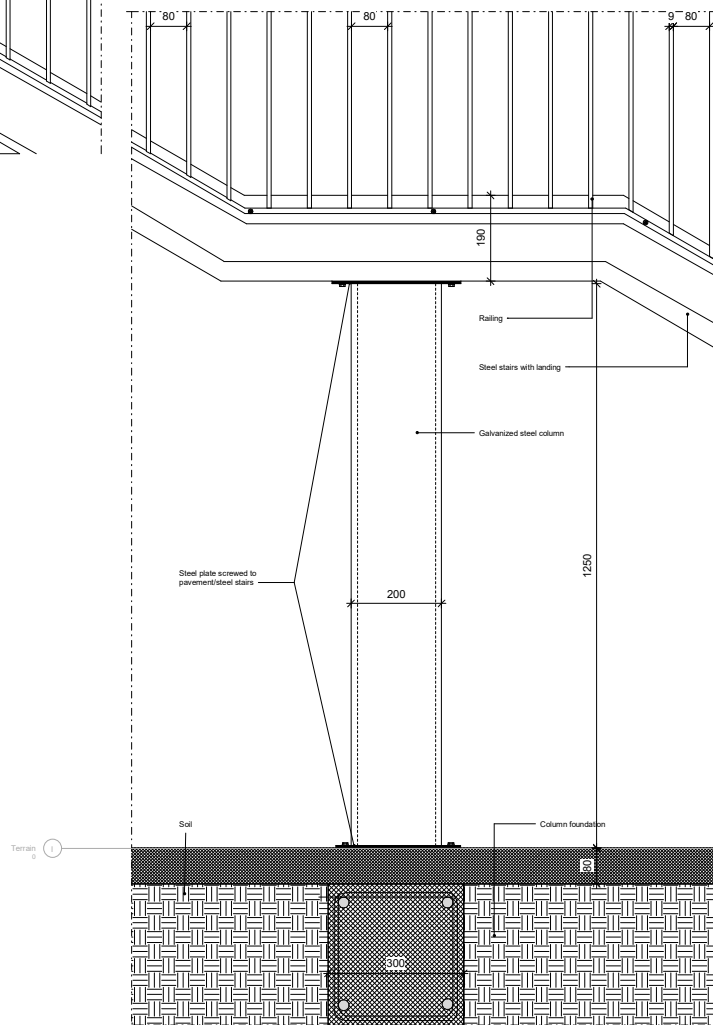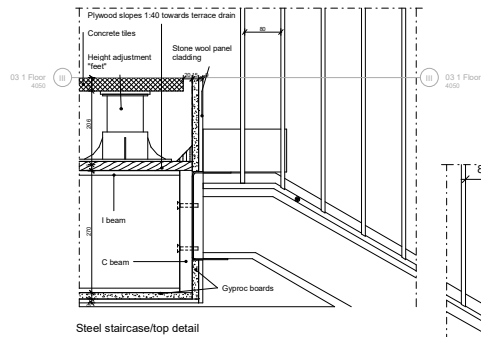

Materials legend

- Prefabricated concrete
- Concrete cast-in-situ
- Mortar/ Screed
- Steel
- Hard insulation
- Soft insulation
- Ceramic tiles
- Hollowcore deck elements

Foundation under columns and external staircase 300x410mm

Reinforcement: External load bearing walls foundations, Internal load bearing foundations, foundations around stairs and columns are reinforced with 4 $\phi 12$ y steel bars

Stairs/terrace railing

$\emptyset 9$ mm round steel
wire with pipe
80mm distance in openings
1100mm height

Reference:

Refer to sheet named "Foundation Plan" for further information on foundation placement

Refer to sheet named "Terrace plan" for further information on terrace drainage


K01_H5_N12



Bring ideas to life
VIA University College









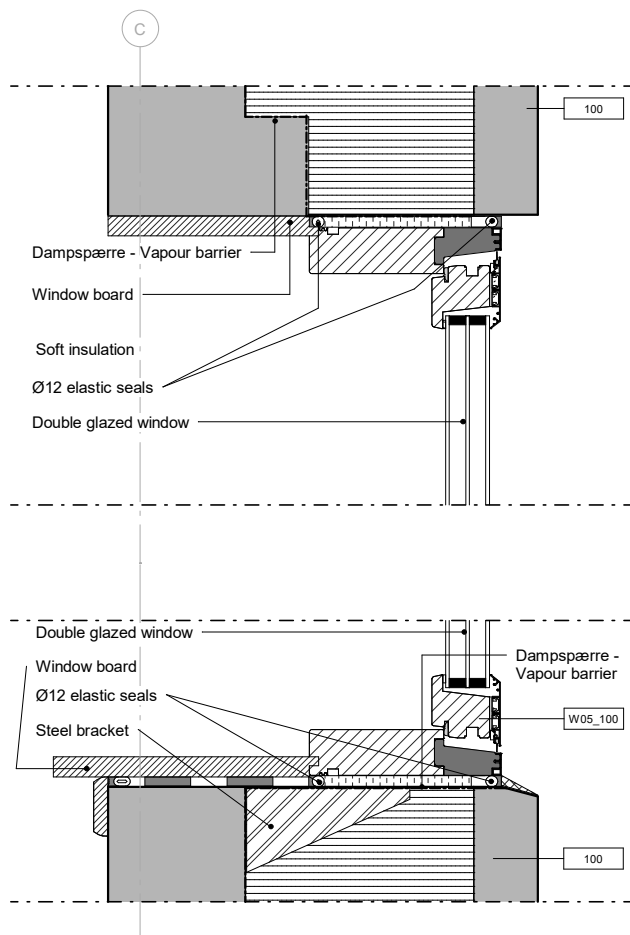VIA Byggeri & Engineering
Campus Horsens

BYGESAG: LØSTENGÅRDEN	DATO: 05/06/24	K01_H5_N12
EMNE: External stairs detail	MAL: As indicated	
UDFORT AF: Author	KLASSE:	



Window detail
1 : 5

Materials legend

-  Prefabricated concrete
-  Concrete cast-in-situ
-  Mortar/ Screed
-  Steel
-  Hard insulation
-  Soft insulation
-  Ceramic tiles
-  Hollowcore deck elements

U value: 0,8 W/m2K


Keynote legend	
Key Value	Keynote Text
100	150mm Prebaricated concrete element (Inner leaf), 250mm Mineral wool, 70mm Prefabricated concrete elemnent (Outer leaf)
W05_100	Window with wooden frame, 2000x1212mm



Bring ideas to life
VIA University College

VIA Byggeri & Engineering
Campus Horsens

BYGGESAG: LÖGTENGARDEN	DATO: 05/27/24	K01_H5_N14
EMNE: Window detail	MÅL: As indicated	
UDFØRT AF: Ana Araújo	KLASSE:	

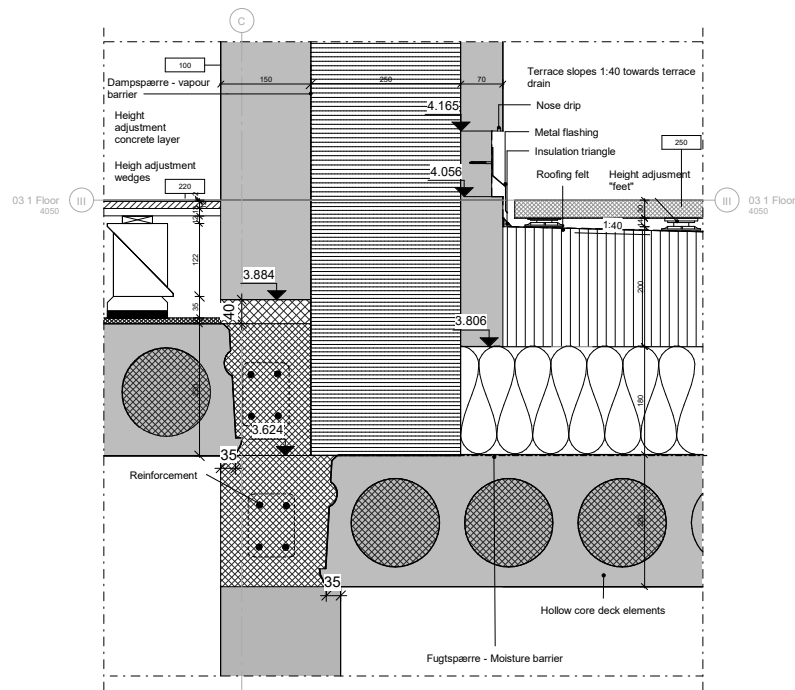


External wall/Internal load bearing wall/Floor partition/Terrace detail

Materials legend

- Prefabricated concrete
- Concrete cast-in-situ
- Mortar/ Screed
- Steel
- Hard insulation
- Soft insulation
- Ceramic tiles
- Hollowcore deck elements

K01_H5_N15

Reference:
Refer to the sheet named "Deck element plan" for dimensions and placement of decks in the building
Refer to sheet named "Terrace Plan" for further information on drainage of terrace



Keynote legend	
Key Value	Keynote Text
100	150mm Prefabricated concrete element (Inner leaf), 250mm Mineral wool, 70mm Prefabricated concrete element (Outer leaf)
220	2mm Linoleum, 12mm Plywood, 12mm Density fiberboard, 170mm Free space, 10mm Screed, 220mm Hollow core deck element
250	30mm Concrete tiles, 15mm Free space/leveling battens, 10mm Roofing felt, 200mm Hard insulation, 180mm Soft insulation, 220mm Hollowcore deck element



Bring ideas to life
VIA University College

VIA Byggeri & Engineering
Campus Horsens

BYGGESAG: LÖGTENGARDEN	DATO: 05/21/24	K01_H5_N15
EMNE: External wall/Internal load bearing wall/Floor partition/Terrace detail	MÅL: As indicated	
UDFØRT AF: Ana Araujo	KLASSE:	